

REPLACED SHEETS

☒	Description	: pages 1 to page 4
☒	Claim(s)	: page 7 to page 7
☒	Drawing(s)	: page 4 to page 7
☒	Abstract	: page 1 to page 1

DATE OF RECEIPT

This Sheet Has Been Replaced



962324-6 2803

RCA 85,968

APPARATUS FOR DRIVING A MECHANICAL RESONATOR FROM A HIGH IMPEDANCE SOURCE

Background

5 The present invention concerns television receivers having circuitry for driving a mechanical resonator such as a ceramic filter or the like, and more particularly, for driving such a mechanical resonator from a high impedance source such that the input impedance of the mechanical resonator substantially loads the source. As used herein, television receiver is intended to include any television signal processor such as a VCR or monitor, with or without a display device such as a CRT.

10 Ceramic filters and other mechanical resonating devices are commonly used in television receivers. For example, the video processing circuitry following a detector for providing a composite signal including color video and intercarrier components will often have a 4.5 MHz ceramic filter trap for removing the sound intercarrier signal from the composite signal produced by the video detector. Additionally, the sound processing circuitry will often have a 4.5 MHz bandpass ceramic filter for passing the intercarrier 4.5 MHz sound subcarrier while eliminating the rest of the combined signal. It is recommended by manufacturers of integrated circuits including detectors in applications notes that combined signals should be coupled to the ceramic filters by a low output impedance source such as an emitter follower. However, in order to improve performance, e.g., to improve signal to noise ratios, it is sometimes necessary to provide extra voltage gain not available from an emitter follower. One economical way to achieve this extra gain is to move one of the signal chains, e.g., the sound chain, to the collector electrode of the emitter follower. Such an arrangement is shown in U.S. Patent No. 3,091,659 (Massman).

20 It is herein recognized that when the output for one of the signal chains, e.g., the sound chain, is moved to a transistor collector electrode, a problem arises because the output source impedance of the collector electrode of the transistor is high (typically more than 100 Kohms). This output source impedance is much more than, e.g., 10 times the input impedance of the ceramic filter which varies considerably with frequency. For example, the ceramic filter sound bandpass filter of the exemplary embodiment has a relatively low input impedance, e.g., about 400 ohms at the 4.5 MHz center frequency, and a much higher input impedance, e.g., 2-3 Kohms, at frequencies removed from the center

30

35



frequency. Since the relatively low input impedance of the ceramic filter loads the high impedance signal source, the gain of the transistor circuit at the collector electrode changes with frequency according to the change of input impedance of the ceramic filter with frequency.

5 This input impedance versus frequency characteristic of the ceramic filter is generally negligible when the signal is coupled from a low source impedance, e.g., 50 ohms or a source impedance comparable to the input impedance of the ceramic filter, e.g., that provided by an emitter follower. However, when driving the ceramic filter from a high source
10 impedance, the input impedance versus frequency characteristic of the ceramic filter becomes an undesirable factor since it causes an increase in gain at frequencies, such as at the 3.58 MHz color subcarrier frequency, that the bandpass filter is intended to filter out. Accordingly, it is desirable to provide an economical way for providing extra gain by driving
15 the mechanical resonant device such as a ceramic filter from the collector electrode of a transistor (rather than at the emitter electrode), while overcoming the input impedance loading effect of the ceramic filter on the high impedance signal source provided at the collector electrode.

20 Summary of the Invention

Briefly, the present invention concerns a high impedance signal source driving a relatively low input impedance mechanical resonating device such as a ceramic filter having an input impedance which varies with frequency. The high impedance source is augmented by a resonant
25 circuit tuned to the center frequency of the mechanical resonating device. The skirts of the resonant tuned circuit rapidly decrease in impedance on both sides of the center frequency of interest substantially compensating for the change of circuit gain with frequency due to the change of the input impedance with frequency of the ceramic filter. Thus, the change of
30 impedance with frequency characteristic of resonant circuit is complementary to the change of input impedance with frequency characteristic of ceramic filter.

Description of the Drawings

35 Reference may be had to the drawings wherein:

FIGURE 1 shows a partial block diagram and a partial schematic of portions of a television receiver, according to aspects of the present invention.



FIGURE 2 is a representative impedance versus frequency characteristic of a tuned circuit having a center frequency of 4.5 MHz.

FIGURE 3 shows a representative input impedance versus frequency characteristic of a ceramic filter, a tuned circuit, and the cumulative effect of the combination of the two, according to aspects of the present invention.

Detailed Description of the Preferred Embodiment

Referring now to the Drawings, wherein like members have been designated with like numbers, there is shown in FIGURE 1 pertinent portions of a television receiver. A television signal is received at antenna terminals 12 from an antenna receiving off the air broadcasts, or from a cable system, VCR, or the like, and is fed to a radio frequency (RF) amplifier 10 which in turn couples the signal to a mixer 14. Both amplifier 10 and mixer 14 are portions of a tuner which selects the desired signal and converts it to an intermediate frequency (IF) signal for further processing. The IF signal is amplified in an intermediate frequency amplifier 16 and then coupled to a video detector 18. The detected composite video signal includes a frequency modulated sound intercarrier signal at 4.5 MHz, and a video signal. The video signal includes a baseband luminance component and a phase modulated chrominance subcarrier signal at 3.58 MHz. The luminance component includes synchronization pulses. The present embodiment primarily concerns separation of the video and sound IF signals, and accordingly the other aspects of the composite signal will not be discussed further.

The detected composite signal at 20 is coupled to the base electrode of a transistor 22. Substantially the same amplitude composite signal is produced at the emitter electrode of transistor 22 across a resistor 24 and is coupled to a 4.5 MHz ceramic filter trap 26 through an isolation resistor 28. The sound modulated 4.5 MHz intercarrier sound signal is removed from the composite signal by trap 26 and the remaining video signal is coupled to a video processing section (not shown) for further processing by a transistor 30. The further processing of the video signal is not directly pertinent to the present invention and will not be further discussed herein.

In order to provide additional voltage gain to the intercarrier sound signal in order to improve the sound signal to noise ratio, in the exemplary embodiment the intercarrier sound signal is taken from the



collector electrode (rather than the emitter electrode) of transistor 22. The collector electrode of transistor 22 is coupled to a capacitor 34 which is coupled in parallel with an inductor 36 thereby forming a parallel tuned resonant circuit. The values of capacitor 34 and inductor 36 are chosen to provide a resonance at the 4.5 MHz sound intercarrier frequency. Supply voltage is coupled to transistor 22 through a low pass filter comprising a resistor 38 and capacitor 40. The intercarrier sound signal developed at the collector electrode of transistor 22 is coupled through an optional DC decoupling capacitor 41 and an optional isolation resistor 43 to a ceramic filter 42 which is a bandpass filter centered at the 4.5 MHz intercarrier frequency. Bandpass filter 42 removes virtually all of the video signal which would otherwise be present.

As discussed above, the output impedance at the collector electrode of a transistor is much higher than the frequency dependent input impedance of bandpass ceramic filter 42. The input impedance of filter 42 of the exemplary embodiment has a minimum value of about 400 ohms at the 4.5 MHz center frequency and rapidly increases to 2 or 3 Kohms on both sides of the center frequency. This input impedance versus frequency response is shown in FIGURE 3 by curve "a" having a saddle or valley point and extending upwardly for frequencies removed from the center frequency of 4.5 MHz. Without tuned circuit 34/36, due to the AC loading of the relatively high output impedance collector electrode of transistor 22 by the relatively low input impedance bandpass filter 42, the gain versus frequency characteristic of transistor 22 produced at the collector electrode would vary according to the change of input impedance of bandpass filter 42 as shown in curve "a" of FIGURE 3. This is undesirable since the resultant gain versus frequency characteristic is contrary to the desired bandpass filtering transfer characteristic of filter 42. Specifically, the resultant gain versus frequency is undesirable because it provides considerably higher gain, inter alia, at the undesirable 3.58 MHz chroma subcarrier frequency than at the desired 4.5 MHz intercarrier sound signal frequency. The higher amplitude 3.58 MHz color subcarrier signal can cause transistor 22 to clip or saturate (effect the dynamic range of transistor 22), and may produce undesirable components in the reproduced audio signal which may be especially noticeable when relatively wideband stereophonic processing is utilized.

This change in gain versus frequency effect is overcome by the parallel tuned resonant circuit comprising capacitor 34 and inductor 36.



Tuned circuit 34/36 has an impedance characteristic shown in FIGURE 2 and curve "c" of FIGURE 3. As shown, tuned circuit 34/36 has a high impedance at the desired frequency of 4.5 MHz but the impedance rapidly falls off at frequencies on both sides of 4.5 MHz. As a result, greater amplification is achieved at the collector electrode of transistor 22 at 4.5 MHz than at off-center frequencies such as 3.58 MHz. Thus, parallel resonant circuit 34/36 provides an impedance versus frequency characteristic "c" which is complimentary to that of input impedance of ceramic bandpass filter 42. The combination of the two characteristics produces a peaked response shown by curve "b" of FIGURE 3.

The impedance versus frequency of the tuned circuit 34, 36 can be adjusted by selecting the proper L/C ratio, which determines the impedance of the parallel resonant circuit at the resonant frequency, and the proper "Q" of the parallel resonant circuit, which determines the slope of the skirts. In the exemplary embodiment, the inductor 36 is 2.2 microhenries and capacitor 34 is a 560 picofarad capacitor. The shape of the curve "c" can be tailored to take into account the effect of optional isolation resistor 43 and/or an optional shunt resistor 46 which are often used with ceramic filters and will slightly change the amplitude and slope of the curve "b" of FIGURE 3.

The effect of parallel resonant tuned circuit 34/36 can be looked at in two ways. Firstly, it can be considered that the tuned circuit lowers source impedances at frequencies removed from the center frequency. This compensates for the change of loading due to the increase of the input impedance with frequency of ceramic filter 42. Secondly, the resonant circuit impedance "swamps out" the input impedance of the bandpass filter 42 at frequencies removed from the resonant frequency. As a result, the gain of the transistor 22 at these removed frequencies is greatly reduced and compensates for the increase of gain which would be due to the increase of the input impedance of ceramic filter 42 at such removed frequencies.

A similar loading problem is not encountered with respect to the 4.5 MHz trap 26 in the video section since the video section is fed from the emitter electrode of the transistor which provides a low source impedance, typically much lower than the input impedance of trap 26.

In this manner, the tuned circuit 34, 36 introduces a complimentary impedance curve to that of the input impedance of ceramic filter 42, while still permitting substantial gain to be derived from

transistor 22 at 4.5 MHz bandpass center frequency (where resonant circuit 34, 36 is resonant).

5 Although the present embodiment shows an NPN transistor, it is within the contemplation of the present invention that a PNP transistor can be used, or a FET of either the enhancement or depletion type in which case the drain electrode would be the high impedance output electrode, or any other appropriate device or circuit having a high impedance output for driving a ceramic filter or the like.

This Sheet Has Been Replaced





CLAIMS:

1. In a television receiver, an amplifier circuit characterized by:

5 amplification means (22) having a relatively high impedance signal output means,

a first load means (34,36;42) coupled to the high impedance signal output means (22), said first load means (34,36;42) having a first input impedance versus frequency characteristic and
10 an input impedance relatively lower than the high impedance signal output means, and

a second load means (34,36;42) coupled to the high impedance signal output means (22), said second load means (34,36;42) having a second impedance versus frequency
15 characteristic which is complementary to the first input impedance versus frequency characteristic such that the amplitude versus frequency characteristic of a signal at the high impedance signal output means (22) is in part determined by the first load means (34,36;42) and in part determined by the second load means
20 (34,36;42).

2. The amplifier circuit of claim 1 characterized in that the first input impedance versus frequency characteristic has a first higher input impedance portion and a first lower input impedance
25 portion, and the second impedance versus frequency characteristic has a second lower impedance portion generally coincident in frequency with the first higher impedance portion and a second higher impedance portion generally coincident in frequency with the first lower impedance portion.

30



3. The amplifier circuit of claim 1 characterized in that first input impedance versus frequency characteristic has two first higher impedance portions with a first low impedance portion therebetween, and the second impedance versus frequency
5 characteristic has a second higher impedance portion substantially coincident in frequency with the first low impedance portion and two second low impedance portions substantially coincident in frequency with the two first higher impedance portions.

10 4. An amplifier circuit of claim 1, characterized by:
the first load means (34,36;42) is a tuned circuit (34,36),
and
the second load means is a mechanical resonator (42).

15 5. The amplifier circuit of claim 4 characterized in that
the tuned circuit (34,36) has a resonant frequency and a peaked impedance at the resonant frequency, and the mechanical resonator (42) has a center frequency substantially coincident in frequency
20 with the resonant frequency of the tuned circuit with a low valley of input impedance at the resonant frequency.

25 6. The amplifier circuit of claim 5 characterized in that
the amplifier means (22) is a transistor, and the relatively high impedance output means is a collector electrode of the transistor.



ABSTRACT

5 The present invention concerns a high impedance signal
source (22) driving a relatively low input impedance mechanical
resonating device (42) such as a ceramic filter having an input
impedance which varies with frequency. The high impedance source
(22) is further loaded by a resonant circuit (34,36) tuned to the
center frequency of the mechanical resonating device (22). The
skirts of the resonant tuned circuit decrease in impedance on both
sides of the center frequency of interest substantially compensating
10 for the change of circuit gain with frequency due to the change of
input impedance with frequency of the ceramic filter.

This Sheet Has Been Replaced



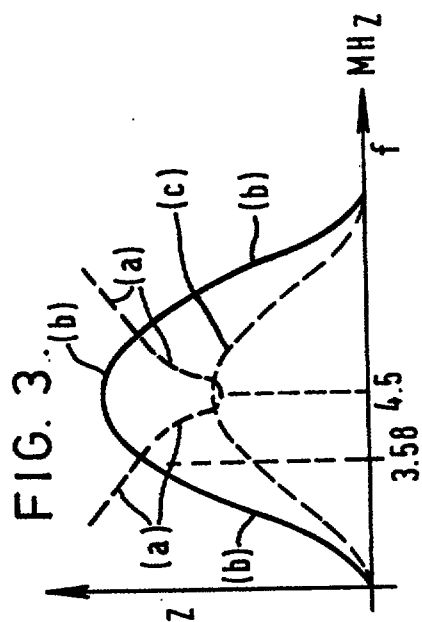


FIG. 3(b)

APPARATUS FOR DRIVING A MECHANICAL RESONATOR FROM A HIGH IMPEDANCE SOURCE

Background

The present invention concerns television receivers having circuitry for driving a mechanical resonator such as a ceramic filter or the like, and more particularly, for driving such a mechanical resonator from a high impedance source such that the input impedance of the mechanical resonator substantially loads the source. As used herein, television receiver is intended to include any television signal processor such as a VCR or monitor, with or without a display device such as a CRT.

Ceramic filters and other mechanical resonating devices are commonly used in television receivers. For example, the video processing circuitry following a detector for providing a composite signal including color video and intercarrier components will often have a 4.5 MHz ceramic filter trap for removing the sound intercarrier signal from the composite signal produced by the video detector. Additionally, the sound processing circuitry will often have a 4.5 MHz bandpass ceramic filter for passing the intercarrier 4.5 MHz sound subcarrier while eliminating the rest of the combined signal. It is recommended by manufacturers of integrated circuits including detectors in applications notes that combined signals should be coupled to the ceramic filters by a low output impedance source such as an emitter follower. However, in order to improve performance, e.g., to improve signal to noise ratios, it is sometimes necessary to provide extra voltage gain not available from an emitter follower. One economical way to achieve this extra gain is to move one of the signal chains, e.g., the sound chain, to the collector electrode of the emitter follower. Such an arrangement is shown in U.S. Patent No. 3,091,659 (Massman).

It is herein recognized that when the output for one of the signal chains, e.g., the sound chain, is moved to a transistor collector electrode, a problem arises because the output source impedance of the collector electrode of the transistor is high (typically more than 100 Kohms). This output source impedance is much more than, e.g., 10 times, the input impedance of the ceramic filter which varies considerably with frequency. For example, the ceramic filter sound bandpass filter of the exemplary embodiment has a relatively low input impedance, e.g., about 400 ohms at the 4.5 MHz center frequency, and a much higher input impedance, e.g., 2-3 Kohms, at frequencies removed from the center

REPLACED SHEETS	
☐ Description	: paged to paged
☒ Claim(s)	: paged 7 to paged 8
☐ Drawing(s)	: paged to paged
☒ Abstract	: paged 1 to paged 1
DATE OF RECEIPT	

REPLACEMENT SHEETS	
☒ Description	: paged 1 to paged 1
☒ Claim(s)	: paged 7 to paged 8
☒ Drawing(s)	: paged 1 to paged 1
☒ Abstract	: paged 1 to paged 1
DATE OF RECEIPT 3/17/96	

frequency. Since the relatively low input impedance of the ceramic filter loads the high impedance signal source, the gain of the transistor circuit at the collector electrode changes with frequency according to the change of input impedance of the ceramic filter with frequency.

This input impedance versus frequency characteristic of the ceramic filter is generally negligible when the signal is coupled from a low source impedance, e.g., 50 ohms or a source impedance comparable to the input impedance of the ceramic filter, e.g., that provided by an emitter follower. However, when driving the ceramic filter from a high source impedance, the input impedance versus frequency characteristic of the ceramic filter becomes an undesirable factor since it causes an increase in gain at frequencies, such as at the 3.58 MHz color subcarrier frequency, that the bandpass filter is intended to filter out. Accordingly, it is desirable to provide an economical way for providing extra gain by driving the mechanical resonant device such as a ceramic filter from the collector electrode of a transistor (rather than at the emitter electrode), while overcoming the input impedance loading effect of the ceramic filter on the high impedance signal source provided at the collector electrode.

Summary of the Invention

Briefly, the present invention concerns a high impedance signal source driving a relatively low input impedance mechanical resonating device such as a ceramic filter having an input impedance which varies with frequency. The high impedance source is augmented by a resonant circuit tuned to the center frequency of the mechanical resonating device. The skirts of the resonant tuned circuit rapidly decrease in impedance on both sides of the center frequency of interest substantially compensating for the change of circuit gain with frequency due to the change of the input impedance with frequency of the ceramic filter. Thus, the change of impedance with frequency characteristic of resonant circuit is complementary to the change of input impedance with frequency characteristic of ceramic filter.

Description of the Drawings

Reference may be had to the drawings wherein:

FIGURE 1 shows a partial block diagram and a partial scheme of portions of a television receiver, according to aspects of the present invention.

This is the replacement sheet

Date: 3 1 JUL 1996

FIGURE 2 is a representative impedance versus frequency characteristic of a tuned circuit having a center frequency of 4.5 MHz.

FIGURE 3 shows a representative input impedance versus frequency characteristic of a ceramic filter, a tuned circuit, and the cumulative effect of the combination of the two, according to aspects of the present invention.

Detailed Description of the Preferred Embodiment

Referring now to the Drawings, wherein like members have been designated with like numbers, there is shown in FIGURE 1 pertinent portions of a television receiver. A television signal is received at antenna terminals 12 from an antenna receiving off the air broadcasts, or from a cable system, VCR, or the like, and is fed to a radio frequency (RF) amplifier 10 which in turn couples the signal to a mixer 14. Both amplifier 10 and mixer 14 are portions of a tuner which selects the desired signal and converts it to an intermediate frequency (IF) signal for further processing. The IF signal is amplified in an intermediate frequency amplifier 16 and then coupled to a video detector 18. The detected composite video signal includes a frequency modulated sound intercarrier signal at 4.5 MHz, and a video signal. The video signal includes a baseband luminance component and a phase modulated chrominance subcarrier signal at 3.58 MHz. The luminance component includes synchronization pulses. The present embodiment primarily concerns separation of the video and sound IF signals, and accordingly the other aspects of the composite signal will not be discussed further.

The detected composite signal at 20 is coupled to the base electrode of a transistor 22. Substantially the same amplitude composite signal is produced at the emitter electrode of transistor 22 across a resistor 24 and is coupled to a 4.5 MHz ceramic filter trap 26 through an isolation resistor 28. The sound modulated 4.5 MHz intercarrier sound signal is removed from the composite signal by trap 26 and the remaining video signal is coupled to a video processing section (not shown) for further processing by a transistor 30. The further processing of the video signal is not directly pertinent to the present invention and will not be further discussed herein.

In order to provide additional voltage gain to the intercarrier sound signal in order to improve the sound signal to noise ratio, in the exemplary embodiment the intercarrier sound signal is taken from the

collector electrode (rather than the emitter electrode) of transistor 22. The collector electrode of transistor 22 is coupled to a capacitor 34 which is coupled in parallel with an inductor 36 thereby forming a parallel tuned resonant circuit. The values of capacitor 34 and inductor 36 are chosen to provide a resonance at the 4.5 MHz sound intercarrier frequency. Supply voltage is coupled to transistor 22 through a low pass filter comprising a resistor 38 and capacitor 40. The intercarrier sound signal developed at the collector electrode of transistor 22 is coupled through an optional DC decoupling capacitor 41 and an optional isolation resistor 43 to a ceramic filter 42 which is a bandpass filter centered at the 4.5 MHz intercarrier frequency. Bandpass filter 42 removes virtually all of the video signal which would otherwise be present.

As discussed above, the output impedance at the collector electrode of a transistor is much higher than the frequency dependent input impedance of bandpass ceramic filter 42. The input impedance of filter 42 of the exemplary embodiment has a minimum value of about 400 ohms at the 4.5 MHz center frequency and rapidly increases to 2 or 3 Kohms on both sides of the center frequency. This input impedance versus frequency response is shown in FIGURE 3 by curve "a" having a saddle or valley point and extending upwardly for frequencies removed from the center frequency of 4.5 MHz. Without tuned circuit 34/36, due to the AC loading of the relatively high output impedance collector electrode of transistor 22 by the relatively low input impedance bandpass filter 42, the gain versus frequency characteristic of transistor 22 produced at the collector electrode would vary according to the change of input impedance of bandpass filter 42 as shown in curve "a" of FIGURE 3. This is undesirable since the resultant gain versus frequency characteristic is contrary to the desired bandpass filtering transfer characteristic of filter 42. Specifically, the resultant gain versus frequency is undesirable because it provides considerably higher gain, inter alia, at the undesirable 3.58 MHz chroma subcarrier frequency than at the desired 4.5 MHz intercarrier sound signal frequency. The higher amplitude 3.58 MHz color subcarrier signal can cause transistor 22 to clip or saturate (effect the dynamic range of transistor 22), and may produce undesirable components in the reproduced audio signal which may be especially noticeable when relatively wideband stereophonic processing is utilized.

This change in gain versus frequency effect is overcome by the parallel tuned resonant circuit comprising capacitor 34 and inductor 36.

This is the replacement sheet

Date: 31 JUL 1996

Tuned circuit 34/36 has an impedance characteristic shown in FIGURE 2 and curve "c" of FIGURE 3. As shown, tuned circuit 34/36 has a high impedance at the desired frequency of 4.5 MHz but the impedance rapidly falls off at frequencies on both sides of 4.5 MHz. As a result, greater amplification is achieved at the collector electrode of transistor 22 at 4.5 MHz than at off-center frequencies such as 3.58 MHz. Thus, parallel resonant circuit 34/36 provides an impedance versus frequency characteristic "c" which is complimentary to that of input impedance of ceramic bandpass filter 42. The combination of the two characteristics produces a peaked response shown by curve "b" of FIGURE 3.

The impedance versus frequency of the tuned circuit 34, 36 can be adjusted by selecting the proper L/C ratio, which determines the impedance of the parallel resonant circuit at the resonant frequency, and the proper "Q" of the parallel resonant circuit, which determines the slope of the skirts. In the exemplary embodiment, the inductor 36 is 2.2 microhenries and capacitor 34 is a 560 picofarad capacitor. The shape of the curve "c" can be tailored to take into account the effect of optional isolation resistor 43 and/or an optional shunt resistor 46 which are often used with ceramic filters and will slightly change the amplitude and slope of the curve "b" of FIGURE 3.

The effect of parallel resonant tuned circuit 34/36 can be looked at in two ways. Firstly, it can be considered that the tuned circuit lowers source impedances at frequencies removed from the center frequency. This compensates for the change of loading due to the increase of the input impedance with frequency of ceramic filter 42. Secondly, the resonant circuit impedance "swamps out" the input impedance of the bandpass filter 42 at frequencies removed from the resonant frequency. As a result, the gain of the transistor 22 at these removed frequencies is greatly reduced and compensates for the increase of gain which would be due to the increase of the input impedance of ceramic filter 42 at such removed frequencies.

A similar loading problem is not encountered with respect to the 4.5 MHz trap 26 in the video section since the video section is fed from the emitter electrode of the transistor which provides a low source impedance, typically much lower than the input impedance of trap 26.

In this manner, the tuned circuit 34, 36 introduces a complimentary impedance curve to that of the input impedance of ceramic filter 42, while still permitting substantial gain to be derived from

This is the replacement sheet

Date: 31 JUL 1996

transistor 22 at 4.5 MHz bandpass center frequency (where resonant circuit 34, 36 is resonant).

Although the present embodiment shows an NPN transistor, it is within the contemplation of the present invention that a PNP transistor can be used, or a FET of either the enhancement or depletion type in which case the drain electrode would be the high impedance output electrode, or any other appropriate device or circuit having a high impedance output for driving a ceramic filter or the like.

This is the replacement sheet

Date: 31 JUL 1996



CLAIMS:

1. In a television receiver, an amplifier circuit characterized by:

5 amplification means (22) having a relatively high impedance signal output means,

a first load means (34,36;42) coupled to the high impedance signal output means (22), said first load means (34,36;42) having a first input impedance versus frequency characteristic and
10 an input impedance relatively lower than the high impedance signal output means, and

a second load means (34,36;42) coupled to the high impedance signal output means (22), said second load means (34,36;42) having a second impedance versus frequency
15 characteristic which is complementary to the first input impedance versus frequency characteristic such that the amplitude versus frequency characteristic of a signal at the high impedance signal output means (22) is in part determined by the first load means (34,36;42) and in part determined by the second load means
20 (34,36;42).

2. The amplifier circuit of claim 1 characterized in that the first input impedance versus frequency characteristic has a first higher input impedance portion and a first lower input impedance
25 portion, and the second impedance versus frequency characteristic has a second lower impedance portion generally coincident in frequency with the first higher impedance portion and a second higher impedance portion generally coincident in frequency with the first lower impedance portion.

30



This is the replacement sheet

Date: 31 JUL 1996



3. The amplifier circuit of claim 1 characterized in that first input impedance versus frequency characteristic has two first higher impedance portions with a first low impedance portion therebetween, and the second impedance versus frequency
5 characteristic has a second higher impedance portion substantially coincident in frequency with the first low impedance portion and two second low impedance portions substantially coincident in frequency with the two first higher impedance portions.

10 4. An amplifier circuit of claim 1, characterized by:
the first load means (34,36;42) is a tuned circuit (34,36),
and
the second load means is a mechanical resonator (42).

15 5. The amplifier circuit of claim 4 characterized in that
the tuned circuit (34,36) has a resonant frequency and a peaked impedance at the resonant frequency, and the mechanical resonator (42) has a center frequency substantially coincident in frequency
20 with the resonant frequency of the tuned circuit with a low valley of input impedance at the resonant frequency.

25 6. The amplifier circuit of claim 5 characterized in that
the amplifier means (22) is a transistor, and the relatively high impedance output means is a collector electrode of the transistor.



This is the replacement sheet

Date: 31 JUL 1996

APPARATUS FOR DRIVING A MECHANICAL RESONATOR FROM A HIGH
IMPEDANCE SOURCE

ABSTRACT

The present invention concerns a high impedance signal source (22) driving a relatively low input impedance mechanical resonating device (42) such as a ceramic filter having an input impedance which varies with frequency. The high impedance source (22) is further loaded by a resonant circuit (34,36) tuned to the center frequency of the mechanical resonating device (22). The skirts of the resonant tuned circuit decrease in impedance on both sides of the center frequency of interest substantially compensating for the change of circuit gain with frequency due to the change of input impedance with frequency of the ceramic filter.




Figure 1

This Sheet Has Been Replaced



This is the replacement sheet

Date: 31 JUL 1996

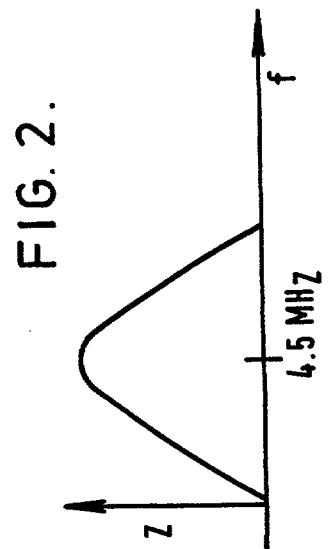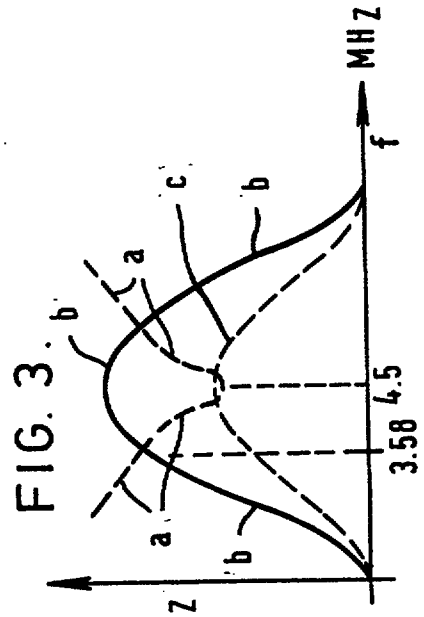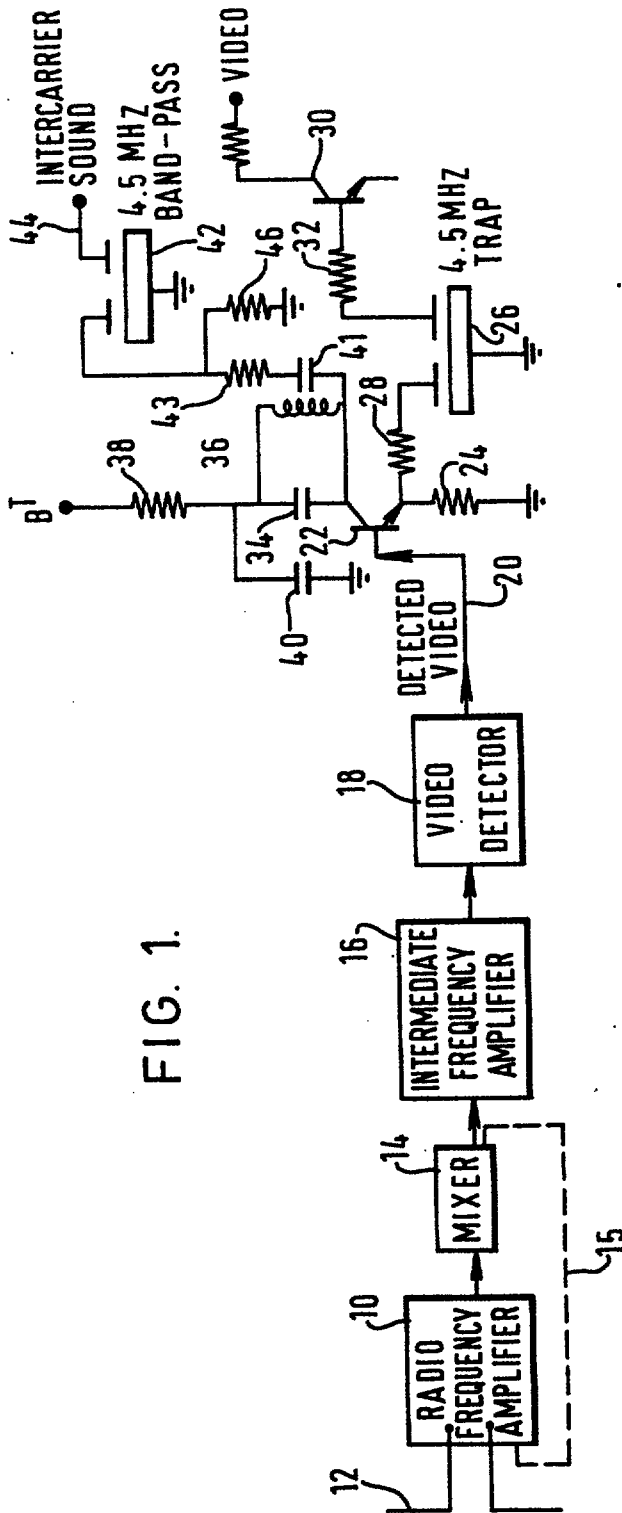

This is the replacement sheet

Date: 31 JUL 1998




TEXT OF THE ABSTRACT

APPARATUS FOR DRIVING A MECHANICAL RESONATOR FROM A HIGH IMPEDANCE SOURCE

The present invention concerns a high impedance signal source (22) driving a relatively lower input impedance mechanical resonating device (42) such as a ceramic filter having an input impedance which varies with frequency. The high impedance source (22) is further loaded by a resonant circuit (34,36) tuned to the center frequency of the mechanical resonating device (22). The skirts of the resonant tuned circuit (34,36) decrease in impedance on both sides of the center frequency of interest substantially compensating for the change of circuit gain with frequency due to the change of input impedance with frequency of the ceramic filter.

Figure 1.

THIS SHEET HAS BEEN
REPLACED



This Sheet Has Been Replaced



Claims

1. A circuit for driving a mechanical resonator (42) as used in television receivers, the circuit comprising an amplifying means (20-24, 34-38) including an amplifier transistor (22) having its collector electrode connected to collector impedance (34-38) and to a first resonant load means (41-46), said first resonant load means (41-46) having a resonance like input impedance versus frequency characteristic (α) with relatively low input impedance in a resonance frequency region, and said collector impedance (34-38) having an impedance versus frequency characteristic which is so related to said input impedance versus frequency characteristic of said first resonant load means (41-46) that a greater amplification is achieved within said resonance frequency region than at frequencies outside of said resonance frequency region.
2. The circuit of claim 1, wherein:
said first resonant load means (41-46) comprises said mechanical resonator, and said collector impedance (34-38) is a tuned circuit.
3. The circuit of claim 1 comprising an emitter impedance (24) and a second resonant load means (26,28) connected to the emitter electrode of said amplifier transistor (22).
4. The circuit of claim 3, wherein
said amplifier transistor (22) has an input which is coupled to the output of a video detector (18), said video detector providing an input signal to said amplifier transistor (22) including a base-band video signal and an intercarrier sound signal ; and
one of said first and second resonant loads (41-46; 26,28) is in a sound intercarrier signal path, and the other is in a video signal path.
5. The circuit of claim 4, wherein said second resonant load (26,28) is a mechanical resonator.

REPLACEMENT SHEETS	
1 Description :	paged ... to paged ...
✓ 2 Claim(s) :	paged 7 to paged 7
3 Drawing(s) :	paged ... to paged ...
✓ 4 Abstract :	paged 8 to paged ...
DATE OF RECEIPT 11/4/2K	



This is the replacement sheet

Date: 11 APR 2000

APPARATUS FOR DRIVING A MECHANICAL RESONATOR FROM A HIGH
IMPEDANCE SOURCE

ABSTRACT

5 The present invention concerns a high impedance signal
source (22) driving a relatively low input impedance mechanical
resonating device (42) such as a ceramic filter having an input
impedance which varies with frequency. The high impedance source
(22) is further loaded by a resonant circuit (34,36) tuned to the
center frequency of the mechanical resonating device (22). The
skirts of the resonant tuned circuit decrease in impedance on both
sides of the center frequency of interest substantially compensating
10 for the change of circuit gain with frequency due to the change of
input impedance with frequency of the ceramic filter.

Figure 1

This is the replacement sheet

Date: 11 APR 2000