



(51) International Patent Classification:
F16C 27/06 (2006.01) *F16C 33/28* (2006.01)

(21) International Application Number:
PCT/EP2010/070123

(22) International Filing Date:
17 December 2010 (17.12.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/287,732 18 December 2009 (18.12.2009) US

(71) Applicant (for all designated States except US): **SAINT-GOBAIN PERFORMANCE PLASTICS PAMPUS GMBH** [DE/DE]; Am Nordkanal 37, 47877 Willich (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **JAEGER, Hans-Juergen** [DE/DE]; Am Schaezjeskriemer 23, 50354 Huerth (DE). **BURGEFF, Dominique** [BE/BE]; Pfarrer-Henreco-Street 7, B-4700 Eupen (BE).

(74) Agents: **ZIMMERMANN, Gerd** et al.; Zimmermann & Partner, Josephspitalstr. 15, 80331 München (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SYSTEM, METHOD AND APPARATUS FOR TOLERANCE RING WITH FUNCTIONAL LAYERS

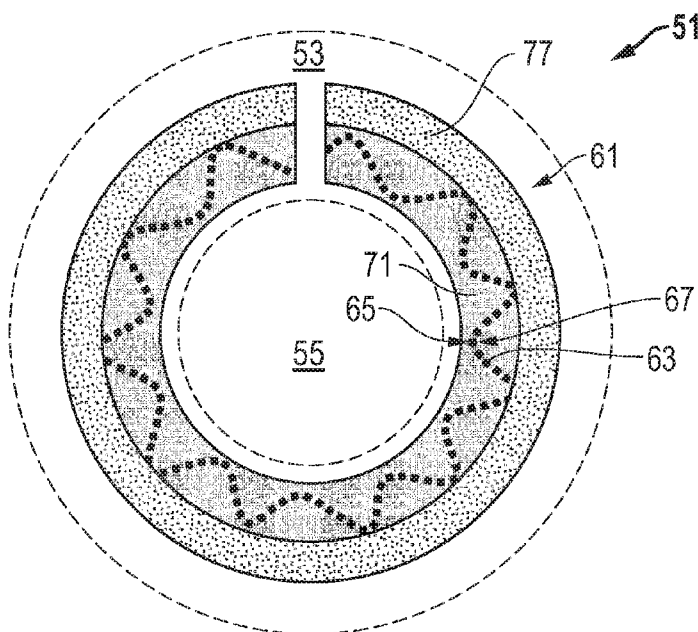


FIG. 11

(57) Abstract: A tolerance ring with functional layers has an annular band and an elastomeric layer. The assembly also may have a low friction layer, which may be bonded, calendared or laminated thereto. The low friction material may completely encapsulate the annular band.

WO 2011/073412 A1



Published:

— *with international search report (Art. 21(3))*