



(51) International Patent Classification:
E21B 19/16 (2006.01) *E21B 19/24* (2006.01)
E21B 17/02 (2006.01)

(21) International Application Number:
PCT/US2012/047306

(22) International Filing Date:
19 July 2012 (19.07.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13/186,571 20 July 2011 (20.07.2011) US

(71) Applicant (for all designated States except US): **CAMERON INTERNATIONAL CORPORATION** [US/US];
1333 West Loop South, Suite 1700, Houston, Texas 77027 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **VANDERFORD, Delbert Edwin** [US/US]; 12311 Pine Glen Lane, Cypress,

Texas 77429 (US). **VAN ADRICHEM, Max** [NL/US];
4266 T.C. Jester Boulevard, Houston, Texas 77018 (US).
GUIDRY, Kirk P. [US/US]; 13606 Branson Lane,
Cypress, Texas 77429 (US).

(74) Agent: **ROSE, Collin A.**; Chamberlain Hrdlicka, 1200
Smith Street, 14th Floor, Houston, Texas 77002 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,

[Continued on next page]

(54) Title: ADJUSTABLE MUDLINE TUBING HANGER SUSPENSION SYSTEM

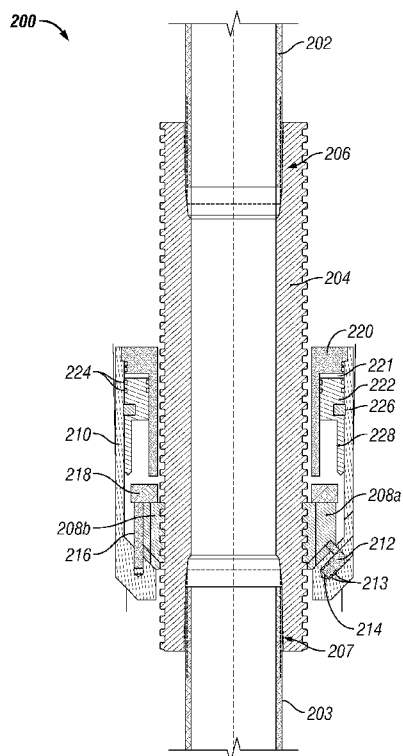


FIG. 2B

(57) Abstract: An adjustable mudline suspension system, including a tubing hanger having an exterior profile, a clamp having an inner profile to mate with the exterior profile of the tubing hanger, a biasing element to bias the clamp radially inward into an engaged position where the inner and exterior profiles are mated, and a piston to bias the clamp radially outward into a disengaged position where the inner and exterior profiles are not mated when hydraulically actuated. The weight of the tubing hanger is supported by the adjustable mudline suspension system when the interior profile of the clamp mates with the exterior profile of the hanger.



UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:

7 March 2013

Published:

— *with international search report (Art. 21(3))*