

(51) International Patent Classification:
G10L 11/04 (2006.01)(21) International Application Number:
PCT/EP2010/050229(22) International Filing Date:
11 January 2010 (11.01.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/146,063 21 January 2009 (21.01.2009) US
09005486.7 17 April 2009 (17.04.2009) EP(71) Applicant (for all designated States except US):
**FRAUNHOFER-GESELLSCHAFT ZUR
FÖRDERUNG DER ANGEWANDTEN
FORSCHUNG E.V.** [DE/DE]; Hansastraße 27c, 80686
München (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BÄCKSTRÖM, Tom** [FI/DE]; Bauerngasse 8-12, 90443 Nürnberg (DE). **BAYER, Stefan** [AT/DE]; Dortmunder Strasse 14, 90425 Nürnberg (DE). **GEIGER, Ralf** [DE/DE]; Maxtorgraben 29, 90409 Nürnberg (DE). **NEUENDORF, Max** [DE/DE]; Theatergasse 17, 90402 Nürnberg (DE). **DISCH, Sascha** [DE/DE]; Turnstrasse 7, 90763 Fürth (DE).(74) Agents: **BURGER, Markus** et al.; Patentanwälte Schoppe, Zimmermann, Stöckeler & Zinkler, P.O. Box 246, 82043 Pullach (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,

[Continued on next page]

(54) Title: APPARATUS, METHOD AND COMPUTER PROGRAM FOR OBTAINING A PARAMETER DESCRIBING A VARIATION OF A SIGNAL CHARACTERISTIC OF A SIGNAL

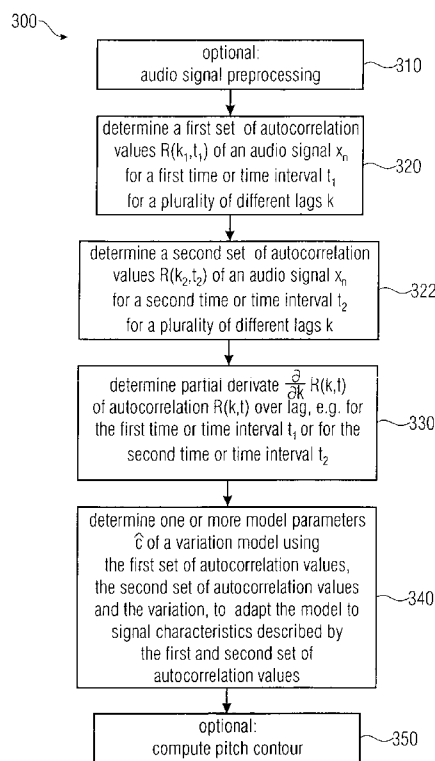


FIGURE 3A

(57) Abstract: An apparatus for obtaining a parameter describing a variation of a signal characteristic of a signal on the basis of actual transform-domain parameters describing the audio signal in transform-domain comprises a parameter determinator. The parameter determinator is configured to determine one or more model parameters of a transform-domain variation model describing an evolution of the transform-domain parameters in dependence on one or more model parameters representing a signal characteristic.



SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*