



(51) International Patent Classification:

E05B 55/00 (2006.01) *E05B 15/10* (2006.01)
E05B 65/06 (2006.01) *E05B 17/00* (2006.01)

(21) International Application Number:

PCT/FI2013/051041

(22) International Filing Date:

5 November 2013 (05.11.2013)

(25) Filing Language:

Finnish

(26) Publication Language:

English

(30) Priority Data:

20126335 19 December 2012 (19.12.2012)

FI

(71) Applicant: **ABLOY OY** [FI/FI]; Wahlforssinkatu 20, FI-80100 Joensuu (FI).

(72) Inventor: **HELISTEN, Mika**; Ratapolku 4 B 10, FI-80400 Ylämylly (FI).

(74) Agent: **BERGGREN OY AB**; P.O. Box 16, (Antinkatu 3 C), FI-00101 Helsinki (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DOOR LOCK

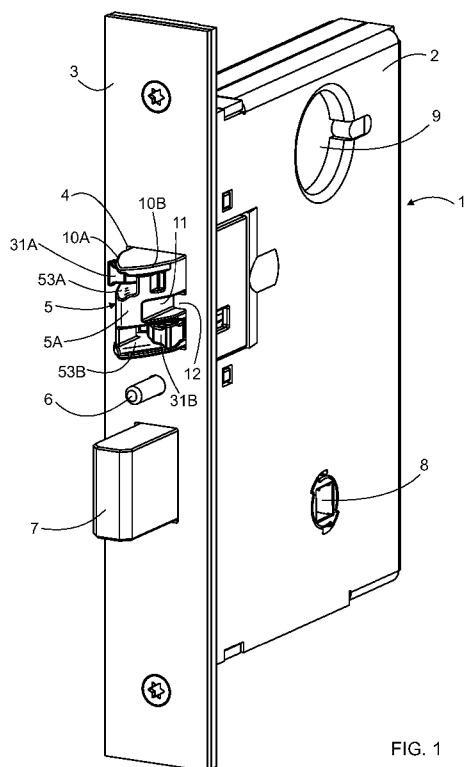


FIG. 1

(57) Abstract: The invention relates to a door lock (1) provided with an oblique bolt (5). The objective is to decrease the external force directed into to deadlocking organs. The oblique bolt (5) comprises slanted surfaces (10A, 10B) on both sides such that the tip part (5A) is narrower at its tip than in the back part of the tip part. The tip part has recesses (53A, 53B) in its lower part and upper part, which extend from the tip to the back part. Both recesses have a turning piece (31A, 31B). Additionally, the oblique bolt has a support piece (47) and flexing organs (46). The turning pieces guide external force up to a given turning angle via the support piece and flexing organs into the deadlocking organs.



Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))