



(43) International Publication Date
17 February 2005 (17.02.2005)

PCT

(10) International Publication Number
WO 2005/014462 A1

(51) International Patent Classification⁷: B66B 1/46, 11/02

(21) International Application Number:
PCT/JP2004/010438

(22) International Filing Date: 15 July 2004 (15.07.2004)

(25) Filing Language: English

(26) **Publication Language:** English

(30) Priority Data:
2003-290864 8 August 2003 (08.08.2003) JP

(71) **Applicant** (*for all designated States except US*):
TOSHIBA ELEVATOR KABUSHIKI KAISHA
 [JP/JP]; 5-27, Kitashinagawa 6-chome, Shinagawa-ku,
 Tokyo, 1410001 (JP).

(72) Inventor; and

(75) **Inventor/Applicant** (*for US only*): **ENDO, Masahiko**
[JP/JP].

(74) **Agents:** SUZUYE, Takehiko et al.; c/o SUZUYE & SUZUYE 7-2, Kasumigaseki 3-chome, Chiyoda-ku, Tokyo, 1000013 (JP).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CAR AND CAR OPERATING PANEL

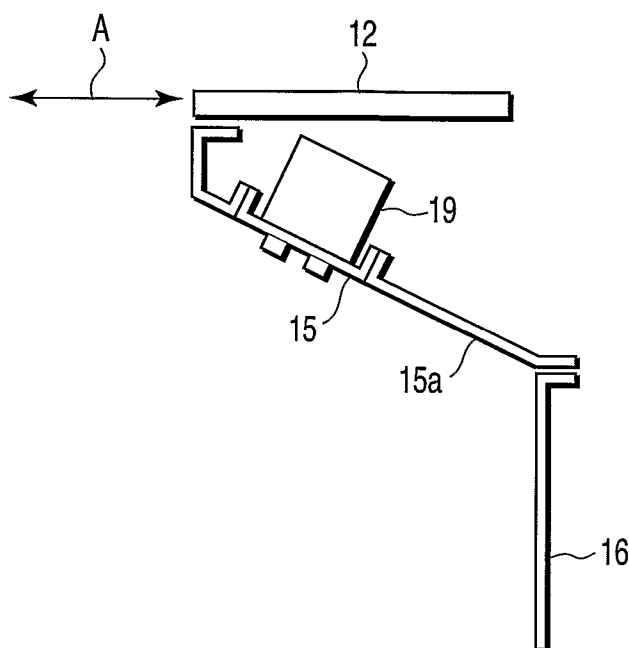

(57) Abstract: A car in an elevator, wherein an inner wall structural member (15) of a car door side of the car is located to be inclined at an angle of 8° to 30° with respect to a line of movement of doors of the car (1) in a direction from a door gate side of the car (1) toward a side plate of a car side portion of the car (1), and a car-operation panel (19) is attached to the inner wall structural member(15).