

9603612-4 3703

✓ Description	19
✓ Claim(s)	: paged 20 to paged 28
✓ Drawing(s)	: paged 29 to paged 30
✓ Abstract	: paged 31 to paged 32
DATE OF RECEIPT	

A VOLTAGE REGULATOR IN A TELEVISION APPARATUS

The invention relates to a switching regulator power supply of a television apparatus.

5 A typical deflection circuit output stage of a television receiver includes a retrace resonant circuit, including a deflection winding and a linearity inductance, and a transistor switch. The output stage generates, in a secondary winding of a flyback transformer, a retrace pulse that is rectified for generating a power-up or run supply
10 voltage for energizing the receiver circuitry. The output stage is energized by a B+ supply voltage that is coupled to a terminal of a primary winding of the flyback transformer. The B+ supply voltage is produced and regulated in a switching regulator. The switching regulator
15 includes a switch such as, for example, an SCR switch having an input terminal that is coupled to an unregulated supply voltage.

During normal power-up operation, the SCR switch is conductive from an instant that is controllable,
20 occurring within each trace interval of a horizontal deflection cycle, and remains latched in a conductive state during the remaining part of trace. During retrace, the SCR switch is turned off in preparation for the following regulation cycle.

25 Regulated B+ supply voltage is developed in a filter capacitor that is coupled via a filter inductance to an output terminal of the SCR switch. The filter capacitor supplies a load current that flows in the deflection circuit output stage during power-up operation. A control
30 circuit of the regulator that includes an oscillator provides, in a given cycle of a first control signal, a trigger pulse that varies the instant when the SCR switch becomes conductive. The trigger pulse occurs at an instant that is controlled in accordance with the B+ supply voltage
35 in a negative feedback manner such that the B+ supply voltage is maintained at a predetermined value.

A turn-off winding of the flyback transformer, coupled between the unregulated supply voltage and the



anode of the SCR, couples a retrace pulse to the anode of the SCR switch during each horizontal retrace interval to turn off the SCR switch during retrace. Thus, the oscillator of the control circuit is synchronized during the power-up operation by the retrace pulse. During a power-off operation the oscillator free runs. During the power-up operation, the timing of the trigger pulse that is produced by the oscillator varies in accordance with the B+ supply voltage in a negative feedback manner.

10 In a power supply, embodying a feature of the invention, the control circuit is energized during both the power-up and power-off operations so as to obviate the need for switching off the unregulated supply voltage via an on/off power switch. On the other hand, a horizontal rate
15 drive signal, provided to the deflection circuit output stage from a horizontal drive stage, ceases to occur during the power-off operation. Consequently, the generation of the deflection current and of the retrace pulses is prevented. The result is that the load current supplied
20 from the filter capacitor is substantially reduced during the power-off operation.

As explained before, the trigger pulses occur at a free running frequency, during the power-off operation. Any trigger pulse that occurs when the anode-to-cathode
25 voltage of the SCR is insufficiently large to enable latching operation in the SCR switch, will, nevertheless, cause the SCR switch to be turned on in an unlatched mode of operation for an interval that is proportional to the pulse width of the trigger pulse. Assuming a constant width
30 of the trigger pulse, it follows that, in the unlatched mode of operation of the SCR switch, the average current through the SCR switch is directly related to the free running frequency of the trigger pulses.

Assume that, during the power-off operation, the
35 frequency or the duty cycle of the trigger pulses is at such a low value that the average current in the SCR switch is smaller than the load current. Further assume that the load current is supplied entirely through the SCR switch.



Therefore, the filter capacitor will discharge until attaining a level that will produce a sufficiently large anode-to-cathode voltage difference in the SCR switch for enabling latching operation. Thereafter, the SCR switch
5 will be triggered by the next trigger pulse of the free running oscillator and the latching operation will occur in the SCR switch.

Because the load current is small, the discharge time for obtaining such sufficiently large anode-to-cathode
10 voltage difference that enables the latching operation might be equal to, for example, 160 miliseconds. Because retrace pulses are not present, during power-off operation, such latching operation will continue until the filter capacitor is again charged to a voltage that is equal to or
15 greater than the unregulated supply voltage, causing the SCR switch to turn off. After the end of each latching operation, and until such interval of 160 miliseconds will have elapsed, the anode-to-cathode voltage of the SCR switch is again too small to enable the next latching
20 operation.

During the latching operation, a high amplitude, wide pulse of current flows in the SCR switch and, for example, in the filter inductance, such pulse is repetitive at a corresponding frequency of, for example, 6Hz. Such
25 wide current pulses might produce an objectionable sound during power-off operation. The objectionable sound might be produced due to possible parasitic mechanical vibrations as a result of the wide pulse current in, for example, the inductance of the filter. Therefore, it may be desirable
30 to prevent the filter capacitor from being discharged to a level that enables the undesirable latching operation in the SCR switch to occur, during the power-off operation.

In accordance with an aspect of the invention, a second control signal having two states that are indicative
35 of the power-off and power-up operations, respectively, in the television receiver, is applied to the control circuit for controlling the free running frequency of the oscillator of the control circuit during the power-off



operation. The second control signal causes the free running frequency to increase in order to increase the conduction of the SCR switch when it operates in the turned-on unlatched mode. The conduction is increased so that the average current is sufficiently large to enable replenishing, during each trigger pulse, of all the filter capacitor charge that was lost during the interval that elapsed from the end of the immediately preceding trigger pulse. Because all the lost charge is replenished during each period of the trigger pulses, the filter capacitor voltage will be substantially at the same level at the end of each trigger pulse. Such level is sufficiently high to maintain the anode-to-cathode voltage of the SCR switch sufficiently low for preventing the latching operation of the SCR switch throughout the power-off operation. The result is that, advantageously, the aforementioned objectionable sound is eliminated.

During power-up operation, the second control signal has no effect on the duty cycle of the SCR switch. On the other hand, during the power-off operation, the second control signal causes an increase in the duty cycle of the first control signal and, in turn, that of the SCR switch. Without the operation of the second control signal the duty cycle of the SCR switch might be lower than required to prevent the latching operation.

Some television receivers have signal terminals for receiving, for example, external video input signals such as R, G and B input signals, that are to be developed relative to the common conductor of the receiver. Such signal terminals and the receiver common conductor may be coupled to corresponding signal terminals and common conductors of external devices, such as, for example, a VCR or a teletext decoder.

To simplify the coupling of signals between the external devices and the television receiver, the common conductors of the receiver and of the external devices are connected together so that all are at the same potential. The signal lines of each external device are coupled to the



corresponding signal terminals of the receiver. In such an arrangement, the common conductor of each device, such as of the television receiver, may be held "floating", or conductively isolated, relative to the corresponding AC
5 mains supply source that energizes the device. When the common conductor is held floating, a user touching a terminal that is at the potential of the common conductor will not suffer an electrical shock.

Therefore, it may be desirable to isolate the
10 common conductor, or ground, of, for example, the television receiver, from the potentials of the terminals of the AC mains supply source that provide power to the television receiver. Such isolation is typically achieved by a transformer. The isolated common conductor is
15 sometimes referred to as "cold" ground conductor.

In the switching regulator of the power supply of the invention, the AC mains supply voltage is coupled directly to a bridge rectifier for producing an unregulated direct current (DC) input supply voltage that is, for
20 example, referenced to a common conductor, referred to as "hot" ground, and that is conductively isolated from the cold ground conductor. As a result, the control circuit, the B+ supply voltage, the primary winding of the flyback transformer, the linearity inductance and the deflection
25 winding are also referenced to the hot ground conductor. On the other hand, a portion of the driver stage that controls the switching operation of the deflection circuit transistor switch is, for example, referenced to the cold ground conductor. Likewise, an on/off control signal that
30 may be generated by a remote control receiver for controlling the on/off operation of the receiver may also be referenced to the cold ground conductor.

A driver transformer of the driver stage couples a switching, second control signal at the horizontal
35 frequency from the portion of the driver stage, that is referenced to the cold ground conductor, to the deflection circuit transistor switch, that is referenced to the hot ground. The driver transformer provides the required



isolation barrier between the hot ground and the cold ground conductors. The on/off control signal may be applied to the driver stage to enable the generation of the second control signal, during normal power-up operation, and to
5 disable its generation during shut-down or power-off operation that disables the operation of the deflection circuit.

In accordance with another aspect of the invention, the first control signal, namely the control
10 signal that causes the free-running frequency of the oscillator of the control circuit to be above the audio range during the power-off operation, is produced from a voltage developed in the linearity inductor of the deflection circuit output stage. The first control signal
15 is produced by an arrangement forming a signal path between the linearity inductor and the control circuit, which signal path is referenced to hot ground. Because the signal path is referenced to hot ground, the need for an additional hot-cold isolation arrangement for applying the
20 power-up and power-off control information of the on/off control signal to the control circuit is, advantageously, obviated.

A television apparatus embodying an aspect of the invention includes a source of an input signal at a
25 frequency that is related to a deflection frequency. A deflection circuit output stage, including a deflection current linearity element that is responsive to the input signal, generates a first signal in the linearity element during a power-on operation but not during a power-off
30 operation of the television deflection apparatus. A power-on/power-off control signal is produced from the first signal that exhibits a power-on state during the power-on operation and a power-off state during the power-off operation. A utilization circuit of the
35 television apparatus is responsive to the power-on/power-off control signal that causes the utilization circuit to operate in a mode of operation that corresponds to the level of the control signal.



In the Drawing:

FIGURE 1 illustrates a television power supply including a supply regulator embodying the invention;

FIGURE 2 illustrates the control circuit of the supply regulator of FIGURE 1 that includes an oscillator;

FIGURES 3a-3d illustrate waveforms useful in explaining the normal power-up operation of the circuits of FIGURE 1 and 2; and

FIGURES 4a-4d illustrate free running operation of the oscillator of the control circuit of FIGURE 2.

FIGURE 1 illustrates a portion of a television receiver incorporating a bridge rectifier 101 that rectifies a mains supply voltage V_{AC} to produce a DC, unregulated voltage V_{UR} . An output stage, or switch regulator 102, that includes a silicon controlled rectifier (SCR) switch, referred to herein as SCR 200, produces a regulated voltage $B+$ that is coupled to a winding $W1$ of a flyback transformer $T1$. An input terminal 102a of regulator 102 is coupled to unregulated voltage V_{UR} . Regulated voltage $B+$ is developed at an output terminal 102d of switch regulator 102. Winding $W1$ of transformer $T1$ is coupled to the collector electrode of a deflection switching transistor $Q1$ of a horizontal circuit output stage 99 operating at a horizontal rate f_H . A control signal H_r , at the horizontal rate f_H , is developed at the base of transistor $Q1$, during a power-up operation. Signal H_r is applied from a control circuit, referred to herein as a horizontal oscillator and driver 100, that is coupled to the base electrode of transistor $Q1$. Signal H_r controls the switching of transistor $Q1$ for generating a deflection current i_y in a series arrangement of a deflection winding L_y , a trace capacitor c_t and a linearity inductor L_{LIN} of horizontal output stage 99. A retrace voltage V_{w2} is produced in a conventional manner across a secondary winding $W2$ of transformer $T1$ in each retrace interval of each horizontal period H . Each retrace interval occurs immediately after transistor $Q1$ becomes nonconductive. A DC, run-mode supply voltage $V+$, that is, illustratively,



+26 volts, is produced by rectifying voltage V_{w2} in a rectifier arrangement 104 that is coupled to winding W2. Voltage V+ is coupled to various circuits of the receiver, not shown, to provide them with a run supply voltage during power-up operation.

Voltage B+ is coupled via a voltage divider, including resistors R_{s1} , R_{s2} and R_{s3} , to a control circuit 110, that is also referred to herein as regulator oscillator 110, that is energized during both power-up and power-off operations to provide a feedback voltage V_{IN} at a terminal 110a. During power-up operation, control circuit 110 generates a signal S_C at the horizontal rate f_H and at a controllable phase that controls the instant, in each horizontal interval H, in which SCR 200 becomes conductive. The phase of signal S_C varies in accordance with a difference between voltage V_{IN} , that is proportional to voltage B+, and a reference voltage, not shown in FIGURE 1, that is produced in control circuit 110. The regulation provided by signal S_C causes regulated voltage B+ to be at a predetermined DC voltage level such as, illustratively, +129 volts, during power-up operation.

The anode of SCR 200 is coupled to unregulated voltage V_{UR} via a winding W4 of transformer T1. The cathode of SCR 200 is coupled to an end terminal 102c of a filter inductor L2. Output terminal 102d, the other end terminal of inductor L2, where regulated voltage B+ is developed, is coupled to winding W1 of flyback transformer T1. A filter capacitor C2 is coupled to output terminal 102d. Signal S_C is coupled via a driver transformer T2 to the gate electrode of SCR 200.

When a leading edge LE of signal S_C of FIGURE 1, having a controllable phase as shown in the waveform of FIGURE 1, occurs, SCR 200 is triggered and becomes immediately conductive. During normal power-up operation, leading edge LE occurs at a time t_{1a} during a trace interval of each period H of a voltage V_{w4} that is developed across winding W4. During the interval in which SCR 200 is conductive, a current i_{L2} in inductor L2, that



charge capacitor C2, increases. The rate of increase of current i_{L2} is determined by unregulated voltage V_{UR} and by regulated voltage B+.

At the end of horizontal trace, a time t_{2a} , shown in the waveform of FIGURE 1, a retrace pulse portion of voltage V_{W4} is developed. Voltage V_{W4} is developed by transformer action from voltage V_R in retrace capacitor C_r . Retrace pulse V_{W4} in winding W4 is poled in such a manner as to tend to reverse bias SCR 200 and to reduce the corresponding currents flowing in inductor L2. As a result of the negative rate of change of current i_{L2} in inductor L2, a voltage developed at end terminal 102c is decreased until a time t_{3a} of retrace pulse portion RT when a catch diode D2, that is coupled to end terminal 102c, becomes conductive. The operation of a diode, such as catch diode D2, is described in detail in U.S. Patent No. 4,163,926, entitled SWITCH REGULATOR FOR A TELEVISION APPARATUS, in the name of D.H. Willis.

FIGURE 2 illustrates a detailed schematic diagram of regulator oscillator or SCR control circuit 110 of FIGURE 1. Similar numerals and symbols in FIGURES 1 and 2 indicate similar items or functions. During normal power-up operation, control circuit or regulator oscillator 110 of FIGURE 2 is synchronized by a retrace signal 49 developed at input terminal 102a of SCR 200 of FIGURE 1 from voltage V_{W4} . During shut-down or power-off operation, regulator oscillator 110 operates continuously as a free running oscillator and generates signal S_c , as described later on.

Both PNP transistor 53 of FIGURE 2 and NPN transistor 52 switch states at a rate established by trip level voltages for a control terminal 54. Control terminal 54 is coupled to the emitter of transistor 52 through a diode 59. A charging capacitor 55, that is coupled to a regulated +33 volt source, is charged through a controllable current source 56 comprising an NPN transistor 57 and a resistor 58, coupled in series. The junction of the capacitor 55 and the collector of transistor 57 form control terminal 54 that was mentioned before. The +33 volt



source is produced across a zener diode Z33 (shown in Fig. 1) during both power-up and power-off operation.

Complementary transistors 52 and 53 are coupled together in a latching arrangement. That is, the collector output terminal of transistor 53 is coupled to the base input terminal of transistor 52, and the collector output terminal of transistor 52 is coupled to the base input terminal of transistor 53, both transistors thereby forming a regenerative latch.

Under continuous free-running oscillator conditions of regulator oscillator 110, that occur during power-off operation, as explained later on, when transistor 52 becomes conductive, current is drawn from the +33 volt source to the collector of transistor 52 through resistors 60 and 61, thereby turning on transistor 53. Part of the collector current of transistor 53 is then coupled to the base of transistor 52 through a resistor 62, thereby regeneratively turning on both transistors into saturated conduction. Similarly, when transistor 52 becomes nonconductive, both transistors regeneratively turn off.

Operation of regulator oscillator 110 for one free-running cycle will now be described. Consider an interval during which transistors 52 and 53 are nonconducting. The voltage at the base of the transistor 52 is determined by the resistance values of a voltage divider comprising resistor 63 in series with the parallel combination of resistors 64 and 62. In order for transistor 52 to become conductive, voltage V_{54} must decrease below a lower trip voltage V_L , which is two diode drops below the voltage at the base of transistor 52. Should voltage V_{54} at terminal 54 decrease below level V_L , transistors 52 and 53 would regeneratively turn on.

When both transistors 52 and 53 are conductive, the voltage divider ratio changes. With transistor 53 in saturated conduction, resistor 63, rather than resistor 64, is now effectively paralleled by resistor 62, developing a new, more positive base voltage for transistor 52, and establishing an upper level trip voltage V_H for control



terminal 54. Should voltage V_{54} at terminal 54 increase above level V_H , transistors 52 and 53 would regeneratively turn off.

FIGURES 4a and 4b illustrate idealized waveforms for voltage V_{54} at control terminal 54 and the collector voltage of oscillator transistor 53 during continuous free-running operation of regulator oscillator 110 that occurs during power-off operation of the power supply. During power-off operation, regulator oscillator 110 of FIGURE 1 is energized but horizontal output stage 99 is disabled. Consider voltage V_{54} of FIGURE 2 during the interval, beginning somewhat after time T_1 . Transistors 52 and 53 are turned off, and capacitor 55 is charging from the +33 volt source at a constant rate determined by the base voltage of transistor 57 of controllable current source 56. The voltage at terminal 54 is thus a decreasing sawtooth. At time T_2 , voltage V_{54} has decreased to its lower trip voltage level V_L , causing transistors 52 and 53 to regeneratively turn on.

The collector of transistor 53 is coupled to one of output terminals B-B through a diode 65. A primary winding T2a of transformer T2 of FIGURE 1 is coupled between terminals B-B. A discharge path of capacitor 55 comprises the terminal of capacitor 55 coupled to the +33 volt source, the emitter-collector path of transistor 53, diode 65, winding T2a coupled across terminals B-B, and the other terminal of capacitor 55. To prevent current source 56 from undesirably charging capacitor 55 during the capacitor discharging interval, the collector of transistor 53 is coupled to the emitter of transistor 57 through a resistor 77. When transistor 53 conducts, transistor 57 is cut off, disabling current source 56 during the discharge interval.

As illustrated in FIGURE 4a, beginning at time T_2 , voltage V_{54} at terminal 54 comprises an increasing sawtooth. At time T_3 , voltage V_{54} has increased to its upper trip voltage level V_H . Transistors 52 and 53



regeneratively turn-off, and the next charging cycle begins.

As represented by the collector voltage of transistor 53, illustrated in FIGURE 4b, during the approximate interval T_2 - T_3 , an output signal is coupled to regulator oscillator 110 output terminals B-B to provide gating current to turn-on the regulator SCR 200 of FIGURE 1. The actual time width of interval T_2 - T_3 of FIGURES 4a-4b is relatively unimportant provided sufficient SCR gating current of a sufficient duration is coupled to SRC 200 of FIGURE 1 to turn it on.

In normal power-up operation, regulator oscillator 110 is not left continuously free-running as in power-off operation but is synchronized with horizontal deflection. The charging rate of capacitor 55 of FIGURE 2 is varied depending upon the magnitude of the feedback voltage V_f coupled to a feedback terminal 101 for varying the turn-on instant and conduction angle of SCR 200 of FIGURE 1.

FIGURES 3a-3d illustrate waveforms useful for explaining normal power-up operation of control circuit 110 of FIGURES 1 and 2. Similar numerals and symbols in FIGURES 1, 2 and 3a-3d indicate similar items or functions.

At the beginning of the retrace interval at time t_1 of FIGURES 3a, negative going retrace pulse 49 of FIGURE 2 is coupled from input terminal 102a to the base electrode of transistor 53 through a resistor 149 and a capacitor 150 that causes transistor 53 to become conductive. Therefore, capacitor 55 becomes immediately afterward substantially discharged.

After time t_2 , the beginning of trace, capacitor 55 begins to charge at a rate determined by the voltage at the base of transistor 57 of current source 56. Voltage V_{54} decreases until lower trip voltage V_L is reached at time t_4 . At time t_4 , the oscillator transistors regeneratively turn on, resulting in a gating signal $S_{c(2)}$ being generated and coupled to SCR 200 to turn on the SCR, as illustrated in FIGURE 3c.



Regulator oscillator 110 then continues in a free-running mode and, as illustrated in FIGURE 3d, several charge-discharge cycles may occur before another synchronizing retrace pulse 49 is coupled to terminal 102a at time t_5 . In this way, the free-running mode, unlike in the power-off operation, is interrupted by synchronizing retrace pulse 49. Thus, as illustrated in FIGURE 3c, in the subsequent free-running mode after time t_4 , and prior to the next retrace pulse 49, another SCR 200 gating signal S_C may be coupled to the SCR. The number of additional gating signals will depend upon such factors as the position of the turn-on instant t_4 within the horizontal trace interval and the charging and discharging rates established for capacitor 55. Such additional turn-on gating signals are of relatively little consequence, since the SCR remains in a conductive state as long as the current through the SCR is above its holding current level.

To provide regulation, the turn-on instant t_4 is varied within the trace interval by varying the charge rate of capacitor 55 through a varying voltage at the base of transistor 57. Transistor 57 base voltage is the proportioned value of feedback voltage V_f coupled to the base of transistor 57 through a voltage divider comprising resistors 70 and 71.

An error amplifying transistor 43 has a base electrode that is coupled to feedback signal V_{IN} that is representative of voltage B+ via an input resistor 43a. Collector load resistors 43b, 70 and 71 form a load resistance at the collector of transistor 43. A zener diode 243 that is coupled to the emitter of transistor 43 determines the threshold voltage of the inverting amplifier that includes transistor 43. Amplified error voltage V_f that is developed at a terminal 91, at the collector of transistor 43, is coupled to the base electrode of transistor 57.

After time t_2 , the beginning of trace, capacitor 55 begins to charge at a rate determined by the voltage at the base of transistor 57 of current source 56. The voltage



V_{54} decreases until the lower trip voltage V_L is reached at time t_4 . At time t_4 , the oscillator transistors regeneratively turn on, resulting in gating signal $S_{C(2)}$ being coupled to SCR 200 to turn the SCR on, as illustrated in FIGURE 3c.

Should the regulated B+ voltage at terminal 102d of FIGURE 1 decrease, for example, the inverted feedback voltage V_f of FIGURE 2 increases causing the base voltage of transistor 57 to also increase. The current magnitude of current source 56 increases, increasing the charge rate of capacitor 55. As illustrated in FIGURES 3d and 3c by the dotted waveforms V_{54} and $S_{C(1)}$, the lower trip voltage level V_L is reached at an earlier instant t_3 , generating a gating pulse $S_{C(1)}$ at the earlier instant t_3 , as required for proper regulation.

A user initiated command to enable shut-down or power-off operation of the television receiver causes remote receiver 120 of FIGURE 1 to generate an on/off control signal ON/OFF at an "OFF" state that is applied to driver 100. After power-off command occurs, the operation of signal on/off causes switching signal H_r at the base electrode of transistor Q1 to be removed. Therefore, horizontal output stage 99 is disabled and supply voltage $V+$ is not generated. Also, retrace pulse V_{W4} in winding W4 of transformer T1 is not generated. Consequently, retrace signal 49 that, in normal power-up operation, synchronizes regulator oscillator 110, is not generated during the power-off operation that follows. Because regulator oscillator 110 is energized from voltage V_{UR} also during the power-off operation, regulator oscillator 110 free runs continuously, as described before.

Assume that, in a given interval that occurs during the power-off operation, the magnitude of the anode-to-cathode voltage of SCR 200 is smaller than the minimum required for enabling latching operation in SCR 200. In this case, any trigger pulse of free running control signal S_C that occurs when the anode-to-cathode voltage of SCR 200 is insufficiently large to enable



latching operation in SCR 200, will, nevertheless, cause SCR 200 to turn on in an unlatched mode. In each such period of signal S_c , SCR 200 will be turned on for an interval that is proportional to the pulse width of the trigger pulse or, for example, to interval T_2 - T_3 of FIGURE 4b. The pulse width of each trigger pulse is constant. It follows that for a given anode-to-cathode voltage difference in SCR 200 of FIGURE 1, operating in the turned-on unlatched operation, the average value of current i_{SCR200} through SCR 200 is directly related to the frequency of the trigger pulses.

Further assume that, in the aforementioned given interval during the power-off operation, the free running frequency of the trigger pulses is so low that the average value of current i_{SCR200} in SCR 200 in each period of the trigger pulses is smaller than a load current i_L in resistor R_{S1} . Additionally, assume that the load current i_L is supplied entirely through SCR 200. Therefore, filter capacitor C2 would discharge by load current i_L until attaining a voltage level that produces a sufficiently large anode-to-cathode voltage difference in SCR 200, such as 10 volts, for enabling the latching operation. Thereafter, SCR 200 will be triggered by the next trigger pulse produced by free running oscillator 110 and the latching operation will occur in SCR 200.

Because load current i_L is small, the discharge interval for obtaining such sufficiently large anode-to-cathode voltage difference that enables the latching operation in SRC 200 may be equal to, for example, 160 milliseconds. Since retrace pulses V_{W4} are not present during the power-off operation, such latching operation will continue until filter capacitor C2 is again charged to a voltage that is equal to or greater from unregulated supply voltage V_{UR} , causing the SCR 200 to turn off. At the end of each such latching operation, the anode-to-cathode voltage of SCR 200 is again insufficiently large to permit the next latching operation until the next interval of 160 milliseconds has elapsed.



The latching operation might produce a high amplitude, wide pulse of current i_{SCR200} flowing in SCR 200 and in filter inductor L2 that is repetitive at a corresponding frequency of approximately 6Hz. Such wide current pulses might produce an objectionable sound during power-off operation. The objectionable sound might be produced due to possible parasitic mechanical vibrations as a result of the wide pulses current in, for example, inductor L2. Such sound may be objectionable if it occurs during the power-off operation when the user does not expect any sound to come from the turned-off television receiver. Therefore, it may be desirable to prevent filter capacitor C2 from being discharged to a level that enables the undesirable latching operation in the SCR 200, during the power-off operation.

In accordance with an aspect of the invention, a signal V_{121} that is derived from a voltage V_{LIN} developed in linearity inductance L_{LIN} of FIGURE 1 is applied to a transistor Q2, operating as a switch, that is coupled to terminal 110a of regulator oscillator 110. Conduction of transistor Q2 causes voltage V_{IN} to be zero, which increases the frequency of signal S_C , during the power-off operation, to the maximum value, in a manner that is described later on.

The absence of signal V_{121} causes the free running frequency of signal S_C to increase in order to increase the frequency of the trigger pulses to enable replenishing, during each trigger pulse, of all the charge in filter capacitor C2 that was lost during the interval that elapsed from the immediately preceding trigger pulse of signal S_C . Because all the charge lost is replenished during each period of the trigger pulses, voltage B+ in filter capacitor C2 will be maintained substantially at the same level at the end of each trigger pulse. Such level of voltage B+ is sufficiently high to maintain the anode-to-cathode voltage of SCR 200 sufficiently low for preventing the latching operation of the SCR switch from occurring throughout the power-off operation. The result



is that, advantageously, the aforementioned objectionable sound is eliminated, as explained in detail in U.S. Patent 4,866,525 entitled, A Television Apparatus Power Supply issued 12 September 1989 to Rodriguez-Cavazos et al.

5 During power-up operation, signal V_{121} causes transistor Q2 to be non-conductive, so as to have no effect on the switching of the SCR 200. On the other hand, during the power-off operation, the absence of signal V_{121} causes transistor Q2 to conduct, which increases the frequency of
10 signal S_C and, in turn, the conduction of SCR 200. The way signal V_{121} is produced and utilized is further explained below.

 During normal power-up operation, AC voltage V_{LIN} at the frequency f_H is developed in linearity inductor
15 L_{LIN} . A capacitor C121a and a resistor R121 form a series arrangement that is coupled in parallel with inductor L_{LIN} and that dampens ringing in inductor L_{LIN} . During a portion of retrace, capacitor C121a is charged by a positive going retrace pulse of voltage V_{LIN} . At the end of such retrace
20 pulse portion, as the retrace pulse of voltage V_{LIN} becomes smaller, capacitor C121a, that is already charged, produces a negative pulse voltage of a bipolar signal V_{121a} at a cathode of a diode D121 that is coupled between resistor R121 and capacitor C121a. Diode D121 and a filter capacitor
25 C121b form a negative peak detector 121 that produces signal V_{121} . The loading effect of detector 121 on inductor L_{LIN} is, advantageously, substantially insignificant. Therefore, detector 121 substantially does not affect deflection current. Signal V_{121} , that is negative during
30 power-up operation, is produced at the anode of diode D121 and is coupled through a resistor R122a to the base of transistor Q2. A protection diode D122 coupled between the base and the emitter electrodes of transistor Q2 prevents the base-emitter reverse voltage in transistor Q2 from
35 exceeding the forward voltage of diode D122.


 In accordance with a feature of the invention, negative signal V_{121} causes transistor Q2 to be nonconductive throughout normal power-up operation. On the



other hand, throughout power-off operation, negative signal V_{121} is not generated and a resistor R122b that is coupled between the +33 volt supply and the base of transistor Q2 causes transistor Q2 to be conductive. Transistor Q2 of
5 FIGURE 1 operates as a conductive switch throughout the power-off operation and as a nonconductive switch throughout the normal power-up operation. The collector of transistor Q2 is coupled to input terminal 110a of control circuit 110 where voltage V_{IN} is developed and causes
10 voltage V_{IN} to be zero during power-off operation. Therefore, the rate of change of voltage V_{54} of FIGURE 2 becomes substantially higher than if voltage B+ were permitted to control the level of voltage V_{IN} during the power-off operation. The result is that control circuit 110
15 will produce signal S_C of FIGURE 1 at a free-running frequency that is at the maximum. Therefore, as explained before, the aforementioned objectionable sound is eliminated. Had voltage B+ been permitted to control the level of voltage V_{IN} during the power-off operation, the
20 frequency of signal S_C might have been at a minimum during at least a portion of each of the aforementioned 160 millisecond intervals.

Regulator oscillator 110, transistor Q2, linearity inductance L_{LIN} , switch regulator 102 and
25 linearity inductor L_{LIN} are each referenced to a common ground conductor HG that is conductively coupled to mains supply voltage V_{AC} and that is referred to herein as hot ground conductor HG. On the other hand, each of remote receiver 120 and horizontal oscillator and driver 100 of
30 the television receiver is referenced to a common ground conductor CG that is conductively isolated from hot ground conductor HG and that is referred to herein as cold ground conductor CG. The conductive isolation between the hot and the cold ground conductors is accomplished, in part, by
35 energizing remote receiver 120 and driver 100 from a voltage 78 produced in a conventional manner that is conductively isolated from hot ground conductor HG. Voltage


This Sheet Has Been Replaced



78 is produced during both the power-off and the power-up operations.

In accordance with another aspect of the invention, signal V_{121} that is applied to regulator oscillator 110 and to regulator switch 102 through transistor Q2 is generated from voltage V_{LIN} developed across inductor L_{LIN} via a signal path that is referenced to hot ground conductor HG. The signal path includes capacitor C121a and detector 121 that are, each conductively coupled to hot ground conductor HG. Signal V_{121} that is referenced to hot ground conductor HG has two levels that correspond to the "OFF" state and to an "ON" state, respectively, of on/off control signal ON/OFF that is referenced to cold ground conductor CG. The "power-up" state of signal V_{121} is obtained from horizontal rate signal H_r that is generated only during the power-up operation. Signal H_r is a transformer coupled signal that is coupled across the hot-cold barrier formed by transformer T3. In this way, advantageously, on/off control signal ON/OFF is applied to transistor Q2 via transformer T3 that maintains the hot-cold barrier. Transformer T3 is the same transformer used for supplying signal H_r to deflection switch transistor Q1, as described before. Consequently, the need for an additional circuit element for applying the two states of on/off control signal ON/OFF across such hot-cold barrier is obviated. Advantageously, extracting the on/off information from voltage V_{LIN} is accomplished without adversely affecting deflection current i_y .

This Sheet Has Been Replaced





WHAT IS CLAIMED IS:

1. A television apparatus, comprising:
 - a source (100,120) of an input signal (H_r) at a frequency that is related to a deflection frequency;
 - 5 a deflection circuit output stage (99), including a deflection current linearity element (L_{LIN}), responsive to said input signal for generating a first signal (V_{LIN}) in said linearity element (L_{LIN}) during a power-on operation but not during a power-off operation of said
 - 10 television apparatus; characterized by means (121) coupled to said linearity element (L_{LIN}) and responsive to said first signal (V_{LIN}) for producing a power-on/power-off control signal (V_{121}) that exhibits a power-on state during said power-on operation
 - 15 and a power-off state during said power-off operation; and a utilization circuit (Q2) of said television apparatus responsive to said power-on/power-off control signal (V_{121}) that causes said utilization circuit (Q2) to operate in a mode of operation that corresponds to said
 - 20 state of said control signal.
2. A television apparatus for generating a power-up/power-off control signal (V_{121}), comprising:
 - first means (100) for generating a first signal (output of 100) at a frequency that is related to a
 - 25 deflection frequency, during a power-up operation of said television apparatus, but not during a power-off operation thereof; characterized by coupling means (T3) having a first portion (primary) that is electrically nonisolated from said first
 - 30 signal (output of 100), with respect to electrical shock hazard isolation, and a second portion (secondary) that is electrically isolated from said first signal with respect to electrical shock hazard isolation, for coupling said first signal to said second portion to develop in said
 - 35 second portion a second signal (H_r) that is electrically isolated from said first signal (output of 100) such that said second signal (H_r) is generated during said power-up operation but not during said power-off operation;





a deflection switch (Q1) coupled to and electrically nonisolated from said second portion (secondary) of said coupling means (T3) and being switched in response to said second signal (H_r) during said power-up operation but not during said power-off operation for generating a deflection current (i_y) in a deflection winding (L_y) during said power-up operation;

third means (121) responsive to said second signal (H_r) and electrically nonisolated from said second portion (secondary) of said coupling means (T3) for generating said power-up/power-off control signal (V_{121}) that is electrically isolated from said first signal (output of 100) and that is in a power-up state (negative) as long as said second signal (H_r) is being generated during said power-up operation and that is in a power-off state (zero) as long as said second signal (H_r) is not being generated during said power-off operation; and

an oscillator (110) electrically isolated from said first signal (output of 100) for being energized during both power-up and power-off operations to generate an oscillator signal (S_c) during both operations, said oscillator (110) being responsive to and electrically nonisolated from said control signal (V_{121}) and being placed in a power-up mode of operation when said control signal (V_{121}) is in said power-up state (negative) and being placed in a power-off mode of operation when said control signal is in said power-off state (zero).

3. A television apparatus according to Claim 2 characterized in that said oscillator (110) is electrically nonisolated from an input AC main supply voltage (V_{AC}).

4. A television apparatus according to Claim 3 characterized by a linearity inductance (L_{LIN}) wherein said third means (121) is responsive to a signal (V_{LIN}) that is developed in said linearity inductance (L_{LIN}) for generating a first level (negative) of said power-on/power-off control signal (V_{121}) when the switching in said deflection switch (Q1) occurs and a second level





(zero) when the switching operation in said deflection switch (Q1) is disabled.

5 5. A television apparatus according to Claim 4 characterized in that said third means (121) comprises a peak detector.

10 6. A television apparatus according to Claim 5 characterized by an R-C network (R121,C121a) coupled between said linearity inductance (L_{LIN}) and said detector (121) for generating a bipolar signal (V_{121a}) that is coupled to an input terminal of said detector (121).

15 7. A television apparatus according to Claim 12 characterized by a regulator switch (200) for coupling an input supply voltage (V_{UR}) to a load, during a portion of a given periodic interval that is determined in accordance with said first signal (output of 100) to generate an output supply voltage (B+) at a level that varies in accordance with said oscillator signal (S_C), wherein said oscillator (110) comprises a regulator oscillator that is energized during both said power-up operation and during
20 said power-off operation for generating said oscillator signal (S_C) during both said power-up and said power-off operations such that during said power-up operation said switching signal (S_C) varies in accordance with a feedback signal (V_{in}) that is representative of said output supply
25 voltage (B+) that, in turn, causes a duty cycle of said regulator switch (200) to vary in a negative feedback loop manner for regulating said output supply voltage (B+), wherein said power-up/power-off control signal (V_{121}) is coupled in said feedback loop for controlling the frequency
30 of said oscillator signal (S_C) during said power-off operation in a manner that does not affect the frequency of said first signal (output of 100) during said power-up operation.

35 8. A television apparatus according to Claim 7 characterized in that said coupling means (T3) forms a hot-cold barrier isolation that electrically isolates said first signal (output of 100) from said deflection switch (Q1), wherein said third means (121) and said regulator





oscillator (110) form a signal path that is interposed between said regulator switch (200) and said deflection switch (Q1), said signal path being electrically isolated from said first signal (output of 100) and electrically nonisolated from said second portion (secondary) of said coupling means (T3).

9. A switch mode power supply of a television apparatus, comprising:

10 a source (101) of an input supply voltage (V_{UR});
a filter capacitor (C2) for developing therein an output supply voltage (B+);

a load (99) coupled to said filter capacitor (C2) for producing a load current from a charge that is stored in said filter capacitor (C2);

15 means (110) for generating a periodic switching first control signal (S_C) during both power-on and power-off modes of operation of said power supply;

a regulator switch (200) having said periodic switching first control signal (S_C) coupled to a control terminal (gate) thereof and having a main current conducting input terminal (102a) coupled to said input supply voltage (V_{UR}) and a main current conducting output terminal (102c) coupled to said filter capacitor (C2) for producing a switching current (i_{SCR200}) in said regulator switch (200), during both power-on and power-off modes of operation, that is coupled to said filter capacitor (C2) to develop from said switching current (i_{L2}) an output supply voltage (B+) in said filter capacitor (C2), said regulator switch (200) being capable of operating in a periodic
20 latched conductive state when said first control signal is developed, provided that a first voltage (at 102c), developed at said regulator switch output terminal (102c) and coupled from said filter capacitor (C2), is at a level that is within a first range of values; characterized by

30 means (121) for generating a power-on/power-off control signal (V_{121}) that is coupled to a control terminal (110a) of said first control signal generating means (110) for changing said first control signal (S_C), during said





power-off mode of operation, to produce said switching current (i_{SCR200}) in said regulator switch (200) during said power-off mode of operation at a level that causes said first voltage (at 102c) to be outside said range of values in order to prevent said regulator switch (200) from operating in a latched conductive state throughout said power-off operation.

10. A power supply according to Claim 9 characterized by a second switch (Q2) responsive to said power-on/power-off control signal (V_{121}) and coupled in a feedback signal path that is formed between said output supply voltage (B+) and said control terminal (110a) of said first control signal generating means (110) for decoupling a feedback signal that is representative of said output supply voltage (B+) from said control terminal (110a) of said first control signal generating means (110) throughout said power-off mode of operation to increase a duty cycle of said first control signal (S_c) that, in turn, increases a duty cycle of said regulator switch (200), wherein during said power-on mode of operation, said feedback signal (from B+) causes said first control signal generating means (110) to vary timings of said first control signal (S_c) in accordance with said output supply voltage (B+) that, in turn, varies said duty cycle of said regulator switch (200) for regulating said output supply voltage (B+).



FIG. 1

This Sheet Has Been Replaced



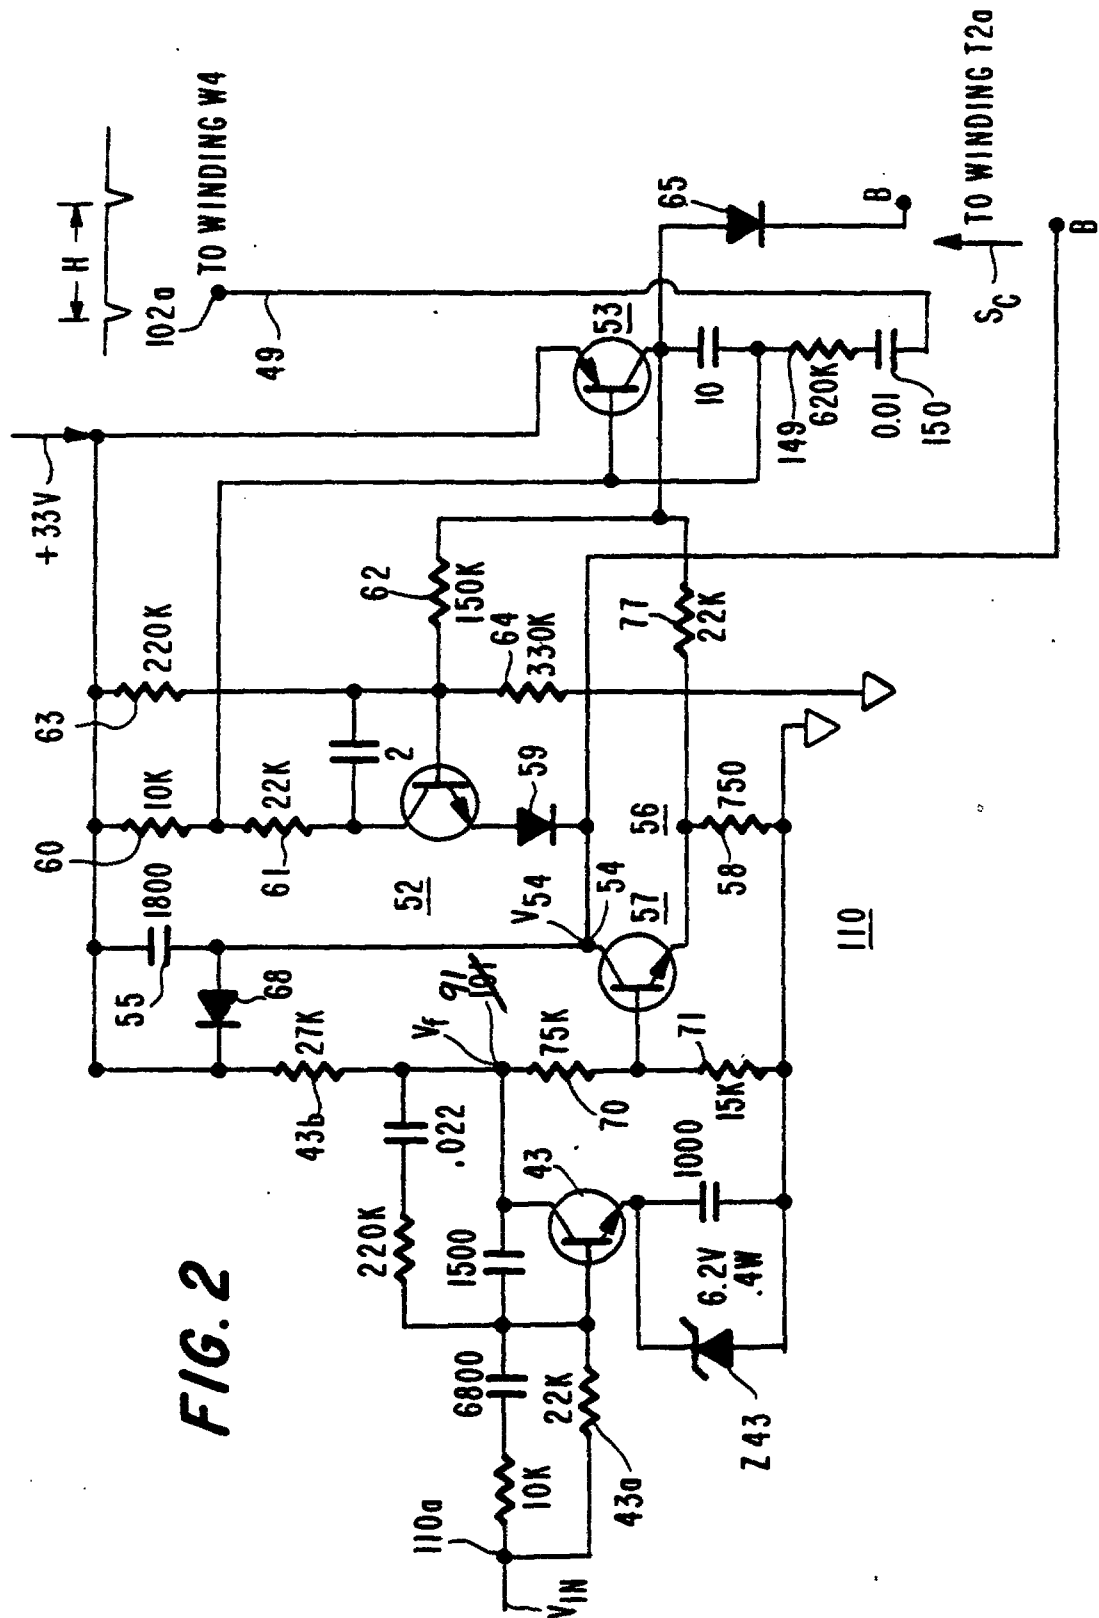


FIG. 2

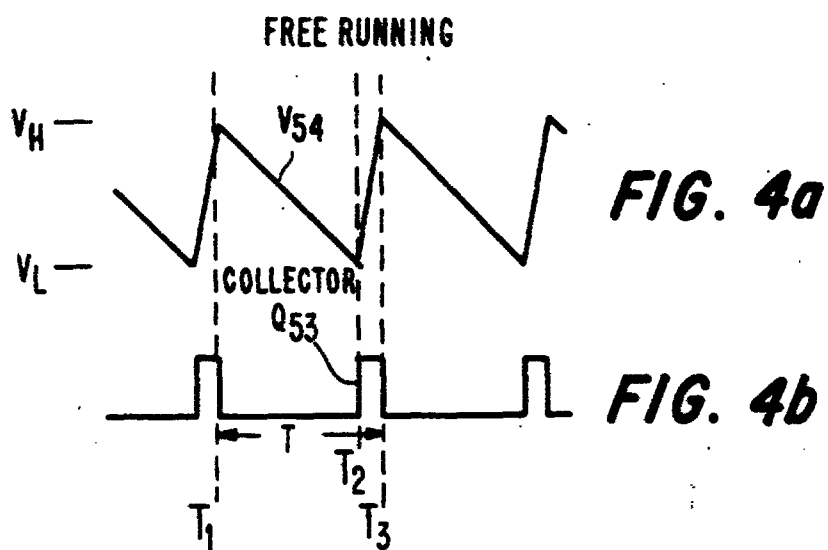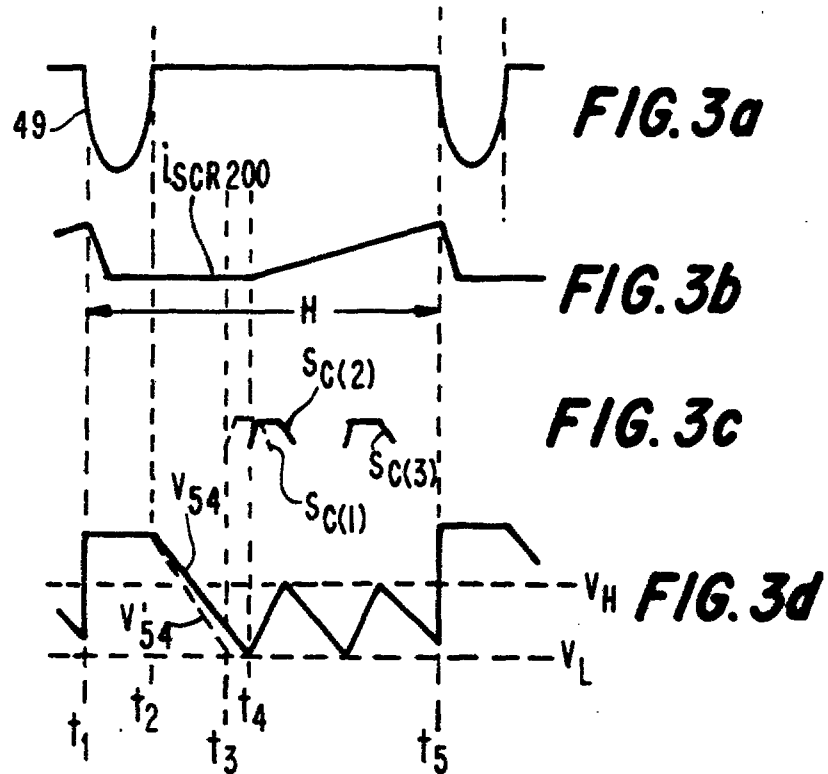

✓ 19
✓ 20
✓ 21
✓ 22

DATE: 5/9/96

A VOLTAGE REGULATOR IN A TELEVISION APPARATUS

The invention relates to a switching regulator power supply of a television apparatus.

A typical deflection circuit output stage of a television receiver includes a retrace resonant circuit, including a deflection winding and a linearity inductance, and a transistor switch. The output stage generates, in a secondary winding of a flyback transformer, a retrace pulse that is rectified for generating a power-up or run supply voltage for energizing the receiver circuitry. The output stage is energized by a B+ supply voltage that is coupled to a terminal of a primary winding of the flyback transformer. The B+ supply voltage is produced and regulated in a switching regulator. The switching regulator includes a switch such as, for example, an SCR switch having an input terminal that is coupled to an unregulated supply voltage.

During normal power-up operation, the SCR switch is conductive from an instant that is controllable, occurring within each trace interval of a horizontal deflection cycle, and remains latched in a conductive state during the remaining part of trace. During retrace, the SCR switch is turned off in preparation for the following regulation cycle.

Regulated B+ supply voltage is developed in a filter capacitor that is coupled via a filter inductance to an output terminal of the SCR switch. The filter capacitor supplies a load current that flows in the deflection circuit output stage during power-up operation. A control circuit of the regulator that includes an oscillator provides, in a given cycle of a first control signal, a trigger pulse that varies the instant when the SCR switch becomes conductive. The trigger pulse occurs at an instant that is controlled in accordance with the B+ supply voltage in a negative feedback manner such that the B+ supply voltage is maintained at a predetermined value.

A turn-off winding of the flyback transformer, coupled between the unregulated supply voltage and the

This is the replacement sheet

Date: 25 SEP 1996

anode of the SCR, couples a retrace pulse to the anode of the SCR switch during each horizontal retrace interval to turn off the SCR switch during retrace. Thus, the oscillator of the control circuit is synchronized during
5 the power-up operation by the retrace pulse. During a power-off operation the oscillator free runs. During the power-up operation, the timing of the trigger pulse that is produced by the oscillator varies in accordance with the B+ supply voltage in a negative feedback manner.

10 In a power supply, embodying a feature of the invention, the control circuit is energized during both the power-up and power-off operations so as to obviate the need for switching off the unregulated supply voltage via an on/off power switch. On the other hand, a horizontal rate
15 drive signal, provided to the deflection circuit output stage from a horizontal drive stage, ceases to occur during the power-off operation. Consequently, the generation of the deflection current and of the retrace pulses is prevented. The result is that the load current supplied
20 from the filter capacitor is substantially reduced during the power-off operation.

As explained before, the trigger pulses occur at a free running frequency, during the power-off operation. Any trigger pulse that occurs when the anode-to-cathode
25 voltage of the SCR is insufficiently large to enable latching operation in the SCR switch, will, nevertheless, cause the SCR switch to be turned on in an unlatched mode of operation for an interval that is proportional to the pulse width of the trigger pulse. Assuming a constant width
30 of the trigger pulse, it follows that, in the unlatched mode of operation of the SCR switch, the average current through the SCR switch is directly related to the free running frequency of the trigger pulses.

Assume that, during the power-off operation, the
35 frequency or the duty cycle of the trigger pulses is at such a low value that the average current in the SCR switch is smaller than the load current. Further assume that the load current is supplied entirely through the SCR switch.

This is the replacement sheet

Date: 25 SEP 1996

Therefore, the filter capacitor will discharge until attaining a level that will produce a sufficiently large anode-to-cathode voltage difference in the SCR switch for enabling latching operation. Thereafter, the SCR switch
5 will be triggered by the next trigger pulse of the free running oscillator and the latching operation will occur in the SCR switch.

Because the load current is small, the discharge time for obtaining such sufficiently large anode-to-cathode
10 voltage difference that enables the latching operation might be equal to, for example, 160 miliseconds. Because retrace pulses are not present, during power-off operation, such latching operation will continue until the filter capacitor is again charged to a voltage that is equal to or
15 greater than the unregulated supply voltage, causing the SCR switch to turn off. After the end of each latching operation, and until such interval of 160 miliseconds will have elapsed, the anode-to-cathode voltage of the SCR switch is again too small to enable the next latching
20 operation.

During the latching operation, a high amplitude, wide pulse of current flows in the SCR switch and, for example, in the filter inductance, such pulse is repetitive at a corresponding frequency of, for example, 6Hz. Such
25 wide current pulses might produce an objectionable sound during power-off operation. The objectionable sound might be produced due to possible parasitic mechanical vibrations as a result of the wide pulse current in, for example, the inductance of the filter. Therefore, it may be desirable
30 to prevent the filter capacitor from being discharged to a level that enables the undesirable latching operation in the SCR switch to occur, during the power-off operation.

In accordance with an aspect of the invention, a second control signal having two states that are indicative
35 of the power-off and power-up operations, respectively, in the television receiver, is applied to the control circuit for controlling the free running frequency of the oscillator of the control circuit during the power-off

This is the replacement sheet

Date: 25 SEP 1996

operation. The second control signal causes the free running frequency to increase in order to increase the conduction of the SCR switch when it operates in the turned-on unlatched mode. The conduction is increased so
5 that the average current is sufficiently large to enable replenishing, during each trigger pulse, of all the filter capacitor charge that was lost during the interval that elapsed from the end of the immediately preceding trigger pulse. Because all the lost charge is replenished during
10 each period of the trigger pulses, the filter capacitor voltage will be substantially at the same level at the end of each trigger pulse. Such level is sufficiently high to maintain the anode-to-cathode voltage of the SCR switch sufficiently low for preventing the latching operation of
15 the SCR switch throughout the power-off operation. The result is that, advantageously, the aforementioned objectionable sound is eliminated.

During power-up operation, the second control signal has no effect on the duty cycle of the SCR switch.
20 On the other hand, during the power-off operation, the second control signal causes an increase in the duty cycle of the first control signal and, in turn, that of the SCR switch. Without the operation of the second control signal the duty cycle of the SCR switch might be lower than
25 required to prevent the latching operation.

Some television receivers have signal terminals for receiving, for example, external video input signals such as R, G and B input signals, that are to be developed relative to the common conductor of the receiver. Such
30 signal terminals and the receiver common conductor may be coupled to corresponding signal terminals and common conductors of external devices, such as, for example, a VCR or a teletext decoder.

To simplify the coupling of signals between the
35 external devices and the television receiver, the common conductors of the receiver and of the external devices are connected together so that all are at the same potential. The signal lines of each external device are coupled to the

corresponding signal terminals of the receiver. In such an arrangement, the common conductor of each device, such as of the television receiver, may be held "floating", or conductively isolated, relative to the corresponding AC
5 mains supply source that energizes the device. When the common conductor is held floating, a user touching a terminal that is at the potential of the common conductor will not suffer an electrical shock.

Therefore, it may be desirable to isolate the
10 common conductor, or ground, of, for example, the television receiver, from the potentials of the terminals of the AC mains supply source that provide power to the television receiver. Such isolation is typically achieved by a transformer. The isolated common conductor is
15 sometimes referred to as "cold" ground conductor.

In the switching regulator of the power supply of the invention, the AC mains supply voltage is coupled directly to a bridge rectifier for producing an unregulated direct current (DC) input supply voltage that is, for
20 example, referenced to a common conductor, referred to as "hot" ground, and that is conductively isolated from the cold ground conductor. As a result, the control circuit, the B+ supply voltage, the primary winding of the flyback transformer, the linearity inductance and the deflection
25 winding are also referenced to the hot ground conductor. On the other hand, a portion of the driver stage that controls the switching operation of the deflection circuit transistor switch is, for example, referenced to the cold ground conductor. Likewise, an on/off control signal that
30 may be generated by a remote control receiver for controlling the on/off operation of the receiver may also be referenced to the cold ground conductor.

A driver transformer of the driver stage couples a switching, second control signal at the horizontal
35 frequency from the portion of the driver stage, that is referenced to the cold ground conductor, to the deflection circuit transistor switch, that is referenced to the hot ground. The driver transformer provides the required

This is the replacement sheet

Date: 25 SEP 1996

isolation barrier between the hot ground and the cold ground conductors. The on/off control signal may be applied to the driver stage to enable the generation of the second control signal, during normal power-up operation, and to
5 disable its generation during shut-down or power-off operation that disables the operation of the deflection circuit.

In accordance with another aspect of the invention, the first control signal, namely the control
10 signal that causes the free-running frequency of the oscillator of the control circuit to be above the audio range during the power-off operation, is produced from a voltage developed in the linearity inductor of the deflection circuit output stage. The first control signal
15 is produced by an arrangement forming a signal path between the linearity inductor and the control circuit, which signal path is referenced to hot ground. Because the signal path is referenced to hot ground, the need for an additional hot-cold isolation arrangement for applying the power-up and power-off control information of the on/off
20 control signal to the control circuit is, advantageously, obviated.

A television apparatus embodying an aspect of the invention includes a source of an input signal at a
25 frequency that is related to a deflection frequency. A deflection circuit output stage, including a deflection current linearity element that is responsive to the input signal, generates a first signal in the linearity element during a power-on operation but not during a power-off
30 operation of the television deflection apparatus. A power-on/power-off control signal is produced from the first signal that exhibits a power-on state during the power-on operation and a power-off state during the power-off operation. A utilization circuit of the
35 television apparatus is responsive to the power-on/power-off control signal that causes the utilization circuit to operate in a mode of operation that corresponds to the level of the control signal.

This is the replacement sheet

Date: 25 SEP 1996

In the Drawing:

FIGURE 1 illustrates a television power supply including a supply regulator embodying the invention;

FIGURE 2 illustrates the control circuit of the
5 supply regulator of FIGURE 1 that includes an oscillator;

FIGURES 3a-3d illustrate waveforms useful in explaining the normal power-up operation of the circuits of FIGURE 1 and 2; and

FIGURES 4a-4d illustrate free running operation
10 of the oscillator of the control circuit of FIGURE 2.

FIGURE 1 illustrates a portion of a television receiver incorporating a bridge rectifier 101 that rectifies a mains supply voltage V_{AC} to produce a DC, unregulated voltage V_{UR} . An output stage, or switch
15 regulator 102, that includes a silicon controlled rectifier (SCR) switch, referred to herein as SCR 200, produces a regulated voltage B+ that is coupled to a winding W1 of a flyback transformer T1. An input terminal 102a of regulator 102 is coupled to unregulated voltage V_{UR} .
20 Regulated voltage B+ is developed at an output terminal 102d of switch regulator 102. Winding W1 of transformer T1 is coupled to the collector electrode of a deflection switching transistor Q1 of a horizontal circuit output stage 99 operating at a horizontal rate f_H . A control
25 signal H_x , at the horizontal rate f_H , is developed at the base of transistor Q1, during a power-up operation. Signal H_x is applied from a control circuit, referred to herein as a horizontal oscillator and driver 100, that is coupled to the base electrode of transistor Q1. Signal H_x controls
30 the switching of transistor Q1 for generating a deflection current i_y in a series arrangement of a deflection winding L_y , a trace capacitor c_t and a linearity inductor L_{LIN} of horizontal output stage 99. A retrace voltage V_{w2} is produced in a conventional manner across a secondary
35 winding W2 of transformer T1 in each retrace interval of each horizontal period H. Each retrace interval occurs immediately after transistor Q1 becomes nonconductive. A DC, run-mode supply voltage V+, that is, illustratively,

This is the replacement sheet

Date: 25 SEP 1996

+26 volts, is produced by rectifying voltage V_{w2} in a rectifier arrangement 104 that is coupled to winding W2. Voltage V+ is coupled to various circuits of the receiver, not shown, to provide them with a run supply voltage during power-up operation.

Voltage B+ is coupled via a voltage divider, including resistors R_{s1} , R_{s2} and R_{s3} , to a control circuit 110, that is also referred to herein as regulator oscillator 110, that is energized during both power-up and power-off operations to provide a feedback voltage V_{IN} at a terminal 110a. During power-up operation, control circuit 110 generates a signal S_C at the horizontal rate f_H and at a controllable phase that controls the instant, in each horizontal interval H, in which SCR 200 becomes conductive. The phase of signal S_C varies in accordance with a difference between voltage V_{IN} , that is proportional to voltage B+, and a reference voltage, not shown in FIGURE 1, that is produced in control circuit 110. The regulation provided by signal S_C causes regulated voltage B+ to be at a predetermined DC voltage level such as, illustratively, +129 volts, during power-up operation.

The anode of SCR 200 is coupled to unregulated voltage V_{UR} via a winding W4 of transformer T1. The cathode of SCR 200 is coupled to an end terminal 102c of a filter inductor L2. Output terminal 102d, the other end terminal of inductor L2, where regulated voltage B+ is developed, is coupled to winding W1 of flyback transformer T1. A filter capacitor C2 is coupled to output terminal 102d. Signal S_C is coupled via a driver transformer T2 to the gate electrode of SCR 200.

When a leading edge LE of signal S_C of FIGURE 1, having a controllable phase as shown in the waveform of FIGURE 1, occurs, SCR 200 is triggered and becomes immediately conductive. During normal power-up operation, leading edge LE occurs at a time t_{1a} during a trace interval of each period H of a voltage V_{W4} that is developed across winding W4. During the interval in which SCR 200 is conductive, a current i_{L2} in inductor L2, that

charge capacitor C2, increases. The rate of increase of current i_{L2} is determined by unregulated voltage V_{UR} and by regulated voltage B+.

At the end of horizontal trace, a time t_{2a} , shown in the waveform of FIGURE 1, a retrace pulse portion of voltage V_{W4} is developed. Voltage V_{W4} is developed by transformer action from voltage V_R in retrace capacitor C_R . Retrace pulse V_{W4} in winding W4 is poled in such a manner as to tend to reverse bias SCR 200 and to reduce the corresponding currents flowing in inductor L2. As a result of the negative rate of change of current i_{L2} in inductor L2, a voltage developed at end terminal 102c is decreased until a time t_{3a} of retrace pulse portion RT when a catch diode D2, that is coupled to end terminal 102c, becomes conductive. The operation of a diode, such as catch diode D2, is described in detail in U.S. Patent No. 4,163,926, entitled SWITCH REGULATOR FOR A TELEVISION APPARATUS, in the name of D.H. Willis.

FIGURE 2 illustrates a detailed schematic diagram of regulator oscillator or SCR control circuit 110 of FIGURE 1. Similar numerals and symbols in FIGURES 1 and 2 indicate similar items or functions. During normal power-up operation, control circuit or regulator oscillator 110 of FIGURE 2 is synchronized by a retrace signal 49 developed at input terminal 102a of SCR 200 of FIGURE 1 from voltage V_{W4} . During shut-down or power-off operation, regulator oscillator 110 operates continuously as a free running oscillator and generates signal S_c , as described later on.

Both PNP transistor 53 of FIGURE 2 and NPN transistor 52 switch states at a rate established by trip level voltages for a control terminal 54. Control terminal 54 is coupled to the emitter of transistor 52 through a diode 59. A charging capacitor 55, that is coupled to a regulated +33 volt source, is charged through a controllable current source 56 comprising an NPN transistor 57 and a resistor 58, coupled in series. The junction of the capacitor 55 and the collector of transistor 57 form control terminal 54 that was mentioned before. The +33 volt

This is the replacement sheet

Date: 25 SEP 1996

source is produced across a zener diode Z33 (shown in Fig. 1) during both power-up and power-off operation.

Complementary transistors 52 and 53 are coupled together in a latching arrangement. That is, the collector output terminal of transistor 53 is coupled to the base input terminal of transistor 52, and the collector output terminal of transistor 52 is coupled to the base input terminal of transistor 53, both transistors thereby forming a regenerative latch.

Under continuous free-running oscillator conditions of regulator oscillator 110, that occur during power-off operation, as explained later on, when transistor 52 becomes conductive, current is drawn from the +33 volt source to the collector of transistor 52 through resistors 60 and 61, thereby turning on transistor 53. Part of the collector current of transistor 53 is then coupled to the base of transistor 52 through a resistor 62, thereby regeneratively turning on both transistors into saturated conduction. Similarly, when transistor 52 becomes nonconductive, both transistors regeneratively turn off.

Operation of regulator oscillator 110 for one free-running cycle will now be described. Consider an interval during which transistors 52 and 53 are nonconducting. The voltage at the base of the transistor 52 is determined by the resistance values of a voltage divider comprising resistor 63 in series with the parallel combination of resistors 64 and 62. In order for transistor 52 to become conductive, voltage V_{54} must decrease below a lower trip voltage V_L , which is two diode drops below the voltage at the base of transistor 52. Should voltage V_{54} at terminal 54 decrease below level V_L , transistors 52 and 53 would regeneratively turn on.

When both transistors 52 and 53 are conductive, the voltage divider ratio changes. With transistor 53 in saturated conduction, resistor 63, rather than resistor 64, is now effectively paralleled by resistor 62, developing a new, more positive base voltage for transistor 52, and establishing an upper level trip voltage V_H for control

This is the replacement sheet

Date: 25 SEP 1996

terminal 54. Should voltage V_{54} at terminal 54 increase above level V_H , transistors 52 and 53 would regeneratively turn off.

FIGURES 4a and 4b illustrate idealized waveforms for voltage V_{54} at control terminal 54 and the collector voltage of oscillator transistor 53 during continuous free-running operation of regulator oscillator 110 that occurs during power-off operation of the power supply. During power-off operation, regulator oscillator 110 of FIGURE 1 is energized but horizontal output stage 99 is disabled. Consider voltage V_{54} of FIGURE 2 during the interval, beginning somewhat after time T_1 . Transistors 52 and 53 are turned off, and capacitor 55 is charging from the +33 volt source at a constant rate determined by the base voltage of transistor 57 of controllable current source 56. The voltage at terminal 54 is thus a decreasing sawtooth. At time T_2 , voltage V_{54} has decreased to its lower trip voltage level V_L , causing transistors 52 and 53 to regeneratively turn on.

The collector of transistor 53 is coupled to one of output terminals B-B through a diode 65. A primary winding T2a of transformer T2 of FIGURE 1 is coupled between terminals B-B. A discharge path of capacitor 55 comprises the terminal of capacitor 55 coupled to the +33 volt source, the emitter-collector path of transistor 53, diode 65, winding T2a coupled across terminals B-B, and the other terminal of capacitor 55. To prevent current source 56 from undesirably charging capacitor 55 during the capacitor discharging interval, the collector of transistor 53 is coupled to the emitter of transistor 57 through a resistor 77. When transistor 53 conducts, transistor 57 is cut off, disabling current source 56 during the discharge interval.

As illustrated in FIGURE 4a, beginning at time T_2 , voltage V_{54} at terminal 54 comprises an increasing sawtooth. At time T_3 , voltage V_{54} has increased to its upper trip voltage level V_H . Transistors 52 and 53

This is the replacement sheet

Date: 25 SEP 1996

regeneratively turn-off, and the next charging cycle begins.

As represented by the collector voltage of transistor 53, illustrated in FIGURE 4b, during the approximate interval T_2 - T_3 , an output signal is coupled to regulator oscillator 110 output terminals B-B to provide gating current to turn-on the regulator SCR 200 of FIGURE 1. The actual time width of interval T_2 - T_3 of FIGURES 4a-4b is relatively unimportant provided sufficient SCR gating current of a sufficient duration is coupled to SRC 200 of FIGURE 1 to turn it on.

In normal power-up operation, regulator oscillator 110 is not left continuously free-running as in power-off operation but is synchronized with horizontal deflection. The charging rate of capacitor 55 of FIGURE 2 is varied depending upon the magnitude of the feedback voltage V_f coupled to a feedback terminal 101 for varying the turn-on instant and conduction angle of SCR 200 of FIGURE 1.

FIGURES 3a-3d illustrate waveforms useful for explaining normal power-up operation of control circuit 110 of FIGURES 1 and 2. Similar numerals and symbols in FIGURES 1, 2 and 3a-3d indicate similar items or functions.

At the beginning of the retrace interval at time t_1 of FIGURES 3a, negative going retrace pulse 49 of FIGURE 2 is coupled from input terminal 102a to the base electrode of transistor 53 through a resistor 149 and a capacitor 150 that causes transistor 53 to become conductive. Therefore, capacitor 55 becomes immediately afterward substantially discharged.

After time t_2 , the beginning of trace, capacitor 55 begins to charge at a rate determined by the voltage at the base of transistor 57 of current source 56. Voltage V_{54} decreases until lower trip voltage V_L is reached at time t_4 . At time t_4 , the oscillator transistors regeneratively turn on, resulting in a gating signal $S_{c(2)}$ being generated and coupled to SCR 200 to turn on the SCR, as illustrated in FIGURE 3c.

This is the replacement sheet

Date: 25 SEP 1996

Regulator oscillator 110 then continues in a free-running mode and, as illustrated in FIGURE 3d, several charge-discharge cycles may occur before another synchronizing retrace pulse 49 is coupled to terminal 102a at time t_5 . In this way, the free-running mode, unlike in the power-off operation, is interrupted by synchronizing retrace pulse 49. Thus, as illustrated in FIGURE 3c, in the subsequent free-running mode after time t_4 , and prior to the next retrace pulse 49, another SCR 200 gating signal S_c may be coupled to the SCR. The number of additional gating signals will depend upon such factors as the position of the turn-on instant t_4 within the horizontal trace interval and the charging and discharging rates established for capacitor 55. Such additional turn-on gating signals are of relatively little consequence, since the SCR remains in a conductive state as long as the current through the SCR is above its holding current level.

To provide regulation, the turn-on instant t_4 is varied within the trace interval by varying the charge rate of capacitor 55 through a varying voltage at the base of transistor 57. Transistor 57 base voltage is the proportioned value of feedback voltage V_f coupled to the base of transistor 57 through a voltage divider comprising resistors 70 and 71.

An error amplifying transistor 43 has a base electrode that is coupled to feedback signal V_{IN} that is representative of voltage B+ via an input resistor 43a. Collector load resistors 43b, 70 and 71 form a load resistance at the collector of transistor 43. A zener diode 243 that is coupled to the emitter of transistor 43 determines the threshold voltage of the inverting amplifier that includes transistor 43. Amplified error voltage V_f that is developed at a terminal 91, at the collector of transistor 43, is coupled to the base electrode of transistor 57.

After time t_2 , the beginning of trace, capacitor 55 begins to charge at a rate determined by the voltage at the base of transistor 57 of current source 56. The voltage

V_{54} decreases until the lower trip voltage V_L is reached at time t_4 . At time t_4 , the oscillator transistors regeneratively turn on, resulting in gating signal $S_{C(2)}$ being coupled to SCR 200 to turn the SCR on, as illustrated in FIGURE 3c.

Should the regulated B+ voltage at terminal 102d of FIGURE 1 decrease, for example, the inverted feedback voltage V_f of FIGURE 2 increases causing the base voltage of transistor 57 to also increase. The current magnitude of current source 56 increases, increasing the charge rate of capacitor 55. As illustrated in FIGURES 3d and 3c by the dotted waveforms V_{54} and $S_{C(1)}$, the lower trip voltage level V_L is reached at an earlier instant t_3 , generating a gating pulse $S_{C(1)}$ at the earlier instant t_3 , as required for proper regulation.

A user initiated command to enable shut-down or power-off operation of the television receiver causes remote receiver 120 of FIGURE 1 to generate an on/off control signal ON/OFF at an "OFF" state that is applied to driver 100. After power-off command occurs, the operation of signal on/off causes switching signal H_r at the base electrode of transistor Q1 to be removed. Therefore, horizontal output stage 99 is disabled and supply voltage $V+$ is not generated. Also, retrace pulse V_{W4} in winding W4 of transformer T1 is not generated. Consequently, retrace signal 49 that, in normal power-up operation, synchronizes regulator oscillator 110, is not generated during the power-off operation that follows. Because regulator oscillator 110 is energized from voltage V_{UR} also during the power-off operation, regulator oscillator 110 free runs continuously, as described before.

Assume that, in a given interval that occurs during the power-off operation, the magnitude of the anode-to-cathode voltage of SCR 200 is smaller than the minimum required for enabling latching operation in SCR 200. In this case, any trigger pulse of free running control signal S_C that occurs when the anode-to-cathode voltage of SCR 200 is insufficiently large to enable

This is the replacement sheet

Date: 2 5 SEP 1996

latching operation in SCR 200, will, nevertheless, cause SCR 200 to turn on in an unlatched mode. In each such period of signal S_c , SCR 200 will be turned on for an interval that is proportional to the pulse width of the trigger pulse or, for example, to interval T_2 - T_3 of FIGURE 4b. The pulse width of each trigger pulse is constant. It follows that for a given anode-to-cathode voltage difference in SCR 200 of FIGURE 1, operating in the turned-on unlatched operation, the average value of current i_{SCR200} through SCR 200 is directly related to the frequency of the trigger pulses.

Further assume that, in the aforementioned given interval during the power-off operation, the free running frequency of the trigger pulses is so low that the average value of current i_{SCR200} in SCR 200 in each period of the trigger pulses is smaller than a load current i_L in resistor R_{S1} . Additionally, assume that the load current i_L is supplied entirely through SCR 200. Therefore, filter capacitor C2 would discharge by load current i_L until attaining a voltage level that produces a sufficiently large anode-to-cathode voltage difference in SCR 200, such as 10 volts, for enabling the latching operation. Thereafter, SCR 200 will be triggered by the next trigger pulse produced by free running oscillator 110 and the latching operation will occur in SCR 200.

Because load current i_L is small, the discharge interval for obtaining such sufficiently large anode-to-cathode voltage difference that enables the latching operation in SRC 200 may be equal to, for example, 160 milliseconds. Since retrace pulses V_{W4} are not present during the power-off operation, such latching operation will continue until filter capacitor C2 is again charged to a voltage that is equal to or greater from unregulated supply voltage V_{UR} , causing the SCR 200 to turn off. At the end of each such latching operation, the anode-to-cathode voltage of SCR 200 is again insufficiently large to permit the next latching operation until the next interval of 160 milliseconds has elapsed.

The latching operation might produce a high amplitude, wide pulse of current i_{SCR200} flowing in SCR 200 and in filter inductor L2 that is repetitive at a corresponding frequency of approximately 6Hz. Such wide current pulses might produce an objectionable sound during power-off operation. The objectionable sound might be produced due to possible parasitic mechanical vibrations as a result of the wide pulses current in, for example, inductor L2. Such sound may be objectionable if it occurs during the power-off operation when the user does not expect any sound to come from the turned-off television receiver. Therefore, it may be desirable to prevent filter capacitor C2 from being discharged to a level that enables the undesirable latching operation in the SCR 200, during the power-off operation.

In accordance with an aspect of the invention, a signal V_{121} that is derived from a voltage V_{LIN} developed in linearity inductance L_{LIN} of FIGURE 1 is applied to a transistor Q2, operating as a switch, that is coupled to terminal 110a of regulator oscillator 110. Conduction of transistor Q2 causes voltage V_{IN} to be zero, which increases the frequency of signal S_c , during the power-off operation, to the maximum value, in a manner that is described later on.

The absence of signal V_{121} causes the free running frequency of signal S_c to increase in order to increase the frequency of the trigger pulses to enable replenishing, during each trigger pulse, of all the charge in filter capacitor C2 that was lost during the interval that elapsed from the immediately preceding trigger pulse of signal S_c . Because all the charge lost is replenished during each period of the trigger pulses, voltage B+ in filter capacitor C2 will be maintained substantially at the same level at the end of each trigger pulse. Such level of voltage B+ is sufficiently high to maintain the anode-to-cathode voltage of SCR 200 sufficiently low for preventing the latching operation of the SCR switch from occurring throughout the power-off operation. The result

This is the replacement sheet

Date: 25 SEP 1996

is that, advantageously, the aforementioned objectionable sound is eliminated, as explained in detail in U.S. Patent 4,866,525 entitled, A Television Apparatus Power Supply issued 12 September 1989 to Rodriguez-Cavazos et al.

5 During power-up operation, signal V_{121} causes transistor Q2 to be non-conductive, so as to have no effect on the switching of the SCR 200. On the other hand, during the power-off operation, the absence of signal V_{121} causes transistor Q2 to conduct, which increases the frequency of
10 signal S_c and, in turn, the conduction of SCR 200. The way signal V_{121} is produced and utilized is further explained below.

 During normal power-up operation, AC voltage V_{LIN} at the frequency f_H is developed in linearity inductor
15 L_{LIN} . A capacitor C121a and a resistor R121 form a series arrangement that is coupled in parallel with inductor L_{LIN} and that dampens ringing in inductor L_{LIN} . During a portion of retrace, capacitor C121a is charged by a positive going retrace pulse of voltage V_{LIN} . At the end of such retrace
20 pulse portion, as the retrace pulse of voltage V_{LIN} becomes smaller, capacitor C121a, that is already charged, produces a negative pulse voltage of a bipolar signal V_{121a} at a cathode of a diode D121 that is coupled between resistor R121 and capacitor C121a. Diode D121 and a filter capacitor
25 C121b form a negative peak detector 121 that produces signal V_{121} . The loading effect of detector 121 on inductor L_{LIN} is, advantageously, substantially insignificant. Therefore, detector 121 substantially does not affect deflection current. Signal V_{121} , that is negative during
30 power-up operation, is produced at the anode of diode D121 and is coupled through a resistor R122a to the base of transistor Q2. A protection diode D122 coupled between the base and the emitter electrodes of transistor Q2 prevents the base-emitter reverse voltage in transistor Q2 from
35 exceeding the forward voltage of diode D122.

 In accordance with a feature of the invention, negative signal V_{121} causes transistor Q2 to be nonconductive throughout normal power-up operation. On the

This is the replacement sheet

Date: 25 SEP 1996

other hand, throughout power-off operation, negative signal V_{121} is not generated and a resistor R122b that is coupled between the +33 volt supply and the base of transistor Q2 causes transistor Q2 to be conductive. Transistor Q2 of
5 FIGURE 1 operates as a conductive switch throughout the power-off operation and as a nonconductive switch throughout the normal power-up operation. The collector of transistor Q2 is coupled to input terminal 110a of control circuit 110 where voltage V_{IN} is developed and causes
10 voltage V_{IN} to be zero during power-off operation. Therefore, the rate of change of voltage V_{54} of FIGURE 2 becomes substantially higher than if voltage B+ were permitted to control the level of voltage V_{IN} during the power-off operation. The result is that control circuit 110
15 will produce signal S_C of FIGURE 1 at a free-running frequency that is at the maximum. Therefore, as explained before, the aforementioned objectionable sound is eliminated. Had voltage B+ been permitted to control the level of voltage V_{IN} during the power-off operation, the
20 frequency of signal S_C might have been at a minimum during at least a portion of each of the aforementioned 160 milisecond intervals.

Regulator oscillator 110, transistor Q2, linearity inductance L_{LIN} , switch regulator 102 and
25 linearity inductor L_{LIN} are each referenced to a common ground conductor HG that is conductively coupled to mains supply voltage V_{AC} and that is referred to herein as hot ground conductor HG. On the other hand, each of remote receiver 120 and horizontal oscillator and driver 100 of
30 the television receiver is referenced to a common ground conductor CG that is conductively isolated from hot ground conductor HG and that is referred to herein as cold ground conductor CG. The conductive isolation between the hot and the cold ground conductors is accomplished, in part, by
35 energizing remote receiver 120 and driver 100 from a voltage 78 produced in a conventional manner that is conductively isolated from hot ground conductor HG. Voltage

78 is produced during both the power-off and the power-up operations.

In accordance with another aspect of the invention, signal V_{121} that is applied to regulator oscillator 110 and to regulator switch 102 through transistor Q2 is generated from voltage V_{LIN} developed across inductor L_{LIN} via a signal path that is referenced to hot ground conductor HG. The signal path includes capacitor C121a and detector 121 that are, each conductively coupled to hot ground conductor HG. Signal V_{121} that is referenced to hot ground conductor HG has two levels that correspond to the "OFF" state and to an "ON" state, respectively, of on/off control signal ON/OFF that is referenced to cold ground conductor CG. The "power-up" state of signal V_{121} is obtained from horizontal rate signal H_r that is generated only during the power-up operation. Signal H_r is a transformer coupled signal that is coupled across the hot-cold barrier formed by transformer T3. In this way, advantageously, on/off control signal ON/OFF is applied to transistor Q2 via transformer T3 that maintains the hot-cold barrier. Transformer T3 is the same transformer used for supplying signal H_r to deflection switch transistor Q1, as described before. Consequently, the need for an additional circuit element for applying the two states of on/off control signal ON/OFF across such hot-cold barrier is obviated. Advantageously, extracting the on/off information from voltage V_{LIN} is accomplished without adversely affecting deflection current i_y .



WHAT IS CLAIMED IS:

1. A television apparatus, comprising:
 - a source (100,120) of an input signal (H_r) at a frequency that is related to a deflection frequency;
 - 5 a deflection circuit output stage (99), including a deflection current linearity element (L_{LIN}), responsive to said input signal for generating a first signal (V_{LIN}) in said linearity element (L_{LIN}) during a power-on operation but not during a power-off operation of said
 - 10 television apparatus; characterized by means (121) coupled to said linearity element (L_{LIN}) and responsive to said first signal (V_{LIN}) for producing a power-on/power-off control signal (V_{121}) that exhibits a power-on state during said power-on operation
 - 15 and a power-off state during said power-off operation; and a utilization circuit (Q2) of said television apparatus responsive to said power-on/power-off control signal (V_{121}) that causes said utilization circuit (Q2) to operate in a mode of operation that corresponds to said
 - 20 state of said control signal.
2. A television apparatus for generating a power-up/power-off control signal (V_{121}), comprising:
 - first means (100) for generating a first signal (output of 100) at a frequency that is related to a
 - 25 deflection frequency, during a power-up operation of said television apparatus, but not during a power-off operation thereof; characterized by coupling means (T3) having a first portion (primary) that is electrically nonisolated from said first
 - 30 signal (output of 100), with respect to electrical shock hazard isolation, and a second portion (secondary) that is electrically isolated from said first signal with respect to electrical shock hazard isolation, for coupling said first signal to said second portion to develop in said
 - 35 second portion a second signal (H_r) that is electrically isolated from said first signal (output of 100) such that said second signal (H_r) is generated during said power-up operation but not during said power-off operation;



a deflection switch (Q1) coupled to and electrically nonisolated from said second portion (secondary) of said coupling means (T3) and being switched in response to said second signal (H_r) during said power-up operation but not during said power-off operation for generating a deflection current (i_y) in a deflection winding (L_y) during said power-up operation;

third means (121) responsive to said second signal (H_r) and electrically nonisolated from said second portion (secondary) of said coupling means (T3) for generating said power-up/power-off control signal (V_{121}) that is electrically isolated from said first signal (output of 100) and that is in a power-up state (negative) as long as said second signal (H_r) is being generated during said power-up operation and that is in a power-off state (zero) as long as said second signal (H_r) is not being generated during said power-off operation; and

an oscillator (110) electrically isolated from said first signal (output of 100) for being energized during both power-up and power-off operations to generate an oscillator signal (S_c) during both operations, said oscillator (110) being responsive to and electrically nonisolated from said control signal (V_{121}) and being placed in a power-up mode of operation when said control signal (V_{121}) is in said power-up state (negative) and being placed in a power-off mode of operation when said control signal is in said power-off state (zero).

3. A television apparatus according to Claim 2 characterized in that said oscillator (110) is electrically nonisolated from an input AC main supply voltage (V_{AC}).

4. A television apparatus according to Claim 3 characterized by a linearity inductance (L_{LIN}) wherein said third means (121) is responsive to a signal (V_{LIN}) that is developed in said linearity inductance (L_{LIN}) for generating a first level (negative) of said power-on/power-off control signal (V_{121}) when the switching in said deflection switch (Q1) occurs and a second level



(zero) when the switching operation in said deflection switch (Q1) is disabled.

5 5. A television apparatus according to Claim 4 characterized in that said third means (121) comprises a peak detector.

10 6. A television apparatus according to Claim 5 characterized by an R-C network (R121, C121a) coupled between said linearity inductance (L_{LIN}) and said detector (121) for generating a bipolar signal (V_{121a}) that is coupled to an input terminal of said detector (121).

15 7. A television apparatus according to Claim 12 characterized by a regulator switch (200) for coupling an input supply voltage (V_{UR}) to a load, during a portion of a given periodic interval that is determined in accordance with said first signal (output of 100) to generate an output supply voltage (B+) at a level that varies in accordance with said oscillator signal (S_C), wherein said oscillator (110) comprises a regulator oscillator that is energized during both said power-up operation and during
20 said power-off operation for generating said oscillator signal (S_C) during both said power-up and said power-off operations such that during said power-up operation said switching signal (S_C) varies in accordance with a feedback signal (V_{in}) that is representative of said output supply
25 voltage (B+) that, in turn, causes a duty cycle of said regulator switch (200) to vary in a negative feedback loop manner for regulating said output supply voltage (B+), wherein said power-up/power-off control signal (V_{121}) is coupled in said feedback loop for controlling the frequency
30 of said oscillator signal (S_C) during said power-off operation in a manner that does not affect the frequency of said first signal (output of 100) during said power-up operation.

35 8. A television apparatus according to Claim 7 characterized in that said coupling means (T3) forms a hot-cold barrier isolation that electrically isolates said first signal (output of 100) from said deflection switch (Q1), wherein said third means (121) and said regulator



oscillator (110) form a signal path that is interposed between said regulator switch (200) and said deflection switch (Q1), said signal path being electrically isolated from said first signal (output of 100) and electrically nonisolated from said second portion (secondary) of said coupling means (T3).

9. A switch mode power supply of a television apparatus, comprising:

- 10 a source (101) of an input supply voltage (V_{UR});
- a filter capacitor (C2) for developing therein an output supply voltage (B+);
- a load (99) coupled to said filter capacitor (C2) for producing a load current from a charge that is stored in said filter capacitor (C2);
- 15 means (110) for generating a periodic switching first control signal (S_c) during both power-on and power-off modes of operation of said power supply;
- a regulator switch (200) having said periodic switching first control signal (S_c) coupled to a control terminal (gate) thereof and having a main current conducting input terminal (102a) coupled to said input supply voltage (V_{UR}) and a main current conducting output terminal (102c) coupled to said filter capacitor (C2) for producing a switching current (i_{SCR200}) in said regulator switch (200), during both power-on and power-off modes of operation, that is coupled to said filter capacitor (C2) to develop from said switching current (i_{L2}) an output supply voltage (B+) in said filter capacitor (C2), said regulator switch (200) being capable of operating in a periodic
- 20 latched conductive state when said first control signal is developed, provided that a first voltage (at 102c), developed at said regulator switch output terminal (102c) and coupled from said filter capacitor (C2), is at a level that is within a first range of values; characterized by
- 30 means (121) for generating a power-on/power-off control signal (V_{121}) that is coupled to a control terminal (110a) of said first control signal generating means (110) for changing said first control signal (S_c), during said
- 35

This is the replacement sheet

Date: 25 SEP 1996



power-off mode of operation, to produce said switching current (i_{SCR200}) in said regulator switch (200) during said power-off mode of operation at a level that causes said first voltage (at 102c) to be outside said range of values in order to prevent said regulator switch (200) from operating in a latched conductive state throughout said power-off operation.

10. A power supply according to Claim 9 characterized by a second switch (Q2) responsive to said power-on/power-off control signal (V_{121}) and coupled in a feedback signal path that is formed between said output supply voltage (B+) and said control terminal (110a) of said first control signal generating means (110) for decoupling a feedback signal that is representative of said output supply voltage (B+) from said control terminal (110a) of said first control signal generating means (110) throughout said power-off mode of operation to increase a duty cycle of said first control signal (S_c) that, in turn, increases a duty cycle of said regulator switch (200), wherein during said power-on mode of operation, said feedback signal (from B+) causes said first control signal generating means (110) to vary timings of said first control signal (S_c) in accordance with said output supply voltage (B+) that, in turn, varies said duty cycle of said regulator switch (200) for regulating said output supply voltage (B+).

THIS SHEET HAS BEEN
REPLACED

A VOLTAGE REGULATOR IN A TELEVISION APPARATUS

ABSTRACT

An input signal coupled to a deflection circuit through an isolation transformer (T3) during a power-on operation but not power-off, develops voltage V_{Lim} in a linearity inductor (L_{LIN}) of the deflection circuit. The voltage in the linearity inductor is rectified to produce rectified signal (V_{121}) coupled to a regulator oscillator of a power supply, isolated by the transformer (T3) from the input signal. The oscillator generates trigger pulses (S_C) for controlling the switching operation of an SCR. The increased frequency causes the anode-to-cathode voltage of the SCR switch to be small, to prevent latching during power-off. By preventing latching, audible parasitic vibrations in the power supply are avoided.

FIGURE 1


This Sheet Has Been Replaced



This is the replacement sheet

Date: 25 SEP 1996

FIG. 1


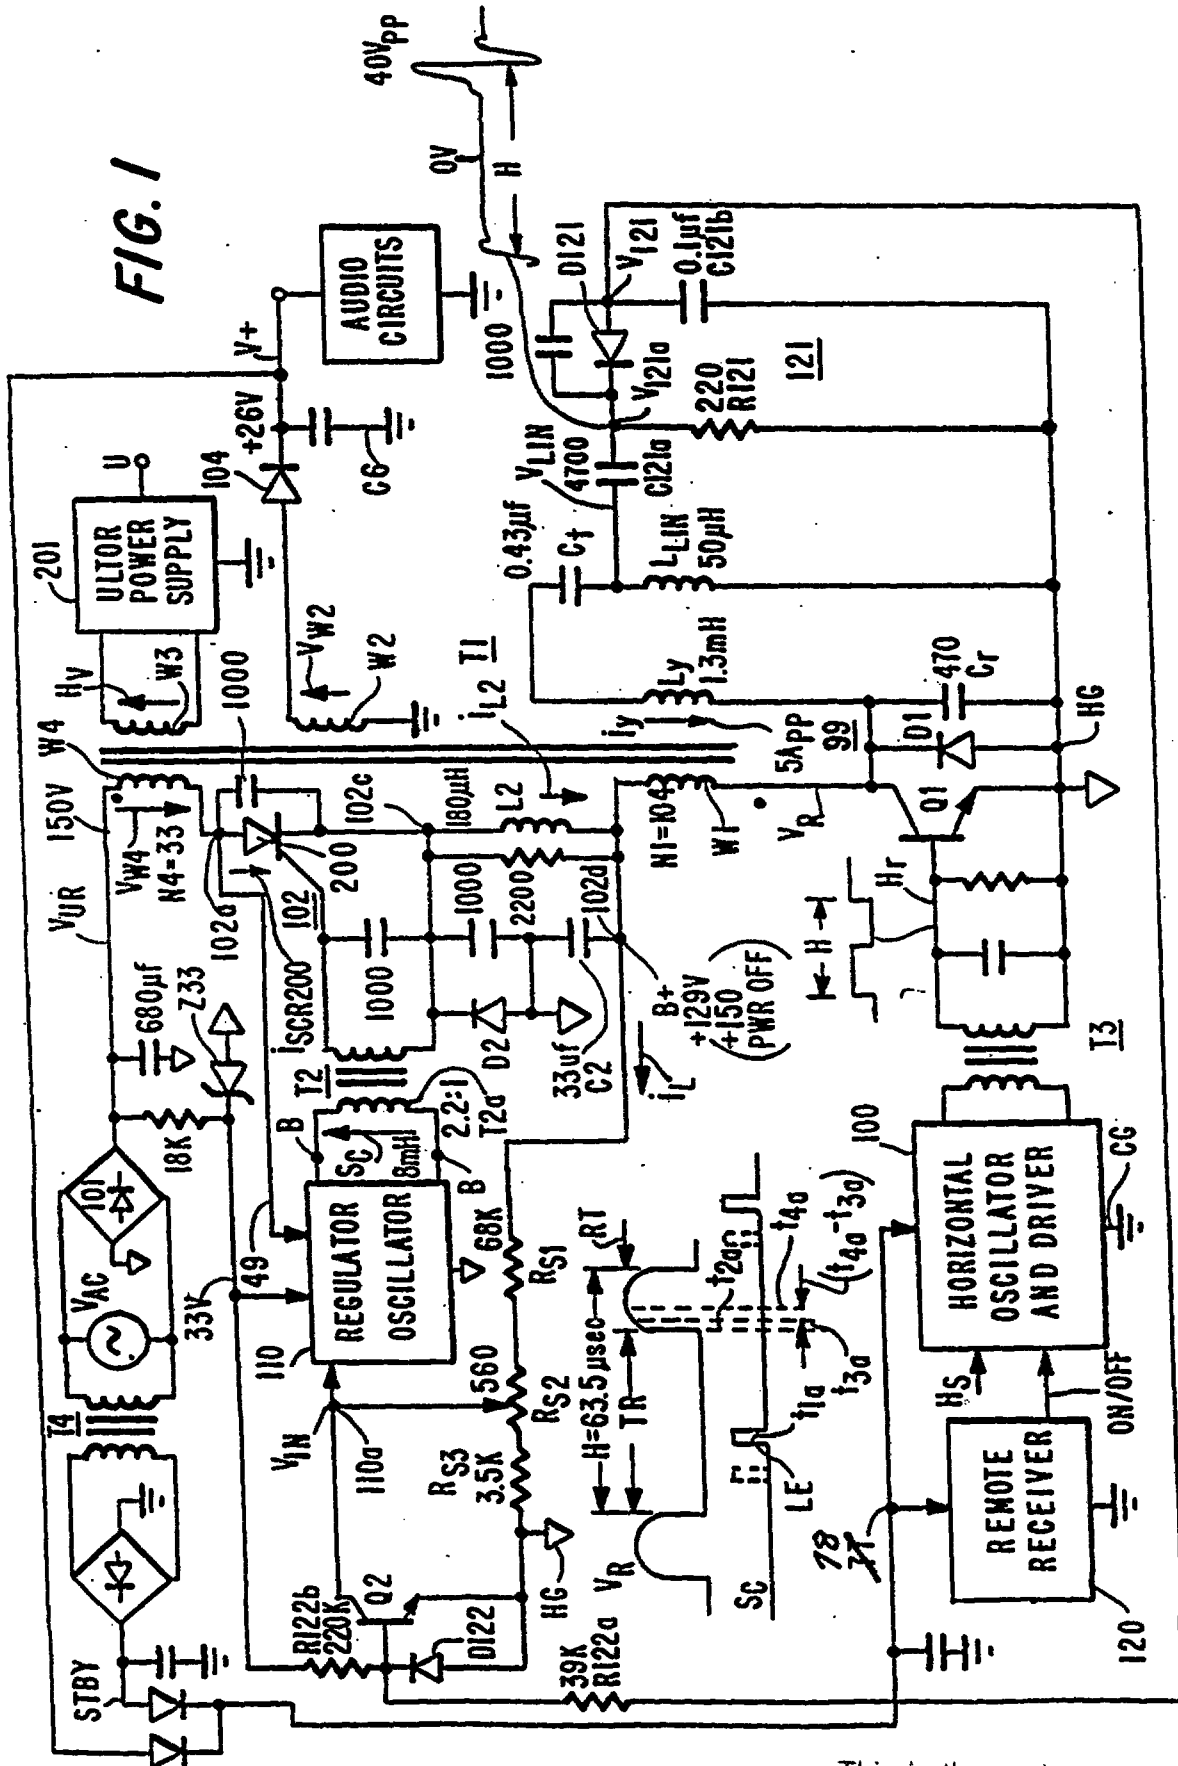


This is the replacement sheet

Date: 25 SEP 1996



Date: 25 SEP 1996

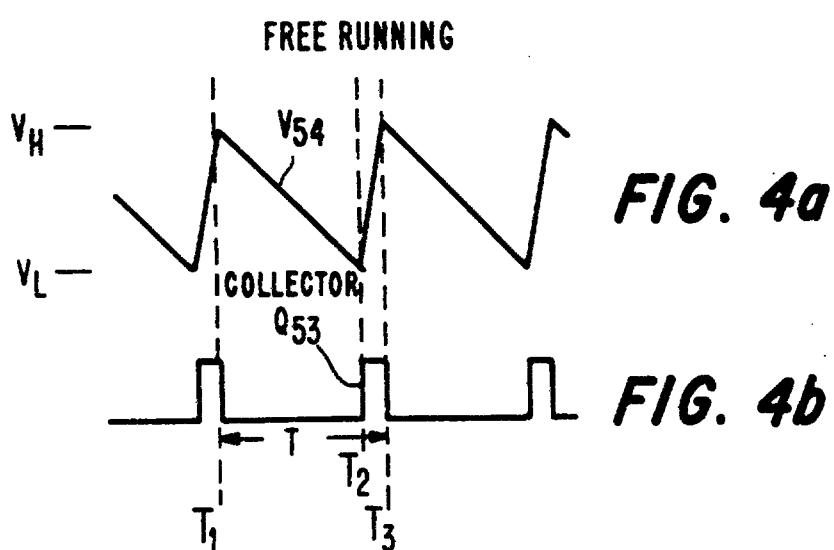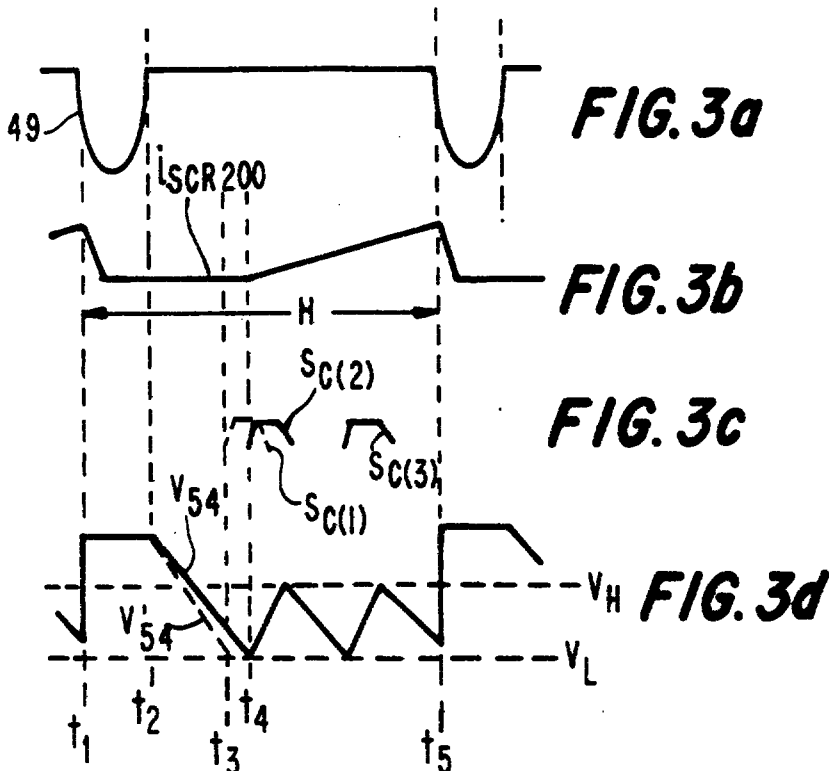

This is the replacement sheet

Date: 25 SEP 1996



TEXT OF THE ABSTRACT

A VOLTAGE REGULATOR IN A TELEVISION APPARATUS

An input signal coupled to a deflection circuit through an isolation transformer (T3) during a power-on operation but not power-off, develops voltage V_{Lim} in a linearity inductor (L_{LIN}) of the deflection circuit. The voltage in the linearity inductor is rectified to produce rectified signal (V121) coupled to a regulator oscillator (110) of a power supply, isolated by the transformer (T3) from the input signal. The oscillator (110) generates trigger pulses (S_C) for controlling the switching operation of an SCR (200). The increased frequency causes the anode-to-cathode voltage of the SCR switch (200) to be small, to prevent latching during power-off. By preventing latching, audible parasitic vibrations in the power supply are avoided.

Figure 1.

