(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
28 May 2009 (28.05.2009)

PCT

(10) International Publication Number
WO 2009/067026 A1

(51) International Patent Classification:
E21B 33/035 (2006.01)

(21) International Application Number:
PCT/NO2008/000421

(22) International Filing Date:
24 November 2008 (24.11.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20076033 23 November 2007 (23.11.2007) NO

(71) Applicant *(for all designated States except US)*: **FMC KONGSBERG SUBSEA AS** [NO/NO]; P.O.Box 1012, N-3601 Kongsberg (NO).

(72) Inventor; and
(75) Inventor/Applicant *(for US only)*: **MOE, Sigurd** [NO/NO]; Noltens vei 6, N-3610 Kongsberg (NO).

(74) Agents: **ONSAGERS AS** et al.; P.O.Box 6963 St. Olavs plass, N-0130 Oslo (NO).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,

[Continued on next page]

(54) Title: SUBSEA HORIZONTAL CHRISTMAS THREE

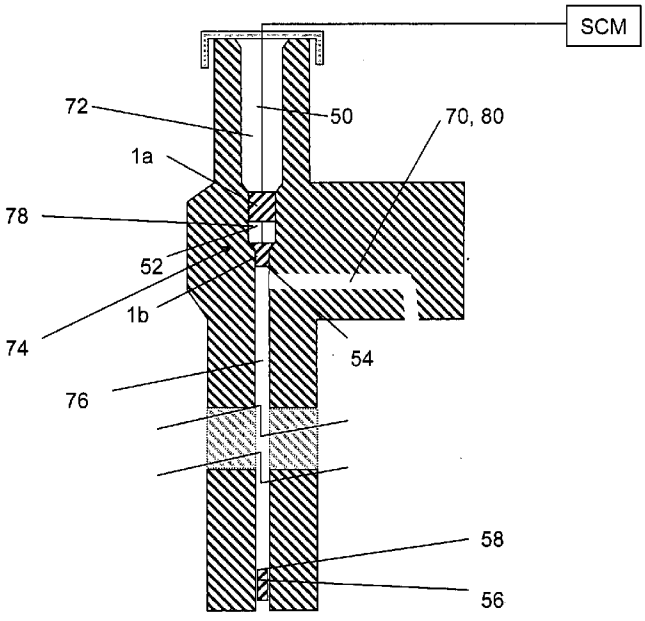


Fig. 2

(57) Abstract: The present invention relates to a horizontal Christmas tree comprising a central bore (72) and a horizontal outlet (70) extending laterally from the central bore. A tubing hanger (74) is locked into the central bore and connected to a production tubing (76) extending into the well. The tubing hanger comprises a first passage (78) axially aligned with the production tubing and a second passage (80) extending laterally from the first passage and aligned with the outlet. The first passage comprises means for releasable fastening of at least one plugging device (1a, 1b) for plugging the first passage above the second passage.

WO 2009/067026 A1

NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*