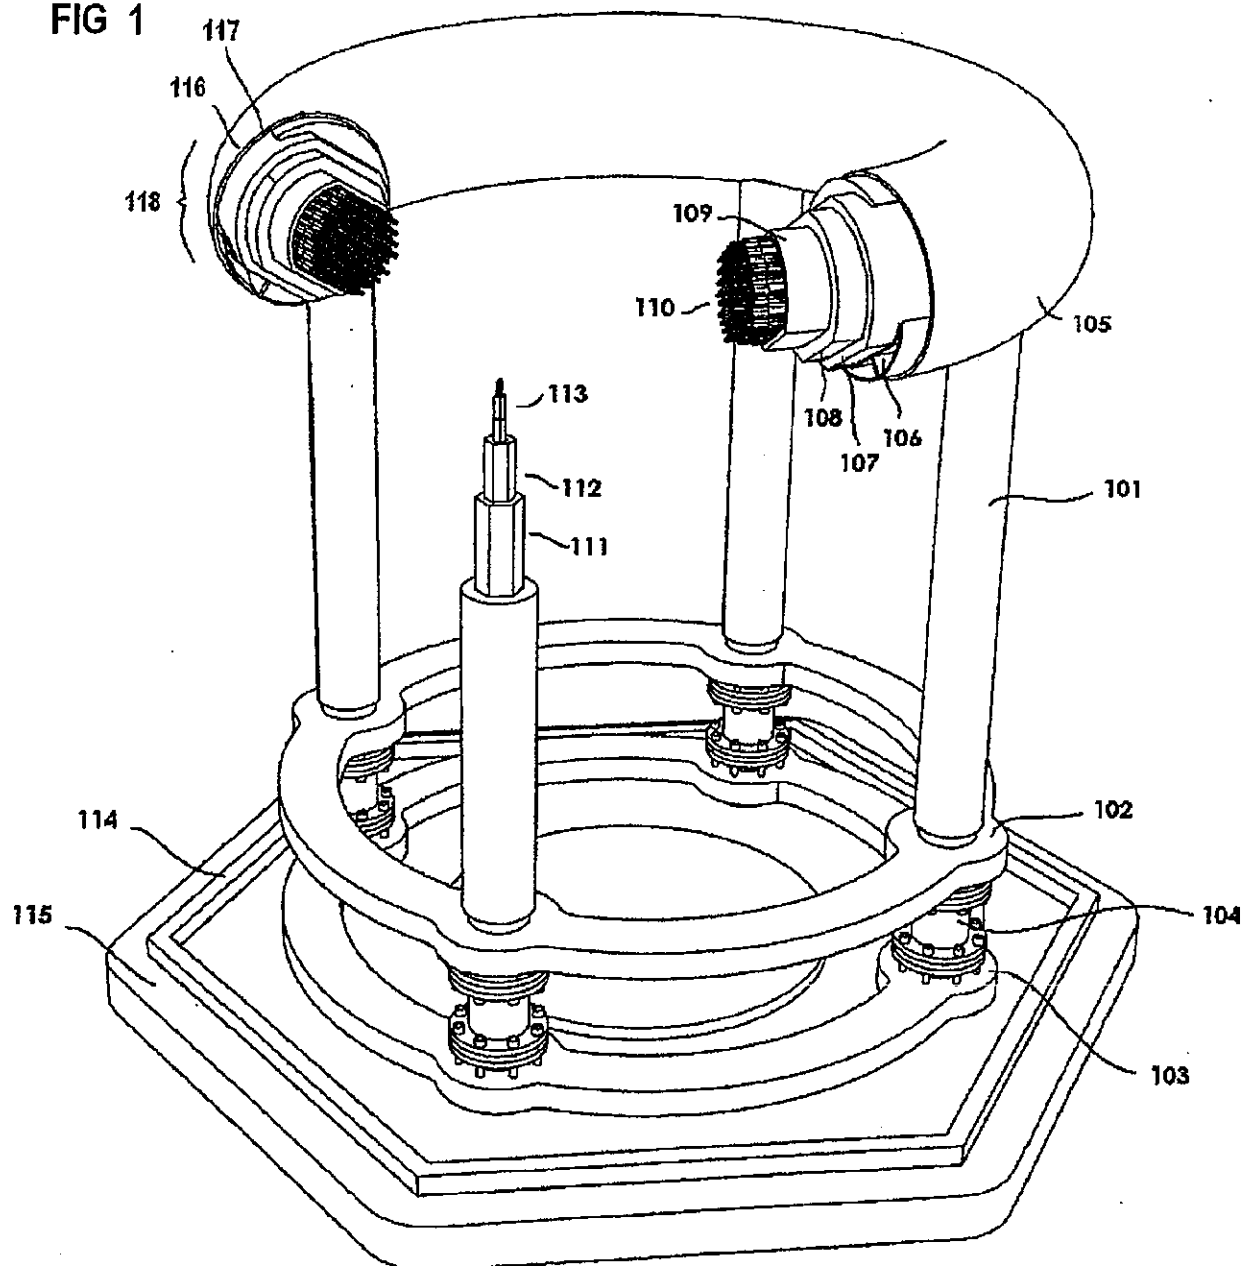
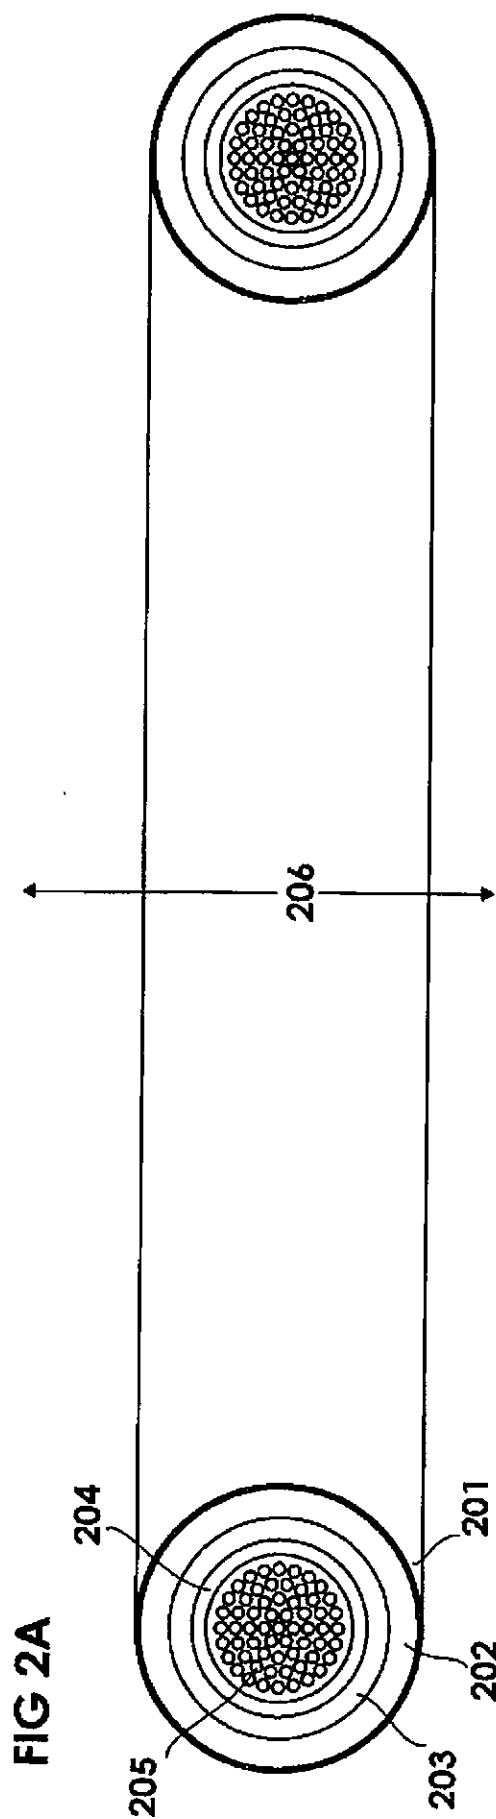
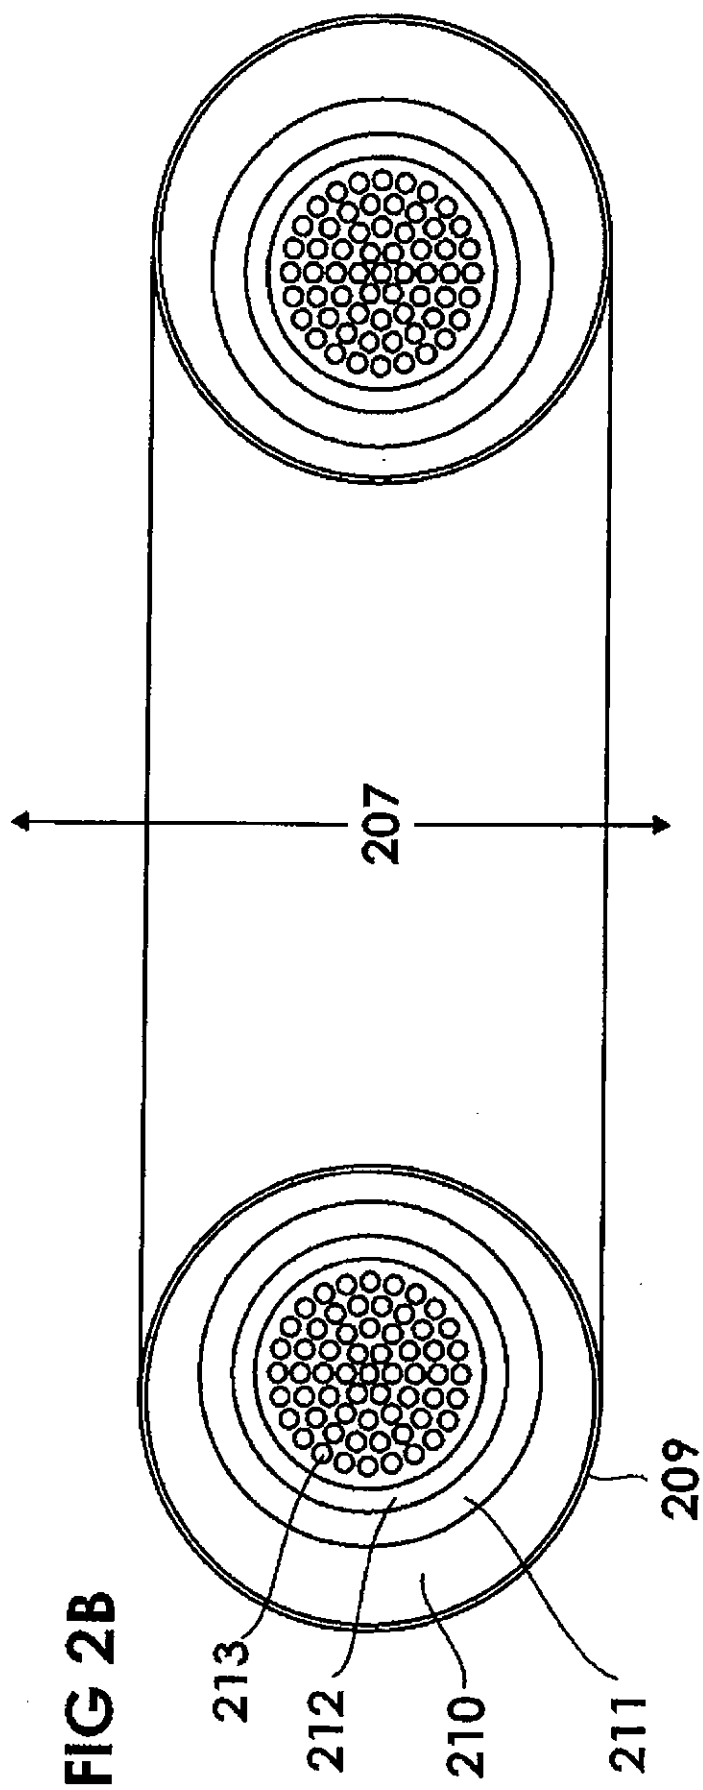


FIG 1







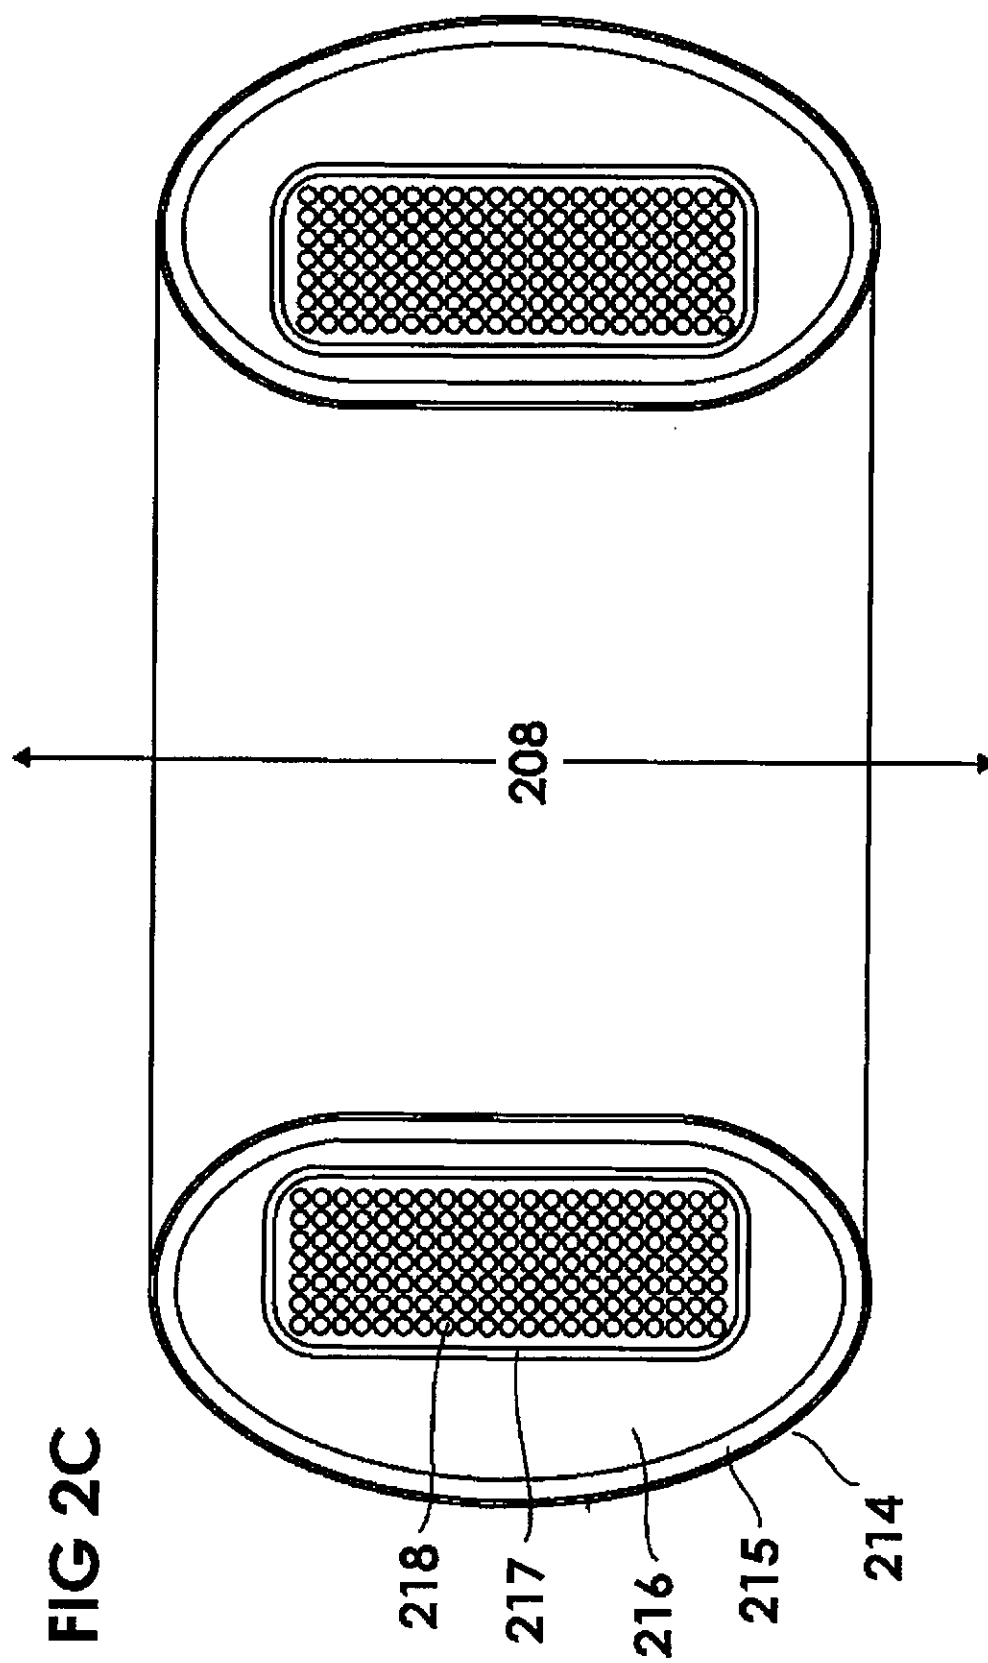


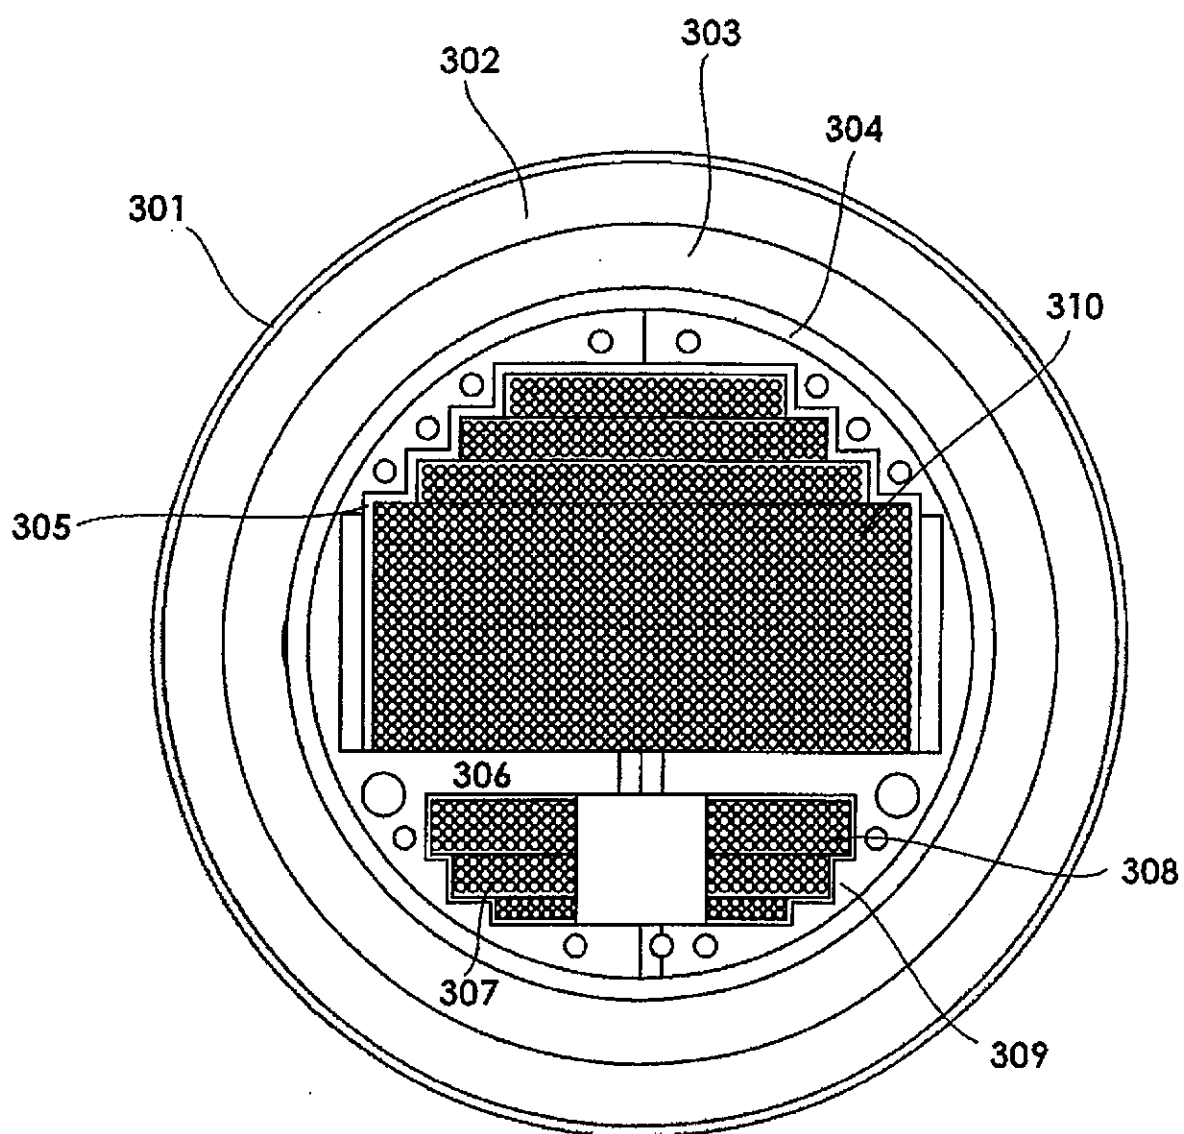
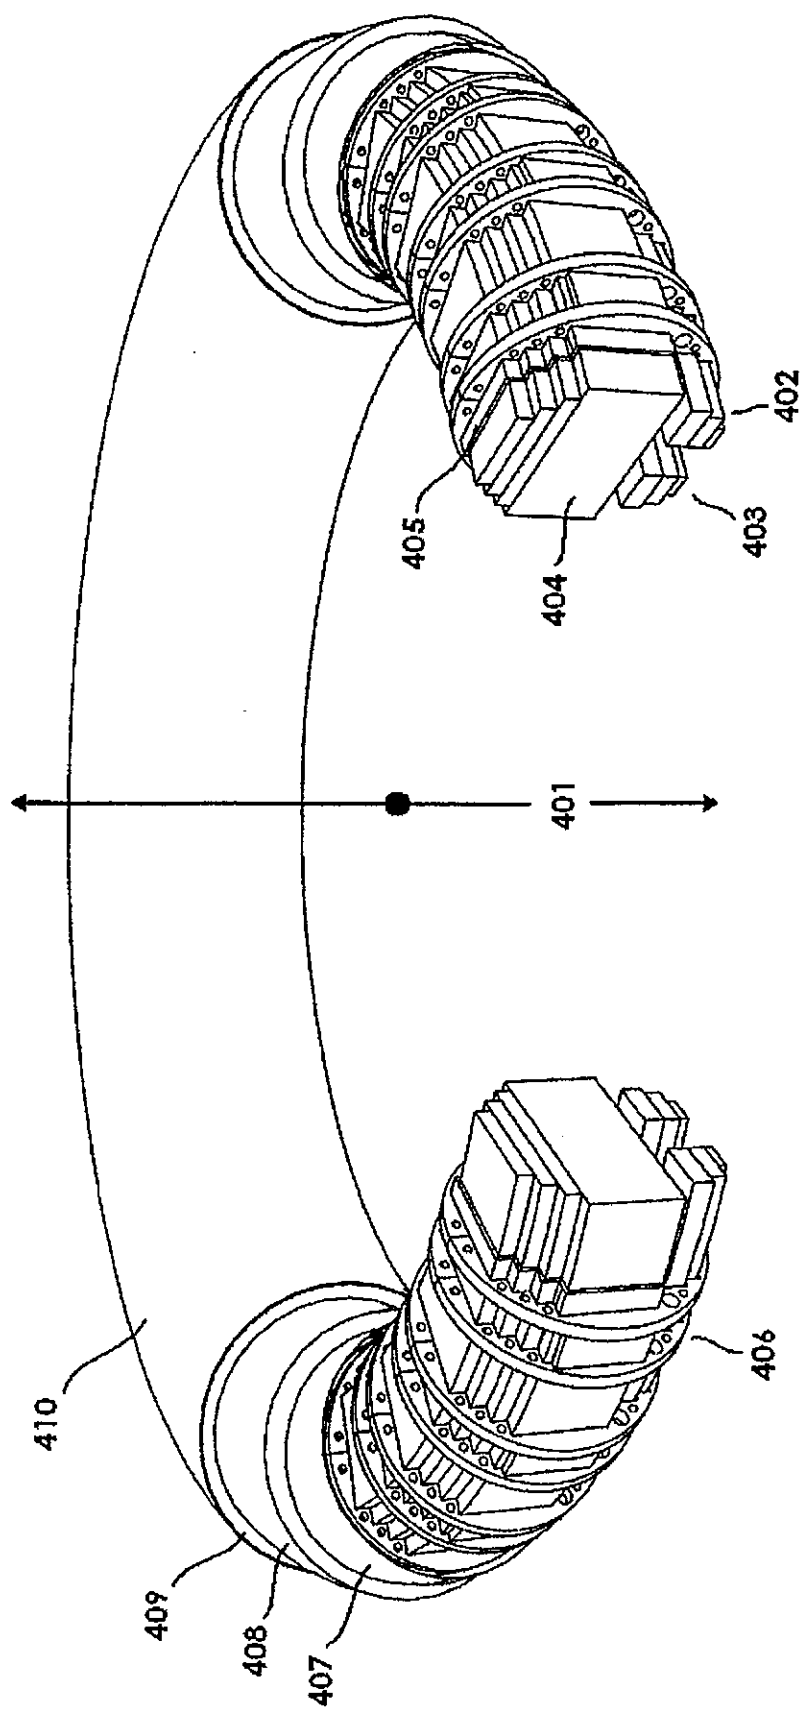
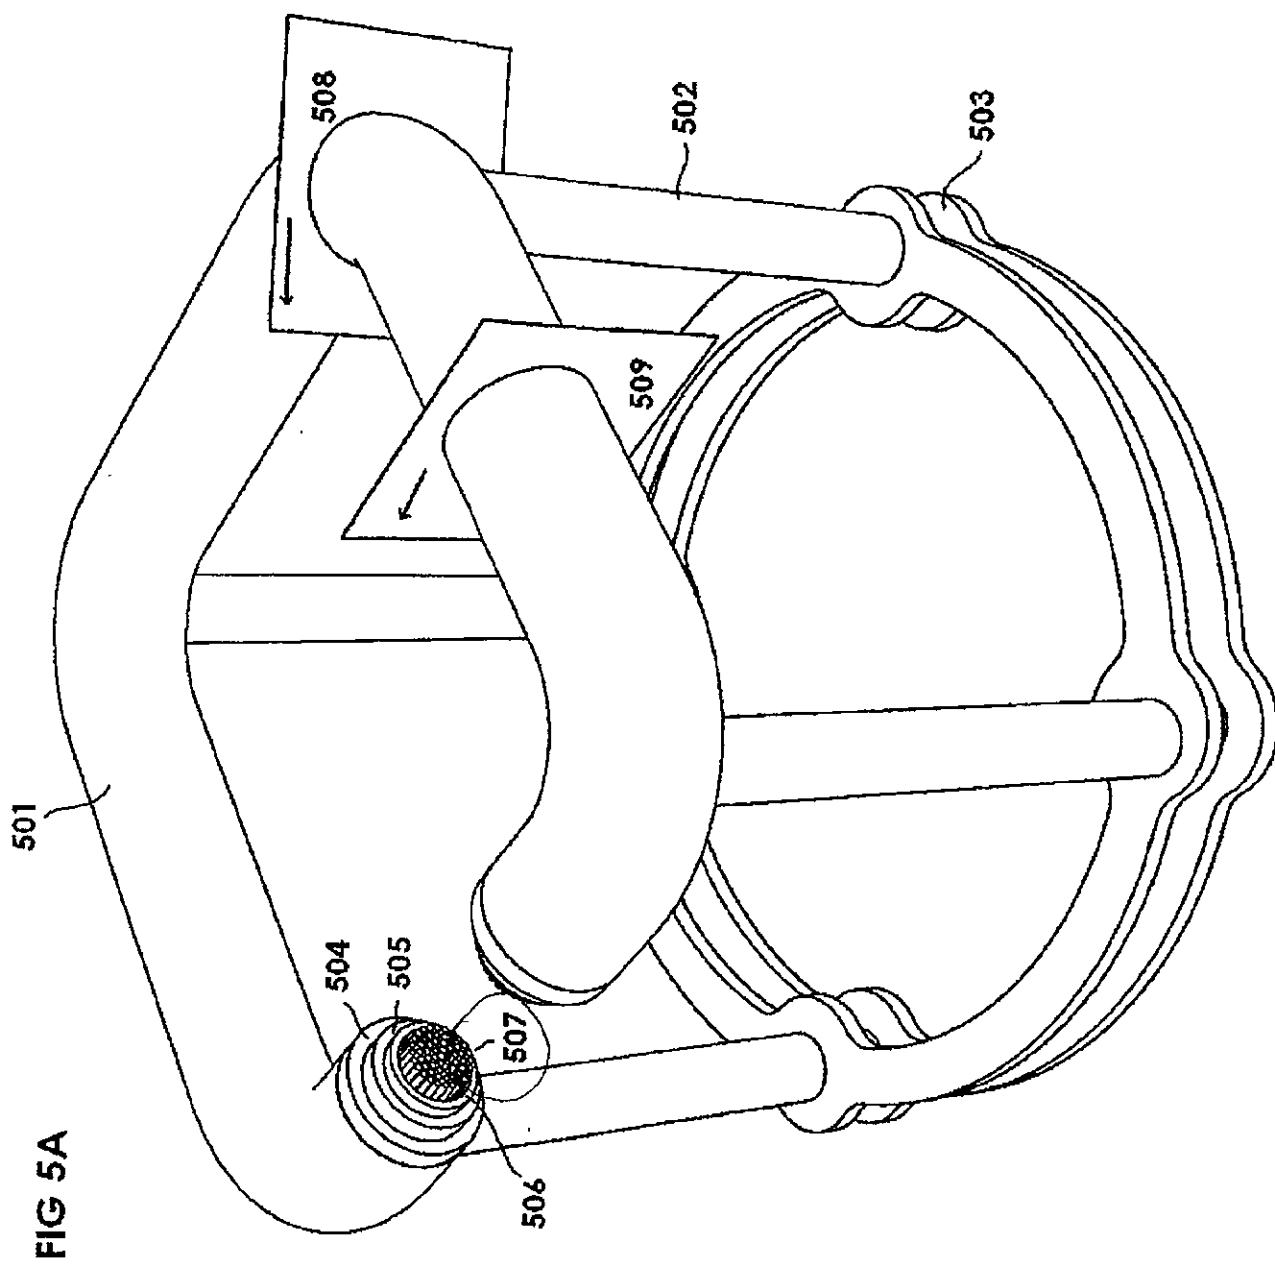
FIG 3

FIG 4





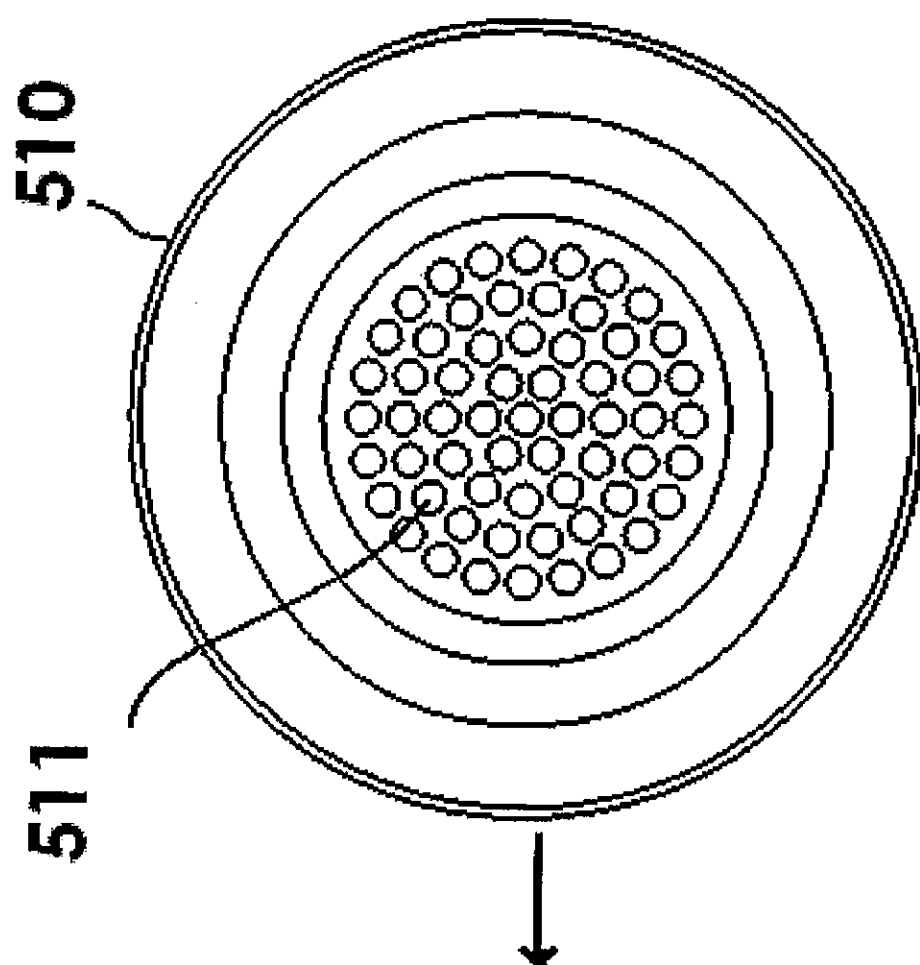


FIG 5B

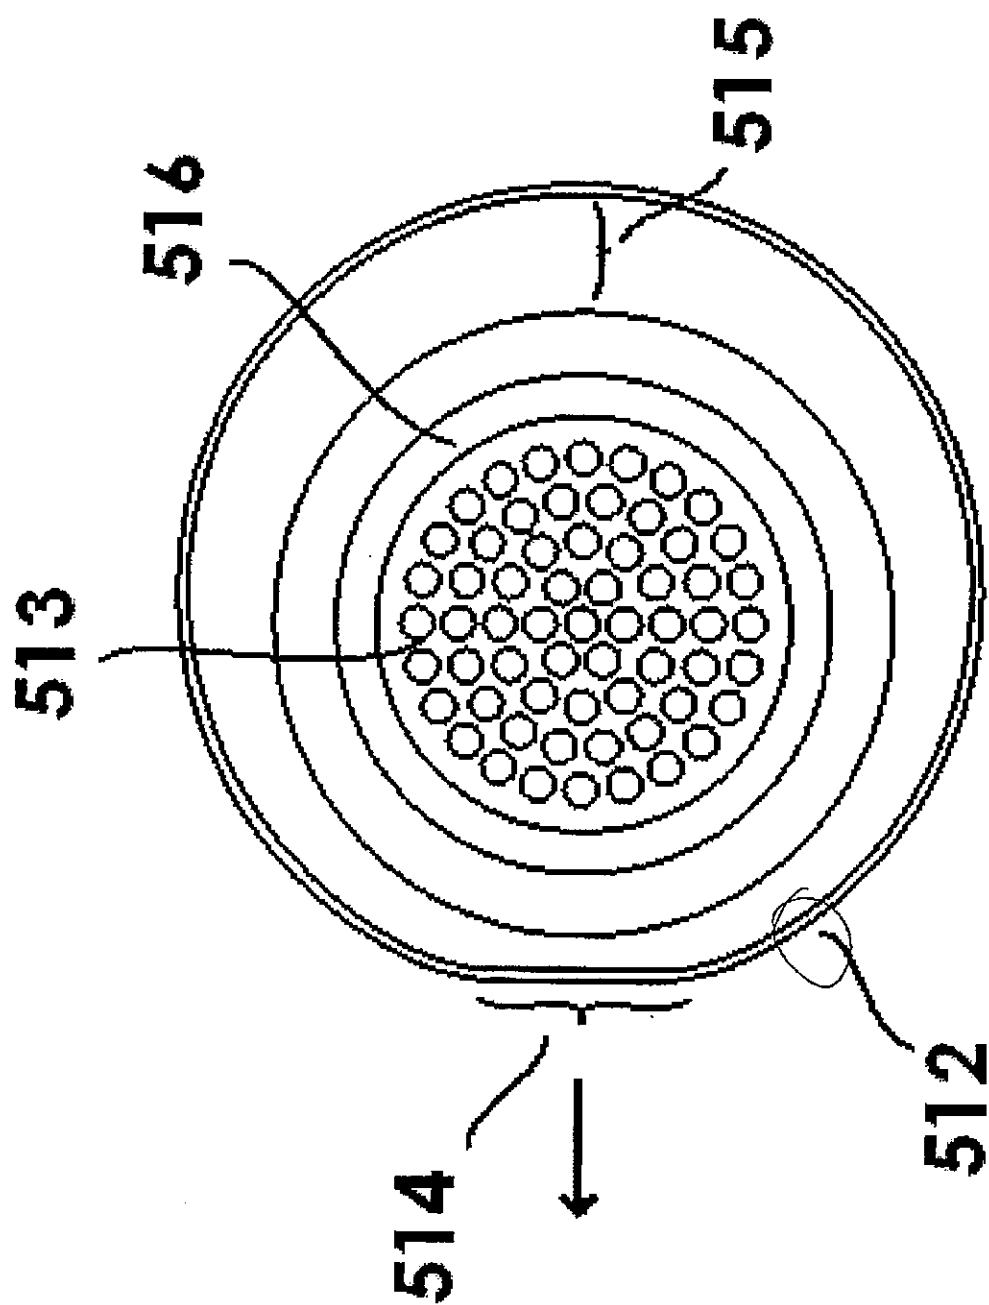
**FIG 5C**

FIG 6

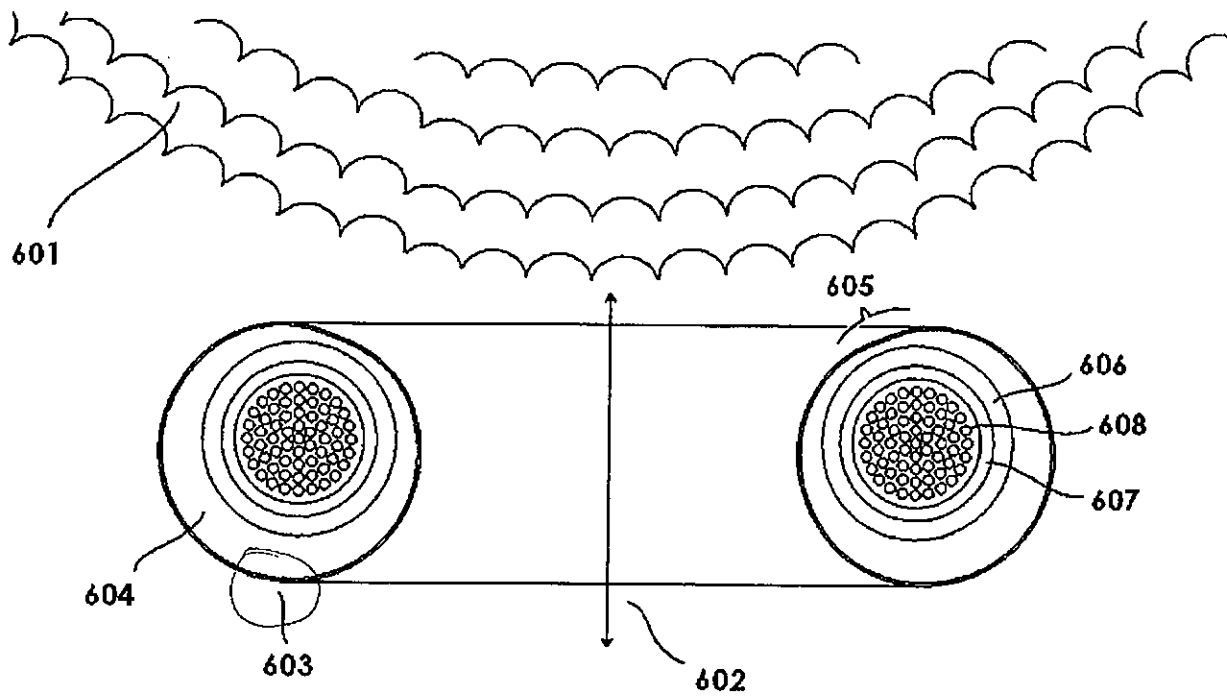
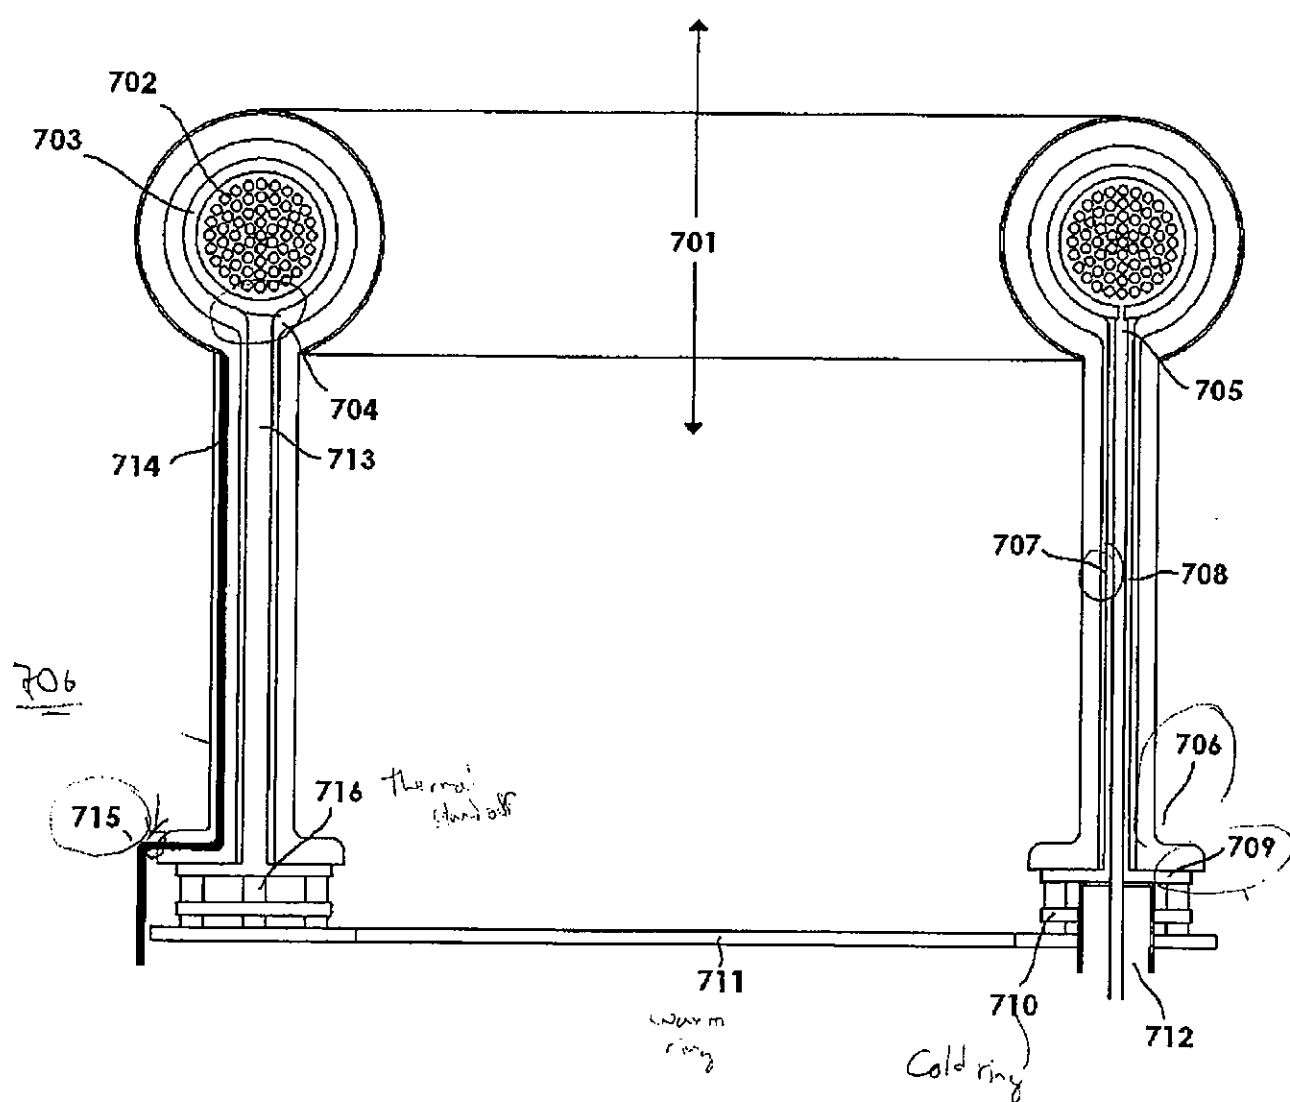
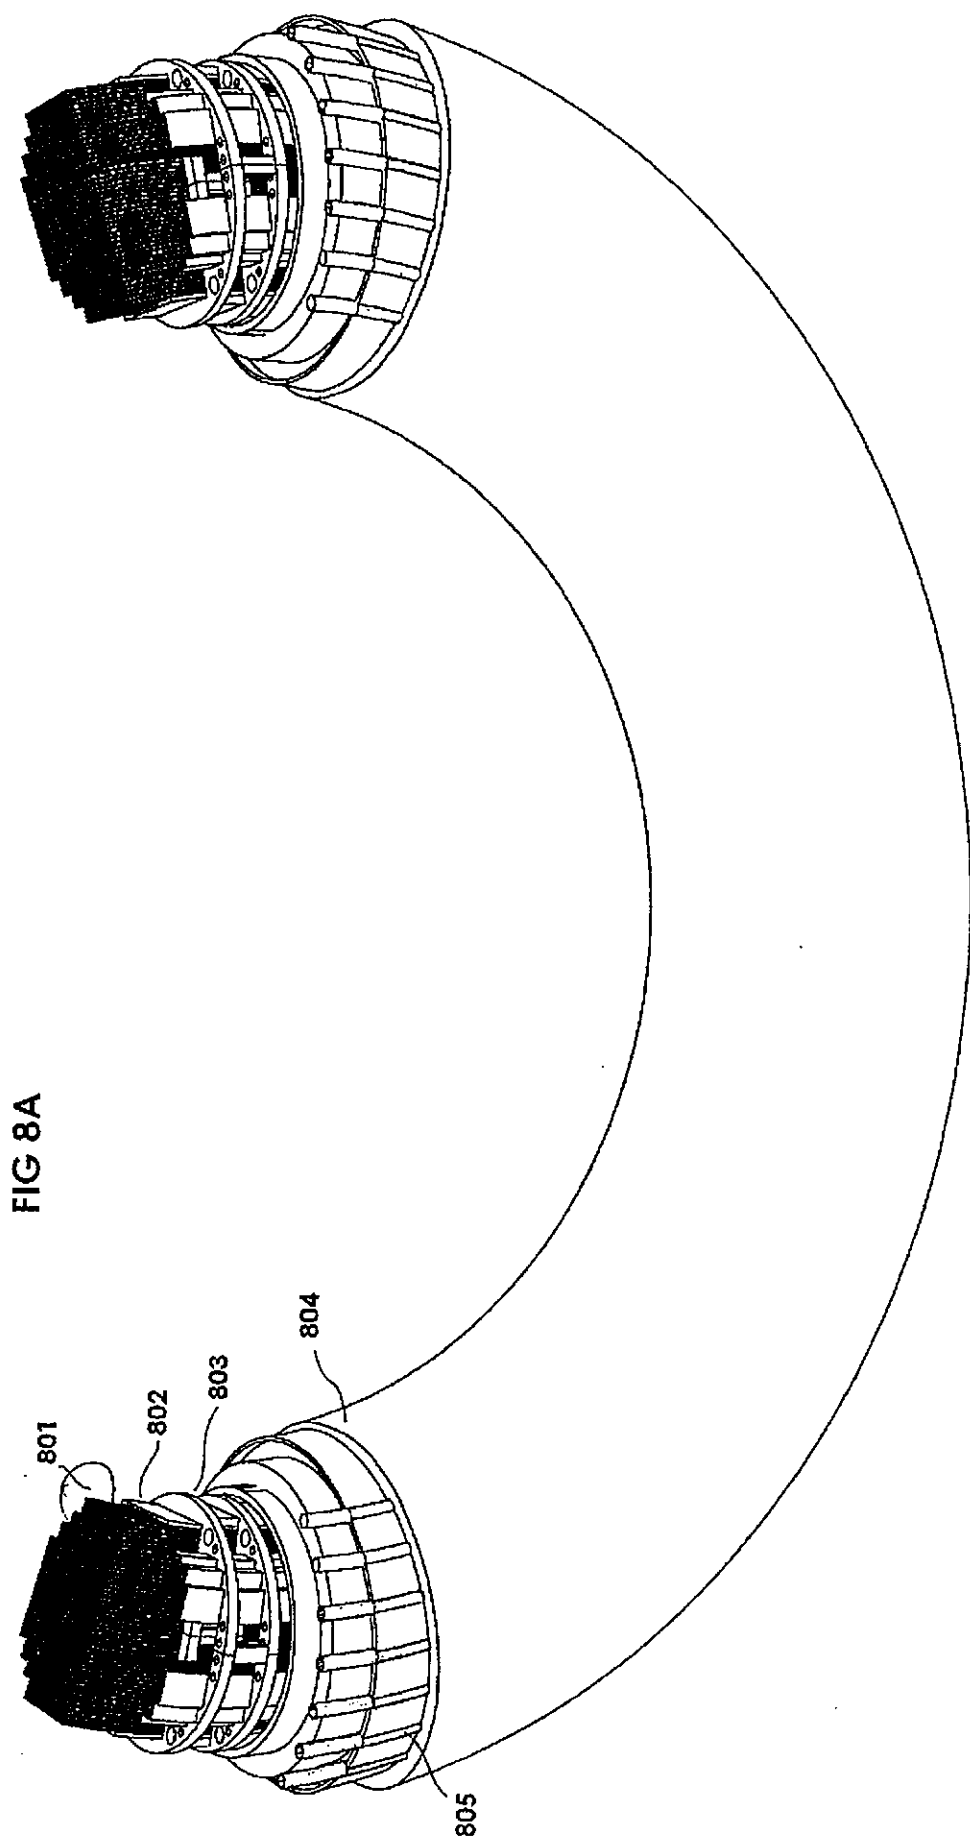


FIG 7





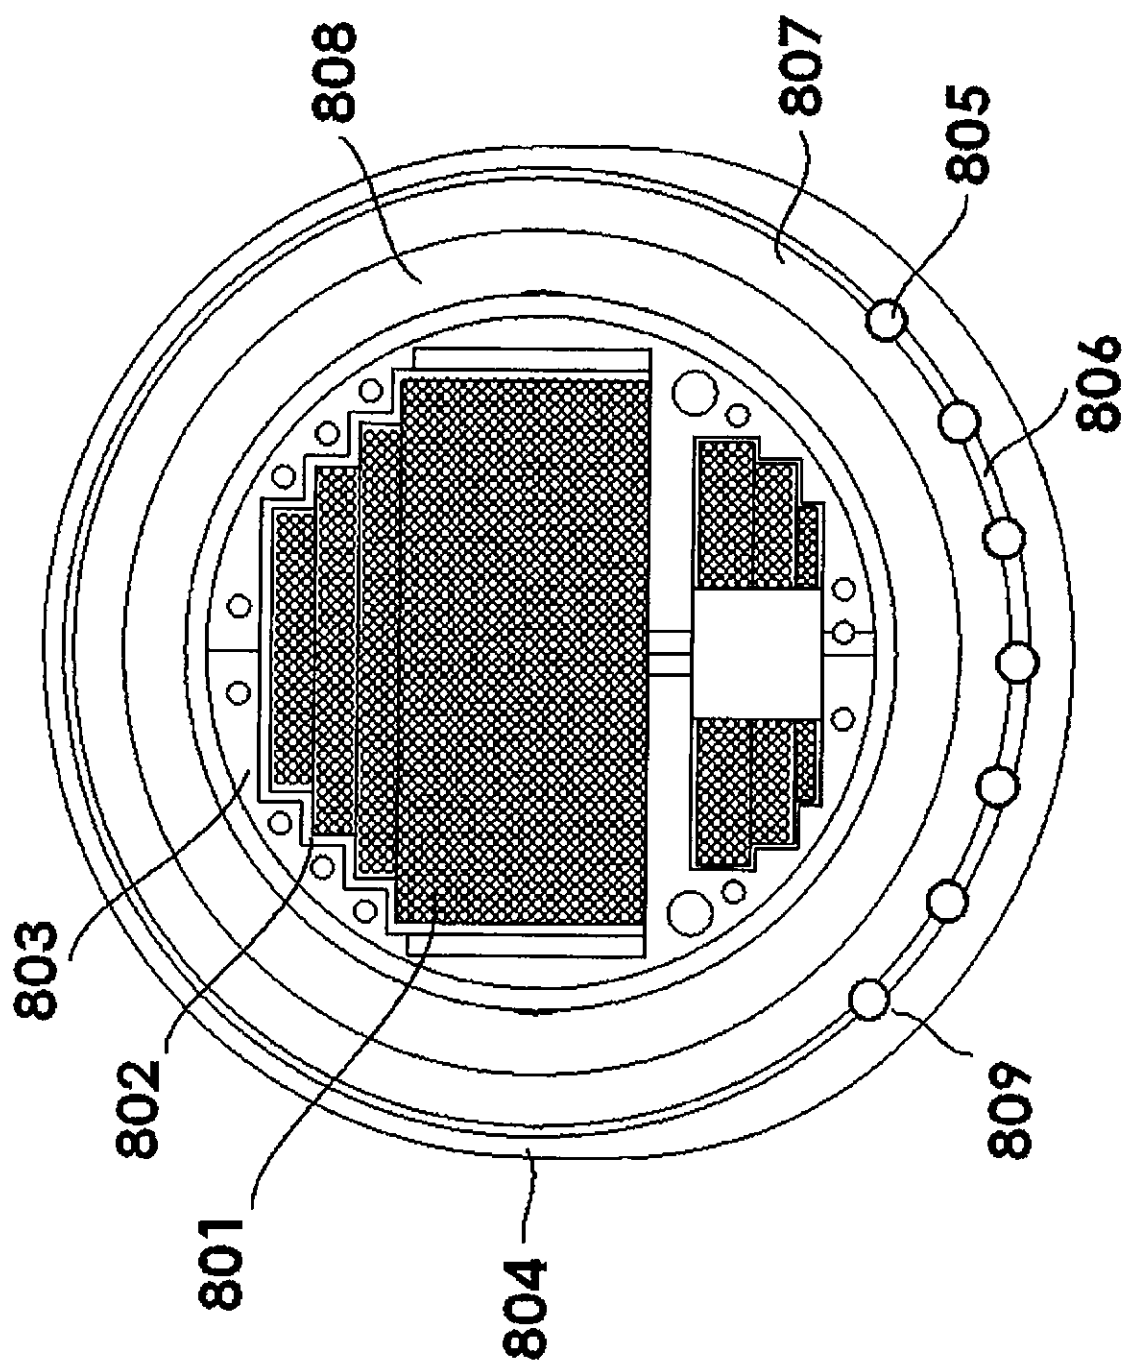


FIG 8B

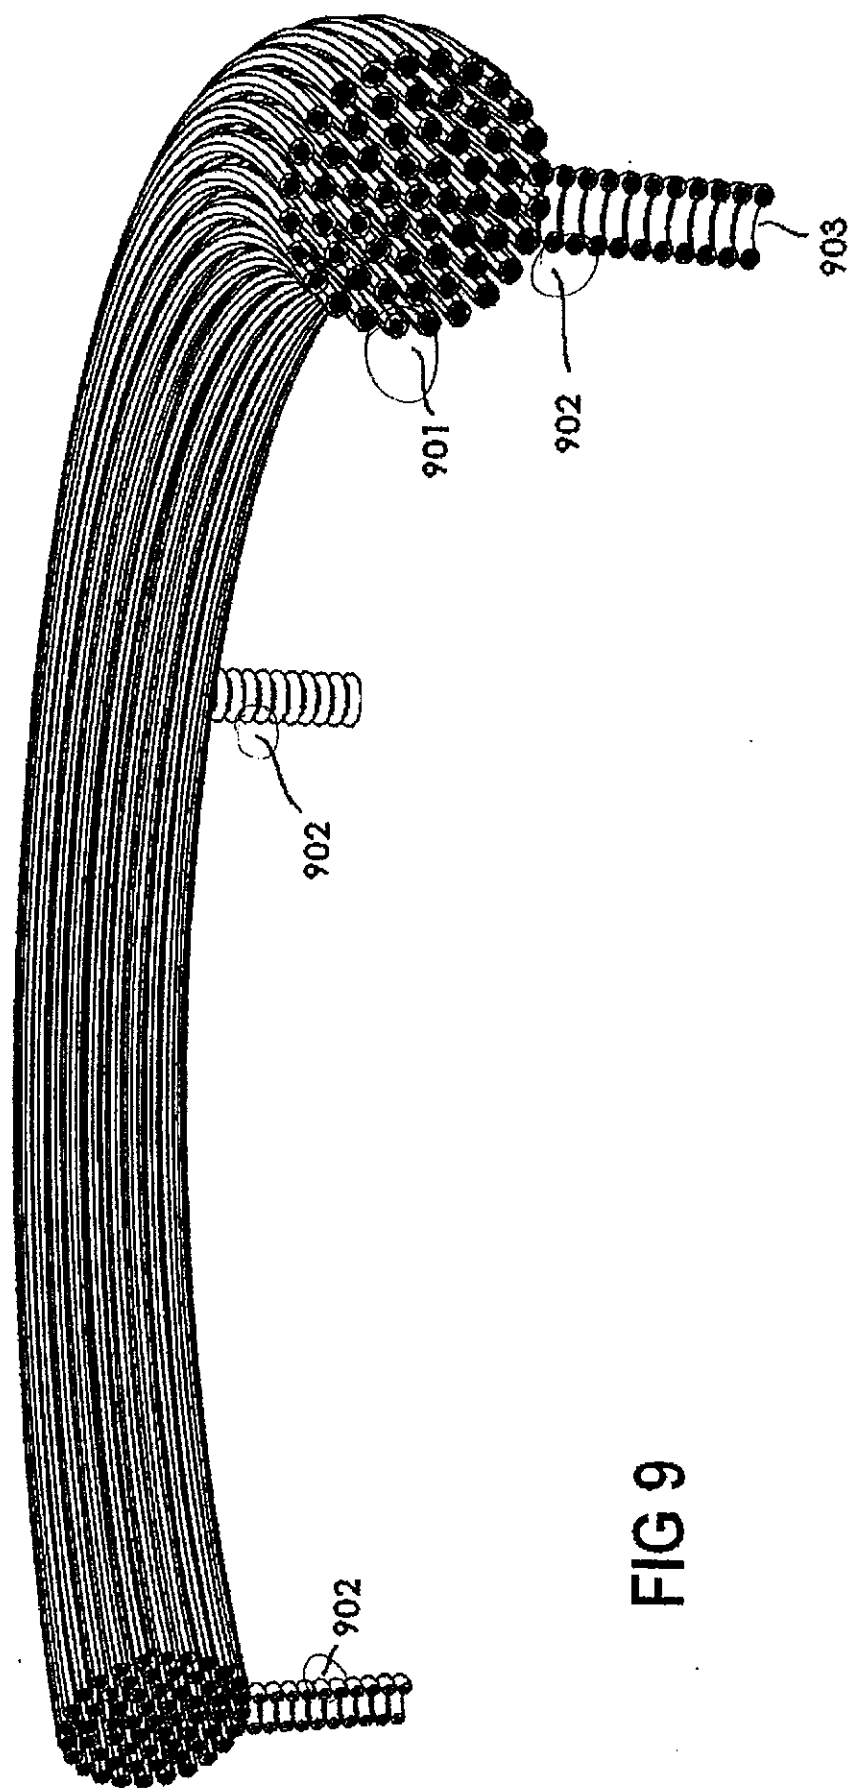
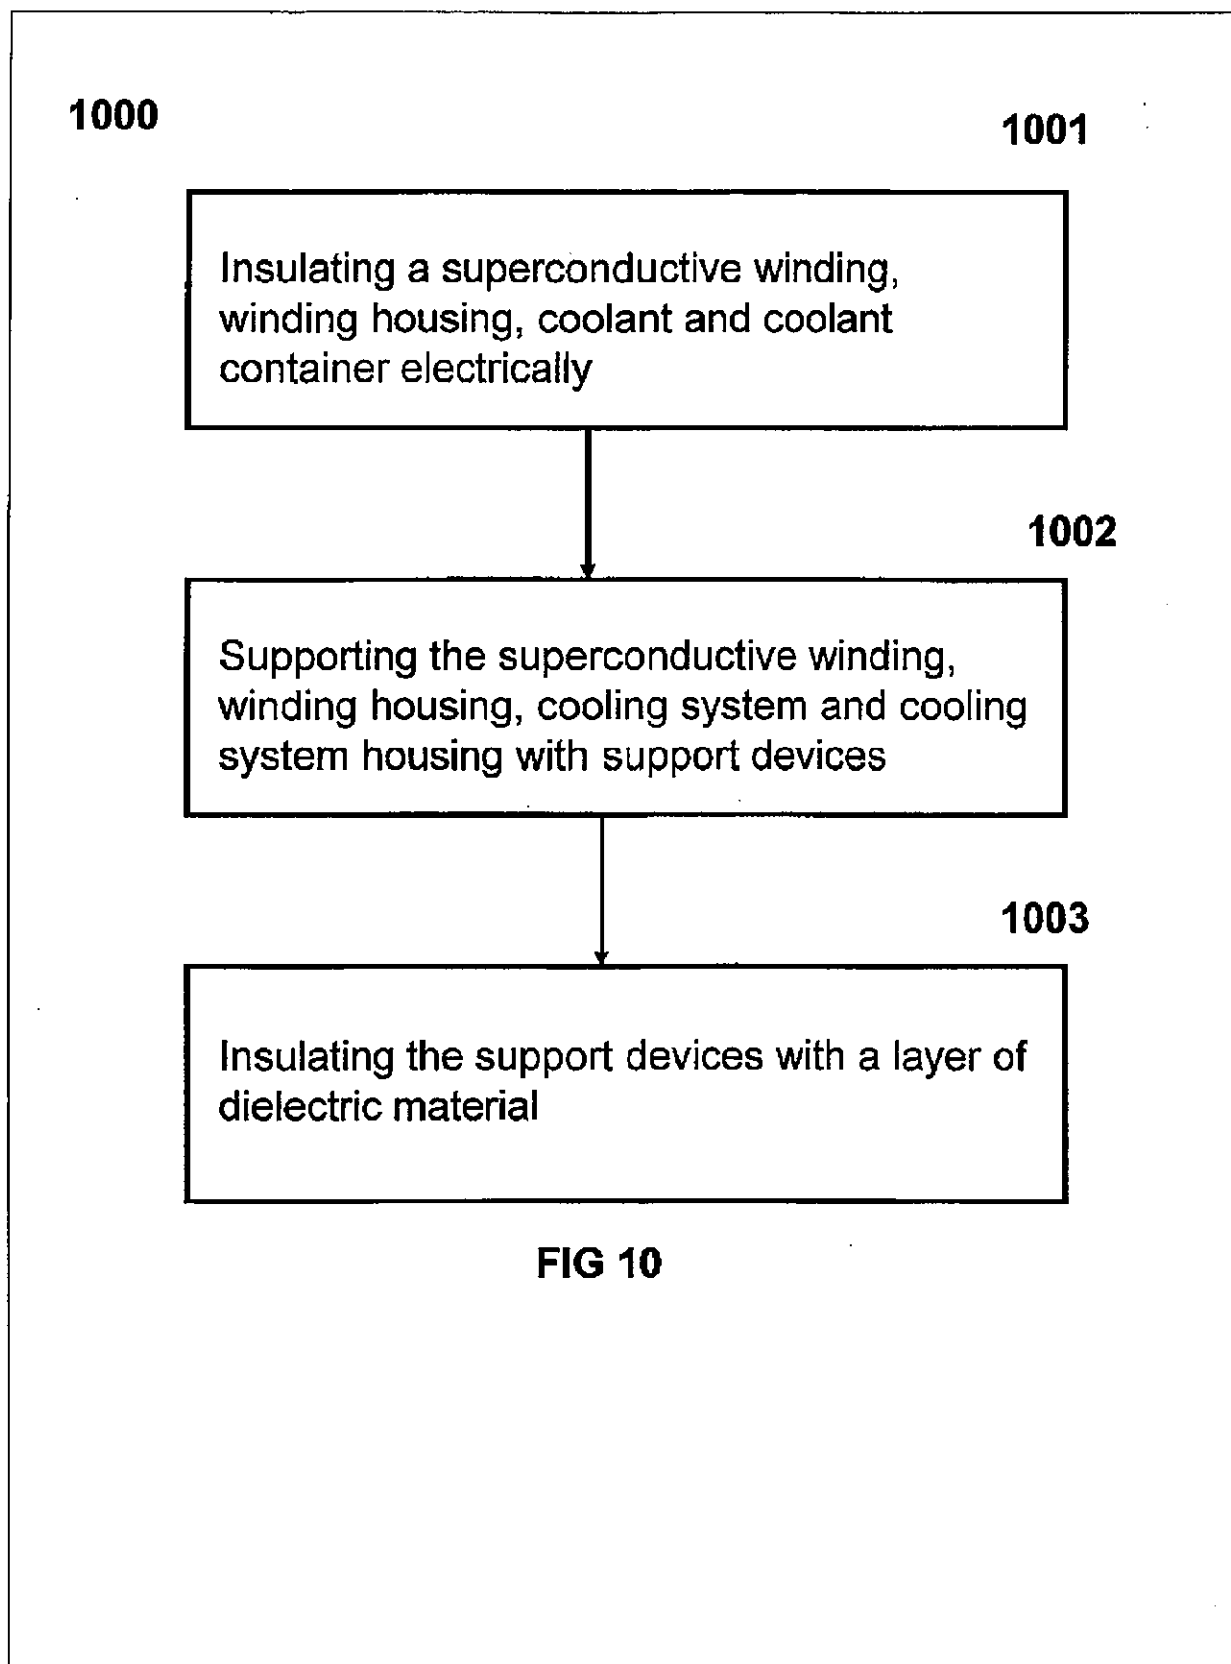
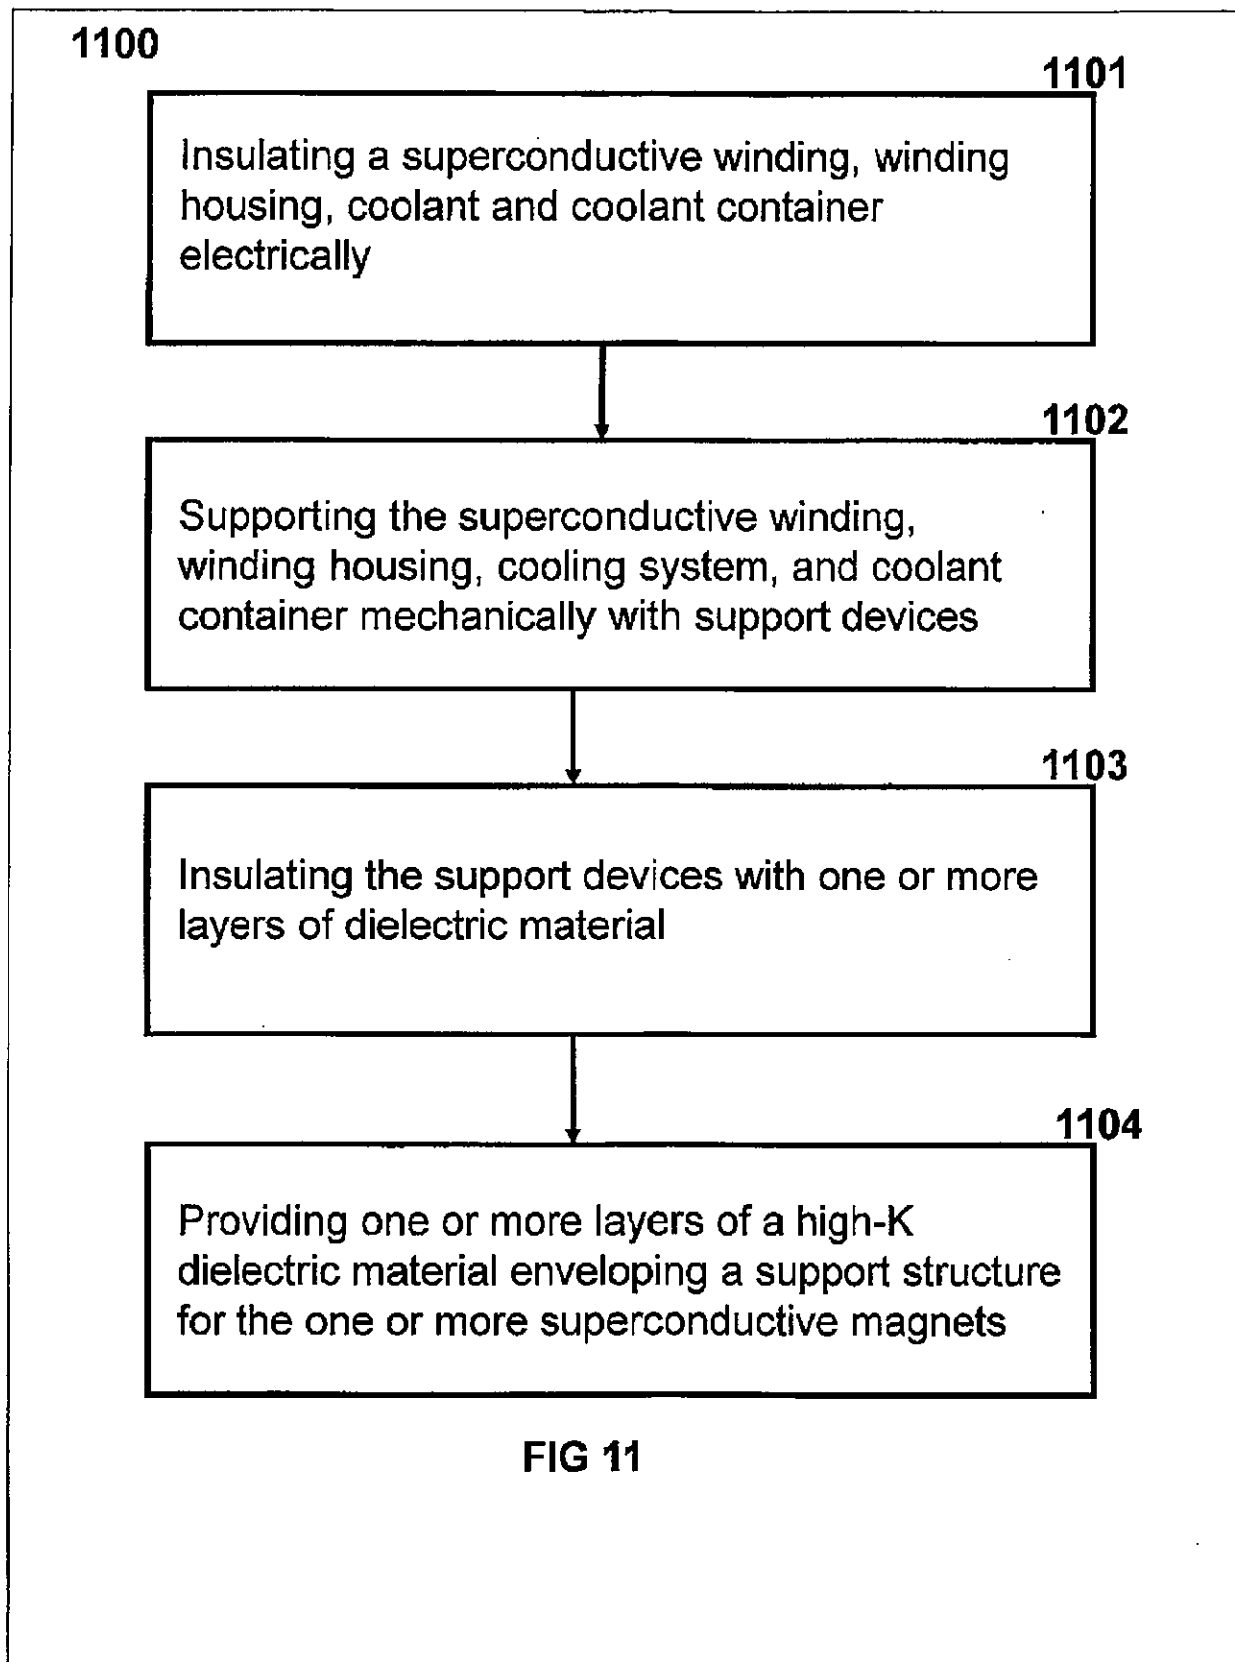
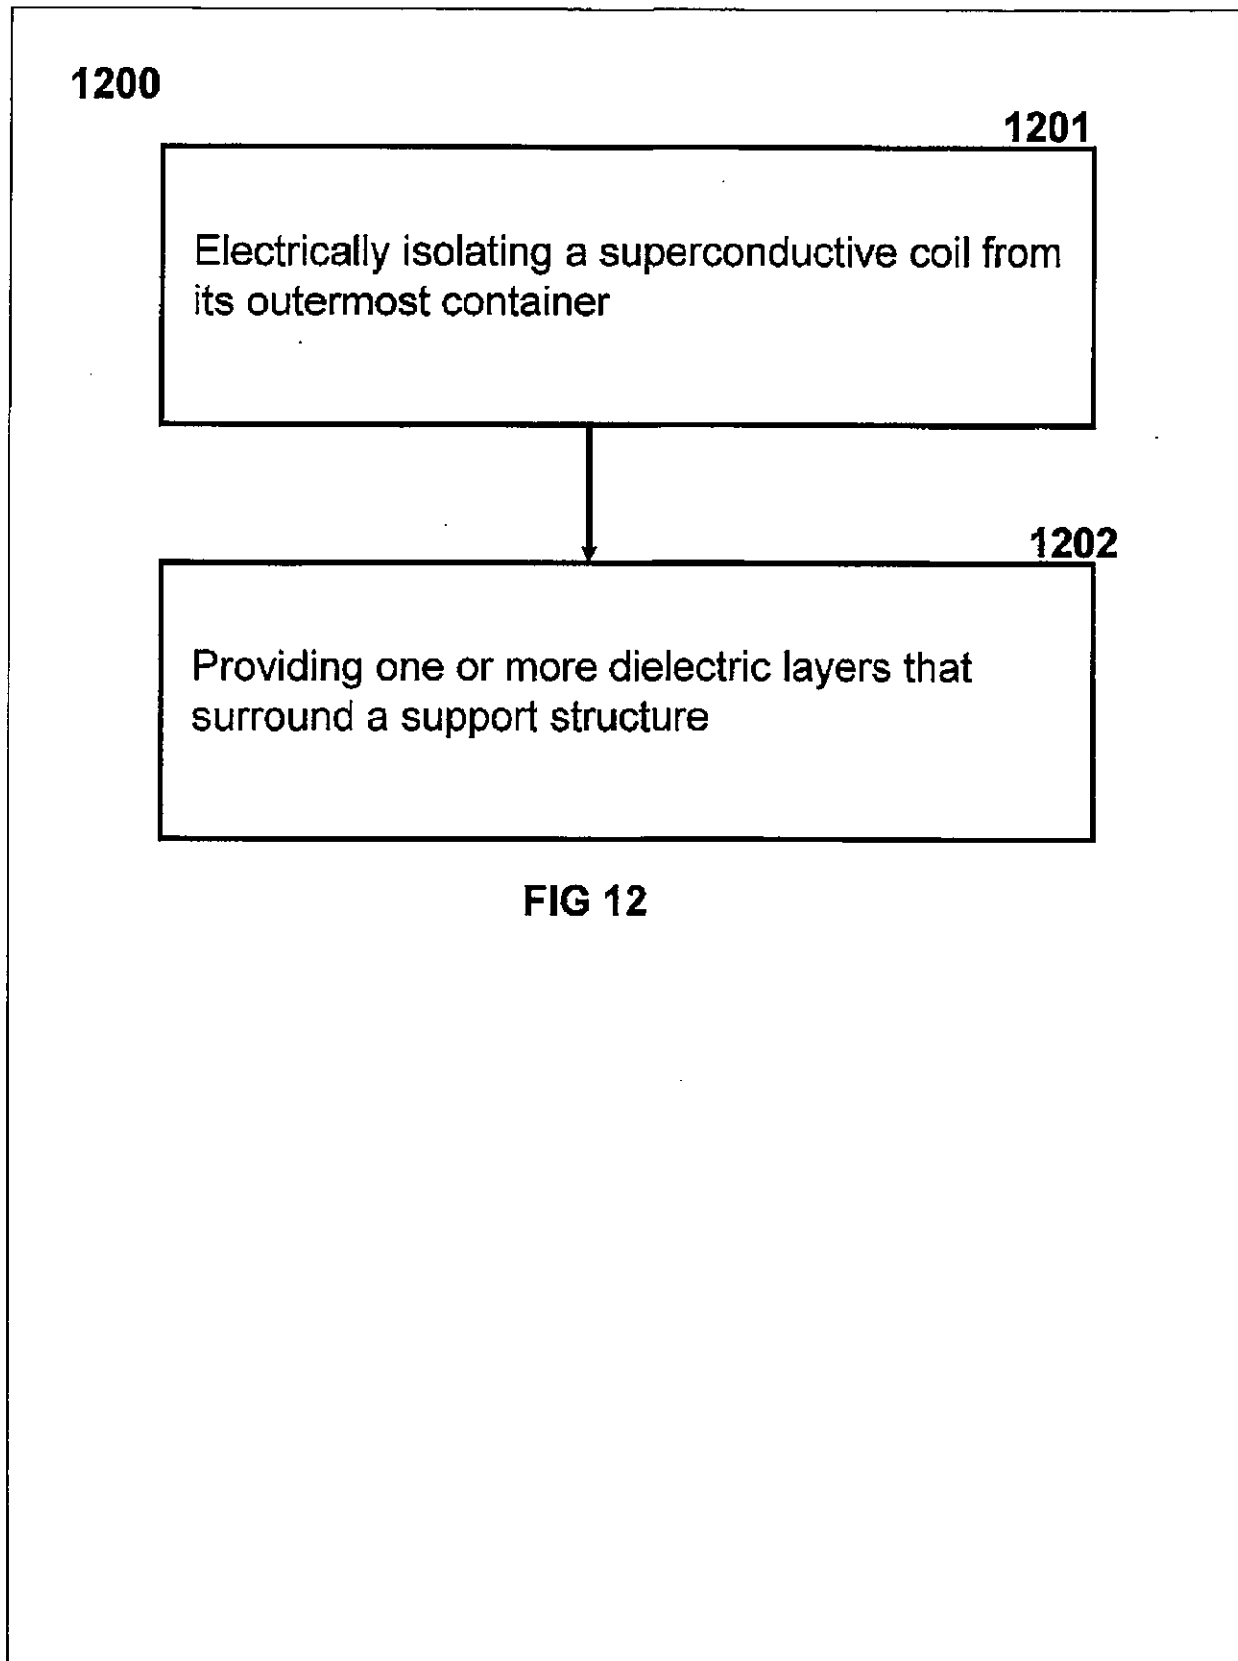


FIG 9







1300**1301**

Electrically isolating a superconductive coil from its outermost container

**1302**

Providing one or more dielectric layers that surround a support structure that is a cryocontainer

FIG 13

1400**1401**

Electrically isolating a superconductive coil from its outermost container

**1402**

Providing one or more dielectric components that surround a support structure wherein the dielectric components withstand a maximum voltage of 250,000V

FIG 14

