



- (51) **International Patent Classification:**
G10L 19/20 (2013.01) *G10L 21/038* (2013.01)
- (21) **International Application Number:**
PCT/US2015/023398
- (22) **International Filing Date:**
30 March 2015 (30.03.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/973,028 31 March 2014 (31.03.2014) US
14/671,757 27 March 2015 (27.03.2015) US
- (71) **Applicant:** QUALCOMM INCORPORATED [US/US];
ATTN: International IP Administration, 5775 Morehouse
Drive, San Diego, California 92121-1714 (US).
- (72) **Inventors:** ATTIL Venkatraman S.; 5775 Morehouse
Drive, San Diego, California 92121-1714 (US). KRISH-
NAN, Venkatesh; 5775 Morehouse Drive, San Diego,
California 92121-1714 (US).
- (74) **Agent:** TOLER, JEFFREY G.; 8500 Bluffstone Cove,
Suite A201, Austin, Texas 78759 (US).

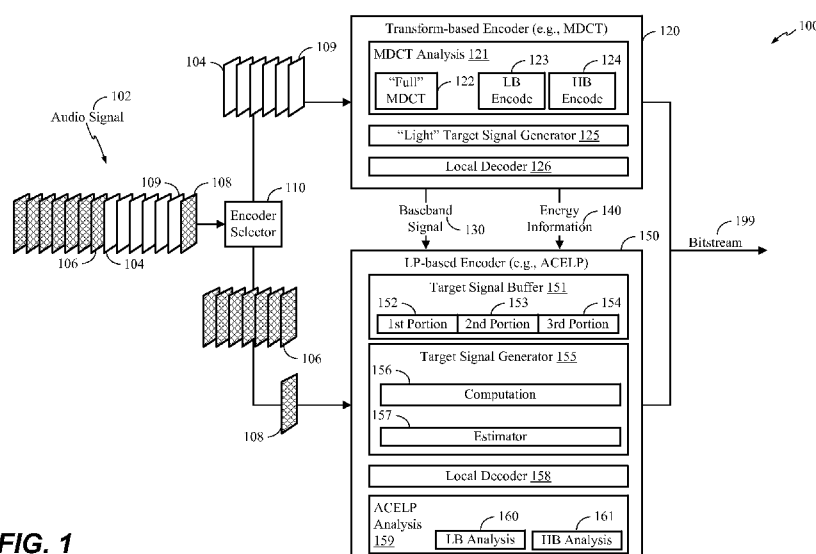
(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** APPARATUS AND METHODS OF SWITCHING CODING TECHNOLOGIES AT A DEVICE

**FIG. 1**

(57) **Abstract:** A particular method includes encoding a first frame of an audio signal using a first encoder. The method also includes generating, during encoding of the first frame, a baseband signal that includes content corresponding to a high band portion of the audio signal. The method further includes encoding a second frame of the audio signal using a second encoder, where encoding the second frame includes processing the baseband signal to generate high band parameters associated with the second frame.