

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 March 2005 (10.03.2005)

PCT

(10) International Publication Number
WO 2005/022937 A1

(51) International Patent Classification⁷: **H04Q 7/20**

(21) International Application Number:
PCT/US2004/025796

(22) International Filing Date: 10 August 2004 (10.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/649,756 26 August 2003 (26.08.2003) US

(71) Applicant (for all designated States except US): **MO-TOROLA, INC.** [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DORENBOSCH,**


Jheroen, P. [NL/US]; 594 CR 3585, Paradise, TX 76073 (US). **GIPSON, Jack, Anthony** [US/US]; 8116 Rainier Road, Fort Worth, TX 76137 (US). **HUFFERD, Lowell, C., III** [US/US]; 1506 Brentwood Trail, Keller, TX 76248 (US). **HIRSBRUNNER, Alex, P.** [CH/US]; 139 North Maple Avenue, Bloomingdale, IL 60108 (US). **BELKIN, Anatoly, S.** [US/US]; 4134 Florence Way, Glenview, IL 60025 (US). **ALEN, Anand, Bernard** [IN/US]; 605 W. Madison Street, #3002, Chicago, IL 60661 (US). **STORM, Brian, D.** [US/US]; 2725 N. Mallard Lane, Round Lake Beach, IL 60073 (US).

(74) Agents: **BROWN, Larry, G.** et al.; 8000 West Sunrise Boulevard, Room 1610, Plantation, FL 33322 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,

[Continued on next page]

(54) Title: SYSTEM AND METHOD TO IMPROVE WLAN HANDOVER BEHAVIOR AT ENTRY/EXIT POINTS

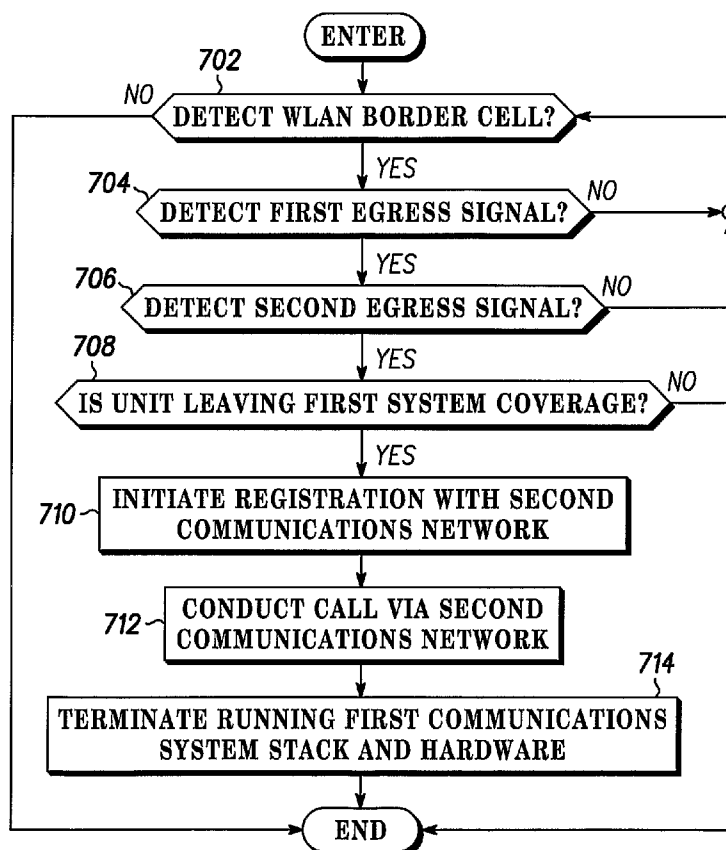

(57) Abstract: A system, wireless device (306) and method determine that a wireless device (306) is detecting a triggering event. The triggering event includes detecting a WLAN border cell (210), detecting a first signal from an egress portal (302), or detecting a degradation in signal quality. The wireless device (306) then detects at least one signal from an egress portal (302), determines that the wireless device (306) is moving from the coverage area of a first communications system to the coverage area of a second communications system according to the order of signals received from the egress portal (302), initiates a registration sequence with the second wireless communication system in response to determining that the wireless device (306) is moving from the coverage area of the first communications system to the coverage area of the second communications system, and conducts present and subsequent calls via the second wireless communication system.



MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.