

SPECIFICATION

TITLE OF THE INVENTION

Method and Apparatus for Filling
Liquid Crystal Material

BACKGROUND OF THE INVENTION

The present invention relates to a method and an apparatus for filling a liquid crystal material to liquid crystal panels (panel cells).

A dipping method has been employed to inject and fill a liquid crystal material to liquid crystal panels heretofore.

A conventional liquid crystal filling apparatus is shown in Fig. 4. A plurality of liquid crystal panels 1 are accommodated in a filling jig cassette 18 of the apparatus with injection ports 1a thereof faced down. A constant amount of a liquid crystal material 11 is stored in a liquid crystal pot 20. Both the filling jig cassette 18 and the liquid crystal pot 20 are placed in a vacuum chamber 19 in a manner to hold the liquid crystal panels 1 out of touch with the liquid crystal material 11.

The vacuum chamber 19 is first reduced to at least about 10^{-3} to about 10^{-4} Torr, whereby air dissolved in the liquid crystal material 11 stored in the liquid crystal pot 20 is degassed. After the air in the liquid

crystal material 11 is degassed sufficiently, the pot 20 is raised by an elevation device 17 and stopped at a position where lower parts of the liquid crystal panels 1 fully sink in the pot.

Thereafter, N_2 gas is introduced into the vacuum chamber 19, thereby to raise the chamber to an atmospheric pressure. In consequence, the liquid crystal material 11 in the pot 20 is pressed out by the pressure and injected/filled through the injection ports 1a to the liquid crystal panels kept still in the vacuum state inside. When the liquid crystal material 11 is filled to all of the liquid crystal panels 1, the liquid crystal pot 20 is lowered and the filling jig cassette 18 is taken out of the vacuum chamber 19. The filling is completed in this manner.

According to the above method and apparatus for filling the liquid crystal material to liquid crystal panels, a larger amount of the liquid crystal material than required should be stored beforehand in the pot so as to prevent the mixture of bubbles into the liquid crystal panels in the middle of the filling operation which would result from the lack of the liquid crystal material.

The liquid crystal material is contaminated and turned unusable after repeated filling operations. This is a waste of the expensive liquid crystal material.

This Sheet Has Been Replaced



Since the lower ends of the liquid crystal panels after the filling operation are totally wet with the liquid crystal material, the liquid crystal panels should be swabbed and cleaned afterwards, which requires not a small amount of time and cost.

SUMMARY OF THE INVENTION

An object of the present invention is therefore to provide a method and an apparatus whereby a swabbing process and a cleaning process for liquid crystal panels are simplified and an unnecessary or extra liquid crystal material is reduced.

In accomplishing these and other objects, according to a first aspect of the present invention, there is provided a method for filling a liquid crystal material to liquid crystal panels, comprising bringing a medium holding a liquid crystal material into touch with downward-directed faces of injection ports of liquid crystal panels in a vacuum chamber and then filling the liquid crystal material to the liquid crystal panels.

According to a second aspect of the present invention, there is provided a liquid crystal material filling method according to the first aspect, wherein in the bringing the medium into touch with the injection ports, the medium is constituted of a plurality of coil-like members having axial centers in a direction

This Sheet Has Been Replaced



intersecting the injection ports of the liquid crystal panels.

According to a third aspect of the present invention, there is provided a liquid crystal material filling method according to the first aspect, wherein in the bringing the medium into touch with the injection ports, the medium is constituted of a plurality of coil-like members having top faces in touch with the injection ports of the liquid crystal panels.

According to a fourth aspect of the present invention, there is provided a liquid crystal material filling method according to the third aspect, wherein in the bringing the medium into touch with the injection ports, each of the coil-like members is a coil spring.

According to a fifth aspect of the present invention, there is provided an apparatus for filling a liquid crystal material, which comprises, in a vacuum chamber, a liquid crystal pot having a liquid crystal reservoir for storing a liquid crystal material and a groove part communicated with the liquid crystal reservoir at a certain angle in which a medium for holding the liquid crystal material is arranged, a filling jig cassette accommodating a plurality of liquid crystal panels with injection ports faced down, an elevation device for moving the liquid crystal pot up and down, and a posture control

This Sheet Has Been Replaced



mechanism which switches a posture of the liquid crystal pot in accordance with up-and-down movement of the liquid crystal pot thereby to flow the liquid crystal material from the liquid crystal reservoir to the groove part at a raised position and bring the holding medium in touch with downward-directed faces of the injection ports of the liquid crystal panels.

According to a sixth aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the fifth aspect, wherein a gate is provided between the liquid crystal reservoir and the groove part to regulate circulation of the liquid crystal material therebetween.

According to a seventh aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the fifth aspect, which includes a stirring device for stirring and degassing the liquid crystal material stored in the liquid crystal reservoir.

According to an eighth aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the sixth aspect, which includes a stirring device for stirring and degassing the liquid crystal material stored in the liquid crystal reservoir.

This Sheet Has Been Replaced



According to a ninth aspect of the present invention, there is provided an apparatus for filling a liquid crystal material, which comprises, in a vacuum chamber, a liquid crystal pot having a liquid crystal reservoir for storing a liquid crystal material and a groove part communicated with the liquid crystal reservoir and having a bottom face higher than a bottom face of the liquid crystal reservoir in which a medium for holding the liquid crystal material is arranged, a filling jig cassette accommodating a plurality of liquid crystal panels with injection ports faced down, a moving device for relatively moving up and down the liquid crystal pot and the liquid crystal panels, and a plunger which can move in and output of the liquid crystal reservoir and flows the liquid crystal material from the liquid crystal reservoir to the groove part when entering the reservoir.

According to a tenth aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the ninth aspect, wherein the plunger works also as a stirring device for stirring and degassing the liquid crystal material stored in the liquid crystal reservoir.

According to an 11th aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the ninth aspect, wherein

This Sheet Has Been Replaced



the bottom face of the groove part is inclined to a horizontal plane, so that the liquid crystal material in the groove part returns to the liquid crystal reservoir by its own weight when the plunger is removed from the liquid crystal reservoir.

According to a 12th aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the tenth aspect, wherein the bottom face of the groove part is inclined to a horizontal plane, so that the liquid crystal material in the groove part returns to the liquid crystal reservoir by its own weight when the plunger is removed from the liquid crystal reservoir.

According to a 13th aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the ninth aspect, wherein a gap is provided between the bottom face of the groove part and a lower face of the medium so as to facilitate circulation of the liquid crystal material.

According to a 14th aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the tenth aspect, wherein a gap is provided between the bottom face of the groove part and a lower face of the medium so as to facilitate circulation of the liquid crystal material.

This Sheet Has Been Replaced




According to a 15th aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the fifth aspect, wherein the holding medium is constituted of a plurality of coils having axial centers in a direction intersecting the injection ports of the liquid crystal panels.

According to a 16th aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the ninth aspect, wherein the holding medium is constituted of a plurality of coils having axial centers in a direction intersecting the injection ports of the liquid crystal panels.

According to a 17th aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the 13th aspect, wherein the holding medium is constituted of a plurality of coils having axial centers in a direction intersecting the injection ports of the liquid crystal panels.

According to an 18th aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the fifth aspect, wherein the holding medium is constituted of a plurality of coil-like members having top faces in touch with the injection ports of the liquid crystal panels.

This Sheet Has Been Replaced




According to a 19th aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the ninth aspect, wherein the holding medium is constituted of a plurality of coil-like members having top faces in touch with the injection ports of the liquid crystal panels.

According to a 20th aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the 13th aspect, wherein the holding medium is constituted of a plurality of coil-like members having top faces in touch with the injection ports of the liquid crystal panels.

According to a 21st aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the 18th aspect, wherein each of the coil-like members is a coil spring.

According to a 22nd aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the 19th aspect, wherein each of the coil-like members is a coil spring.

According to a 23rd aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the 20th aspect, wherein each of the coil-like members is a coil spring.



This Sheet Has Been Replaced



According to a 24th aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the 23rd aspect, wherein the coil spring is screwed in a supporting plate which is in turn held in the groove part.

According to a 25th aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the fifth aspect, wherein a top of the medium is higher than upper faces of side walls of the groove part.

According to a 26th aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the ninth aspect, wherein a top of the medium is higher than upper faces of side walls of the groove part.

According to a 27th aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the fifth aspect, wherein a width of an opened groove face of the groove part is wider than a width of a downward-directed face of the injection port of the liquid crystal panel.

According to a 28th aspect of the present invention, there is provided a liquid crystal material filling apparatus according to the ninth aspect, wherein a width of an opened groove face of the groove part is wider

This Sheet Has Been Replaced



than a width of a downward-directed face of the injection port of the liquid crystal panel.

The medium holding the liquid crystal material may be of any kind and in any form so long as it supplies the holding liquid crystal material into the liquid crystal panels from the lower faces of the injection ports in touch therewith. However, a plurality of coil-like means with axial centers set in a direction intersecting the injection ports is preferable. Many coil-like means having top faces thereof held in touch with the injection ports of the liquid crystal panels are preferably used as the above medium. One that is substantially the same as a coil and obtained by arranging many rings in a longitudinal direction in parallel to each other and coupling by a coupling wire, or the like is included in the above coil-like object, other than a coil. Moreover, a porous material object, e.g., sponge or the like may be used as the medium.

According to the liquid crystal material filling method and apparatus of the present invention, since the liquid crystal material can be brought in touch with only the injection ports of the liquid crystal panels in the vacuum chamber, a waste of the liquid crystal material is eliminated and a swabbing and a cleaning processes for the liquid crystal panels can be simplified.

This Sheet Has Been Replaced



BRIEF DESCRIPTION OF THE DRAWINGS

These and other aspects and features of the present invention will become clear from the following description taken in conjunction with the preferred embodiments thereof with reference to the accompanying drawings, in which:

Figs. 1A and 1B are perspective views of a liquid crystal pot in a first embodiment of the present invention and its gate;

Figs. 2A, 2B, and 2C are longitudinal sectional views and a lateral sectional view showing a schematic constitution of the liquid crystal pot and a positional relationship with a liquid crystal panel at the filling time in the first embodiment of the present invention;

Fig. 3 is a sectional view of a liquid crystal filling apparatus in the first embodiment of the present invention;

Fig. 4 is a sectional view of a conventional liquid crystal filling apparatus;

Fig. 5 is a partially-removed perspective view of a liquid crystal pot in a second embodiment of the present invention;

Fig. 6 is a sectional view of the liquid crystal pot of Fig. 5;

This Sheet Has Been Replaced



Fig. 7 is a sectional view of a medium of the pot for holding a liquid crystal material;

Figs. 8A, 8B, and 8C are a sectional view of a liquid crystal filling apparatus in the second embodiment of the present invention, a perspective view and a cross-sectional view of a plunger thereof;

Fig. 9 is a sectional view of a liquid crystal filling apparatus in a third embodiment of the present invention;

Fig. 10 is a longitudinal sectional view showing a schematic constitution of a liquid crystal pot in a fourth embodiment of the present invention;


Fig. 11 is a lateral sectional view of the liquid crystal pot in the fourth embodiment of the present invention; and

Fig. 12 is a lateral sectional view of a liquid crystal pot in a fifth embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Before the description of the present invention proceeds, it is to be noted that like parts are designated by like reference numerals throughout the accompanying drawings.

A first embodiment of the present invention will be described with reference to Figs. 1A-3.



This Sheet Has Been Replaced



A liquid crystal pot 2 shown in Figs. 1A, 1B, and 2A, 2B, 2C is constituted of a liquid crystal reservoir 3 where a liquid crystal material 11 of a necessary amount for filling is stored, a slim groove part 6 integrally formed with the reservoir 3 at a certain angle, and a gate 5 for regulating the circulation of the liquid crystal material between the reservoir 3 and groove part 6.

A bottom face 3a of the reservoir 3 and a bottom face 6a of the groove part 6 are bent and connected with each other at a bending angle of approximately 165° (at any angle in the range of 175° - 155°) as indicated in Figs. 2A and 2B. The gate 5 is disposed at a circulation path between the reservoir 3 and groove part 6. The gate 5 has a cutaway 5a and a hole 5b for passing the liquid crystal material through the hole 5b and the cutaway 5a between the groove part 6 and the reservoir 3 without overflowing outside of the pot 2. The liquid crystal material 11 is allowed to flow through a space defined by the cutaway 5a of the gate 5 and the bottom face 6a of the groove part 6. A resistance of the path can be adjusted by adjusting an opening degree of the gate 5. That is, when the gate 5 is inserted into the base part of the groove part 6 close to the reservoir 3, the inserting amount of the gate 5 is changed to change the size of the space defined by the cutaway 5a of the gate 5 and the bottom face 6a of the

This Sheet Has Been Replaced



groove part 6 to regulate the flow amount of the liquid crystal material passing through the space. A required filling amount of the liquid crystal material 11 is stored in the reservoir 3. The liquid crystal material 11 is supplemented in accordance with the consumption when filled into liquid crystal panels 1. An automatic liquid crystal material supply device (not shown) is preferably used to supplement the material. It is convenient in order to correctly set the supplementation amount if the liquid crystal reservoir 3 is formed to be narrow and deep with a small sectional area. That is, the level of the liquid crystal material in the reservoir 3 is detected by a sensor, and then the consumed amount of the liquid crystal material is detected. The automatic liquid crystal material supply device supplies the material 11 in accordance with the detected and consumed amount of the material 11 to the reservoir 3.

The groove part 6 is relatively shallow and thin in a U-shaped cross section.

Three coils 9 (medium for holding the liquid crystal material) each having an axial center directed in the same direction as a longitudinal direction of the groove part 6 are arranged in parallel to each other in the groove part 6. A supporting wire 9a is inserted inside each coil 9, with both end parts bent downward and fixedly

This Sheet Has Been Replaced




inserted in the bottom face 6a of the groove part 6, thereby to hold the coil 9. A top of each coil 9 projects slightly above upper faces of side walls of the groove part 6 as shown in Fig. 2C.


Although it is preferable to form the above liquid crystal pot 2, gate 5, supporting wires 9a, and coils 9 by SUS304 in the Japanese Industrial Standard, any material or any surface treatment may be used so long as the quality of the liquid crystal panels 1 and the liquid crystal material 11 is ensured.

A diameter, a pitch, and an outer diameter of the coil 9, and a count of the coils 9, a width and a depth of the groove part 6, and the like are suitably determined from the viewpoint of whether the liquid crystal material 11 is held sufficiently, whether the coils 9 fit the shape of injection ports 1a of the liquid crystal panels 1, etc.

Fig. 3 is a liquid crystal material filling apparatus. The above-described liquid crystal pot 2 containing the liquid crystal material 11 and a filling jig cassette 18 holding a plurality of liquid crystal panels 1 with the injection ports 1a faced down are set in a vacuum chamber 19 of the apparatus. Before a filling operation is started, as designated by A in Fig. 3, the liquid crystal pot 2 is placed on a stage 22 fixed inside the vacuum chamber 19 so as to keep the bottom face 3a of the



This Sheet Has Been Replaced



reservoir 3 horizontally. On the other hand, the groove part 6 is supported by a roll 30 set at an upper end of a base 24 in a manner to be rotatable about the axis of the roll 30. The base is fixed onto the stage 22.

In an elevation device 17, a horizontal elevation table 26 is fixed to a main shaft 25 which can slide up and down penetrating a bottom wall of the vacuum chamber 19 air-tightly. Four elevation driving shafts 16 of an equal length are fixed to the elevation table 26 at positions corresponding to vertices of a rectangle of the table 26. Right two of the four driving shafts 16 in Fig. 3 have rollers 14 at respective front ends, while left two are formed to project at respective front ends as conical projections 31. The elevation device 17 has a motor 17a for rotating a screw shaft 17b in both directions so as to move up and down a nut member 17c engaged with the screw shaft 17b together with a plate 17d fixed to the nut member 17c and projecting the main shaft 25 having the elevation table 26 at its upper end.


A through hole 23 is opened in the stage 22 on an extension line of an axial center of each driving shaft 16 to allow the shaft 16 to pass freely. A groove 10 having a semicircular cross section is formed in a lower face of the liquid crystal pot 2, more specifically, in the vicinity of an end part of the liquid crystal pot 2 at the side of the

This Sheet Has Been Replaced



groove part 6. The roll 30 is detachably fitted in the groove 10. Moreover, the above rollers 14 contact the lower face of the liquid crystal pot 2 at the side of the reservoir 3 where a pair of roller reception recesses 7 allowing the rotation of the rollers 14 in a predetermined range are formed. Also a pair of conical recesses 15 to be engaged with the above-described conical projections 31 are formed in the lower face of the liquid crystal pot 2 at the side of the groove part 6 at a halfway point between the groove 10 and roller reception recesses 7.

A stirring plate 13 is arranged in the vacuum chamber 19 to stir the liquid crystal material 11 inside the reservoir 3. The stirring plate 13 can be moved up and down by an elevation device 12. The elevation device 12 has a motor 12a for rotating a screw shaft 12b in both directions so as to move up and down a nut member 12c engaged with the screw shaft 12b together with a plate 12d fixed to the nut member 12c and projecting a stirring shaft 12e having the stirring plate 13 at its lower end. This stirring plate 13 stirs the liquid crystal material 11 while repeatedly moved up and down in the reservoir 3 in accordance with the rotations of the screw shaft 12b in the directions. Alternatively, the stirring plate may be designed to turn about the axis of the stirring shaft 12e thereby to stir the liquid crystal material 11. Although



This Sheet Has Been Replaced



SUS304 is preferably used to constitute the stirring plate, any material or any surface treatment is employable so long as it secures the quality of the liquid crystal panels 1 and the liquid crystal material 11.


Hereinbelow the operation of the apparatus in the above constitution will be discussed.

Initially, the liquid crystal pot 2 is set in the vacuum chamber 19 in a state as shown in Fig. 2A and by A in Fig. 3, that is, with the bottom face 3a of the reservoir 3 kept horizontally and the bottom face 6a of the groove part 6 inclined approximately 15° upward. The liquid crystal material 11 is kept in the reservoir 3. In addition, the liquid crystal pot 2 is separated from the liquid crystal panels 1.

The vacuum chamber 19 is vacuumized from the above state. Since only a front face of the liquid crystal material 11 in the reservoir 3 is degassed in the above state, the stirring plate 13 is let down by the elevation device 12 to be inserted into the reservoir 3. The liquid crystal material 11 is fully degassed by repeatedly moving the stirring plate 13 up and down. The degassing is promoted further if the stirring plate 13 is in touch with the bottom face 3a of the reservoir 3, and therefore a floating structure is preferably adopted.



This Sheet Has Been Replaced



One example of the floating structure is shown in Figs. 8B and 8C. This floating structure includes a piston 43a supported by the stirring shaft 12e, a plurality of support shafts 143d penetrated the piston 43a so as to freely move up and down and having stoppers 143e at their upper ends for preventing the support shaft 143d from dropping from the piston 43a, and a floating plate 143b fixed to lower ends of the support shafts 143d and having holes 143c, so that the liquid crystal material 11 can be moved through the holes 143c of the floating plate 143b while the stirring shaft 12e moves up and down together with the piston 43a. At this time, since the floating plate 143b is simply supported by the stoppers 143e of the support shafts 143d at the upper surface of the piston 43a via the support shafts 143d, the floating plate 143b can freely move up and down in the liquid crystal material 11. Even when the floating plate 143b contacts the bottom of the reservoir 3, the floating plate 143b moves up to prevent the reservoir 3 from having any damage.

When the liquid crystal material 11 is fully degassed and the vacuum chamber 19 is decreased to at least approximately 10^{-3} or 10^{-4} Torr, the stirring plate 13 is raised and the liquid crystal pot 2 is started to be moved up by the elevation device 17.

This Sheet Has Been Replaced



When the main shaft 25 of the elevation device 17 moves upward, the two shafts 16 with the rollers 14 among the four driving shafts 16 on the elevation table 26 contact the roller reception recesses 7 of the liquid crystal pot 2 earlier than the other two shafts 16. In accordance with the further upward motion of the main shaft 25, the liquid crystal pot 2 is subject to rotation in the counterclockwise direction in the drawing, and consequently is raised at the side of the liquid crystal reservoir 3, whereby the bottom face 6a of the groove part 6 becomes horizontal. Simultaneously with this, the conical projections 31 at the front ends of the remaining driving shafts 16 are engaged with the conical recesses 15 in the lower face of the liquid crystal pot 2.

The above state is represented in Fig. 2B and by B in Fig. 3. Before and after this state, while the liquid crystal material 11 in the reservoir 3 flows to the groove part 6 through the cutaway 5a of the gate 5, a flow rate of the liquid crystal material 11 is suitably regulated by the gate 5. The liquid crystal material 11 is filled into the three coils 9 arranged in the groove part 6. In this case, the top of each coil 9 is exposed a constant height from the both upper faces of the side walls of the groove part 6. Therefore, even when the liquid crystal material 11 has a relatively small surface tension, the liquid crystal

This Sheet Has Been Replaced




material 11 swells over an upper end of the groove part 6 as shown in Fig. 2C. The coil 9 thus works as a medium for holding the liquid crystal material 11.

When the four driving shafts 16 move up further, the groove 10 is separated from the roll 30 and the liquid crystal pot 2 moves up while maintaining its posture shown in Fig. 2B. Finally, as indicated by C in Fig. 3, the coils 9 come in touch with the injection ports 1a of the liquid crystal panels 1, when the elevation device 17 is stopped.

The liquid crystal material is started to be filled. After the filling of the material 11 for a fixed time through the capillary phenomenon, N_2 is supplied into the vacuum chamber 19, so that the vacuum chamber 19 is returned to the atmospheric pressure. A liquid level of the liquid crystal pot 2 is pressed by the atmospheric pressure and hence the liquid crystal material 11 is gradually filled into the liquid crystal panels 1.

At this time, although the amount of the liquid crystal material 11 present in the groove part 6 is limited, the liquid crystal material 11 corresponding to the reduced amount is naturally supplemented from the reservoir 3 by the automatic liquid crystal material supply device until the liquid crystal panels 1 are completely filled with the liquid crystal material 11. Since the




This Sheet Has Been Replaced



lower end parts of the liquid crystal panels 1 are not entirely soaked in the liquid crystal material 11, and only the injection ports 1a of the liquid crystal panels 1 are in touch with the liquid crystal material 11, other surface portions of the liquid crystal panels 1 than the injection ports 1a are remained not wet. Accordingly, the liquid crystal panels 1 can be swabbed and cleaned simply after the filling operation.

Upon completion of the filling operation, the elevation device 17 is moved in an opposite direction thereby to lower and rotate the liquid crystal pot 2 to return to the original state as shown in Fig. 2A and by A in Fig. 3. As a result, the groove part 6 is inclined again right downward and the liquid crystal material 11 remaining in the coils 9 and groove part 6 is nearly completely returned to the reservoir 3 through the hole 5b and cutaway 5a of the gate 5. Accordingly, a change of the liquid level of the liquid crystal pot 2 reflects correctly the amount of the liquid crystal material 11 filled into the liquid crystal panels 1. A required minimum amount of the liquid crystal material 11 can be supplemented highly accurately in this manner.

A servo motor or the like is preferably used for the elevation device 17 to control a speed and a position of the table 26 so as to prevent the liquid crystal



This Sheet Has Been Replaced



material 11 from leaking out of the groove part 6 of the liquid crystal pot 2.

A second embodiment of the present invention will be depicted with reference to Figs. 5-8 below.

A liquid crystal pot 32 in Figs. 5-7 has a liquid crystal reservoir 33 for storing the liquid crystal material 11, and a groove part 36 having a bottom face 36a higher than a bottom face 33a of the reservoir 33 and communicating with the reservoir 33. A holding medium for holding the liquid crystal material 11 is arranged in the groove part 36.

The liquid crystal reservoir 33 is circular in cross section and communicates at a part thereof with the groove part 36. The groove part 36 is moderately inclined to allow the liquid crystal material 11 therein to return to the liquid crystal reservoir 33 by its own weight.

The holding medium 39 is constituted of many coil springs 39a having top faces thereof in touch with the injection ports 1a of the liquid crystal panels 1. The coil springs 39a are screwed into screw holes 35 in a supporting plate 39b. Owing to the arrangement that the supporting plate 39b is held by stepped supporting parts 41 provided at both side faces of the groove part 36, a gap 42 is secured between the supporting plate 39b and the bottom

This Sheet Has Been Replaced




face 36a of the groove part 36 to facilitate the circulation of the liquid crystal material 11.

The liquid crystal pot 32 is, as shown in Figs. 6 and 8, laid horizontally at all times, and the coil springs 39a keep in the natural state the top faces thereof slightly projecting upward from upper faces of both side walls of the groove part 36.

In the vacuum chamber 19 of a liquid crystal material filling apparatus of Fig. 8 are set the above-described liquid crystal pot 32, the filling jig cassette 18 holding a plurality of liquid crystal panels 1 with the injection ports 1a faced down, an elevation device 37 for moving the liquid crystal pot 32 up and down, and a plunger 43 which can move in and out of the reservoir 33 and flows the liquid crystal material 11 to the groove part 36 from the reservoir 33 when entering the reservoir 33.

Both side parts of a bottom face of the liquid crystal pot 32 are supported horizontally by a pair of supporting plates 44. Conical recesses 45 are formed at four points of the bottom face of the liquid crystal pot 32. In the elevation device 37, a horizontal elevation table 56 is fixed to a main shaft 45 which is slidable up and down to penetrate a bottom wall of the vacuum chamber 19 hermetically. Four driving shafts 57 of an equal length are fixed to the elevation table 56 at positions



This Sheet Has Been Replaced



corresponding to vertices of a rectangle thereof. Upper ends of these driving shafts 57 are shaped to be conical projections 58 to be fitted in the above conical recesses 45. Other reference numerals 68, 59 and 60 represent respectively a motor, a driving screw and, a nut member meshed with the driving screw 59 and coupled with the main shaft 45. The four driving shafts 57 are moved up and down by the rotation of the motor 68.

The plunger 43 is moved up and down by a plunger elevation device 61. The plunger elevation device 61 is provided with a motor 62, a driving screw 63, a nut member 64, and a main shaft 65 which air-tightly penetrates a top wall of the vacuum chamber 19 and is slidable up and down. The plunger 43 is mounted at a lower end of the main shaft 65. The plunger 43 is constructed of a main body 43a, and a stirring propeller 43b supported by the main body 43a to be movable up and down. A water-tight motor 43c for driving the stirring propeller 43b is incorporated in the plunger main body 43a. The stirring propeller 43b projects downward from a lower end of the main body 43a and is supported by the main body 43a in a floating manner. The plunger main body 43a is formed circular in cross section to be fitted with the reservoir 33. When the plunger 43 enters the reservoir 33, the liquid crystal material 11 in the reservoir 33 overflows to be sent to the groove part

This Sheet Has Been Replaced



36. The plunger 43 may be constituted by the floating structure shown in Figs. 8A and 8B described above.

The operation of the above-constituted apparatus will be described now.

At first, the liquid crystal pot 32 is set on the pair of the supporting plates 44, while the plunger 43 up away from the pot 32 stands by (shown by A in Fig. 8). The vacuum chamber 19 is started to be vacuumized in this state. Since only a front face of the liquid crystal material 11 stored in the reservoir 33 is degassed in the above state, the plunger 43 is descended by the plunger elevation device 61 to insert the stirring propeller 43b into the reservoir 33. The stirring propeller 43b is then rotated to accelerate the degassing (shown by B in Fig. 8).

When the liquid crystal material 11 is sufficiently degassed and the vacuum chamber 19 is reduced to at least about 10^{-3} to 10^{-4} Torr, the elevation device 37 starts to move the liquid crystal pot 32 upward.

Because of the upward driving of the elevation device 37, the four driving shafts 57 are moved up and, the conical projections 58 at the front ends of the shafts 57 are fitted in the conical recesses 45 in the bottom face of the liquid crystal pot 32. The liquid crystal pot 32 is consequently moved up, thereby bringing top faces of many coil springs 39a in the groove part 36 in pressed touch

This Sheet Has Been Replaced



with the injection ports 1a of the liquid crystal panels 1. The liquid crystal pot 32 is stopped to move upward at this time point.

Meanwhile, the plunger 43 is controlled to move up before the upward movement of the liquid crystal pot 32. After the upward movement of the pot 32, the plunger 43 gradually descends relatively to the liquid crystal pot 32, so that the main body 43a enters the liquid crystal material 11 in the reservoir 33 to send the liquid crystal material 11 to the groove part 36 (indicated by C in Fig. 8).

While the top faces of the coil springs 39a are in touch with the injection ports 1a of the liquid crystal panels 1, the liquid crystal material 11 is fed to the coil springs 39a through the gap 42 and screw holes 35 of the supporting plate 39b. The liquid crystal material 11 is filled in the coil springs 39a and moreover swells at the surface thereof. The liquid crystal material 11 adhering to the periphery of the coil springs 39a due to the surface tension is filled by the capillary phenomenon to the injection ports 1a of the liquid crystal panel 1 in touch with the material 11.

After the filling operation of a fixed time by the capillary phenomenon, N_2 is fed into the vacuum chamber 19 to return the vacuum chamber 19 to the atmospheric

This Sheet Has Been Replaced



pressure. The atmospheric pressure presses a liquid level of the liquid crystal pot 32 and accordingly, the liquid crystal material 11 is filled into the liquid crystal panels 1 gradually. The whole of the lower end parts of the liquid crystal panels 1 is not soaked in the liquid crystal material 11 and only the injection ports 1a of the liquid crystal panels 1 are brought in touch with the liquid crystal material 11. Since other surface portions of the liquid crystal panels 1 are not turned wet, the liquid crystal panels 1 can be swabbed and cleaned in a simple process after the filling operation.

After the filling operation is completed, the liquid crystal pot 32 is lowered and returned to the original position, and the plunger 43 is raised and returned to the original position. Since the plunger 43 is removed from the reservoir 33, the liquid crystal material 11 in the groove part 36 traces the inclined face and returns to the reservoir 33 by its own weight.

As shown in Fig. 2C, the width W_2 of an opened groove face of the groove part 6, 36 is wider than the width W_1 of the downward-directed face of the injection port 1a of the liquid crystal panel 1 so as not to define a gap between the opened groove face of the groove part 6, 36 and the downward-directed face of the injection port 1a of the liquid crystal panel 1. That is, if any gap is defined

This Sheet Has Been Replaced



between them, a gas might be mixed into the liquid crystal panel 1 through the gap to deteriorate the liquid crystal panel 1. Preferably, when the liquid crystal material 11 is filled into the liquid crystal panel 1, the lower side of the liquid crystal panel 1 is not contacted to the liquid crystal material 11 and the upper faces of the side walls of the groove part 6, 36.

The elevation device 37 serving as one example of the moving device for relatively moving up and down the liquid crystal pot 32 and the liquid crystal panels 11, may be constituted by a moving device 137 as shown in Fig. 9. In the moving device 137, a horizontal elevation table 156 is fixed to a main shaft 145 which is slidable up and down to penetrate a bottom wall of the vacuum chamber 19 hermetically. Four driving shafts 157 of an equal length are fixed to the elevation table 156 at positions corresponding to vertices of a rectangle.

Front ends of these driving shafts 157 are fixed to a plate 100 for supporting the jig cassette 18. Other reference numerals 158, 159 and 160 represent respectively a motor, a driving screw and, a nut member meshed with the driving screw 159 and coupled with the main shaft 145. The four driving shafts 157 are moved up and down by the rotation of the motor 158 to move up and down the liquid crystal panels 1 between position shown by solid lines H

This Sheet Has Been Replaced



and dotted lines L with respect to the pot 32 fixed on a plate 144 to bring the springs 39 in touch with the downward-directed faces of the injection ports 1a of the liquid crystal panels 1.

The medium may be formed in any shape or construction as long as the medium 9 for holding the liquid crystal material 11 into touch with the downward-directed faces of the injection ports 1a of the liquid crystal panels 1. For example, as shown in Figs. 10 and 11 as a liquid crystal pot in a fourth embodiment of the present invention, the medium may be formed by frames 90 of trapezoid shape and each of which is not connected to each other as a coil-like member. Each of the frames 90 is independently stood on the bottom face 6a of the groove part 6 and a supporting wire 90a is inserted inside the frames 90 to fix the frames 90 to the bottom face 6a of the groove part 6. The top part of each frame 90 is slightly higher than the upper faces of side walls of the groove part 6 to bring the frames 90 in touch with the downward-directed faces of the injection ports 1a of the liquid crystal panels 1.

The shape of the medium 9 is not limited to a ring or frame shape. That is, as shown in Fig. 12 as a liquid crystal pot in a fifth embodiment of the present invention, the medium may be formed by T-shaped members 190

THIS SHEET HAS BEEN REPLACED

This Sheet Has Been Replaced




fixed to the bottom face 6a of the groove part 6 and having top parts thereof slightly higher than the upper faces of side walls of the groove part 6 to bring the frames 90 in touch with the downward-directed faces of the injection ports 1a of the liquid crystal panels 1.

As is described hereinabove, according to the present invention, liquid crystal panels can be swabbed and cleaned in a simple process after the filling operation. Moreover, a required minimum amount of the liquid crystal material suffices the invention with a waste eliminated.

Although the present invention has been fully described in connection with the preferred embodiments thereof with reference to the accompanying drawings, it is to be noted that various changes and modifications are apparent to those skilled in the art. Such changes and modifications are to be understood as included within the scope of the present invention as defined by the appended claims unless they depart therefrom.

This Sheet Has Been Replaced



WHAT IS CLAIMED IS:

1. A method for filling a liquid crystal material to liquid crystal panels, comprising bringing a medium (9,39,90,190) holding a liquid crystal material (11) into touch with downward-directed faces of injection ports (1a) of liquid crystal panels (1) in a vacuum chamber (19) and then filling the liquid crystal material to the liquid crystal panels.

2. A liquid crystal material filling method according to claim 1, wherein in the bringing the medium into touch with the injection ports, the medium (9) is constituted of a plurality of coil-like members having axial centers in a direction intersecting the injection ports of the liquid crystal panels.

3. A liquid crystal material filling method according to claim 1, wherein in the bringing the medium into touch with the injection ports, the medium (39) is constituted of a plurality of coil-like members having top faces in touch with the injection ports of the liquid crystal panels.

4. A liquid crystal material filling method according to claim 3, wherein in the bringing the medium into touch with the injection ports, each of the coil-like members is a coil spring.



* C L M S *

This Sheet Has Been Replaced



5. An apparatus for filling a liquid crystal material, which comprises, in a vacuum chamber (19), a liquid crystal pot (2) having a liquid crystal reservoir (3) for storing a liquid crystal material (11) and a groove part (6) communicated with the liquid crystal reservoir at a certain angle in which a medium (9,90,190) for holding the liquid crystal material is arranged, a filling jig cassette (18) accommodating a plurality of liquid crystal panels (1) with injection ports (1a) faced down, an elevation device (17) for moving the liquid crystal pot up and down, and a posture control mechanism (30,10,31,15,14,7) which switches a posture of the liquid crystal pot in accordance with up-and-down movement of the liquid crystal pot thereby to flow the liquid crystal material from the liquid crystal reservoir to the groove part at a raised position and bring the holding medium in touch with downward-directed faces of the injection ports of the liquid crystal panels.

6. A liquid crystal material filling apparatus according to claim 5, wherein a gate (5) is provided between the liquid crystal reservoir and the groove part to regulate circulation of the liquid crystal material therebetween.

7. A liquid crystal material filling apparatus according to claim 5, which includes a stirring device



THIS SHEET HAS BEEN
REPLACED

(13,12) for stirring and degassing the liquid crystal material stored in the liquid crystal reservoir.

8. A liquid crystal material filling apparatus according to claim 6, which includes a stirring device (13,12) for stirring and degassing the liquid crystal material stored in the liquid crystal reservoir.

9. An apparatus for filling a liquid crystal material, which comprises, in a vacuum chamber (19), a liquid crystal pot (32) having a liquid crystal reservoir (33) for storing a liquid crystal material (11) and a groove part (36) communicated with the liquid crystal reservoir and having a bottom face (36a) higher than a bottom face (33a) of the liquid crystal reservoir in which a medium (39) for holding the liquid crystal material is arranged, a filling jig cassette (18) accommodating a plurality of liquid crystal panels (1) with injection ports (1a) faced down, a moving device (37) for relatively moving up and down the liquid crystal pot and the liquid crystal panels, and a plunger (43) which can move in and output of the liquid crystal reservoir and flows the liquid crystal material from the liquid crystal reservoir to the groove part when entering the reservoir.

10. A liquid crystal material filling apparatus according to claim 9, wherein the plunger (43) works also



This Sheet Has Been Replaced



as a stirring device for stirring and degassing the liquid crystal material stored in the liquid crystal reservoir.

11. A liquid crystal material filling apparatus according to claim 9, wherein the bottom face (36a) of the groove part (36) is inclined to a horizontal plane, so that the liquid crystal material in the groove part returns to the liquid crystal reservoir by its own weight when the plunger is removed from the liquid crystal reservoir.

12. A liquid crystal material filling apparatus according to claim 10, wherein the bottom face (36a) of the groove part (36) is inclined to a horizontal plane, so that the liquid crystal material in the groove part returns to the liquid crystal reservoir by its own weight when the plunger is removed from the liquid crystal reservoir.

13. A liquid crystal material filling apparatus according to claim 9, wherein a gap (42) is provided between the bottom face of the groove part and a lower face of the medium so as to facilitate circulation of the liquid crystal material.

14. A liquid crystal material filling apparatus according to claim 10, wherein a gap (42) is provided between the bottom face of the groove part and a lower face of the medium so as to facilitate circulation of the liquid crystal material.



* C L M S *

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



15. A liquid crystal material filling apparatus according to claim 5, wherein the holding medium is constituted of a plurality of coils having axial centers in a direction intersecting the injection ports of the liquid crystal panels.

16. A liquid crystal material filling apparatus according to claim 9, wherein the holding medium is constituted of a plurality of coils having axial centers in a direction intersecting the injection ports of the liquid crystal panels.

17. A liquid crystal material filling apparatus according to claim 13, wherein the holding medium is constituted of a plurality of coils having axial centers in a direction intersecting the injection ports of the liquid crystal panels.

18. A liquid crystal material filling apparatus according to claim 5, wherein the holding medium is constituted of a plurality of coil-like members having top faces in touch with the injection ports of the liquid crystal panels.

19. A liquid crystal material filling apparatus according to claim 9, wherein the holding medium is constituted of a plurality of coil-like members having top faces in touch with the injection ports of the liquid crystal panels.



* C L M S *

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



20. A liquid crystal material filling apparatus according to claim 13, wherein the holding medium is constituted of a plurality of coil-like members having top faces in touch with the injection ports of the liquid crystal panels.

21. A liquid crystal material filling apparatus according to claim 18, wherein each of the coil-like members is a coil spring.

22. A liquid crystal material filling apparatus according to claim 19, wherein each of the coil-like members is a coil spring.

23. A liquid crystal material filling apparatus according to claim 20, wherein each of the coil-like members is a coil spring.

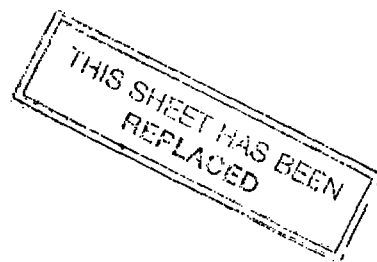
24. A liquid crystal material filling apparatus according to claim 23, wherein the coil spring is screwed in a supporting plate (39b) which is in turn held in the groove part.

25. A liquid crystal material filling apparatus according to claim 5, wherein a top of the medium is higher than upper faces of side walls of the groove part.

26. A liquid crystal material filling apparatus according to claim 9, wherein a top of the medium is higher than upper faces of side walls of the groove part.



* C L M S *



27. A liquid crystal material filling apparatus according to claim 5, wherein a width (W_2) of an opened groove face of the groove part (6) is wider than a width (W_1) of a downward-directed face of the injection port of the liquid crystal panel.

28. A liquid crystal material filling apparatus according to claim 9, wherein a width (W_2) of an opened groove face of the groove part (36) is wider than a width (W_1) of a downward-directed face of the injection port of the liquid crystal panel.

This Sheet Has Been Replaced




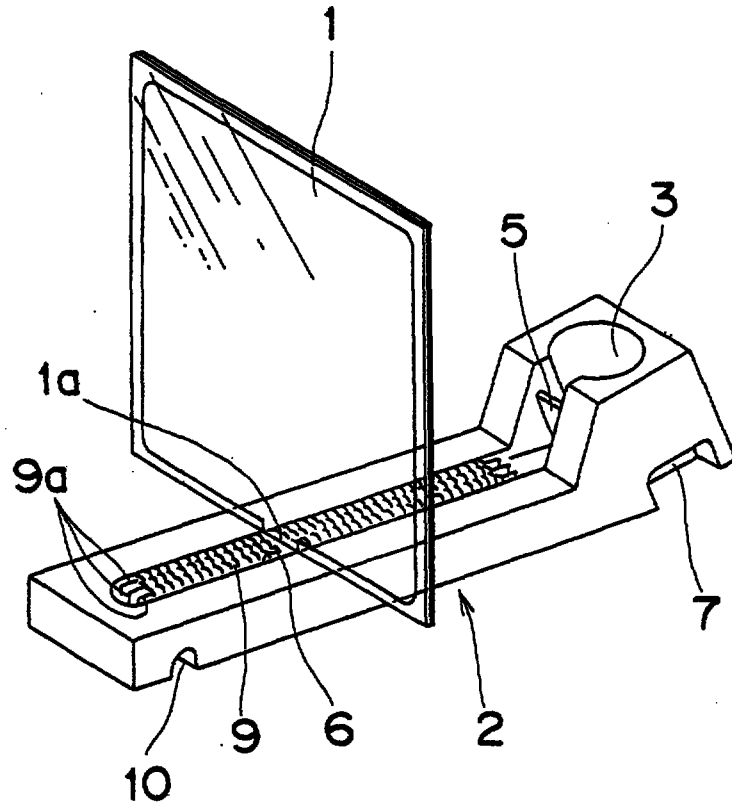
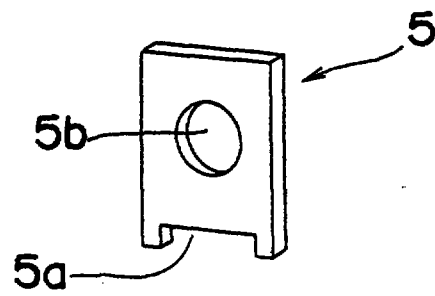
Fig. 1A*Fig. 1B*

Fig. 2A

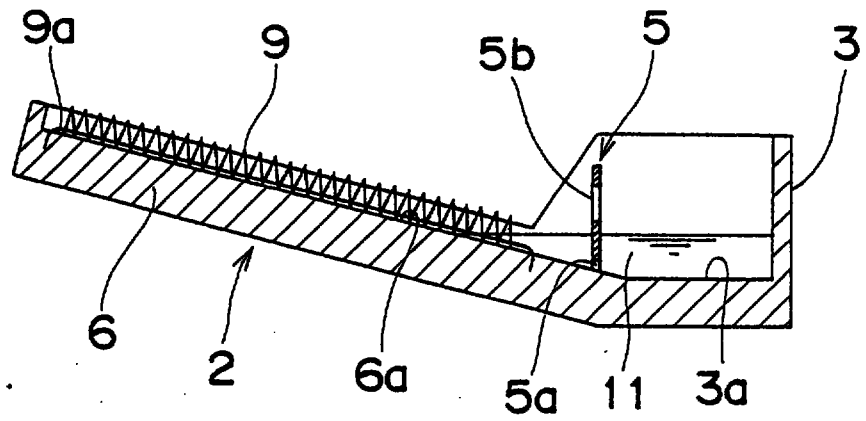


Fig. 2B

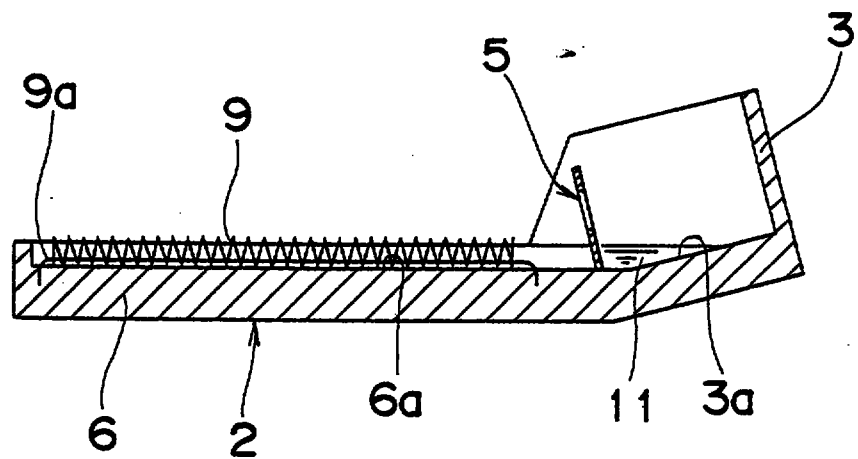


Fig. 2C

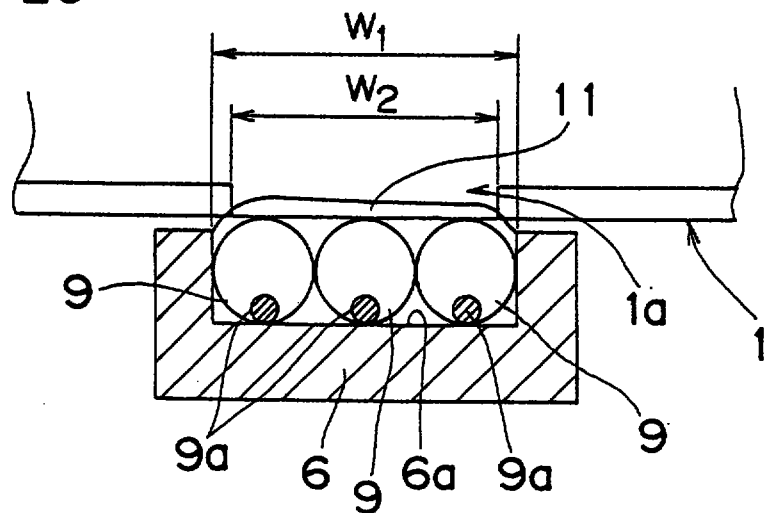


Fig. 3

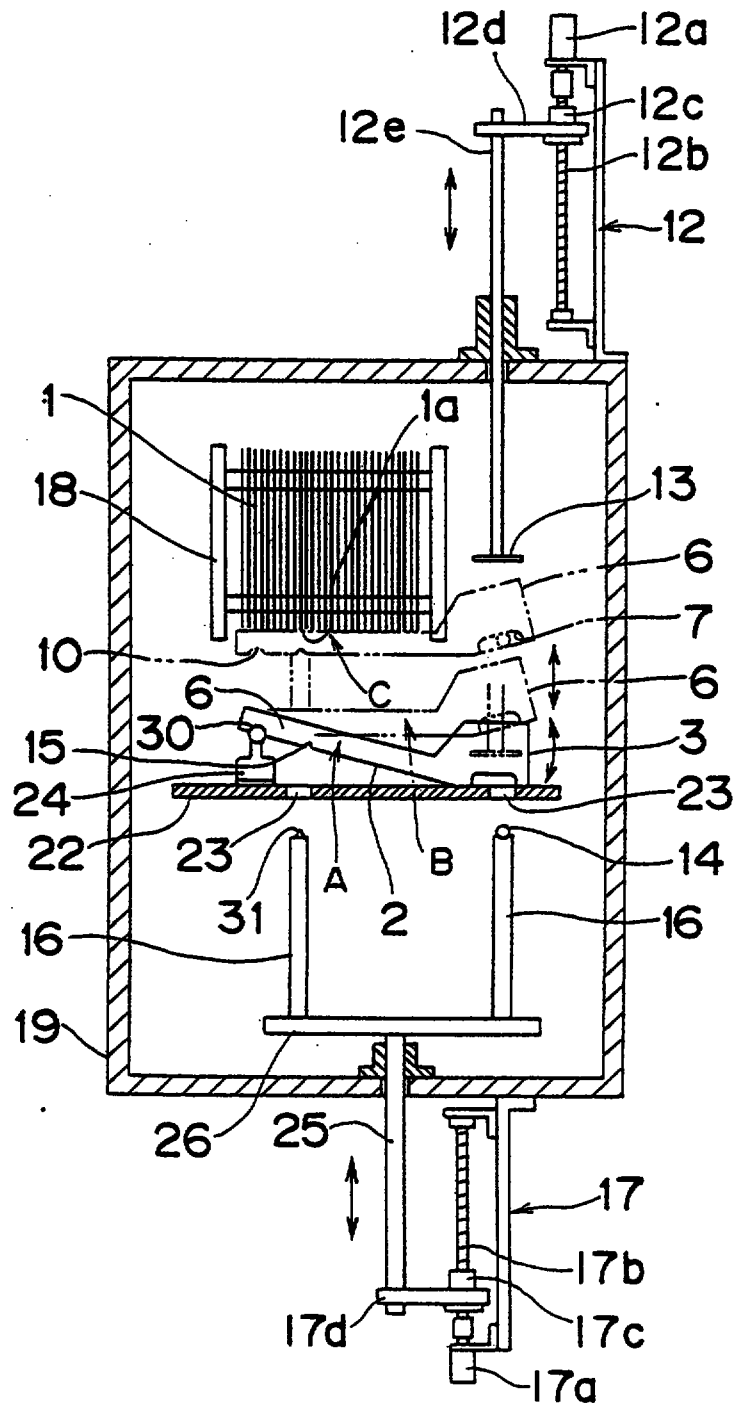


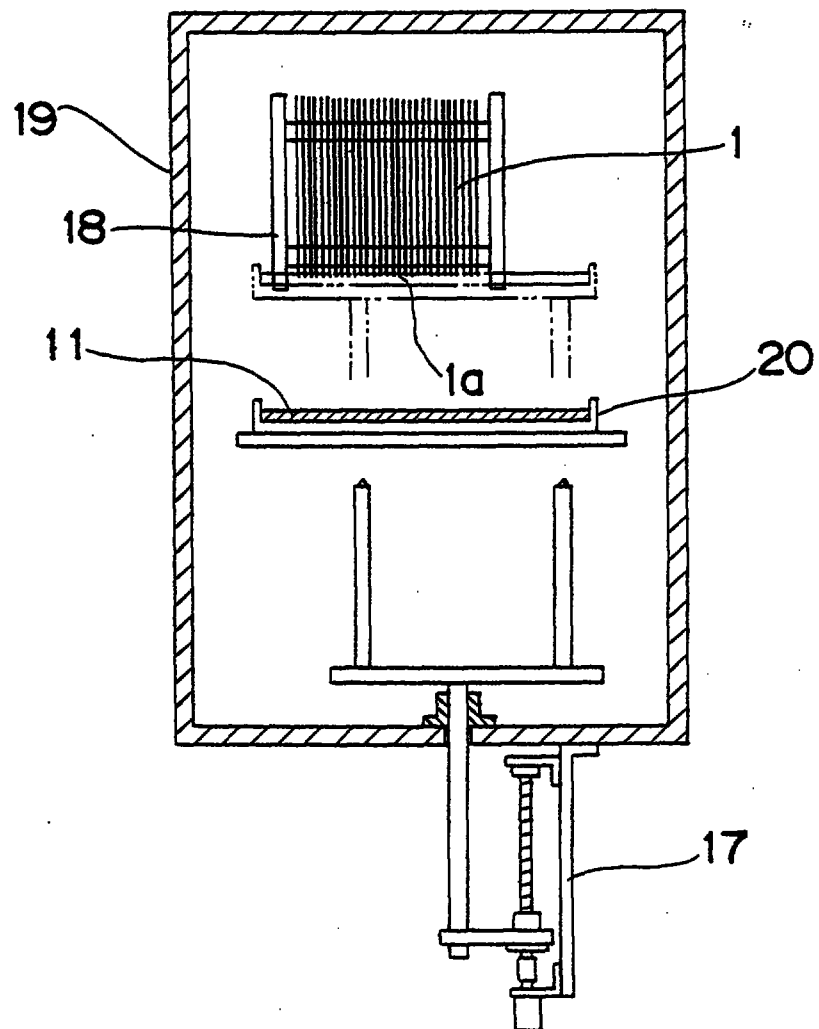
Fig. 4

Fig. 5

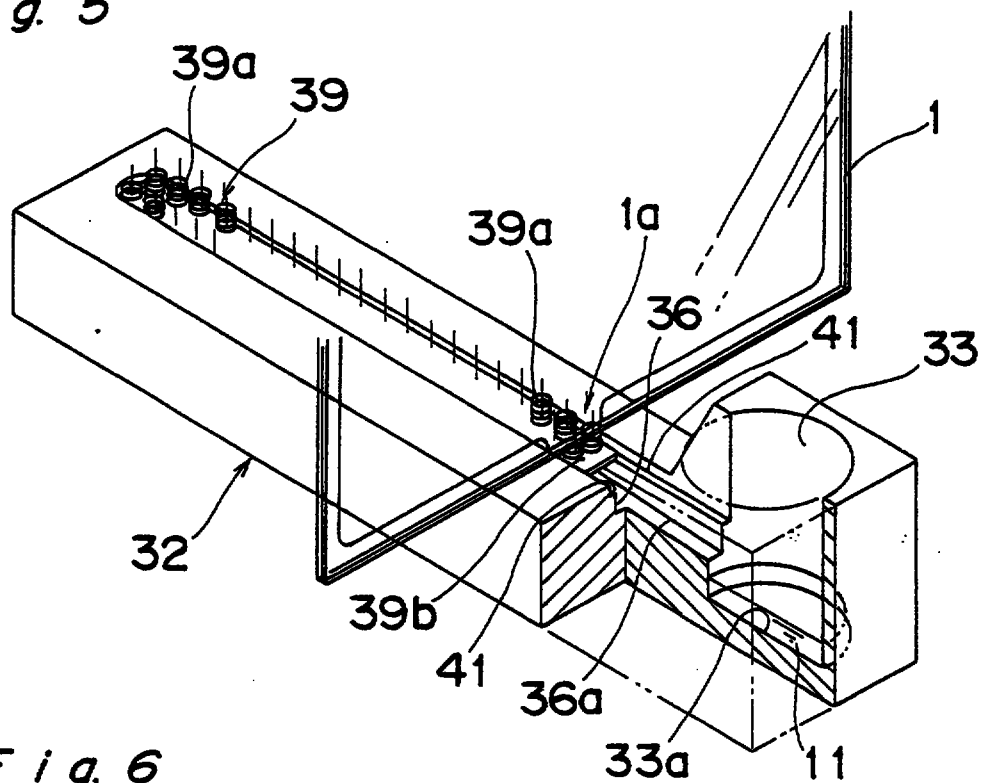


Fig. 6

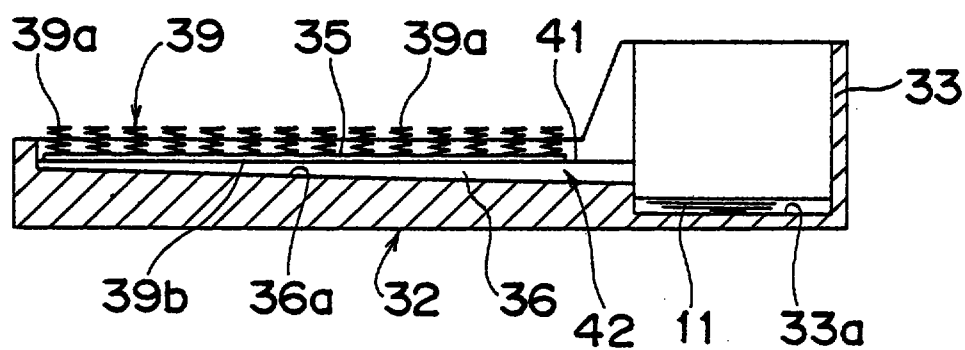


Fig. 7

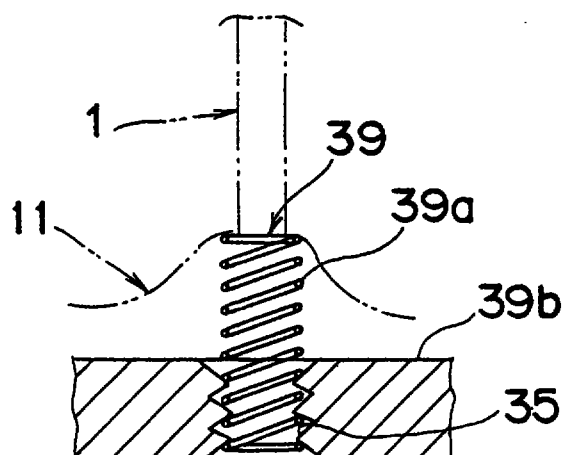


Fig. 8A

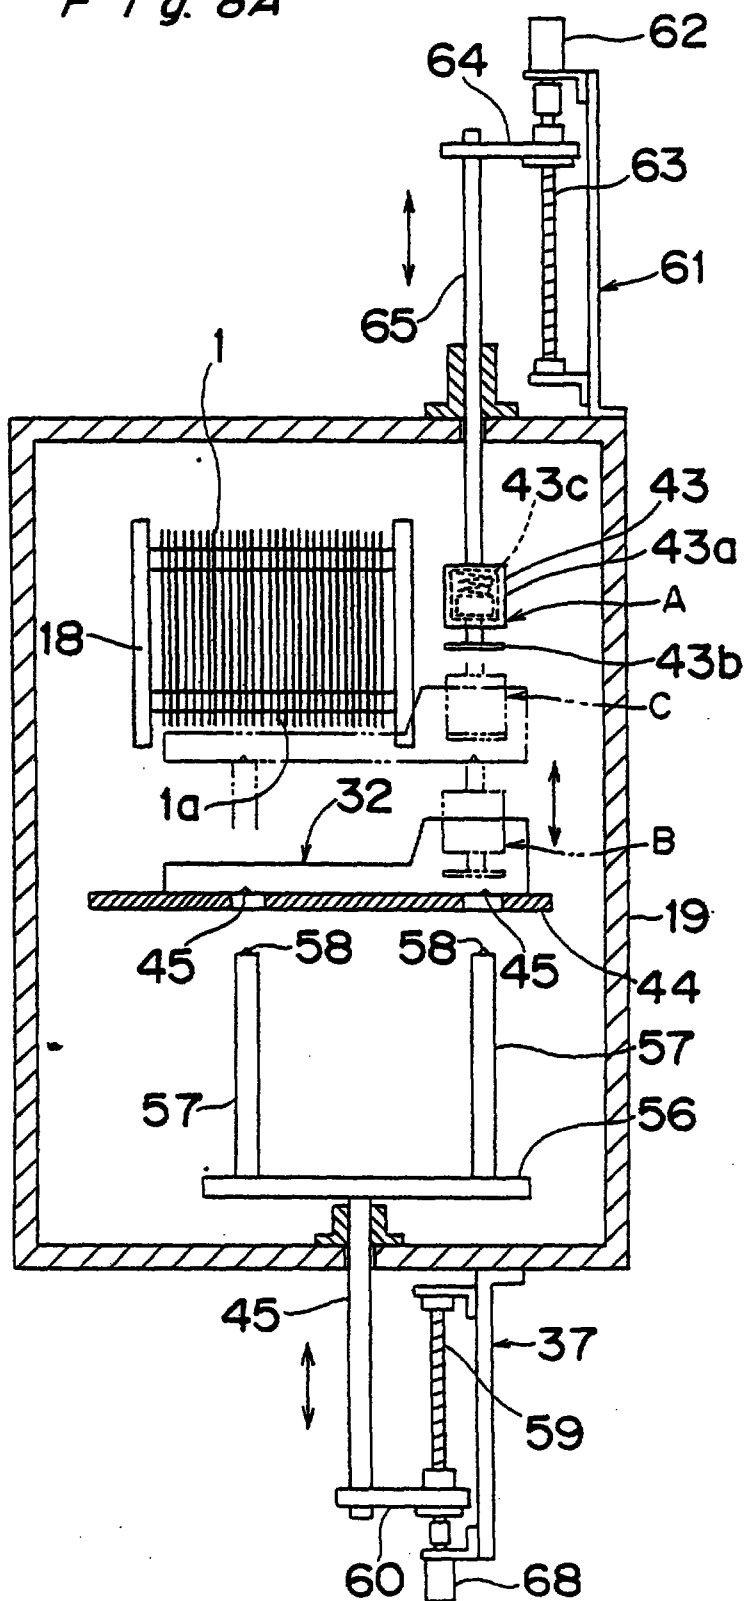


Fig. 8B

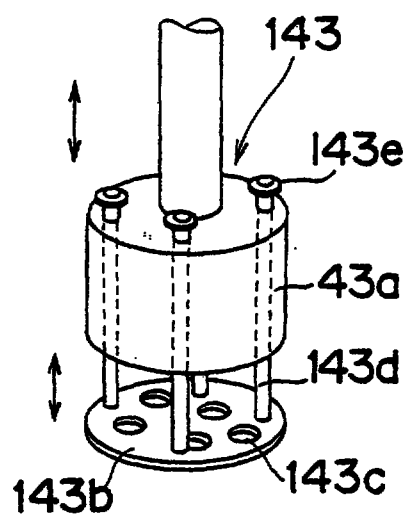


Fig. 8C

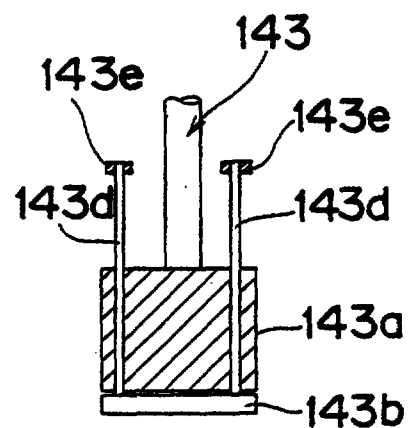


Fig. 9

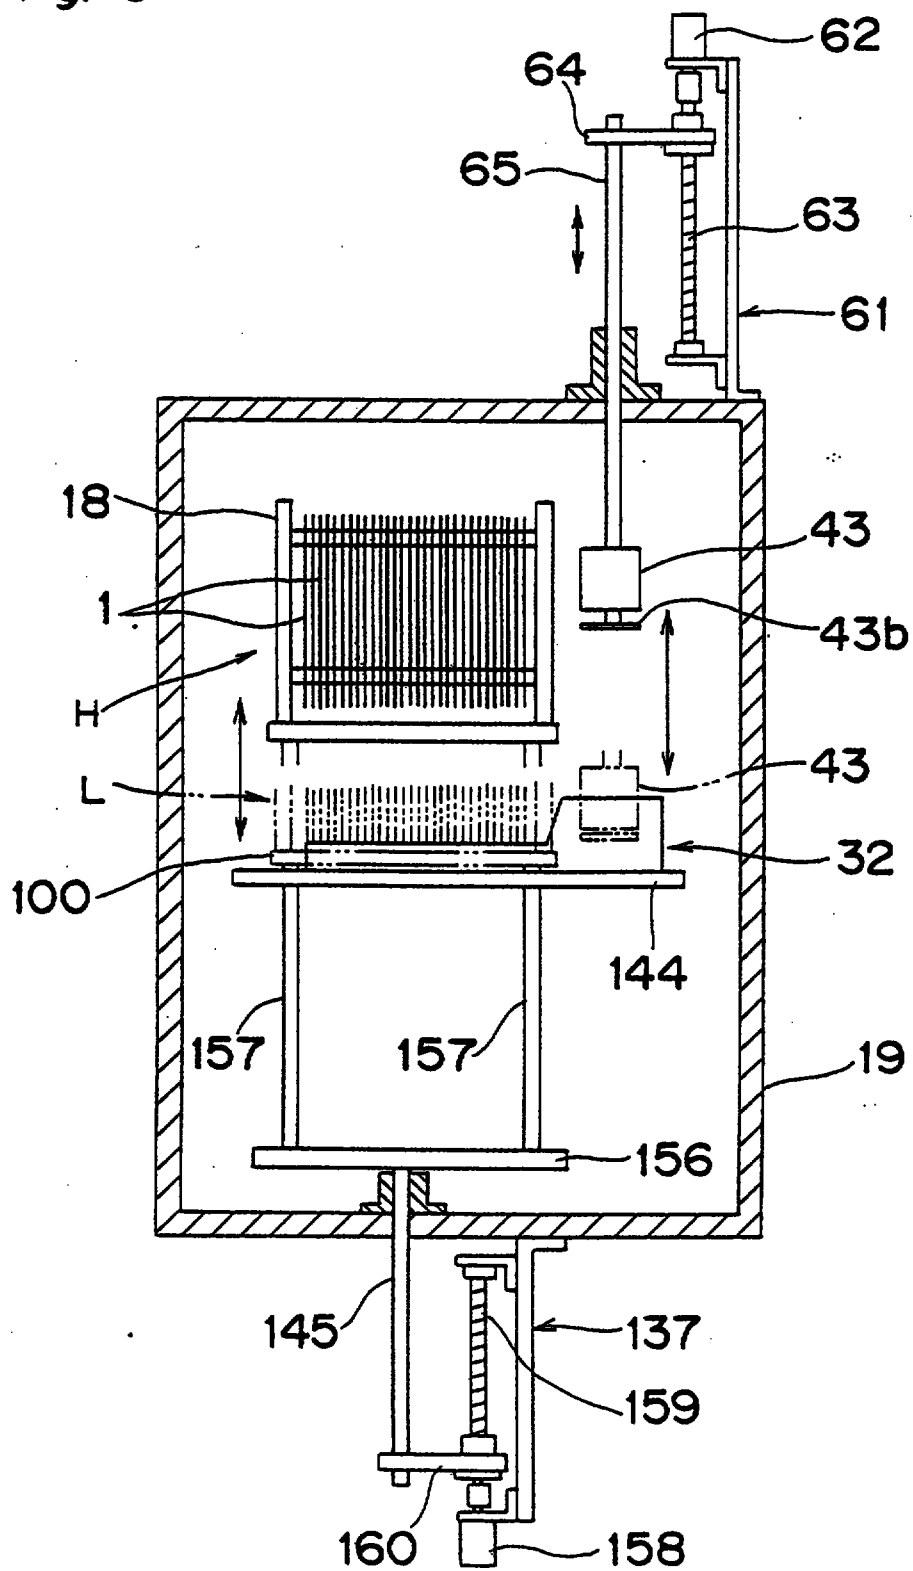
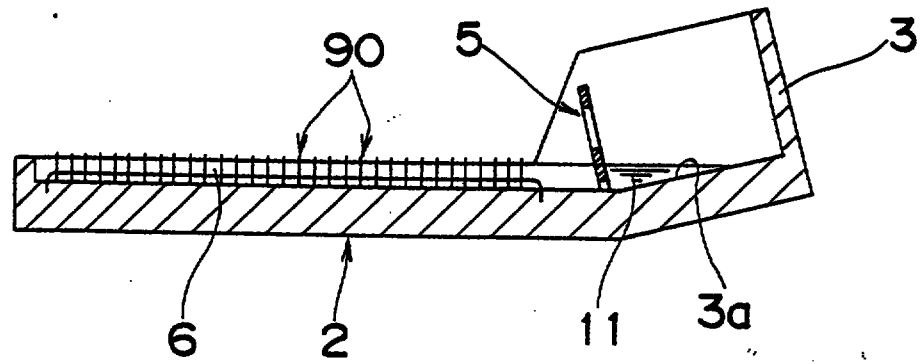
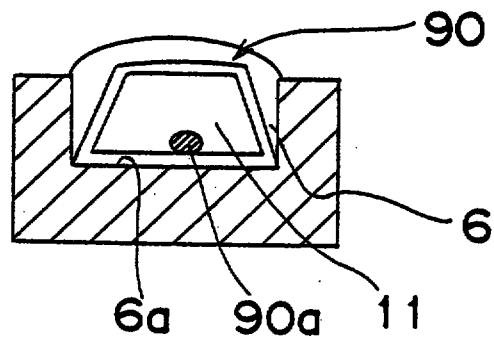
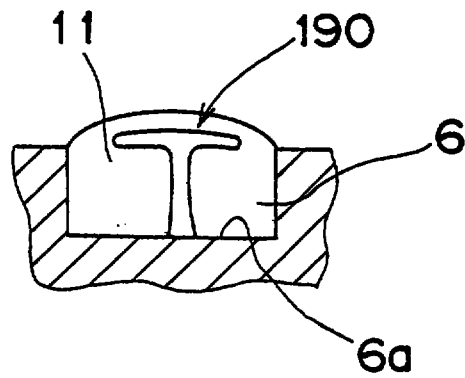


Fig. 10*Fig. 11**Fig. 12*

THIS SHEET HAS BEEN
REPLACED

ABSTRACT OF THE DISCLOSURE

Method and Apparatus for Filling

Liquid Crystal Material

The liquid crystal material filling apparatus includes, in a vacuum chamber, a liquid crystal pot having a liquid crystal reservoir for storing a liquid crystal material and a groove part coupled with the liquid crystal reservoir at a certain angle in which a medium for holding the liquid crystal material is arranged, a filling jig cassette accommodating a plurality of liquid crystal panels having injection ports faced down, an elevation device for moving the liquid crystal pot up and down, and a posture control mechanism which switches a posture of the liquid crystal pot in accordance with the up/down movement of the liquid crystal pot thereby to flow the liquid crystal material from the liquid crystal reservoir to the groove part at a raised position and bring the medium in touch with lower faces of the injection ports of the liquid crystal panels.

(Fig. 1A)

This Sheet Has Been Replaced



REPLACEMENT SHEET

Substitute sheet

23 June 1999
24 JUN 1999

- 3 -

Since the lower ends of the liquid crystal panels after the filling operation are totally wet with the liquid crystal material, the liquid crystal panels should be swabbed and cleaned afterwards, which requires not a small amount of time and cost.

SUMMARY OF THE INVENTION

In accordance with the present invention, there is provided a method of filling liquid crystal panels with a liquid crystal material, the method comprising:

- 10 placing a liquid crystal material holder and at least one liquid crystal panel in a vacuum chamber, wherein said liquid crystal material holder includes a reservoir and a groove part communicating with and extending from said reservoir at an angle;
- 15 moving said liquid crystal material holder relative to said liquid crystal panel such that said groove part moves from an upwardly inclined position into a horizontal position so as to cause liquid crystal material to flow from said reservoir to said groove part; and
- 20 raising said liquid crystal material holder so that an injection port of said liquid crystal panel contacts a medium which is disposed in said groove part and holds liquid crystal material.

In another aspect, there is provided a method of filling
25 liquid crystal panels with a liquid crystal material, the method comprising:

placing a liquid crystal material holder and a cassette holding a plurality of liquid crystal panels in a vacuum chamber, wherein said liquid crystal material holder includes a
30 reservoir and a groove part extending from said reservoir;

moving said liquid crystal material holder upwardly toward said liquid crystal panels;

changing the posture of said groove part relative to said cassette as said liquid crystal material holder is moved toward
35 said liquid crystal panels so as to cause liquid crystal material to flow from said reservoir into said groove part; and

24 JUN 1999

Substitute sheet - 23 June 1999

-4-

contacting said injection ports of said liquid crystal panels with a medium disposed in said groove part, wherein said medium holds the liquid crystal material which initially flows into said liquid crystal panels via said injection ports by 5 capillary action.

In another aspect, there is provided an apparatus for filling a liquid crystal material, said apparatus comprising:

a vacuum chamber;

10 a liquid crystal pot having a reservoir for storing a liquid crystal material and a groove part extending from said reservoir at an angle, wherein said groove part is in communication with said reservoir for receiving liquid crystal material therefrom;

15 a liquid crystal holding medium disposed in said groove part;

a filling jig cassette for accommodating a plurality of liquid crystal panels having injection ports;

an elevation device for moving said liquid crystal pot upward and downward; and

20 a posture control mechanism for switching a posture of said liquid crystal pot in accordance with upward and downward movement of said liquid crystal pot in order to cause liquid crystal material to flow from said liquid crystal reservoir into said groove part, at a raised position thereof, and bring said 25 liquid crystal holding medium into contact with downwardly-directed faces of the liquid crystal panel injection ports.

In another aspect, there is provided a filling apparatus for a liquid crystal material, said apparatus comprising:

a vacuum chamber;

30 a liquid crystal pot having a reservoir for storing a liquid crystal material and a groove part in communication with said reservoir, said groove part having a groove formed in an upper surface thereof, wherein said groove has a bottom surface which is disposed at a higher level than an interior bottom 35 surface of said reservoir;

a liquid crystal holding a medium disposed in said groove

24 JUN 1999

Substitute sheet - 23 June 1999

- 5 -

part;

a filling jig cassette for accommodating a plurality of liquid crystal panels having injection ports which are directed downwardly;

5 a moving device for moving said liquid crystal pot up and down relative to said filling jig; and

a plunger disposed relative to said liquid crystal pot such that said plunger can move into and out of said reservoir so as to cause the liquid crystal material to flow from said reservoir
10 and into said groove formed in said groove part as said plunger enters said reservoir.

24 JUN 1999

Substitute sheet - 23 June 1999

-6-

The medium holding the liquid crystal material may be of any kind and in any form so long as it supplies the holding liquid crystal material into the liquid crystal panels from the lower faces of the injection ports in touch therewith. However, a plurality of coil-like means with axial centers set in a direction intersecting the injection ports is preferable. Many coil-like means having top faces thereof held in touch with the injection ports of the liquid crystal panels are preferably used as the above medium. One that is substantially the same as a coil and obtained by arranging many rings in a longitudinal direction in parallel to each other and coupling by a coupling wire, or the like is included in the above coil-like object, other than a coil. Moreover, a porous material object, e.g., sponge or the like may be used as the medium.

According to the liquid crystal material filling method and apparatus of the present invention, since the liquid crystal material can be brought in touch with only the injection ports of the liquid crystal panels in the vacuum chamber, a waste of the liquid crystal material is eliminated and a swabbing and a cleaning processes for the liquid crystal panels can be simplified.

REPLACEMENT SHEET

24 JUN 1999

BRIEF DESCRIPTION OF THE DRAWINGS

These and other aspects and features of the present invention will become clear from the following description taken in conjunction with the preferred embodiments thereof with reference to the accompanying drawings, in which:

Figs. 1A and 1B are perspective views of a liquid crystal pot in a first embodiment of the present invention and its gate;

Figs. 2A, 2B, and 2C are longitudinal sectional views and a lateral sectional view showing a schematic constitution of the liquid crystal pot and a positional relationship with a liquid crystal panel at the filling time in the first embodiment of the present invention;

Fig. 3 is a sectional view of a liquid crystal filling apparatus in the first embodiment of the present invention;

Fig. 4 is a sectional view of a conventional liquid crystal filling apparatus;

Fig. 5 is a partially-removed perspective view of a liquid crystal pot in a second embodiment of the present invention;

Fig. 6 is a sectional view of the liquid crystal pot of Fig. 5;

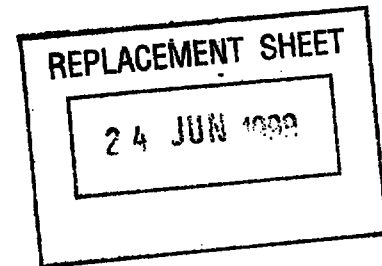


Fig. 7 is a sectional view of a medium of the pot for holding a liquid crystal material;

Figs. 8A, 8B, and 8C are a sectional view of a liquid crystal filling apparatus in the second embodiment of the present invention, a perspective view and a cross-sectional view of a plunger thereof;

Fig. 9 is a sectional view of a liquid crystal filling apparatus in a third embodiment of the present invention;

Fig. 10 is a longitudinal sectional view showing a schematic constitution of a liquid crystal pot in a fourth embodiment of the present invention;

Fig. 11 is a lateral sectional view of the liquid crystal pot in the fourth embodiment of the present invention; and

Fig. 12 is a lateral sectional view of a liquid crystal pot in a fifth embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Before the description of the present invention proceeds, it is to be noted that like parts are designated by like reference numerals throughout the accompanying drawings.

A first embodiment of the present invention will be described with reference to Figs. 1A-3.

REPLACEMENT SHEET

24 JUN 1999

A liquid crystal pot 2 shown in Figs. 1A, 1B, and 2A, 2B, 2C is constituted of a liquid crystal reservoir 3 where a liquid crystal material 11 of a necessary amount for filling is stored, a slim groove part 6 integrally formed with the reservoir 3 at a certain angle, and a gate 5 for regulating the circulation of the liquid crystal material between the reservoir 3 and groove part 6.

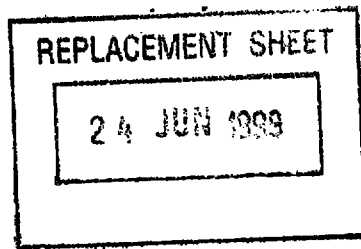
A bottom face 3a of the reservoir 3 and a bottom face 6a of the groove part 6 are bent and connected with each other at a bending angle of approximately 165° (at any angle in the range of 175° - 155°) as indicated in Figs. 2A and 2B. The gate 5 is disposed at a circulation path between the reservoir 3 and groove part 6. The gate 5 has a cutaway 5a and a hole 5b for passing the liquid crystal material through the hole 5b and the cutaway 5a between the groove part 6 and the reservoir 3 without overflowing outside of the pot 2. The liquid crystal material 11 is allowed to flow through a space defined by the cutaway 5a of the gate 5 and the bottom face 6a of the groove part 6. A resistance of the path can be adjusted by adjusting an opening degree of the gate 5. That is, when the gate 5 is inserted into the base part of the groove part 6 close to the reservoir 3, the inserting amount of the gate 5 is changed to change the size of the space defined by the cutaway 5a of the gate 5 and the bottom face 6a of the

24 JUN 1999

groove part 6 to regulate the flow amount of the liquid crystal material passing through the space. A required filling amount of the liquid crystal material 11 is stored in the reservoir 3. The liquid crystal material 11 is supplemented in accordance with the consumption when filled into liquid crystal panels 1. An automatic liquid crystal material supply device (not shown) is preferably used to supplement the material. It is convenient in order to correctly set the supplementation amount if the liquid crystal reservoir 3 is formed to be narrow and deep with a small sectional area. That is, the level of the liquid crystal material in the reservoir 3 is detected by a sensor, and then the consumed amount of the liquid crystal material is detected. The automatic liquid crystal material supply device supplies the material 11 in accordance with the detected and consumed amount of the material 11 to the reservoir 3.

The groove part 6 is relatively shallow and thin in a U-shaped cross section.

Three coils 9 (medium for holding the liquid crystal material) each having an axial center directed in the same direction as a longitudinal direction of the groove part 6 are arranged in parallel to each other in the groove part 6. A supporting wire 9a is inserted inside each coil 9, with both end parts bent downward and fixedly



inserted in the bottom face 6a of the groove part 6, thereby to hold the coil 9. A top of each coil 9 projects slightly above upper faces of side walls of the groove part 6 as shown in Fig. 2C.

Although it is preferable to form the above liquid crystal pot 2, gate 5, supporting wires 9a, and coils 9 by SUS304 in the Japanese Industrial Standard, any material or any surface treatment may be used so long as the quality of the liquid crystal panels 1 and the liquid crystal material 11 is ensured.

A diameter, a pitch, and an outer diameter of the coil 9, and a count of the coils 9, a width and a depth of the groove part 6, and the like are suitably determined from the viewpoint of whether the liquid crystal material 11 is held sufficiently, whether the coils 9 fit the shape of injection ports 1a of the liquid crystal panels 1, etc.

Fig. 3 is a liquid crystal material filling apparatus. The above-described liquid crystal pot 2 containing the liquid crystal material 11 and a filling jig cassette 18 holding a plurality of liquid crystal panels 1 with the injection ports 1a faced down are set in a vacuum chamber 19 of the apparatus. Before a filling operation is started, as designated by A in Fig. 3, the liquid crystal pot 2 is placed on a stage 22 fixed inside the vacuum chamber 19 so as to keep the bottom face 3a of the

REPLACEMENT SHEET

24 JUN 1999

reservoir 3 horizontally. On the other hand, the groove part 6 is supported by a roll 30 set at an upper end of a base 24 in a manner to be rotatable about the axis of the roll 30. The base is fixed onto the stage 22.

In an elevation device 17, a horizontal elevation table 26 is fixed to a main shaft 25 which can slide up and down penetrating a bottom wall of the vacuum chamber 19 air-tightly. Four elevation driving shafts 16 of an equal length are fixed to the elevation table 26 at positions corresponding to vertices of a rectangle of the table 26. Right two of the four driving shafts 16 in Fig. 3 have rollers 14 at respective front ends, while left two are formed to project at respective front ends as conical projections 31. The elevation device 17 has a motor 17a for rotating a screw shaft 17b in both directions so as to move up and down a nut member 17c engaged with the screw shaft 17b together with a plate 17d fixed to the nut member 17c and projecting the main shaft 25 having the elevation table 26 at its upper end.

A through hole 23 is opened in the stage 22 on an extension line of an axial center of each driving shaft 16 to allow the shaft 16 to pass freely. A groove 10 having a semicircular cross section is formed in a lower face of the liquid crystal pot 2, more specifically, in the vicinity of an end part of the liquid crystal pot 2 at the side of the

REPLACEMENT SHEET

24 JUN 1999

groove part 6. The roll 30 is detachably fitted in the groove 10. Moreover, the above rollers 14 contact the lower face of the liquid crystal pot 2 at the side of the reservoir 3 where a pair of roller reception recesses 7 allowing the rotation of the rollers 14 in a predetermined range are formed. Also a pair of conical recesses 15 to be engaged with the above-described conical projections 31 are formed in the lower face of the liquid crystal pot 2 at the side of the groove part 6 at a halfway point between the groove 10 and roller reception recesses 7.

A stirring plate 13 is arranged in the vacuum chamber 19 to stir the liquid crystal material 11 inside the reservoir 3. The stirring plate 13 can be moved up and down by an elevation device 12. The elevation device 12 has a motor 12a for rotating a screw shaft 12b in both directions so as to move up and down a nut member 12c engaged with the screw shaft 12b together with a plate 12d fixed to the nut member 12c and projecting a stirring shaft 12e having the stirring plate 13 at its lower end. This stirring plate 13 stirs the liquid crystal material 11 while repeatedly moved up and down in the reservoir 3 in accordance with the rotations of the screw shaft 12b in the directions. Alternatively, the stirring plate may be designed to turn about the axis of the stirring shaft 12e thereby to stir the liquid crystal material 11. Although

-14-

REPLACEMENT SHEET

24 JUN 1999

SUS304 is preferably used to constitute the stirring plate, any material or any surface treatment is employable so long as it secures the quality of the liquid crystal panels 1 and the liquid crystal material 11.

Hereinbelow the operation of the apparatus in the above constitution will be discussed.

Initially, the liquid crystal pot 2 is set in the vacuum chamber 19 in a state as shown in Fig. 2A and by A in Fig. 3, that is, with the bottom face 3a of the reservoir 3 kept horizontally and the bottom face 6a of the groove part 6 inclined approximately 15° upward. The liquid crystal material 11 is kept in the reservoir 3. In addition, the liquid crystal pot 2 is separated from the liquid crystal panels 1.

The vacuum chamber 19 is vacuumized from the above state. Since only a front face of the liquid crystal material 11 in the reservoir 3 is degassed in the above state, the stirring plate 13 is let down by the elevation device 12 to be inserted into the reservoir 3. The liquid crystal material 11 is fully degassed by repeatedly moving the stirring plate 13 up and down. The degassing is promoted further if the stirring plate 13 is in touch with the bottom face 3a of the reservoir 3, and therefore a floating structure is preferably adopted.

REPLACEMENT SHEET

24 JUN 1999

One example of the floating structure is shown in Figs. 8B and 8C. This floating structure includes a piston 43a supported by the stirring shaft 12e, a plurality of support shafts 143d penetrated the piston 43a so as to freely move up and down and having stoppers 143e at their upper ends for preventing the support shaft 143d from dropping from the piston 43a, and a floating plate 143b fixed to lower ends of the support shafts 143d and having holes 143c, so that the liquid crystal material 11 can be moved through the holes 143c of the floating plate 143b while the stirring shaft 12e moves up and down together with the piston 43a. At this time, since the floating plate 143b is simply supported by the stoppers 143e of the support shafts 143d at the upper surface of the piston 43a via the support shafts 143d, the floating plate 143b can freely move up and down in the liquid crystal material 11. Even when the floating plate 143b contacts the bottom of the reservoir 3, the floating plate 143b moves up to prevent the reservoir 3 from having any damage.

When the liquid crystal material 11 is fully degassed and the vacuum chamber 19 is decreased to at least approximately 10^{-3} or 10^{-4} Torr, the stirring plate 13 is raised and the liquid crystal pot 2 is started to be moved up by the elevation device 17.

REPLACEMENT SHEET

24 JUN 1999

When the main shaft 25 of the elevation device 17 moves upward, the two shafts 16 with the rollers 14 among the four driving shafts 16 on the elevation table 26 contact the roller reception recesses 7 of the liquid crystal pot 2 earlier than the other two shafts 16. In accordance with the further upward motion of the main shaft 25, the liquid crystal pot 2 is subject to rotation in the counterclockwise direction in the drawing, and consequently is raised at the side of the liquid crystal reservoir 3, whereby the bottom face 6a of the groove part 6 becomes horizontal. Simultaneously with this, the conical projections 31 at the front ends of the remaining driving shafts 16 are engaged with the conical recesses 15 in the lower face of the liquid crystal pot 2.

The above state is represented in Fig. 2B and by B in Fig. 3. Before and after this state, while the liquid crystal material 11 in the reservoir 3 flows to the groove part 6 through the cutaway 5a of the gate 5, a flow rate of the liquid crystal material 11 is suitably regulated by the gate 5. The liquid crystal material 11 is filled into the three coils 9 arranged in the groove part 6. In this case, the top of each coil 9 is exposed a constant height from the both upper faces of the side walls of the groove part 6. Therefore, even when the liquid crystal material 11 has a relatively small surface tension, the liquid crystal

REPLACEMENT SHEET

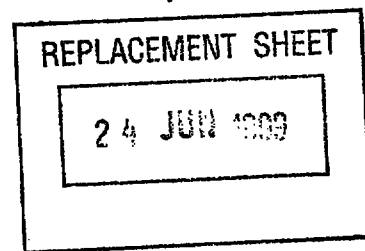
24 JUN 1999

material 11 swells over an upper end of the groove part 6 as shown in Fig. 2C. The coil 9 thus works as a medium for holding the liquid crystal material 11.

When the four driving shafts 16 move up further, the groove 10 is separated from the roll 30 and the liquid crystal pot 2 moves up while maintaining its posture shown in Fig. 2B. Finally, as indicated by C in Fig. 3, the coils 9 come in touch with the injection ports 1a of the liquid crystal panels 1, when the elevation device 17 is stopped.

The liquid crystal material is started to be filled. After the filling of the material 11 for a fixed time through the capillary phenomenon, N_2 is supplied into the vacuum chamber 19, so that the vacuum chamber 19 is returned to the atmospheric pressure. A liquid level of the liquid crystal pot 2 is pressed by the atmospheric pressure and hence the liquid crystal material 11 is gradually filled into the liquid crystal panels 1.

At this time, although the amount of the liquid crystal material 11 present in the groove part 6 is limited, the liquid crystal material 11 corresponding to the reduced amount is naturally supplemented from the reservoir 3 by the automatic liquid crystal material supply device until the liquid crystal panels 1 are completely filled with the liquid crystal material 11. Since the



lower end parts of the liquid crystal panels 1 are not entirely soaked in the liquid crystal material 11, and only the injection ports 1a of the liquid crystal panels 1 are in touch with the liquid crystal material 11, other surface portions of the liquid crystal panels 1 than the injection ports 1a are remained not wet. Accordingly, the liquid crystal panels 1 can be swabbed and cleaned simply after the filling operation.

Upon completion of the filling operation, the elevation device 17 is moved in an opposite direction thereby to lower and rotate the liquid crystal pot 2 to return to the original state as shown in Fig. 2A and by A in Fig. 3. As a result, the groove part 6 is inclined again right downward and the liquid crystal material 11 remaining in the coils 9 and groove part 6 is nearly completely returned to the reservoir 3 through the hole 5b and cutaway 5a of the gate 5. Accordingly, a change of the liquid level of the liquid crystal pot 2 reflects correctly the amount of the liquid crystal material 11 filled into the liquid crystal panels 1. A required minimum amount of the liquid crystal material 11 can be supplemented highly accurately in this manner.

A servo motor or the like is preferably used for the elevation device 17 to control a speed and a position of the table 26 so as to prevent the liquid crystal

REPLACEMENT SHEET

24 JUN 1999

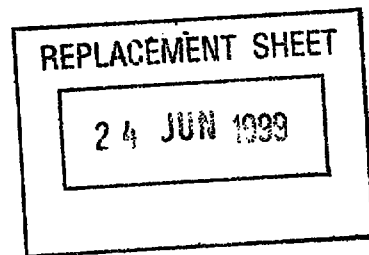
material 11 from leaking out of the groove part 6 of the liquid crystal pot 2.

A second embodiment of the present invention will be depicted with reference to Figs. 5-8 below.

A liquid crystal pot 32 in Figs. 5-7 has a liquid crystal reservoir 33 for storing the liquid crystal material 11, and a groove part 36 having a bottom face 36a higher than a bottom face 33a of the reservoir 33 and communicating with the reservoir 33. A holding medium for holding the liquid crystal material 11 is arranged in the groove part 36.

The liquid crystal reservoir 33 is circular in cross section and communicates at a part thereof with the groove part 36. The groove part 36 is moderately inclined to allow the liquid crystal material 11 therein to return to the liquid crystal reservoir 33 by its own weight.

The holding medium 39 is constituted of many coil springs 39a having top faces thereof in touch with the injection ports 1a of the liquid crystal panels 1. The coil springs 39a are screwed into screw holes 35 in a supporting plate 39b. Owing to the arrangement that the supporting plate 39b is held by stepped supporting parts 41 provided at both side faces of the groove part 36, a gap 42 is secured between the supporting plate 39b and the bottom



face 36a of the groove part 36 to facilitate the circulation of the liquid crystal material 11.

The liquid crystal pot 32 is, as shown in Figs. 6 and 8, laid horizontally at all times, and the coil springs 39a keep in the natural state the top faces thereof slightly projecting upward from upper faces of both side walls of the groove part 36.

In the vacuum chamber 19 of a liquid crystal material filling apparatus of Fig. 8 are set the above-described liquid crystal pot 32, the filling jig cassette 18 holding a plurality of liquid crystal panels 1 with the injection ports 1a faced down, an elevation device 37 for moving the liquid crystal pot 32 up and down, and a plunger 43 which can move in and out of the reservoir 33 and flows the liquid crystal material 11 to the groove part 36 from the reservoir 33 when entering the reservoir 33.

Both side parts of a bottom face of the liquid crystal pot 32 are supported horizontally by a pair of supporting plates 44. Conical recesses 45 are formed at four points of the bottom face of the liquid crystal pot 32. In the elevation device 37, a horizontal elevation table 56 is fixed to a main shaft 45 which is slidable up and down to penetrate a bottom wall of the vacuum chamber 19 hermetically. Four driving shafts 57 of an equal length are fixed to the elevation table 56 at positions

REPLACEMENT SHEET

24 JUN 1999

corresponding to vertices of a rectangle thereof. Upper ends of these driving shafts 57 are shaped to be conical projections 58 to be fitted in the above conical recesses 45. Other reference numerals 68, 59 and 60 represent respectively a motor, a driving screw and, a nut member meshed with the driving screw 59 and coupled with the main shaft 45. The four driving shafts 57 are moved up and down by the rotation of the motor 68.

The plunger 43 is moved up and down by a plunger elevation device 61. The plunger elevation device 61 is provided with a motor 62, a driving screw 63, a nut member 64, and a main shaft 65 which air-tightly penetrates a top wall of the vacuum chamber 19 and is slidable up and down. The plunger 43 is mounted at a lower end of the main shaft 65. The plunger 43 is constructed of a main body 43a, and a stirring propeller 43b supported by the main body 43a to be movable up and down. A water-tight motor 43c for driving the stirring propeller 43b is incorporated in the plunger main body 43a. The stirring propeller 43b projects downward from a lower end of the main body 43a and is supported by the main body 43a in a floating manner. The plunger main body 43a is formed circular in cross section to be fitted with the reservoir 33. When the plunger 43 enters the reservoir 33, the liquid crystal material 11 in the reservoir 33 overflows to be sent to the groove part

REPLACEMENT SHEET

24 JUN 1999

36. The plunger 43 may be constituted by the floating structure shown in Figs. 8A and 8B described above.

The operation of the above-constituted apparatus will be described now.

At first, the liquid crystal pot 32 is set on the pair of the supporting plates 44, while the plunger 43 up away from the pot 32 stands by (shown by A in Fig. 8). The vacuum chamber 19 is started to be vacuumized in this state. Since only a front face of the liquid crystal material 11 stored in the reservoir 33 is degassed in the above state, the plunger 43 is descended by the plunger elevation device 61 to insert the stirring propeller 43b into the reservoir 33. The stirring propeller 43b is then rotated to accelerate the degassing (shown by B in Fig. 8).

When the liquid crystal material 11 is sufficiently degassed and the vacuum chamber 19 is reduced to at least about 10^{-3} to 10^{-4} Torr, the elevation device 37 starts to move the liquid crystal pot 32 upward.

Because of the upward driving of the elevation device 37, the four driving shafts 57 are moved up and, the conical projections 58 at the front ends of the shafts 57 are fitted in the conical recesses 45 in the bottom face of the liquid crystal pot 32. The liquid crystal pot 32 is consequently moved up, thereby bringing top faces of many coil springs 39a in the groove part 36 in pressed touch

REPLACEMENT SHEET

24 JUN 1999

with the injection ports 1a of the liquid crystal panels 1. The liquid crystal pot 32 is stopped to move upward at this time point.

Meanwhile, the plunger 43 is controlled to move up before the upward movement of the liquid crystal pot 32. After the upward movement of the pot 32, the plunger 43 gradually descends relatively to the liquid crystal pot 32, so that the main body 43a enters the liquid crystal material 11 in the reservoir 33 to send the liquid crystal material 11 to the groove part 36 (indicated by C in Fig. 8).

While the top faces of the coil springs 39a are in touch with the injection ports 1a of the liquid crystal panels 1, the liquid crystal material 11 is fed to the coil springs 39a through the gap 42 and screw holes 35 of the supporting plate 39b. The liquid crystal material 11 is filled in the coil springs 39a and moreover swells at the surface thereof. The liquid crystal material 11 adhering to the periphery of the coil springs 39a due to the surface tension is filled by the capillary phenomenon to the injection ports 1a of the liquid crystal panel 1 in touch with the material 11.

After the filling operation of a fixed time by the capillary phenomenon, N_2 is fed into the vacuum chamber 19 to return the vacuum chamber 19 to the atmospheric

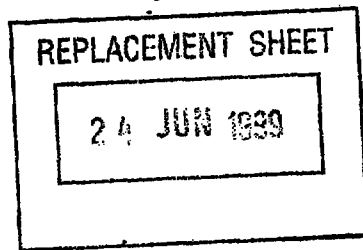
REPLACEMENT SHEET

24 JUN 1999

pressure. The atmospheric pressure presses a liquid level of the liquid crystal pot 32 and accordingly, the liquid crystal material 11 is filled into the liquid crystal panels 1 gradually. The whole of the lower end parts of the liquid crystal panels 1 is not soaked in the liquid crystal material 11 and only the injection ports 1a of the liquid crystal panels 1 are brought in touch with the liquid crystal material 11. Since other surface portions of the liquid crystal panels 1 are not turned wet, the liquid crystal panels 1 can be swabbed and cleaned in a simple process after the filling operation.

After the filling operation is completed, the liquid crystal pot 32 is lowered and returned to the original position, and the plunger 43 is raised and returned to the original position. Since the plunger 43 is removed from the reservoir 33, the liquid crystal material 11 in the groove part 36 traces the inclined face and returns to the reservoir 33 by its own weight.

As shown in Fig. 2C, the width W_2 of an opened groove face of the groove part 6, 36 is wider than the width W_1 of the downward-directed face of the injection port 1a of the liquid crystal panel 1 so as not to define a gap between the opened groove face of the groove part 6, 36 and the downward-directed face of the injection port 1a of the liquid crystal panel 1. That is, if any gap is defined



between them, a gas might be mixed into the liquid crystal panel 1 through the gap to deteriorate the liquid crystal panel 1. Preferably, when the liquid crystal material 11 is filled into the liquid crystal panel 1, the lower side of the liquid crystal panel 1 is not contacted to the liquid crystal material 11 and the upper faces of the side walls of the groove part 6, 36.

The elevation device 37 serving as one example of the moving device for relatively moving up and down the liquid crystal pot 32 and the liquid crystal panels 11, may be constituted by a moving device 137 as shown in Fig. 9. In the moving device 137, a horizontal elevation table 156 is fixed to a main shaft 145 which is slidable up and down to penetrate a bottom wall of the vacuum chamber 19 hermetically. Four driving shafts 157 of an equal length are fixed to the elevation table 156 at positions corresponding to vertices of a rectangle.

Front ends of these driving shafts 157 are fixed to a plate 100 for supporting the jig cassette 18. Other reference numerals 158, 159 and 160 represent respectively a motor, a driving screw and, a nut member meshed with the driving screw 159 and coupled with the main shaft 145. The four driving shafts 157 are moved up and down by the rotation of the motor 158 to move up and down the liquid crystal panels 1 between position shown by solid lines H

REPLACEMENT SHEET

24 JUN 1999

and dotted lines L with respect to the pot 32 fixed on a plate 144 to bring the springs 39 in touch with the downward-directed faces of the injection ports 1a of the liquid crystal panels 1.

The medium may be formed in any shape or construction as long as the medium 9 for holding the liquid crystal material 11 into touch with the downward-directed faces of the injection ports 1a of the liquid crystal panels 1. For example, as shown in Figs. 10 and 11 as a liquid crystal pot in a fourth embodiment of the present invention, the medium may be formed by frames 90 of trapezoid shape and each of which is not connected to each other as a coil-like member. Each of the frames 90 is independently stood on the bottom face 6a of the groove part 6 and a supporting wire 90a is inserted inside the frames 90 to fix the frames 90 to the bottom face 6a of the groove part 6. The top part of each frame 90 is slightly higher than the upper faces of side walls of the groove part 6 to bring the frames 90 in touch with the downward-directed faces of the injection ports 1a of the liquid crystal panels 1.

The shape of the medium 9 is not limited to a ring or frame shape. That is, as shown in Fig. 12 as a liquid crystal pot in a fifth embodiment of the present invention, the medium may be formed by T-shaped members 190

REPLACEMENT SHEET

24 JUN 1999

fixed to the bottom face 6a of the groove part 6 and having top parts thereof slightly higher than the upper faces of side walls of the groove part 6 to bring the frames 90 in touch with the downward-directed faces of the injection ports 1a of the liquid crystal panels 1.

As is described hereinabove, according to the present invention, liquid crystal panels can be swabbed and cleaned in a simple process after the filling operation. Moreover, a required minimum amount of the liquid crystal material suffices the invention with a waste eliminated.

Although the present invention has been fully described in connection with the preferred embodiments thereof with reference to the accompanying drawings, it is to be noted that various changes and modifications are apparent to those skilled in the art. Such changes and modifications are to be understood as included within the scope of the present invention as defined by the appended claims unless they depart therefrom.



- 28 -

REPLACEMENT SHEET

24 JUN 1999

WE CLAIM:

1. A method of filling liquid crystal panels with a liquid crystal material, the method comprising:
 - 5 placing a liquid crystal material holder and at least one liquid crystal panel in a vacuum chamber, wherein said liquid crystal material holder includes a reservoir and a groove part communicating with and extending from said reservoir at an angle;
 - 10 moving said liquid crystal material holder relative to said liquid crystal panel such that said groove part moves from an upwardly inclined position into a horizontal position so as to cause liquid crystal material to flow from said reservoir to said groove part; and
 - 15 raising said liquid crystal material holder so that an injection port of said liquid crystal panel contacts a medium which is disposed in said groove part and holds liquid crystal material.
- 20 2. The method of filling liquid crystal panels with a liquid crystal material as claimed in claim 1, further comprising injecting a gas into the vacuum chamber.
3. The method of filling liquid crystal panels with a liquid
25 crystal material as claimed in claim 1, further comprising regulating the flow of liquid crystal material between said reservoir and said groove part.
4. The method of filling liquid crystal panels with a liquid
30 crystal material as claimed in claim 1, further comprising stirring and degassing liquid crystal material stored in said reservoir.
5. A method of filling liquid crystal panels with a liquid
35 crystal material, the method comprising:
 - placing a liquid crystal material holder and a cassette



REPLACEMENT SHEET

24 JUN 1999

Substitute sheet - 23 June 1999

- 29 -

holding a plurality of liquid crystal panels in a vacuum chamber, wherein said liquid crystal material holder includes a reservoir and a groove part extending from said reservoir;

moving said liquid crystal material holder upwardly toward
5 said liquid crystal panels;

changing the posture of said groove part relative to said cassette as said liquid crystal material holder is moved toward said liquid crystal panels so as to cause liquid crystal material to flow from said reservoir into said groove part; and

10 contacting said injection ports of said liquid crystal panels with a medium disposed in said groove part, wherein said medium holds the liquid crystal material which initially flows into said liquid crystal panels via said injection ports by capillary action.

15

6. The method of filling liquid crystal panels with a liquid crystal material as claimed in claim 5, wherein the medium holding the liquid crystal material comprises a plurality of coil-like members, and each of said coil-like members has a
20 central longitudinal axis in alignment with said injection ports of said liquid crystal panels.

7. The method of filling liquid crystal panels with a liquid crystal material as claimed in claim 5, further comprising
25 injecting a gas into the vacuum chamber.

8. The method of filling liquid crystal panels with a liquid crystal material as claimed in claim 5, further comprising regulating the flow of liquid crystal material between said
30 reservoir and said groove part.

9. The method of filling liquid crystal panels with a liquid crystal material as claimed in claim 5, further comprising stirring and degassing the liquid crystal material which is
35 contained in said reservoir.

REPLACEMENT SHEET

24 JUN 1999

Substitute sheet - 23 June 1999



* C L M S *

- 30 -

10. An apparatus for filling a liquid crystal material, said apparatus comprising:

a vacuum chamber;

a liquid crystal pot having a reservoir for storing a liquid crystal material and a groove part extending from said reservoir at an angle, wherein said groove part is in communication with said reservoir for receiving liquid crystal material therefrom;

a liquid crystal holding medium disposed in said groove part;

a filling jig cassette for accommodating a plurality of liquid crystal panels having injection ports;

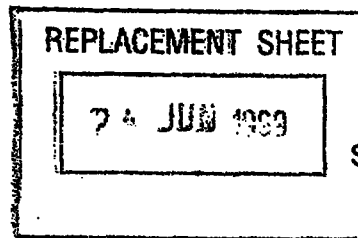
an elevation device for moving said liquid crystal pot upward and downward; and

a posture control mechanism for switching a posture of said liquid crystal pot in accordance with upward and downward movement of said liquid crystal pot in order to cause liquid crystal material to flow from said liquid crystal reservoir into said groove part, at a raised position thereof, and bring said liquid crystal holding medium into contact with downwardly-directed faces of the liquid crystal panel injection ports.

11. The liquid crystal material filling apparatus as claimed in claim 10, further comprising a flow regulating gate, provided between said liquid crystal reservoir and said groove part, for regulating the flow of liquid crystal material between said reservoir and said groove part.

12. The liquid crystal material filling apparatus as claimed in claim 11, further comprising a stirring device for stirring and degassing liquid crystal material contained in said liquid crystal reservoir.

13. The liquid crystal material filling apparatus as claimed in claim 10, further comprising a stirring device for stirring and degassing liquid crystal material contained in said reservoir.



Substitute sheet - 23 June 1999

- 31 -

14. The liquid crystal material filling apparatus as claimed in claim 10, wherein said liquid crystal holding medium comprises a plurality of coils, and each of said coils has a central axis which is oriented in a direction so as to intersect said liquid
5 crystal panel injection ports.

15. The liquid crystal material filling apparatus as claimed in claim 10, wherein said liquid crystal holding medium comprises a plurality of coil-like members, and each of said coil-like
10 members has a top portion which is engagable with said liquid crystal panel injection ports.

16. The liquid crystal material filling apparatus as claimed in claim 5, wherein each of said coil-like members is a coil
15 spring.

17. The liquid crystal material filling apparatus as claimed in claim 10, wherein a top portion of said liquid crystal holding medium is higher than adjacent upper surfaces of side walls of
20 said groove part.

18. The liquid crystal material filling apparatus as claimed in claim 10, wherein said groove part defines a groove, and a width of said groove is wider than a width of a downward-directed face
25 of said liquid crystal panel injection ports.

19. A filling apparatus for a liquid crystal material, said apparatus comprising:

a vacuum chamber;

30 a liquid crystal pot having a reservoir for storing a liquid crystal material and a groove part in communication with said reservoir, said groove part having a groove formed in an upper surface thereof, wherein said groove has a bottom surface which is disposed at a higher level than an interior bottom
35 surface of said reservoir;

a liquid crystal holding a medium disposed in said groove



REPLACEMENT SHEET

24 JUN 1999

Substitute sheet - 23 June 1999

- 32 -

part;

a filling jig cassette for accommodating a plurality of liquid crystal panels having injection ports which are directed downwardly;

5 a moving device for moving said liquid crystal pot up and down relative to said filling jig; and

a plunger disposed relative to said liquid crystal pot such that said plunger can move into and out of said reservoir so as to cause the liquid crystal material to flow from said reservoir
10 and into said groove formed in said groove part as said plunger enters said reservoir.

20. The filling apparatus as claimed in claim 19, wherein said plunger also functions as a stirring device for stirring and
15 degassing the liquid crystal material stored in said liquid crystal material.

21. The filling apparatus as claimed in claim 20, wherein said bottom surface of said groove formed in said groove part is
20 inclined, relative to a horizontal plane, so that the liquid crystal material in said groove will return to said reservoir due to its own weight when said plunger is removed from said reservoir.

25 22. The filling apparatus as claimed in claim 20, wherein a lower face of said liquid crystal holding medium is spaced from said bottom surface of said groove so as to form a gap there between and facilitate circulation of the liquid crystal material.

30

23. The filling apparatus as claimed in claim 19, wherein said bottom surface of said groove formed in said groove part is inclined, relative to a horizontal plane, so that the liquid crystal material in said groove will return to said reservoir
35 due to its own weight when said plunger is removed from said reservoir.

REPLACEMENT SHEET

24 JUN 1999

Substitute sheet - 23 June 1999



* C L M S *

- 33 -

24. The filling apparatus as claimed in claim 19, wherein a lower face of said liquid crystal holding medium is spaced from said bottom surface of said groove so as to form a gap there between and facilitate circulation of the liquid crystal material.

25. The filling apparatus as claimed in claim 24, wherein said liquid crystal holding medium comprises a plurality of coils, and each of said coils has a central axis which extends in a direction which intersects one of the liquid crystal panel injection ports.

26. The filling apparatus as claimed in claim 24, wherein said liquid crystal holding medium comprises a plurality of coil-like members, and each of said coil-like members has a top face which is adapted to engage one of the liquid crystal panel injection ports.

27. The filling apparatus as claimed in claim 26, wherein each of said coil-like members is a coil spring.

28. The filling apparatus as claimed in claim 27, further comprising a supporting plate supported on said groove part, wherein said coil springs are screwed into said support plate.

29. The filling apparatus as claimed in claim 19, wherein said liquid crystal holding medium comprises a plurality of coils, and each of said coils has a central axis which extends in a direction which intersects one of the liquid crystal panel injection ports.

30. The filling apparatus as claimed in claim 19, wherein said liquid crystal holding medium comprises a plurality of coil-like members, and each of said coil-like members has a top face which is adapted to engage one of the liquid crystal panel injection ports.

REPLACEMENT SHEET

24 JUN 1999

Substitute sheet - 23 June 1999



- 34 -

31. The filling apparatus as claimed in claim 30, wherein each of said coil-like members is a coil spring.

32. The filling apparatus as claimed in claim 19, wherein a top
5 of said liquid crystal holding medium is positioned at a higher level than an uppermost surface of said groove part.

33. The filling apparatus as claimed in claim 19, wherein a
width of said groove formed in said groove part is wider than a
10 width of a downwardly-directed face of the injection ports of the liquid crystal panels.