9605182-6
IPOS

POWER MOSFET WITH OVERCURRENT AND OVER-TEMPERATURE PROTECTION

BACKGROUND OF THE INVENTION

This invention relates to power MOSFETs and more specifically relates to a power MOSFET having integrated on the same semiconductor die, novel over-temperature and overcurrent protection circuits.

This is a divisional application from U.K. patent application No. 9418179.9.

Power MOSFETs are well known in the art. A particularly well-known power MOSFET is manufactured and sold by International Rectifier Corporation of El Segundo, California, under its registered trademark HEXFET. Such power MOSFETs are adapted to handle electrical power of at least about 1 watt and can be switched on and off by applying and removing a low voltage control signal between the gate and source electrodes of the device. They are packaged in various package styles, for example, a TO-220 style package which typically presents three terminals, gate, source and drain, for connection in an electrical circuit.

It is known to be desirable to turn off a power MOSFET, or otherwise control the circuit in which it is connected, when the current flow between the source and drain electrodes exceeds a particular value, for example, 5 times rated current, or when the die temperature exceeds a certain value, for example 150°C. Some known devices act to turn off a power MOSFET in response to either high current or high temperature, and others respond to either condition.

For example, one known device employs a small bipolar thyristor die which is glued to the power MOSFET

SPEC\49871

REPLACED SHEETS SG
☑ Description : paged 3,4,5,17 to paged —
☑ Claim(s) : paged 15 to paged —
☐ Drawing(s) : paged ..... to paged .....
☐ Abstract : paged ..... to paged .....
DATE OF RECEIPT .....

die and turns on to connect the MOSFET gate to the MOSFET source when the MOSFET die temperature exceeds a given value. This device, however, has too long a thermal time constant to offer short circuit protection.

Another known device employs a small bipolar transistor chip with emitter and collector electrodes connected between the power MOSFET gate and source terminals. The bipolar transistor base to emitter circuit is connected across a voltage dropping resistor in the power MOSFET source circuit, so that the bipolar transistor turns on under short circuit conditions to short the power MOSFET gate to the source and limit current. However, if the power FET is exposed to a high current which is less than short circuit current, the control bipolar transistor simply reduces the power MOSFET drive, causing very high power dissipation and possible destruction of the device. Moreover, this circuit does not monitor the temperature of the power MOSFET die.

A third known device employs a current-sensing power MOSFET which has a limited number of cells of the MOSFET devoted to production of an output signal which is representative of the main power current, and also has a temperature monitoring circuit to monitor the temperature of the MOSFET die. The circuits for these functions are integrated into the power MOSFET die, but require an auxiliary power source to power these circuits. This auxiliary power is applied to the power MOSFET via a fourth terminal, in addition to the source, drain and gate terminals. Consequently, the device is not pin compatible with existing power MOSFETs.

A fourth known device provides current and temperature sensing and has only three pins (gate, source


and drain) but this device employs a 4K voltage dropping resistor connected between the gate pin and gate electrode in order to limit the input current in case of a fault. The protect circuit then operates to turn on an auxiliary MOSFET connected between the gate to source terminals of the power MOSFET to turn off the power MOSFET under given overcurrent or over-temperature conditions.

The voltage dropping resistor in the above device is subject to stringent design tradeoffs. Thus, if the resistor value is too low, a high pin current will be drawn through the turn-off MOSFET. If the resistor value is too high, switching time is increased for the main power FET.

BRIEF SUMMARY OF THE INVENTION

In accordance with the invention, the gate pin and the input voltage for the power MOSFET is connected to the gate electrode through a first series connected control MOSFET. A second control MOSFET is connected between the gate and source electrodes of the power MOSFET. The gates of the first and second MOSFETs are controlled by the outputs of the protect circuit such that the first is turned off and the second is turned on in response to a given fault condition. The protect circuit is powered by the input source voltage to the series MOSFET. When on, the second MOSFET can have a resistance of about 200 ohms. Thus, the switching time of the main power device will be about 20 times that of the prior art device using a 4,000 ohm resistor. The current drawn from the gate pin and through the series MOSFET is, typically, 660μA but can be lower, depending

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

on the design of the protect circuit which draws the current.

The protect circuit operates such that, when an overcurrent or over-temperature is measured by the protect circuit, the first MOSFET turns off to isolate the gate from input voltage and to limit the current sinked by the gate pin, and the second MOSFET turns on to short the power MOSFET gate to its source, thus turning off the device at high speed.

The novel invention described above is applicable to any power MOSFET type device over all voltage and current ranges. This includes devices using a MOSgate to control the switching on and off of a device and expressly includes IGBTs, power integrated circuits, MOSgate controlled thyristors (MCTs) and power FETs such as the HEXFET device previously described.

In accordance with a further feature of the invention, a novel "boot-strap" circuit is provided to provide a gate voltage for the series MOSFET described above which is higher than the input gate voltage of the power MOSFET. More specifically, if the power MOSFET is an N channel device, and the series MOSFET is also an N channel device, the gate voltage to turn on the series MOSFET must be higher than the input gate voltage. The novel boot strap circuit employs all N channel MOSFETs and contains a capacitor which, when charged, increases the voltage on the gate of the series MOSFET to above the voltage at the gate pin so that the series MOSFET can turn on when potential is applied to the gate pin of the power MOSFET.

As a still further feature of the invention, there is provided a novel temperature shutdown circuit and a novel trimmer circuit for trimming the set

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

temperature. The novel temperature shutdown circuit has a first transistor circuit configured to produce a gate voltage for a control MOSFET which increases with temperature, and a second transistor circuit (inverter) which has an input threshold with a negative temperature coefficient. These two output characteristics are combined such that their intersection defines a threshold temperature which, if reached, produces an output to trigger the turn-off of the main power MOSFET. The exact value of the crossover can be trimmed by trimming the working area of a transistor in a zero temperature coefficient segment of the circuit.


A further feature of the present invention is a novel structure and circuit to prevent conduction of the P well containing the control components for the power MOSFET if the N(-) substrate goes to a negative potential relative to the source of the power MOSFET. More specifically, a novel bipolar switching transistor is built into the substrate adjacent the P well. This transistor has its collector connected to the P well whereby, if the N(-) substrate goes negative with respect to the source, the bipolar transistor shorts the P well to the N(-) substrate and prevents conduction of the diode formed at the junction of the P well and N(-) body.

Other features and advantages of the present invention will become apparent from the following description of the invention which refers to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a prior art overcurrent and over-temperature control circuit for a power MOSFET.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

Figure 2 shows a circuit diagram of the novel circuit of the invention for deriving control circuit power from the gate supply circuit.

Figure 3 shows a novel bootstrap circuit used with the present invention to permit use of N channel control MOSFETs in an N channel power MOSFET.

Figure 4 shows a novel temperature shutdown circuit for use with the circuits of Figures 2 and 3.

Figures 4a and 4b show characteristic curves for the circuit of Figure 4.

Figure 5 shows a cross-section of a power MOSFET die having a P well for receiving the control circuits integrated into the die, and further shows a novel circuit to prevent the forward bias of the P well/N(-) substrate junction.

DETAILED DESCRIPTION OF THE DRAWINGS

Referring first to Figure 1, there is shown a prior art power MOSFET, with over-temperature and overcurrent protection circuits. The power MOSFET has a conventional power section having gate, drain and source terminals 10, 11 and 12. Integrated into the same die which contains the power section is a control section including a 4K resistor 13, a control MOSFET 14 and the protect circuits 15. Note that the source acts as a ground for the internal protective circuits. While not shown, the power MOSFET section may have a current sense section which delivers source current information to the protect circuits 15. An input terminal 16 (sometimes referred to as a gate or input pin) is the third terminal pin of the device along with terminal pins 11 and 12. Thus, the device is pin-compatible with power MOSFETs without integrated protective circuits.

In operation, the operating power for the protect circuits is derived from input pin 16 which is from 5 to 10 volts. In the absence of a fault, MOSFET 14 is off and no current flows in resistor 13. If a fault condition occurs, MOSFET 14 turns on and, with a 200 ohm MOSFET on-resistance, draws from 1250 μA to 2500 μA through resistor 13, for a 5 volt and 10 volt supply respectively at pin 16.

The value of resistor 13 is a tradeoff between the switching time of the power MOSFET, which increases with higher resistance, and the current drain from input pin 16, which increases as the value of resistor 13 reduces. A resistor value of 4000 ohms produces a switching time of about 15 microseconds and a current drain on the input of 3 to 4 milliamperes (at a 10 volt input).

The novel circuit of Figure 2 provides the necessary V_{cc} to power the protective circuits, but retains much higher switching speed and a much lower current drain on the input terminal. More specifically, in Figure 2, components similar to those of Figure 1 have the same identifying numerals although, in Figure 2, the power MOSFET can be any MOSgated device, for example, an IGBT or MOSgated thyristor or the like.

In the present invention, the resistor 13 of Figure 1 is replaced by a MOSFET 20 which, like MOSFET 14, is controlled by an output from the protect circuits 15. MOSFETs 14 and 20 are operated in opposite phase.

Thus, when a voltage appears at terminal 16 to turn on the main power MOSFET, the MOSFET 14 is off and MOSFET 20 turns on to charge the gate at terminal 10 of the power MOSFET. The MOSFET 20 is designed to produce a resistance of about 200 ohms. Therefore, it has only a

minor effect on the turn-on and turn-off switching times of the power MOSFET which is 20 times faster than with the 4000 ohm resistor of Figure 1.

To implement the circuit of Figure 2 with a simple process, it is desirable that the power MOSFET is an N channel device, and that the MOSFET 20 also be an N channel MOSFET. The gate voltage to turn on MOSFET 20, however, is then higher than the voltage at the pin 16.

In accordance with the invention, a novel "boot-strap" circuit, shown in Figure 3, is provided to generate a high enough gate voltage to operate MOSFET 20 if it is an N channel device.

Referring to Figure 3, components similar to those of Figure 2 are given the same identifying numerals. Thus, pin 16 is connected in series with MOSFET 20 to gate 10 of the power MOSFET section, and MOSFET 14 connects pin 16 and MOSFET 20 to pin 12.

Also provided in Figure 3 is a boot-strap capacitor 30 connected between the node between MOSFETs 14 and 20, and the node 31 between the gate electrode of MOSFET 20 and a depletion mode MOSFET 32. The depletion mode MOSFET 32 is connected to the gate and source of depletion mode MOSFET 33. Node 31 is further connected to a shutdown driver MOSFET 34 having a gate connected to terminal 35 to which "smart" circuits which develop turn-off information produce an input to cause turn off of the power MOSFET.

Also provided in Figure 3 is an added depletion mode MOSFET 36 which provides an added current path to ensure permanent turn-on of the power section and a MOSFET 37, which acts as a diode, to ensure turn-off of the power section in response to a signal at terminal 16.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

The operation of the boot-strap circuit of Figure 3 is as follows: When a voltage V_{cc} is applied to terminal 16, the potential at node 38 will follow V_{cc} because MOSFET 39 is off. The transistor 32 next turns on and node 31 begins to charge up to V_{cc}. Since node 31 is at V_{cc}, MOSFET 20 turns partially on and starts to charge the gate of the power MOSFET at terminal 10. When terminal 10 reaches the threshold voltage of MOSFET 39, it turns on. Node 38 then drops to ground and MOSFET 32 turns off. Node 31 is now floating, and capacitor 30 stays charged, and MOSFET 20 stays fully on. At the end of this switching process, the voltage at node 31 is, theoretically 2 x V_{cc}, (but is less because of leakage and charge sharing). The boot-strap capacitor 30 is a 1 picofarad capacitor.

In order to turn off the power section in response to an output from the intelligence section of the circuit, a signal is applied to terminal 35 to turn on MOSFET 34 and to cause the turn-off of the MOSFET 14 and the power circuit.

It is to be understood that all components of Figure 3 are N channel devices, integrated into the same silicon die as the power section.

Figure 4 shows one of the intelligence circuits which is operated from V_{cc} of Figures 2 and 3, and which applies a turn-off signal to terminal 35 when a given over-temperature condition is measured. In Figure 4, the pin 16 is connected to MOSFET 40, which is a constant current source and then to MOSFET 41. The MOSFET 41 is connected in parallel with other MOSFETs 42 to 46, which are trimmer areas which can be removed from the circuit, as will be later described.

The node 50 is intended to have a zero temperature coefficient so that the potential at that node, preferably about 1.6 volts for a selected process, is fixed by trimming the area of transistor 41 and its parallel transistors 42 to 46. The node 50 has a constant voltage because its potential V_{gON} can be expressed as the sum of the threshold voltage V_{TH} of transistor 41 (a negative temperature coefficient) and the quantity I_d/g_m, where I_d is the drain current of transistor 41 and g_m is the g_m of transistor 41. Since g_m has a negative temperature coefficient, the quantity I_d/g_m has a positive temperature coefficient.

The above is illustrated in Figure 4a where V_{gON} is a fixed value for a given drain current for transistor 41.

More specifically, the curve shown in Figure 4a has the form:

$$I_D = K_P (V_{gs} - V_{TH})^2$$

The quantity of V_{gON} can be expressed as:

$$V_{gON} = V_{TH} + \sqrt{I_D/K_P}$$

where K_P has a negative temperature coefficient. Since K_P has a negative temperature coefficient, the temperature coefficient of $\sqrt{I_D/K_P}$ is positive.

At a low current I_D, the value V_{TH} dominates, producing an overall negative temperature coefficient. At high I_D, the value $\sqrt{I_D/K_P}$ dominates, producing a positive coefficient.

However, there is only one value of I_D for which

$$\frac{\partial V_{gON}}{\partial \theta} = 0.$$

This value represents the trimmed point of the circuit, as is later described.

The potential at node 50 of Figure 4 is connected to MOSFET 51 which is connected in series with a MOSFET 52, operated as a current source. The voltage at node 53 has a positive temperature coefficient, and is applied to the gate of MOSFET 54. MOSFET 54 is connected to the MOSFET 55.

The voltage at node 56 may now be considered, and it will be seen that, for a temperature higher than a given fixed value, the MOSFET 54 turns on and, for a temperature lower than that value, it remains off. This operation is demonstrated in Figure 4b, where curve V_{53} is the voltage at node 53 (a positive temperature coefficient) and V_{TH} is the threshold voltage of transistor 54 (a negative coefficient). The intersection of these curves defines the shutdown temperature since a temperature higher than this value $T_{SHUTDOWN}$ turns on MOSFET 54 while a temperature lower than this value leaves the MOSFET 54 off.

The voltage at node 56 is then applied through a logic inverter circuit to the shutdown input terminal 35 in Figure 3. Thus, when the temperature of the die containing the power FET exceeds the temperature $T_{SHUTDOWN}$ in Figure 4b, the power section is turned off. MOSFET 52 creates a positive feedback circuit and provides some hysteresis on the value of $T_{SHUTDOWN}$.

As stated previously, the size of transistors 41 to 46 must be trimmed to ensure a zero temperature constant at node 50. The trimming is accomplished by assigning different areas to transistors 41 to 46 and then open-circuiting those transistors which must be removed to provide the desired temperature compensation

at node 50. By way of example, probe pads 60 to 64 can be provided for transistors 46 to 42, respectively. These pads can be connected to respective zener diodes, not shown, which can be blown in short circuit by a potential applied to the pad in order to remove one or more of transistors 42 to 46 from the circuit. To carry out the trimming operation, the die is held at a temperature of 160°C and a binary search is made to determine which transistor areas must be removed for good temperature compensation. The necessary zeners are then blown to short circuit their respective transistors in the well-known manner.

Referring next to Figure 5, there is illustrated a cross-section of a junction pattern of a small part of a power MOSFET and the P well which carries the control circuits which have been described. Thus, in Figure 5, as section of a die is shown containing a plurality of P+ base cells diffused into an N(-) epitaxial body. The epitaxial body is commonly formed on an N+ substrate which has a drain electrode 74 on its bottom. A large number of cells can be used, frequently in excess of several thousand, which are symmetrically disposed over the surface of the N(-) body. The topology of these cells can be as desired and they may have any polygonal shape, such as hexagons, elongated rectangles or squares. The power section can also use an interdigitated topology.

Each of the base cells contains a respective N+ source region to define invertible channel regions in the P bodies which are covered by a gate oxide and then by polysilicon gates 75 to 78. The gates are insulated and a source electrode 79 overlies the gates and the power section.

The other components, including all control MOSFETs previously described, are preferably formed in one or more P wells, shown as P well 80.

It has been found that, during operation of the power section, the N(-) substrate can be negatively biased relative to the source electrode 79. Thus, if the P well 80 is directly connected to electrode 79 (source 12 in Fig. 2), the junction 81 will be forward biased. This produces minority carrier injection into the P well which will interfere with the operation of the components in the P well.

In accordance with another feature of the invention, a bipolar transistor means 90 is formed in the N(-) substrate, consisting of a P base 91 and N+ collector 92. The N(-) substrate is the emitter of the transistor. The base 91 has a contact 93 connected to source terminal 12, and the P well has a contact 94 also connected to source 12 through 10 ohm resistor 95. The actual value used must be so low that the bias current of the control circuit does not offset, too greatly, the ground of the control circuit with respect to source 12. N+ region 92 is connected to contact 94 via conductor 96.

In operation, if the N(-) region goes negative relative to the source 12, the transistor 90 turns on. The N+ region potential, and thus the potential of P well 80, is then pulled down to the potential of the N(-) substrate to prevent the forward biasing of junction 81.

Although the present invention has been described in relation to particular embodiments thereof, many other variations and modifications and other uses will become apparent to those skilled in the art. It is preferred, therefore, that the present invention be

limited not by the specific disclosure herein, but only by the appended claims.

CLAIMS:

1. A MOSgated device having a power section and a fault responsive control section integrated into a common semiconductor die; said power section having a source electrode; said control section being formed in a P type well in an N type substrate; and a transistor means integrated into said N type substrate and having first and second main electrodes connected to said N type substrate and said P well respectively, and having a control electrode at the potential of said source electrode whereby, if said P well is biased positive relative to said substrate, said transistor means turns on to connect said P well to the potential of said substrate thereby to prevent the turn on of the junction between said P well and said substrate.

2. The device of claim 1 wherein said transistor means is a bipolar transistor.

THIS SHEET HAS BEEN REPLACED

* C L M S *

This Sheet Has Been Replaced

POWER MOSFET WITH OVERCURRENT AND OVER-TEMPERATURE PROTECTION

An MOS-gated device has a control section comprising a transistor (90) formed in an N-type substrate, with the substrate acting as the emitter. A P-type well (80) in the substrate is connected to the collector (92) of the transistor. The source of the MOS-gated device is connected to the base of the transistor. If the N-substrate goes negative with respect to the source of the MOS-gated device the transistor turns on, so that the potential of the P-type well is equal to the potential of the N-substrate.

FIG. 1
PRIOR ART

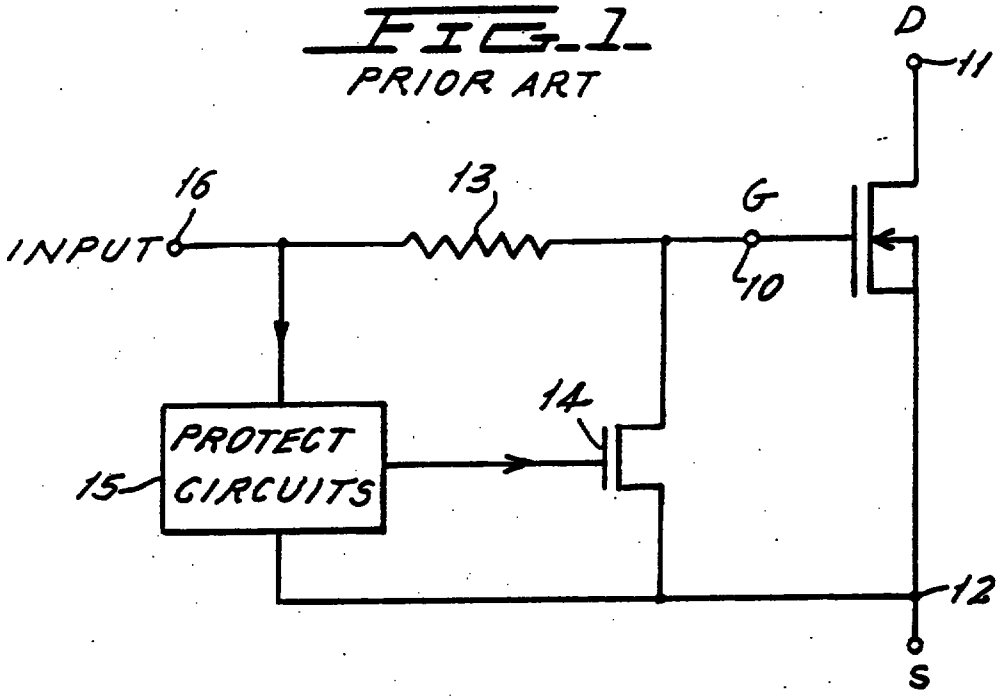
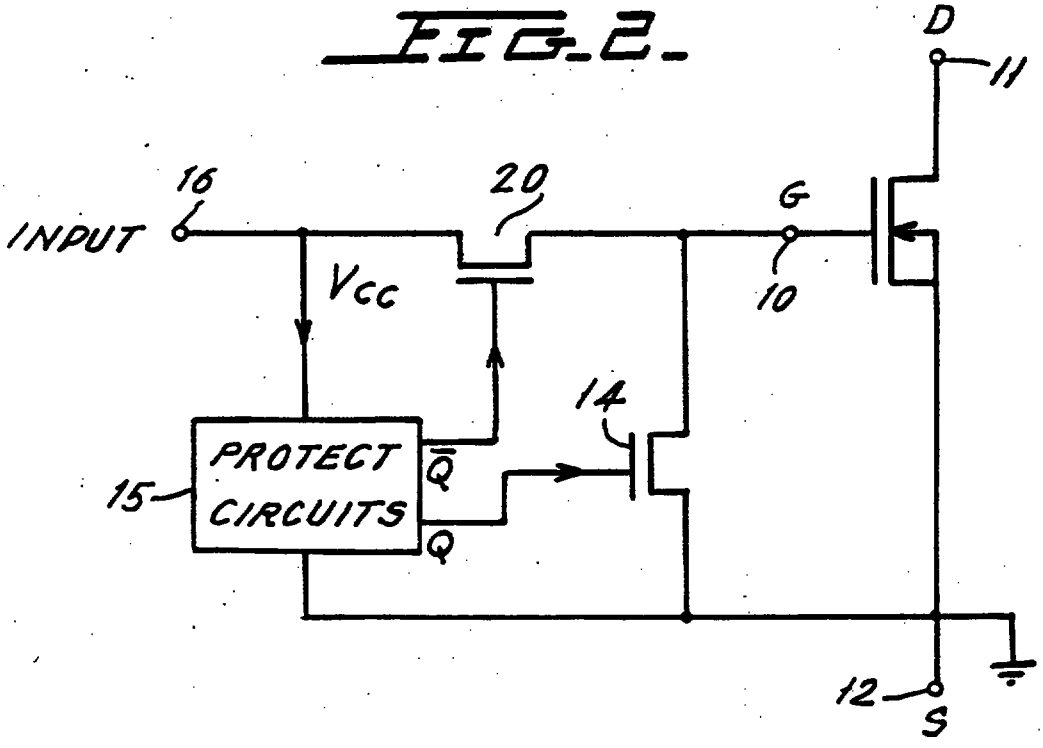


FIG. 2



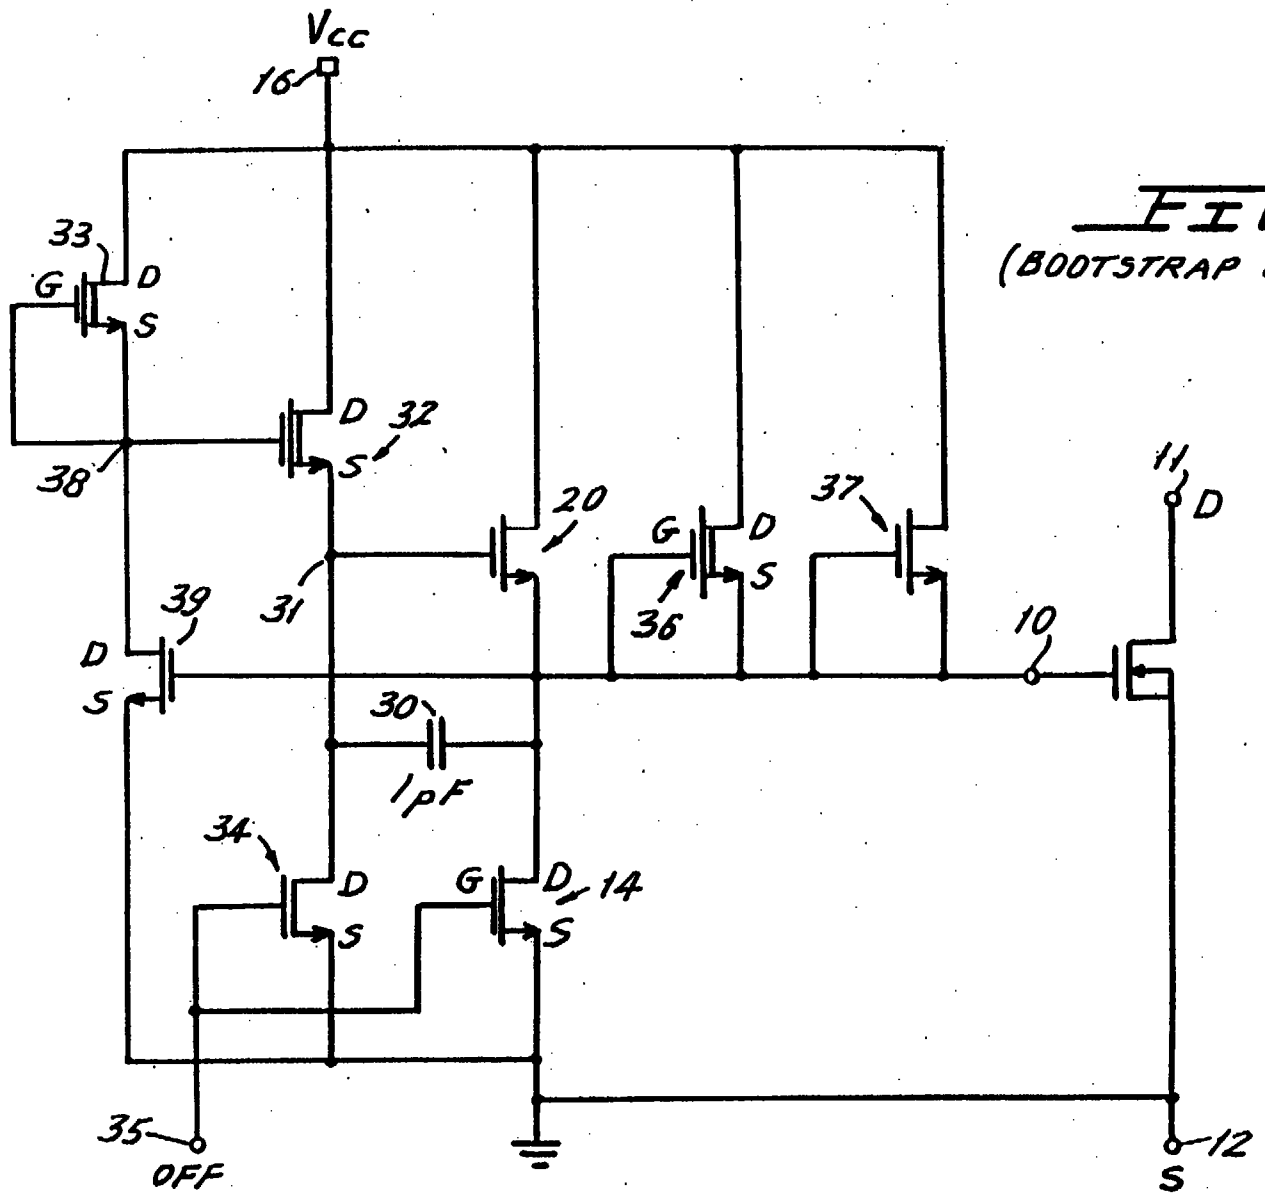


FIG. 3
(BOOTSTRAP CIRCUIT)

2/5

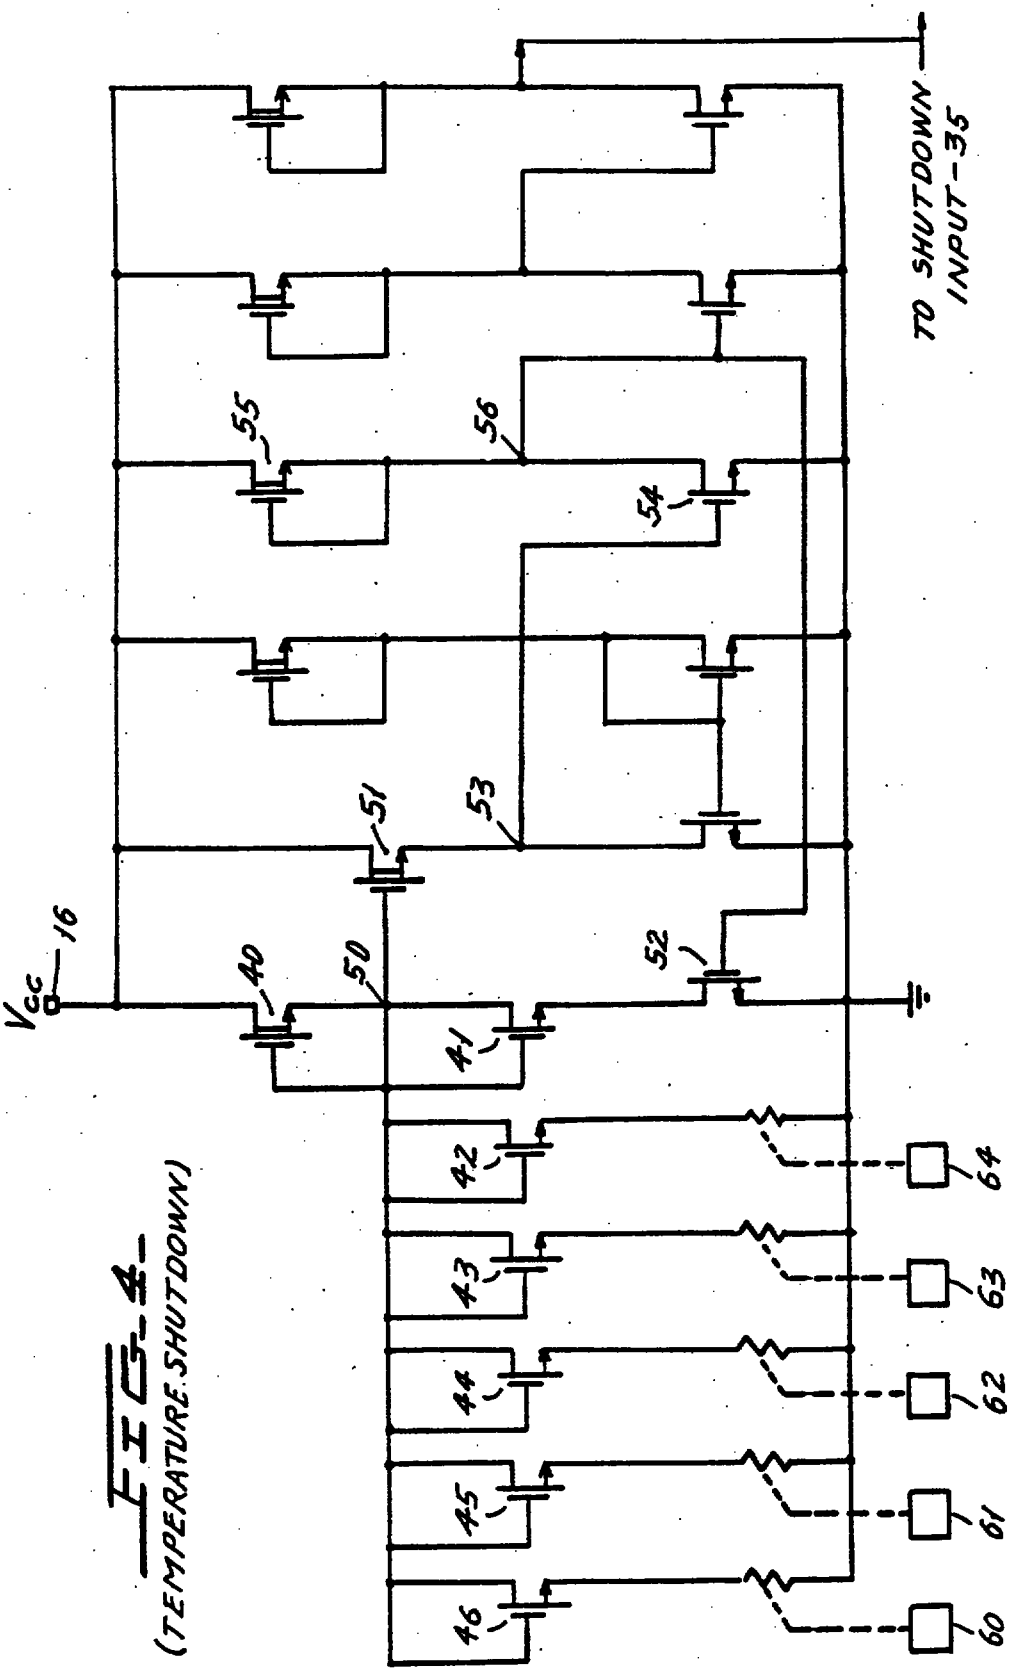


FIG. 4
(TEMPERATURE SHUTDOWN)

FIG. 4a.

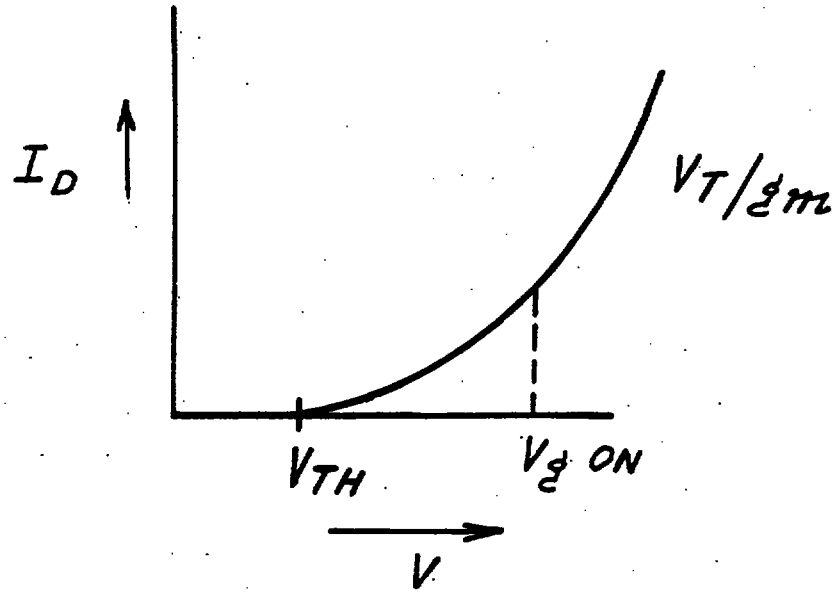


FIG. 4b.

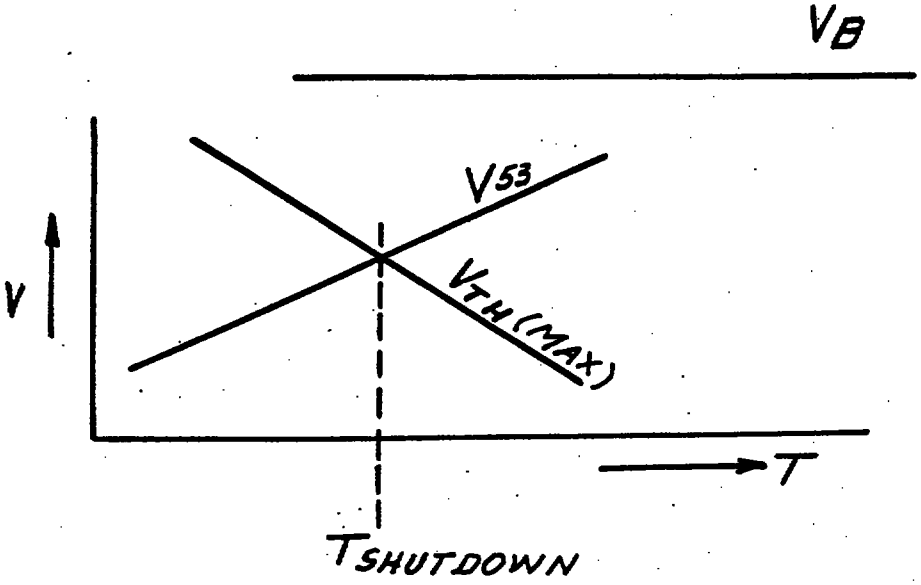
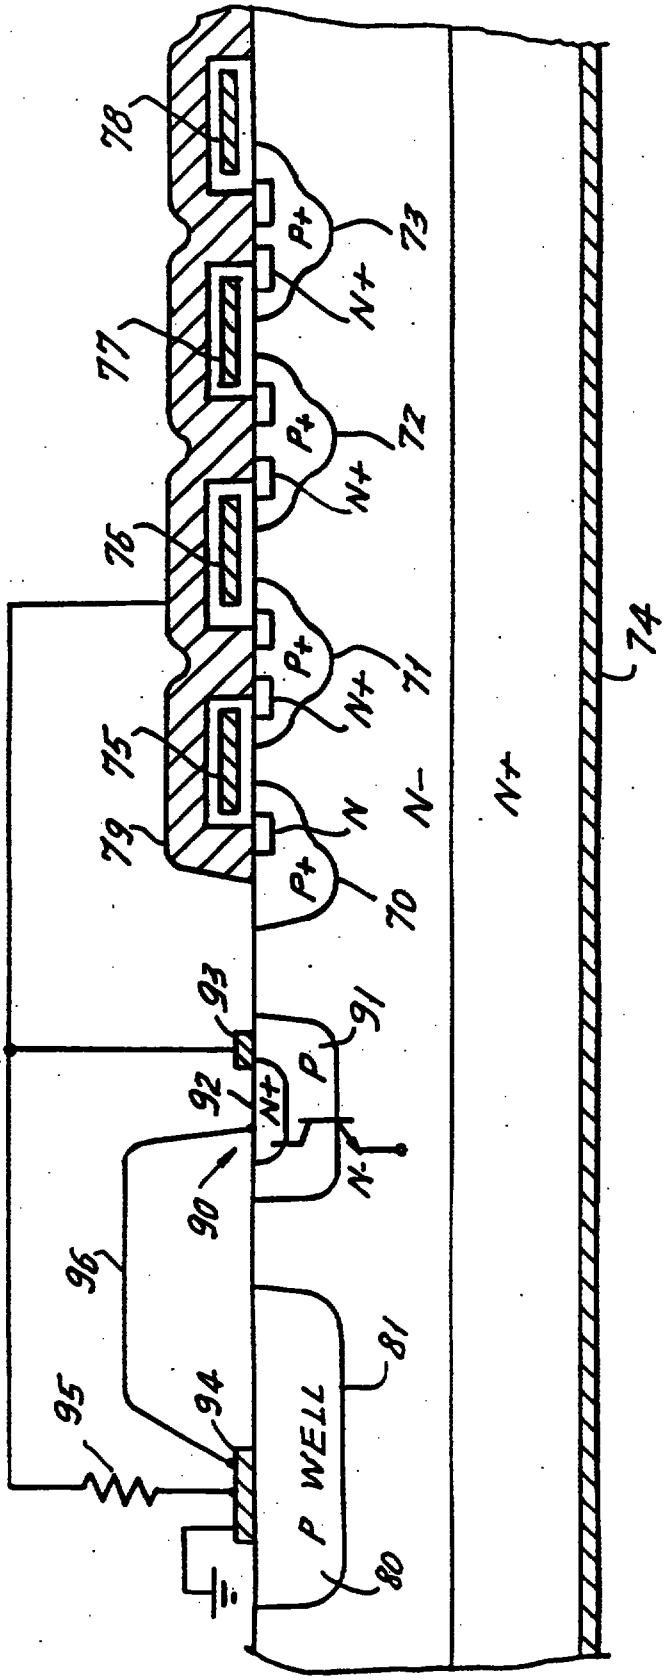


FIG. 5.


78
77
76
75
79
73
72
71
70
74
P+
N+
N
N-
N+
93
91
92
90
96
95
94
81
80
P WELL
P
N-

CLAIMS

1. A device having a power section and a fault responsive control section, the power section and the fault responsive control section being integrated into a common semiconductor die;

wherein the power section includes a power MOSgated device having a source electrode;

wherein the control section is formed in a P-type well in an N-type substrate;

and wherein the control section further comprises a transistor means integrated in the N-type substrate, the transistor means having a first electrode connected to the N-type substrate and a second electrode connected to the P-type well and a control electrode maintained at the potential of the source electrode of the MOSgated device;

whereby, if the P-type well is positively biased with respect to the N-type substrate the transistor means turns on and connects the P-type well to the N-type substrate so as to prevent the junction between the P-type well and the N-type substrate turning on.

2. A device as claimed in claim 1 wherein the transistor means is a bipolar transistor

REPLACEMENT SHEET
12 FEB 1996

REPLACEMENT SHEET
12 FEB 1998

* C L M S *

REPLACEMENT SHEET
9605182-6
IPES

and drain) but this device employs a 4K voltage dropping resistor connected between the gate pin and gate electrode in order to limit the input current in case of a fault. The protect circuit then operates to turn on an auxiliary MOSFET connected between the gate to source terminals of the power MOSFET to turn off the power MOSFET under given overcurrent or over-temperature conditions.

The voltage dropping resistor in the above device is subject to stringent design tradeoffs. Thus, if the resistor value is too low, a high pin current will be drawn through the turn-off MOSFET. If the resistor value is too high, switching time is increased for the main power FET.

REPLACEMENT SHEETS SG
☑ Description : paged 3-5,18 to paged ....
☐ Claim(s) : paged ..... to paged .....
☐ Drawing(s) : paged ..... to paged .....
☐ Abstract : paged ..... to paged .....
DATE OF RECEIPT 12/8/98

REPLACEMENT SHEET
12 AUG 1999

REPLACEMENT SHEET

According to the present invention there is provided a device having a power section and a fault responsive control system, the power section and the fault responsive control section being integrated into a common semiconductor die;

wherein the power section includes a power MOSgated device having a source electrode;

wherein the control section is formed in a P-type well in an N-type substrate;

and wherein the control section further comprises a transistor means integrated in the N-type substrate, the transistor means having a first electrode connected to the N-type substrate and a second electrode connected to the P-type well and a control electrode maintained at the potential of the source electrode of the MOSgated device;

whereby, if the P-type well is positively biased with respect to the N-type substrate the transistor means turns on and connects the P-type well to the N-type substrate so as to prevent the junction between the P-type well and the N-type substrate turning on.

In a preferred embodiment the transistor means is a bipolar transistor.


The invention described above is applicable to any power MOSFET type device over all voltage and current ranges. This includes devices using a MOSgate to control the switching on and off of a device and expressly includes IGBTs, power integrated circuits, MOSgate controlled thyristors (MCTs) and power FETs such as the HEXFET device previously described

REPLACEMENT SHEET
12 AUG 1999

REPLACEMENT SHEET

Other features and advantages of the present invention will become apparent from the following description of the invention which refers to the accompanying drawings.

Figure 1 shows a prior art overcurrent and over-temperature control circuit for a power MOSFET.

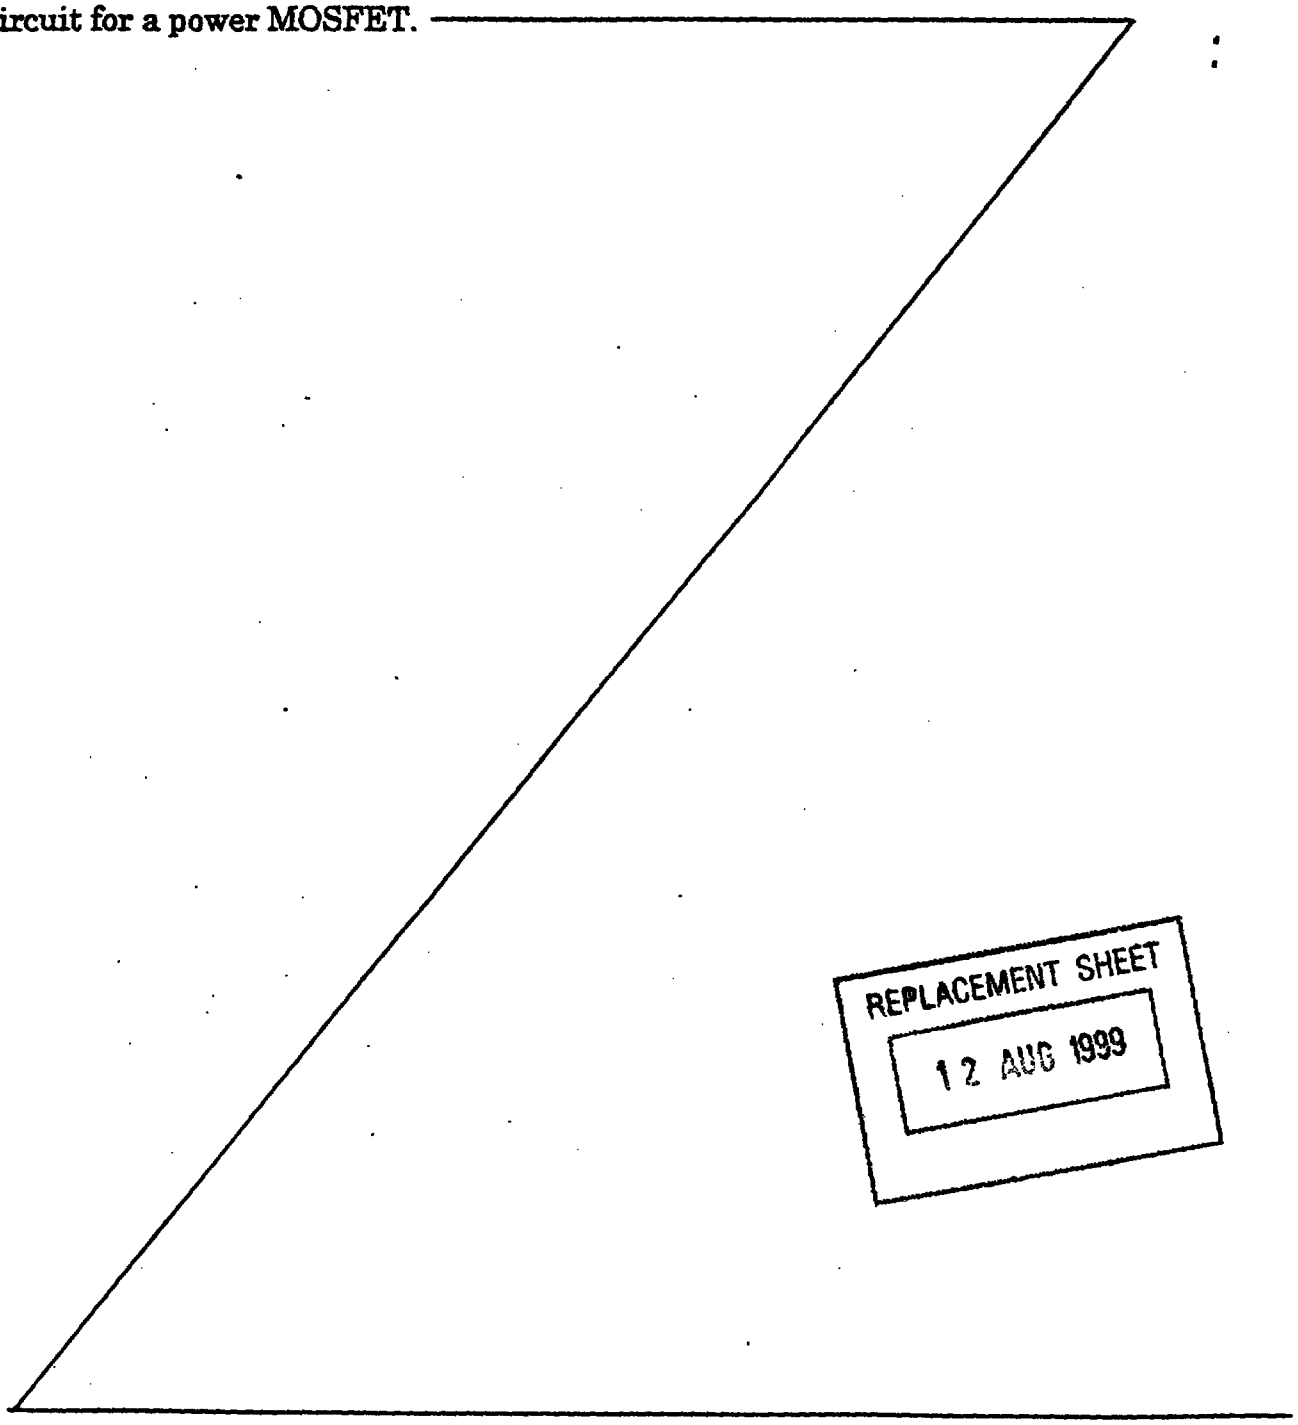

REPLACEMENT SHEET
12 AUG 1999

minor effect on the turn-on and turn-off switching times of the power MOSFET which is 20 times faster than with the 4000 ohm resistor of Figure 1.

To implement the circuit of Figure 2 with a simple process, it is desirable that the power MOSFET is an N channel device, and that the MOSFET 20 also be an N channel MOSFET. The gate voltage to turn on MOSFET 20, however, is then higher than the voltage at the pin 16. A "boot-strap" circuit, shown in Figure 3, is provided to generate a high enough gate voltage to operate MOSFET 20 if it is an N channel device.

Referring to Figure 3, components similar to those of Figure 2 are given the same identifying numerals. Thus, pin 16 is connected in series with MOSFET 20 to gate 10 of the power MOSFET section, and MOSFET 14 connects pin 16 and MOSFET 20 to pin 12.

Also provided in Figure 3 is a boot-strap capacitor 30 connected between the node between MOSFETs 14 and 20, and the node 31 between the gate electrode of MOSFET 20 and a depletion mode MOSFET 32. The depletion mode MOSFET 32 is connected to the gate and source of depletion mode MOSFET 33. Node 31 is further connected to a shutdown driver MOSFET 34 having a gate connected to terminal 35 to which "smart" circuits which develop turn-off information produce an input to cause turn off of the power MOSFET.

Also provided in Figure 3 is an added depletion mode MOSFET 36 which provides an added current path to ensure permanent turn-on of the power section and a MOSFET 37, which acts as a diode, to ensure turn-off of the power section in response to a signal at terminal 16.

REPLACEMENT SHEET
12 AUG 1999