



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E05B 9/04, 27/00	A1	(11) International Publication Number: WO 96/36782 (43) International Publication Date: 21 November 1996 (21.11.96)
(21) International Application Number: PCT/SE96/00652 (22) International Filing Date: 17 May 1996 (17.05.96) (30) Priority Data: 9501856-0 18 May 1995 (18.05.95) SE (71) Applicant (for all designated States except US): WINLOC AG [CH/CH]; Baarerstrasse 75, CH-6302 Zug (CH). (72) Inventor; and (75) Inventor/Applicant (for US only): WIDEN, Bo [SE/SE]; P.O. Box 37, S-644 00 Torshälla (SE). (74) Agents: MODIN, Jan et al.; Axel Ehmers Patentbyrå AB, P.O. Box 10316, S-100 55 Stockholm (SE).	(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report.	

(54) Title: REMOVABLE CORE CYLINDER LOCK

(57) Abstract

A removable core cylinder lock with a cylinder lock casing and a removable cylinder lock core (20) inserted into the casing. The lock core has an upper massive part (22) with a row (25) of holes for accommodating locking tumblers (26, 66) and a lower part (23) defining a cylindrical bore (24), in which a cylindrical, rotatable key plug (60) is located. The lower part (23) defining the cylinder bore (24) of the cylinder lock core (20) is partially cut away so as to form an axially elongated chamber (30) accommodating a transversely movable retainer member (40) and leaving a continuous lower wall portion (23a). The retainer member has an axial length, which corresponds to at least half of the axial length of the row (25) of holes in the upper massive part, and a limited circumferential extension, which is substantially supplementary to the continuous lower wall portion so as to define said cylindrical bore (24).

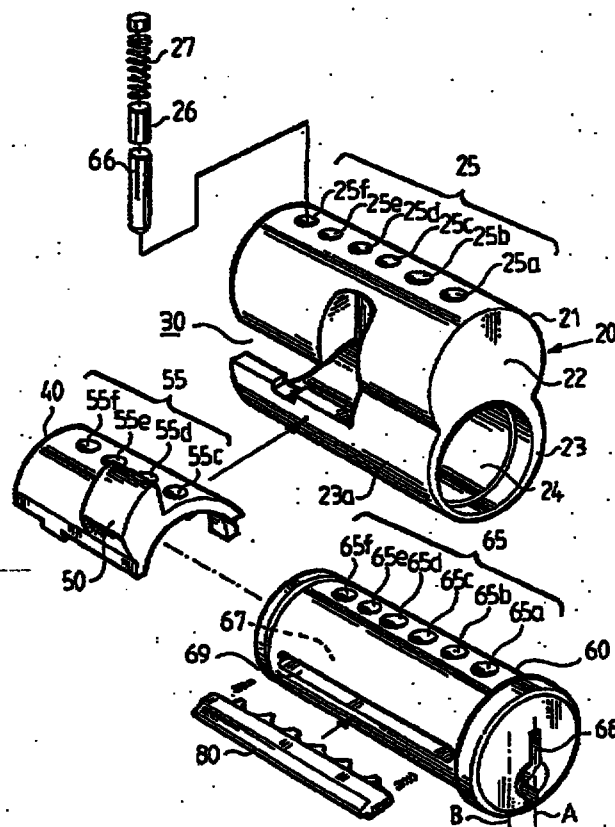

REPLACED SHEETS		SG
☐	Description : paged	to paged
☒	Claim(s) : paged 12	to paged 15
☐	Drawing(s) : paged	to paged
☐	Abstract : paged	to paged
DATE OF RECEIPT		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam