

Image Processing Apparatus
With Multiple Functions

BACKGROUND OF THE INVENTION

5 Field of the Invention

The present invention relates to control of an execution order of a plurality of processing operations in an image processing apparatus with multiple functions.

10 Related Background Art

In recent years, a multiple functions apparatus, which performs facsimile communication using a scanner and a printer of a digital copying machine, or developing code data from a computer into bit map data and printing out the developed data using the printer of the digital copying machine, is commercially available.

In such a multiple functions apparatus, at least three of, e.g., a copying function, a facsimile function, a printer formatter function, an image filing function, an image memory function, and the like are incorporated in one unit.

In a multiple functions image processing apparatus with the above-mentioned arrangement, the respective functions share a scanner and printer, thus realizing space saving and cost down.

Furthermore, upon execution of each function processing in the multiple functions image processing apparatus, input/output processing of image data during execution of each function processing using a scanner
5 and a printer is executed using a half-duplex video bus in terms of easy control and cost down.

However, in order to allow a plurality of functions to share a single scanner and printer, and since input and output image data between copying
10 function processing and another function processing are transferred using a half-duplex communication type video bus, for example, image data developed by a printer formatter processing unit cannot be output to the printer simultaneously while the scanner is being
15 used for image reading processing for facsimile transmission. In addition, image data searched by the image filing function cannot be printed out simultaneously while document data received by the facsimile function is printed out.

20

It is a concern of the present invention to provide an image processing apparatus which can eliminate the above-mentioned drawbacks.

25 It is another concern of the present invention to provide an image processing apparatus which determines an execution order of simultaneously generated

input/output requests in accordance with a predetermined priority order, can greatly improve processing efficiency upon generation of execution requests of respective processing operations, and
5 realizes apparent parallel processing of image input output processing operations.

An embodiment of the present invention provides an image processing apparatus which determines an execution order of a plurality of
10 processing requests in accordance with their execution times, thereby improving processing efficiency.

Another embodiment of the present invention provides an image processing apparatus which determines an execution order of a plurality of
15 processing requests in accordance with whether these requests are image input requests or image output requests, thereby improving processing efficiency.

The above and other concerns of the present invention will become apparent from the following
20 description taken in conjunction with the accompanying drawings and the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram for explaining the
25 arrangement of a multiple functions image processing apparatus according to an embodiment of the present invention;

Fig. 2 is a sectional view showing the arrangement of a reader unit and a printer unit shown in Fig. 1;

Fig. 3 is a block diagram showing the signal processing arrangement of the reader unit shown in
5 Fig. 2;

Fig. 4 is a block diagram showing the detailed arrangement of a core unit shown in Fig. 1;

Fig. 5 is a block diagram for explaining the detailed arrangement of a facsimile unit shown in
10 Fig. 1;

Fig. 6 is a block diagram for explaining the detailed arrangement of a file unit shown in Fig. 1;

Fig. 7 is a block diagram for explaining the detailed arrangement of a man-machine interface unit
15 shown in Fig. 1;

Fig. 8 is a block diagram for explaining the detailed arrangement of a computer interface unit shown in Fig. 1;

Fig. 9 is a block diagram for explaining the detailed arrangement of a formatter unit shown in
20 Fig. 1;

Fig. 10 is a block diagram for explaining the detailed arrangement of an image memory unit shown in Fig. 1;

25 Fig. 11 is a view showing an example of command packets in the multiple functions image processing apparatus according to the present invention;

Fig. 12 is a view showing an example of an image transfer job management table in the multiple functions image processing apparatus according to the present invention;

5 Fig. 13 is a view showing an example of an image transfer parameter table in the multiple functions image processing apparatus according to the present invention;

10 Fig. 14 is a flow chart showing an example of a priority setting control sequence of jobs in the multiple functions image processing apparatus according to the present invention;

15 Fig. 15 is a view for explaining the priority setting control state of jobs in the multiple functions image processing apparatus according to the present invention;

20 Fig. 16 is a view for explaining the priority setting control state of jobs in the multiple functions image processing apparatus according to the present invention; and

Figs. 17A to 17C are views for explaining the priority setting control state of jobs in the multiple functions image processing apparatus according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Fig. 1 is a block diagram for explaining the arrangement of a multiple functions image processing apparatus according to an embodiment of the present invention.

Referring to Fig. 1, an image input device (to be referred to as a reader unit hereinafter) 1 converts an original image into image data, and an image output device (to be referred to as a printer unit hereinafter) 2 has a plurality of different recording sheet cassettes, and outputs image data onto a recording sheet as a visual image in accordance with a print command. A peripheral device control device (external device) 3 is electrically connected to the reader unit 1, and has various functions. The peripheral device control device 3 comprises a facsimile unit 4, a file unit 5, a man-machine interface unit 6 connected to the file unit 5, a computer interface unit 7 for allowing a connection of a computer 790, a formatter unit 8 for converting information from the computer into a visual image, an image memory unit 9 for storing information from the reader unit 1, and for temporarily storing information sent from the computer, a core unit 10 for controlling the function units 1 to 8, and the like.

The functions of the units 1 to 8 will be described in detail below.

Fig. 2 is a sectional view showing the arrangement of the reader unit 1 and the printer unit 2 shown in Fig. 1. The arrangement and operation of these units will be described below.

Originals stacked on an original feeder 101 are sequentially conveyed one by one onto an original table glass surface 102. When an original is conveyed, a lamp 103 of a scanner unit 104 is turned on, and the scanner unit 104 is moved to illuminate the original. Light reflected by the original is transmitted through a lens 108 via mirrors 105, 106, and 107 in turn, and is then input to a CCD image sensor unit (to be referred to as a CCD hereinafter) 109.

Fig. 3 is a block diagram showing the signal processing arrangement of the reader unit 1 shown in Fig. 2. The arrangement and operation of the reader unit 1 will be described below.

Image information input to the CCD 109 is photoelectrically converted into an electrical signal. Color information from the CCD 109 is amplified by amplifiers 110R, 110G, and 110B in correspondence with the input signal level of an A/D converter 111. The output signals from the A/D converter 111 are input to a shading circuit 112, so as to correct light distribution nonuniformity of the lamp 103 and

sensitivity nonuniformity of the CCD. The output signals from the shading circuit 112 are input to a Y signal generation·color detecting circuit 113 and an outside I/F switching circuit 119. The Y signal generation·color detecting circuit 113 performs a calculation based on equation (1) below using the signals from the shading circuit 112 to obtain a Y signal:

$$Y = 0.3R + 0.6G + 0.1B \quad \dots(1)$$

Furthermore, the circuit 113 has a color detecting circuit for separating R, G, and B signals into seven colors, and outputting signals corresponding to the separated colors. The output signal from the Y signal generation·color detecting circuit 113 is input to a variable magnification·repeat circuit 114. Variable magnification processing in the sub-scanning direction is achieved by the scanning speed of the scanner unit 104, and variable magnification processing in the main scanning direction is achieved by the variable magnification·repeat circuit 114. The variable magnification·repeat circuit 114 can output a plurality of identical images. An outline·edge emphasizing circuit 115 obtains edge emphasis information and outline information by emphasizing the high-frequency components of the signal output from the variable magnification·repeat circuit. The signal output from the outline·edge emphasizing circuit 115 is supplied to

a marker area discriminating·outline generating circuit 116 and a pattern·thickening·masking·trimming circuit 117. The marker area discriminating·outline generating circuit 116 reads a portion written with a marker pen in a designed color on an original, and generates marker outline information. The pattern·thickening·masking·trimming circuit 117 performs thickening, masking, and trimming of the input signal on the basis of the generated outline information. Also, the pattern·thickening·masking·trimming circuit 117 makes a pattern by a color detected signal detected by the Y signal generation color detecting circuit 113. The output signal from the pattern·thickening·masking·trimming circuit 117 is supplied to a laser driver circuit 118, and the signal subjected to the various kinds of processing is converted into a signal for driving a laser. The output signal from the laser driver circuit is supplied to the printer unit 2, and image formation is performed to obtain a visual image.

The outside I/F switching circuit 119 for interfacing with the peripheral device control device will be described below.

When image information from the reader unit 1 is to be output to the peripheral device control device 3, the outside I/F switching circuit 119 outputs image information from the

pattern·thickening·masking·trimming circuit 117 to a
connector 120. When the reader unit 1 receives image
information from the peripheral device control device
3, the outside I/F switching circuit 119 inputs image
5 information from the connector 120 to the Y signal
generation·color detecting circuit 113.

The above-mentioned image information is
transferred under the control of a CPU 122. An area
generating circuit 121 generates various timing signals
10 necessary for the image processing on the basis of a
value set by the CPU 122. Also, the CPU 122
communicates with the peripheral device control device
3 using its internal communication function. A sub CPU
123 controls an operation unit 124, and communicates
15 with the peripheral device control device 3 using its
internal communication function.

The arrangement and operation of the printer unit
2 will be described below with reference to Fig. 2.

An image signal input to the printer unit 2 is
20 converted into an optical signal by an exposure control
unit 201, and is radiated as a light beam onto a
photosensitive body 202. A latent image formed on the
photosensitive body 202 by the radiated beam is
developed by a developer 203. A transfer sheet is
25 conveyed from a transfer sheet stacking unit 204 or 205
in synchronism with the latent image, and the developed
image is transferred onto the transfer sheet by a

transfer unit 206. The transferred image is fixed on
the transfer sheet by a fixing unit 207, and the
transfer sheet is exhausted outside the apparatus by an
exhaust unit 208. If a sort function is active, the
5 transfer sheet output from the exhaust unit 208 is
exhausted onto a corresponding bin of a sorter 220; if
the sort function is inactive, the transfer sheet is
exhausted onto the uppermost bin of the sorter.

Subsequently, a method of outputting images on two
10 surfaces of a single output sheet will be described
below. An output sheet on which an image is fixed by
the fixing unit 207 is temporarily conveyed to the
exhaust unit 208, and is then conveyed to a re-feed
transfer sheet stacking unit 210 via a convey direction
15 switching member 209 for reversing the convey direction
of a sheet. When the next original is prepared, the
original image is read by the same process as in the
above-mentioned process. In this case, since the
transfer sheet is fed from the re-feed transfer sheet
20 stacking unit 210, two original images can be
respectively output onto the upper and lower surfaces
of a single sheet.

The system arrangement and operation of the
peripheral device control device 3 shown in Fig. 1 will
25 be described below.

The peripheral device control device 3 is
connected to the reader unit 1 via a cable, and the

core unit therein controls respective signals and functions. The peripheral device control device 3 includes the facsimile unit 4 for transmitting/receiving facsimile data, the file unit 5 for preserving various kinds of original information by converting them into electrical signals, the formatter unit 8 for developing code information from the computer into image information, the computer interface unit 7 for interfacing with the computer, the image memory unit 9 for storing information from the reader unit 1, and for temporarily storing information sent from the computer, and the core unit 10 for controlling the respective functions.

The arrangement and operation of the core unit 10 in the peripheral device control device 3 will be described below with reference to the block diagram shown in Fig. 4.

Fig. 4 is a block diagram showing the detailed arrangement of the core unit 10 shown in Fig. 1.

A connector 1001 of the core unit 10 is connected to the connector 120 of the reader unit 1 via a cable.

The connector 1001 incorporates four different signal lines. A signal line 1057 is an 8-bit multi-valued video signal line. A signal line 1055 is a control signal line for controlling a video signal, and a signal line 1051 is a signal line used in communications with the CPU 122 in the reader unit 1.

A signal line 1052 is a signal line used in communications with the sub CPU 123 in the reader unit 1. The signal lines 1051 and 1052 are subjected to communication protocol processing by a communication IC 1002, and transmit communication information to a CPU 1003 via a CPU bus 1053.

The signal line 1057 is a bidirectional video signal line. That is, the signal line 1057 allows the core unit 10 to receive information from the reader unit 1, and also allows the core unit 10 to output information to the reader unit 1. The signal line 1057 is connected to a buffer 1010, and is separated from the bidirectional signal line into unidirectional signal lines 1058 and 1070. The signal line 1058 is an 8-bit multi-valued video signal line from the reader unit 1, and is connected to an LUT 1011. The LUT 1011 converts image information from the reader unit 1 into a desired density value by looking up a look-up table. An output signal line 1059 from the LUT 1011 is connected to a two-valued circuit 1012 and a selector 1013. The two-valued circuit 1012 has a simple two-valued function for converting a signal on the multi-valued signal line 1059 into two-valued data with a fixed slice level, a two-valued function using a variable slice level which varies depending on the density values of pixels around a pixel of interest, and a two-valued function using an error diffusion

method. When the two-valued information is 0, it is converted into a multi-valued signal 00H; when the two-valued information is 1, it is converted into FFH. The converted signal is supplied to the selector 1013.

5 The selector 1013 selects one of the signal from the LUT 1011 and the output signal from the two-valued circuit 1012. A signal line 1060 from the selector 1013 is connected to a selector 1014. The selector 1014 selects one of a signal on the output signal line

10 1060 of the selector 1013 and a signal on a signal line 1064 which outputs video signals from the facsimile unit 4, the file unit 5, the computer interface unit 7, the formatter unit 8, and the image memory unit 9, and is input to the core unit 10 via connectors 1005, 1006,

15 1007, 1008, and 1009, in accordance with an instruction from the CPU 1003. An output signal line 1061 of the selector 1014 is input to a turning circuit 1015 or a selector 1016. The turning circuit 1015 has a function of rotating an input image signal through $+90^\circ$, -90° ,

20 or $+180^\circ$. Information output from the reader unit 1 is converted into a two-valued signal by the two-valued circuit 1012, and the two-valued signal is stored in the turning circuit 1015 as information from the reader unit. Then, the turning circuit 1015 turns and reads

25 out the stored information in accordance with an instruction from the CPU 1003. The selector 1016 selects one of a signal on an output signal line 1062

of the turning circuit 1015 and the input signal line 1061 to the turning circuit 1015, and outputs the selected signal, as a signal on a signal line 1063, to the connector 1005 with the facsimile unit 4, the
5 connector 1006 with the file unit 5, the connector 1007 with the computer interface unit 7, the connector 1008 with the formatter unit 8, the connector 1009 with the image memory unit 9, and a selector 1017.

The signal line 1063 is a synchronous 8-bit
10 unidirectional video bus for transferring image information from the core unit 10 to the facsimile unit 4, the file unit 5, the computer interface unit 7, the formatter unit 8, and the image memory unit 9. A signal line 1064 is a synchronous 8-bit unidirectional
15 video bus for transferring image information from the facsimile unit 4, the file unit 5, the computer interface unit 7, the formatter unit 8, and the image memory unit 9. A video control circuit 1004 controls the synchronous buses of the signal lines 1063 and 1064
20 using a signal on its output signal line 1056 from the video control circuit 1004. The connectors 1005 to 1009 are connected to a signal line 1054 in addition to the above-mentioned signal lines. The signal line 1054 is a bidirectional 16-bit CPU bus, and is used for
25 exchanging data commands by an asynchronous method. Information transfer between the core unit 10 and the facsimile unit 4, the file unit 5, the computer

interface unit 7, the formatter unit 8, and the image memory unit 9 can be realized by the above-mentioned two video buses 1063 and 1064, and the CPU bus 1054.

5 The signal line 1064 from the facsimile unit 4, the file unit 5, the computer interface unit 7, the formatter unit 8, and the image memory unit 9 is input to the selectors 1014 and 1017. The selector 1014 inputs a signal on the signal line 1064 to the turning circuit 1015 in accordance with an instruction from the
10 CPU 1003.

 The selector 1017 selects one of signals on the signal lines 1063 and 1064 in accordance with an instruction from the CPU 1003. A signal on an output signal line 1065 of the selector 1017 is input to a
15 pattern matching circuit 1018 and a selector 1019. The pattern matching circuit 1018 performs pattern matching between the signal from the signal line 1065 and a predetermined pattern. When the two patterns coincide with each other, the pattern matching circuit 1018
20 outputs a predetermined multi-valued signal onto a signal line 1066. When the two patterns do not coincide with each other, the pattern matching circuit 1018 outputs a signal on the signal line 1065 onto the signal line 1066.

25 The selector 1019 selects one of signals on the signal lines 1065 and 1066 in accordance with an instruction from the CPU 1003. The output signal from

the selector 1019 is supplied to an LUT 1020 via a signal line 1067.

5 The LUT 1020 converts a signal on the signal line 1067 in correspondence with the characteristics of the printer unit when image information is output to the printer unit 2.

A selector 1021 selects one of a signal on an output signal line 1068 of the LUT 1020 and a signal on the signal line 1065 in accordance with an instruction
10 from the CPU 1003. A signal on an output signal line 1069 of the selector 1021 is input to a magnification circuit 1022.

The magnification circuit 1022 can independently set magnification factors in the X direction
15 (sub-scanning direction) and the Y direction (main scanning direction) in accordance with an instruction from the CPU 1003. A magnification method is a first-order linear interpolation method. An output signal line 1070 of the magnification circuit 1022 is
20 input to the buffer 1010.

A signal on the signal line 1070 input to the buffer 1010 is supplied to the printer unit 2 via the connector 1001 through the bidirectional signal line 1057, and is printed out by the printer unit 2, in
25 accordance with an instruction from the CPU 1003.

The flow of signals between the core unit and other units will be described below.

- Operation of Core Unit Based on Information from Facsimile Unit

A case will be explained below wherein information is to be output to the facsimile unit 4. The CPU 1003 communicates with the CPU 122 of the reader unit 1 via the communication IC 1002, and issues an original scan command. Upon reception of this command, the reader unit 1 causes the scanner unit 104 to scan an original, and outputs the read image information to the connector 120. The reader unit 1 and the peripheral device control device 3 are connected to each other through a cable, and information from the reader unit 1 is input to the connector 1001 of the core unit 10. The image information input to the connector 1001 is input to the buffer 1010 via the multi-valued 8-bit signal line 1057. The buffer 1010 inputs the signal on the bidirectional signal line 1057 to the LUT 1011 via the signal line 1058 as a unidirectional signal in accordance with an instruction from the CPU 1003. The LUT 1011 converts the image information from the reader 1 into a desired density value using the look-up table. For example, a background image of an original can be removed. The output signal line 1059 of the LUT 1011 is input to the two-valued circuit 1012. The two-valued circuit 1012 converts an 8-bit multi-valued signal on the signal line 1059 into a two-valued signal. When the two-valued signal is 0, the

two-valued circuit 1012 converts it into a multi-valued
signal 00H; when the two-valued signal is 1, the
circuit 1012 converts it into a multi-valued signal
FFH. The output signal from the two-valued circuit
5 1012 is input to the turning circuit 1015 and the
selector 1016 via the selectors 1013 and 1014. A
signal on the output signal line 1062 of the turning
circuit 1015 is also input to the selector 1016. The
selector 1016 selects one of the signals on the signal
10 lines 1061 and 1062. The signal selection is
determined by the CPU 1003 which communicates with the
facsimile unit 4 via the CPU bus 1054. A signal on the
output signal line 1063 from the selector 1016 is
supplied to the facsimile unit 4 via the connector
15 1005.

Next, a case will be explained below wherein
information from the facsimile unit 4 is to be
received. Image information from the facsimile unit 4
is transmitted onto the signal line 1064 via the
20 connector 1005. The signal on the signal line 1064 is
input to the selectors 1014 and 1017. When image
information received by the facsimile unit is to be
turned and the turned image is to be output to the
printer unit 2 in accordance with an instruction from
25 the CPU 1003, the signal on the signal line 1064 input
to the selector 1014 undergoes turning processing in
the turning circuit 1015. The signal on the output

signal line 1062 from the turning circuit 1015 is supplied to the pattern matching circuit 1018 via the selectors 1016 and 1017. When the image information received by the facsimile unit is to be directly output
5 to the printer unit 2 in accordance with an instruction from the CPU 1003, the signal on the signal line 1064 input to the selector 1017 is input to the pattern matching circuit 1018.

The pattern matching circuit 1018 has a smoothing
10 function of smoothing indentations of oblique line portions of an image received by the facsimile unit. The pattern-matched signal is input to the LUT 1020 via the selector 1019. The table in the LUT 1020 can be changed by the CPU 1003, so that an image received by
15 the facsimile unit can be output with a desired density by the printer unit 2. The signal on the output signal line 1068 of the LUT 1020 is input to the magnification circuit 1022 via the selector 1021. The magnification circuit 1022 performs magnification processing of the
20 8-bit multi-valued signal having two values (00H, FFH) by the first-order linear interpolation method. An 8-bit multi-valued signal which is output from the magnification circuit 1022 and assumes a value ranging from 00H to FFH is supplied to the reader unit 1 via
25 the buffer 1010 and the connector 1001. The reader unit 1 supplies this signal to the outside I/F switching circuit 119 via the connector 120. The

outside I/F switching circuit 119 supplies the signal from the facsimile unit 4 to the Y signal generation·color detecting circuit 113. The output signal from the Y signal generation·color detecting circuit 113 is subjected to the above-mentioned processing, and thereafter, is output to the printer unit 2, thus performing image formation on an output sheet.

• Operation of Core Unit Based on Information from
10 File Unit

A case will be exemplified below wherein information is to be output to the file unit 5. The CPU 1003 communicates with the CPU 122 of the reader unit 1 via the communication IC 1002, and issues an original scan command. Upon reception of this command, the reader unit 1 causes the scanner unit 104 to scan an original, and outputs the read image information to the connector 120. The reader unit 1 and the peripheral device control device 3 are connected to each other through a cable, and information from the reader unit 1 is input to the connector 1001 of the core unit 10. The image information input to the connector 1001 is transmitted onto the unidirectional signal line 1058 via the buffer 1010. A multi-valued 8-bit signal on the signal line 1058 is converted into a signal with a desired density value by the LUT 1011. A signal on the output signal line 1059 of the LUT 1011

is input to the connector 1006 via the selectors 1013, 1014, and 1016. More specifically, the 8-bit multi-valued signal is directly transferred to the file unit 5 without using the functions of the two-valued circuit 1012 and the turning circuit 1015. When a two-valued signal is to be filed by communications with the file unit 5 via the CPU bus 1054 of the CPU 1003, the functions of the two-valued circuit 1012 and the turning circuit 1015 are used. Since the two-valued processing and turning processing are the same as those for the facsimile unit, a detailed description thereof will be omitted.

Next, a case will be explained below wherein information is to be output from the file unit 5.

Image information from the file unit 5 is input to the selector 1014 or 1017 via the connector 1006 and the signal line 1064. In an 8-bit multi-valued filing mode, an image signal is input to the selector 1017; in a two-valued filing mode, an image signal can be input to the selector 1014 or 1017. In the two-valued filing mode, since the same processing as that for the facsimile unit is performed, a detailed description thereof will be omitted. In the multi-valued filing mode, a signal on the output signal line 1065 from the selector 1017 is input to the LUT 1020 via the selector 1019. The LUT 1020 generates a look-up table in correspondence with a desired print density in

accordance with an instruction from the CPU 1003. A
signal on the output signal line 1068 from the LUT 1020
is input to the magnification circuit 1022 via the
selector 1021. A signal on the 8-bit multi-valued
5 signal line 1070, which signal is magnified at a
desired magnification factor by the magnification
circuit 1022, is supplied to the reader unit 1 via the
buffer 1010 and the connector 1001. Information from
the file unit, which is supplied to the reader unit 1,
10 is output to the printer unit 2, and image formation is
performed on an output sheet in the same manner as the
above-mentioned processing for the facsimile unit.

• Operation of Core Unit Based on Information from
Computer Interface Unit

15 The computer interface unit 7 interfaces with the
computer connected to the peripheral device control
device 3. The computer interface unit 7 has, as
computer interfaces, SCSI, RS232C, and Centronics
interfaces. The computer interface unit 7 has the
20 above-mentioned three different interfaces, and
information from each interface is supplied to the CPU
1003 via the connector 1007 and the data bus 1054. The
CPU 1003 performs various kinds of control on the basis
of the received contents.

- Operation of Core Unit Based on Information from
Formatter Unit

The formatter unit 8 has a function of developing command data of, e.g., a document file supplied from
5 the above-mentioned computer interface unit 7 into image data. When the CPU 1003 determines that data sent from the computer interface unit 7 via the data bus 1054 is data associated with the formatter unit, it transfers the data to the formatter unit via the
10 connector 1008. The formatter unit 8 develops the transferred data onto an image data memory.

A sequence for receiving information from the formatter unit 8, and performing image formation onto an output sheet will be described below. Image
15 information from the formatter unit 8 is transmitted onto the signal line 1064 via the connector 1008 as a multi-valued signal having two values (00H, FFH). The signal on the signal line 1064 is input to the selector 1014 or 1017. The selector 1014 and 1017 are
20 controlled by an instruction from the CPU 1003. Thereafter, the same processing as that for the facsimile unit is performed, and a detailed description thereof will be omitted.

- Operation of Core Unit Based on Information from
25 Image Memory Unit

A case will be explained below wherein information is to be output to the image memory unit 9. The CPU

1003 communicates with the CPU 122 of the reader unit 1 via the communication IC 1002, and issues an original scan command. Upon reception of this command, the reader unit 1 causes the scanner unit 104 to scan an original, and outputs the read image information to the connector 120. Information from the reader unit 1 is input to the connector 1001 of the core unit 10. The image information input to the connector 1001 is supplied to the LUT 1011 via the multi-valued 8-bit signal line 1057 and the buffer 1010. A signal on the output signal line 1059 of the LUT 1011 is transferred to the image memory unit 9 via the selectors 1013, 1014, and 1016, and the connector 1009. Image information stored in the image memory unit 9 is supplied to the CPU 1003 via the connector 1009 and the CPU bus 1054. The CPU 1003 transfers the data supplied from the image memory unit 9 to the above-mentioned computer interface unit 7. The computer interface unit 7 transfers the received data to the computer (the work station 790 in this embodiment) via a desired one of the three different interfaces (SCSI, RS232C, and Centronics).

A case will be explained below wherein information is to be received from the image memory unit 9. Image information from the computer is supplied to the core unit 10 via the computer interface unit 7. When the CPU 1003 of the core unit 10 determines that data

supplied from the computer interface unit 7 via the CPU
bus 1054 is data associated with image memory unit 9,
it transfers the data to the image memory unit 9 via
the connector 1009. The image memory unit 9 transfers
5 an 8-bit multi-valued signal on the signal line 1064 to
the selector 1014 or 1017 via the connector 1009. The
output signal from the selector 1014 or 1017 is output
to the printer unit 2, and image formation is performed
onto an output sheet, in accordance with an instruction
10 from the CPU 1003 in the same manner as the
above-mentioned processing for the facsimile unit 4.

The arrangement of the facsimile unit 4 shown in
Fig. 1 will be described below with reference to the
block diagram shown in Fig. 5.

15 Fig. 5 is a block diagram for explaining the
detailed arrangement of the facsimile unit 4 shown in
Fig. 1.

The facsimile unit 4 is connected to the core unit
10 via a connector 400, and exchanges various signals
20 with the core unit 10. A signal line 451 is a
bidirectional two-valued image signal line. A buffer
401 separates the bidirectional signal line 451 into an
output signal line 452 from the facsimile unit 4 and an
input signal line 453 to the facsimile unit 4. Signals
25 on the signal lines 452 and 453 are input to a selector
402, and the selector 402 selects one of the two input
signals in accordance with an instruction from a CPU

412. When two-valued information from the core unit 10 is to be stored in one of memories A 405 to D 408, the selector 402 selects the signal on the signal line 453. When data is to be transferred from one memory (one of the memories A 405 to D 408) to another memory, the selector 402 selects the signal on the signal line 452. The output signal from the selector 402 is input to a variable magnification circuit 403, and is subjected to variable magnification processing. The variable magnification circuit 403 converts the resolution of data to be transmitted in correspondence with that of a receiving facsimile unit when facsimile transmission is performed at a reading resolution of 400 DPI of the reader unit 1. A signal on an output signal line 454 of the variable magnification circuit 403 is stored in one of the memories A 405, B 406, C 407, and D 408, or a memory circuit obtained by cascade-connecting two memories under the control of a memory controller 404. The memory controller 404 has four functions, i.e., a first mode for exchanging data between the memories A 405 to D 408 and a CPU bus 462 in accordance with an instruction from the CPU 412, a second mode for exchanging data with a CODEC bus 463 of a CODEC 411 having encoding and decoding functions, a third mode for storing two-valued video input data on the signal line 454 in one of the memories A 405 to D 408 under the control of a timing generating circuit 409, and a

fourth mode for reading out the memory contents of one of the memories A 405 to D 408, and outputting the readout contents onto a readout signal line 452. Each of the memories A 405 to D 408 has a capacity of 2
5 Mbytes, and stores an A4-size image or equivalent at a resolution of 400 DPI. The timing generating circuit 409 is connected to the connector 400 via a signal line 459, is started by control signals HSYNC, HEN, VSYNC, and VEN from the core unit 10, and generates signals
10 for realizing the following two functions. One function is a function of storing an image signal from the core unit 10 in one or two of the memories A 405 to D 408, and the other function is a function of reading out an image signal from one of the memories A 405 to D
15 408, and transmitting the readout signal onto the signal line 452. A dual port memory 410 is connected to the CPU 1003 of the core unit 10 via a signal line 461, and is also connected to the CPU 412 of the facsimile unit 4 via the signal line 462. The two CPUs
20 exchange commands via the dual port memory 410. A SCSI controller 413 interfaces with a hard disk drive connected to the facsimile unit 4 shown in Fig. 1, and stores data to be transmitted or received by the facsimile unit. The CODEC 411 reads out image
25 information stored in one of the memories A 405 to D 408, encodes the readout information by a desired one of MH, MR, and MMR methods, and stores encoded

information in one of the memories A 405 to D 408.
Also, the CODEC 411 reads out encoded information
stored in one of the memories A 405 to D 408, decodes
the readout information by a desired one of the MH, MR,
5 and MMR methods, and stores the decoded information,
i.e., image information in one of the memories A 405 to
D 408. A MODEM 414 has a function of modulating
encoded information from the CODEC 411 or a hard disk
drive connected to the SCSI controller 413 so as to
10 transmit it onto a telephone line, and a function of
demodulating information sent from an NCU 415 into
encoded information, and transferring the encoded
information to the CODEC 411 or the hard disk drive
connected to the SCSI controller 413. The NCU 415 is
15 directly connected to the telephone line, and exchanges
information with an exchanger arranged in a telephone
office according to a predetermined protocol.

An example of facsimile transmission processing
will be described below.

20 A two-valued image signal from the reader unit 1
is input from the connector 400, and is supplied to the
buffer 401 via the signal line 451. The buffer 401
outputs a signal onto the signal line 453 via the
signal line 451 according to setting data from the CPU
25 412. The signal on the signal line 453 is supplied to
the selector 402, and is then output to the variable
magnification circuit 403. The variable magnification

circuit 403 converts an image signal at the resolution of 400 DPI of the reader unit 1 into an image signal with a resolution for facsimile transmission. A signal output from the variable magnification circuit 403 via the signal line 454 is stored in the memory A 405 under the control of the memory controller 404. The storage timing in the memory A 405 is generated by the timing generating circuit 409 on the basis of a timing signal transmitted from the reader unit 1 via the signal line 459. The CPU 412 connects the memories A 405 and B 406 of the memory controller 404 to the bus line 463 of the CODEC 411. The CODEC 411 reads out image information from the memory A 405, encodes the readout information by the MR method, and writes the encoded information in the memory B 406. After A4-size image information is encoded by the CODEC 411, the CPU 412 connects the memory B 406 of the memory controller 404 to the CPU bus 462. The CPU 412 sequentially reads out the encoded information from the memory B 406, and transfers the readout information to the MODEM 414. The MODEM 414 modulates the encoded information, and transmits the modulated information onto the telephone line via the NCU 415 as facsimile information.

An example of facsimile reception processing will be described below.

Information sent from the telephone line is input to the NCU 415, and is connected to the facsimile unit

4 in a predetermined protocol by the NCU 415.
Information from the NCU 415 is supplied to the MODEM
414, and is demodulated. The CPU 412 stores
information from the MODEM 414 in the memory C 407 via
5 the CPU bus 462. When information for one frame is
stored in the memory C 407, the CPU 412 controls the
memory controller 404 to connect the data line 457 of
the memory C 407 to the line 463 of the CODEC 411. The
CODEC 411 sequentially reads out encoded information in
10 the memory C 407 and decodes the readout information.
Then, the CODEC 411 stores the decoded information as
image information in the memory D 408. The CPU 412
communicates with the CPU 1003 in the core unit 10 via
the dual port memory 410 to perform a setting operation
15 for printing an image from the memory D 408 by the
printer unit 2 via the core unit 10. Upon completion
of the setting operation, the CPU 412 starts the timing
generating circuit 409 to output a predetermined timing
signal from a signal line 460 to the memory controller
20 404. The memory controller 404 reads out image
information from the memory D 408 in synchronism with
the signal from the timing generating circuit 409, and
transmits the readout information onto the signal line
452. The signal on the signal line 452 is input to the
25 buffer 401, and is output to the connector 400 via the
signal line 451. Since the output operation of the
signal from the connector 400 to the printer unit 2 has

already been described in the description of the core unit 10, a detailed description thereof will be omitted.

5 The detailed arrangement and operation of the file unit 5 will be described below with reference to the block diagram shown in Fig. 6.

Fig. 6 is a block diagram for explaining the detailed arrangement of the file unit 5 shown in Fig. 1.

10 The file unit 5 is connected to the core unit 10 via a connector 500, and exchanges various signals with the core unit 10. A signal line 551 is a bidirectional 8-bit multi-valued image signal line, and is connected to a buffer 501. A multi-valued image signal is input
15 to a compression circuit 503 via the buffer 501 and a multi-valued input signal line 555, and is converted from multi-valued image information into two-valued compressed information. The compressed information is output to a selector 505. A signal line 552 is a
20 bidirectional two-valued image signal line, and is connected to a buffer 502. A two-valued image signal is input to the selector 505 via the buffer 502 and a two-valued input signal line 557. The selector 505 selects one of three different signals, i.e., a signal
25 on an output signal line 561 from the compression circuit 503, a signal on the output signal line 557 from the buffer 502, and a signal on an output signal

line 562 from a buffer 512 in accordance with an instruction from a CPU 516, and supplies the selected signal to a memory controller 510. The signal from the selector 505 is also input to a selector 511 via an
5 output signal line 563. When compressed information obtained by compressing 8-bit multi-valued information from the core unit 10 is to be stored in one of memories A 506 to D 509, the selector 505 selects a signal on the signal line 561. When two-valued
10 information is to be stored in a memory, the selector 505 selects a signal on the signal line 557. When information from the man-machine interface unit 6 shown in Fig. 1 is to be stored in a memory, the selector 505 selects a signal on the signal line 562. A signal on
15 the signal line 563 is stored in one of the memories A 506, B 507, C 508, and D 509, or a memory circuit obtained by cascade-connecting two memories under the control of the memory controller 510. The memory controller 510 has four functions, i.e., a mode for
20 exchanging data between the memories A 506 to D 509 and a CPU bus 560 in accordance with an instruction from the CPU 516, a mode for exchanging data with a CODEC bus 570 of a CODEC 517 for performing encoding and decoding, a mode for storing a signal on the signal
25 line 563 in one of the memories A 506 to D 509 under the control of a timing generating circuit 514, and a mode for reading out the memory contents of one of the

memories A 506 to D 509, and outputting the readout contents onto a signal line 558. Each of the memories A 506 to D 509 has a capacity of 2 Mbytes, and stores an A4-size image or equivalent at a resolution of 400
5 DPI. The timing generating circuit 514 is connected to the connector 500 via a signal line 553, is started by control signals (HSYNC, HEN, VSYNC, and VEN) from the core unit 10, and generates signals for realizing the following two functions. One function is a function of
10 storing information from the core unit 10 in one or two of the memories A 506 to D 509, and the other function is a function of reading out an image signal from one of the memories A 506 to D 509, and transmitting the readout signal onto the signal line 558. A connector
15 513 exchanges signals with the man-machine interface unit 6 shown in Fig. 1. Image information is input to the buffer 512, and a command is input to a communication circuit 518. A signal line 569 is a bidirectional image signal line. When the buffer 512
20 receives image information from the man-machine interface unit 6, it outputs the image information onto the signal line 562. When image information is to be output from the file unit 5 to the man-machine interface unit 6, information on a signal line 568 is
25 transferred via the buffer 512 and the connector 513. A dual port memory 515 is connected to the CPU 1003 of the core unit 10 via a signal line 554, and is also

connected to the CPU 516 of the file unit 5 via a
signal line 560. The CPUs 1003 and 516 exchange
commands via the dual port memory 515. A SCSI
controller 519 interfaces with an external recording
5 device 520 connected to the file unit 5 shown in
Fig. 1. More specifically, the external recording
device 520 comprises a magnetooptical disk, and stores
data such as image information. The CODEC 517 reads
out image information stored in one of the memories A
10 506 to D 509, and encodes the readout information by a
desired one of the MH, MR, and MMR methods.
Thereafter, the CODEC 517 stores encoded information in
one of the memories A 506 to D 509. Also, the CODEC
517 reads out encoded information stored in one of the
15 memories A 506 to D 509, and decodes the readout
information by one of the MH, MR, and MMR methods.
Thereafter, the CODEC 517 stores the decoded
information in one of the memories A 506 to D 509 as
image information.

20 An example of processing for storing file
information in the external recording device 520 will be
described below.

 An 8-bit multi-valued image signal from the reader
unit 1 is input via the connector 500, and is input to
25 the buffer 501 via the signal line 551. The buffer 501
outputs the signal on the signal line 551 onto the
signal line 555 according to setting data of the CPU.

516. The signal on the signal line 555 is input to the compression circuit 503, and is converted into two-valued compressed information (the signal line 561). The compressed information on the signal line 561 is input to the selector 505, and is then transferred to the memory controller 510. The signal on the signal line 563 is input to the memory controller 510, and is also input to the man-machine interface unit 6 via the selector 511, the buffer 512, and the connector 513. The memory controller 510 causes the timing generating circuit 514 to generate timing signals in accordance with the signals received from the core unit 10 via the signal line 553, and to output the generated signals onto a signal line 559.

15 The memory controller 510 stores the compressed signal on the signal line 563 in the memory A 506 in accordance with the generated timing signals. The CPU 516 connects the memories A 506 and B 507 of the memory controller 510 to the bus line 570 of the CODEC 517.

20 The CODEC 517 reads out compressed information from the memory A 506, and encodes the readout information by the MR method. The encoded information is written in the memory B 507. Upon completion of encoding by the CODEC 517, the CPU 516 connects the memory B 507 of the memory controller 510 to the CPU bus 560. The CPU 516 sequentially reads out the encoded information from the memory B 507, and transfers the readout information to

25

the SCSI controller 519. The SCSI controller 519 records the encoded information on a signal line 572 in the external recording device 520.

5 An example of print processing for reading out information from the external recording device 520, and outputting the readout information from the printer unit 2 will be described below.

Upon reception of a search·print instruction of information from the man-machine interface unit 6, the
10 CPU 516 receives encoded information from the external recording device 520 via the SCSI controller 519, and transfers the encoded information to the memory C 508. At this time, the memory controller 510 connects the CPU bus 560 to a bus 566 of the memory C 508 according
15 to an instruction from the CPU 516. Upon completion of transfer of the encoded information to the memory C 508, the CPU 516 controls the memory controller 510 to connect the memories C 508 and D 509 to the bus 570 of the CODEC 517. The CODEC 517 sequentially reads out
20 the encoded information from the memory C 508, and decodes the readout information. Thereafter, the CODEC 517 transfers the decoded information to the memory D 509. The CPU 516 communicates with the CPU 1003 of the core unit 10 via the dual port memory 515 to perform a
25 setting operation for printing out an image from the memory D 509 by the printer unit 2 via the core unit 10. Upon completion of the setting operation, the CPU

516 starts the timing generating circuit 514 to output predetermined timing signals from the signal line 559 to the memory controller 510. The memory controller 510 reads out the decoded information from the memory D 509 in synchronism with the signals from the timing generating circuit 514, and transmits the readout information onto the signal line 558. The signal on the signal line 558 is input to an expansion circuit 504, and the decoded information is expanded. The output signal from the expansion circuit 504 is input to the buffer 501 via a signal line 556, and is then output to the connector 500 via the signal line 551. Since the output operation of the signal from the connector 500 to the printer unit 2 has already been described in the description of the core unit 10, a detailed description thereof will be omitted.

The arrangement and display processing operation of the man-machine interface unit 6 shown in Fig. 1 will be described below with reference to the block diagram shown in Fig. 7.

Fig. 7 is a block diagram for explaining the detailed arrangement of the man-machine interface unit 6 shown in Fig. 1.

An example of processing for receiving image information from the file unit 5, and displaying the received image information on a display will be described below.

A connector 600 is connected to the connector 513 of the file unit 5 via a cable. A CPU 615 causes a communication circuit 610 to communicate with the CPU 516 of the file unit via a CPU bus 660 so as to set an image input mode. An image signal output from the connector 600 via a bidirectional signal line 651 is input to a buffer 601. A signal output from the buffer 601 is input to a reduction circuit 602 via a signal line 652. The reduction circuit 602 reduces the input image signal in correspondence with the display size of an FLC (ferroelectric liquid crystal) display 608. The output signal from the reduction circuit 602 is input to a dual port memory 605 via a signal line 654 and a buffer 603. In this case, the signal is written in the dual port memory 605 in accordance with signals output from a timing generating circuit 604 via a signal line 658. The timing generating circuit 604 is started by timing signals transmitted from the file unit 5 via a signal line 657. When image information for one line is written in the dual port memory 605, the timing generating circuit 604 issues a DMA (direct memory access) request to the CPU 516 by a signal output via a signal line 666. The CPU 615 causes its internal DMAC (direct memory access controller) to transfer image information from the dual port memory 605 to a DRAM (dynamic random-access memory) 612 via the CPU bus 660. Upon repetition of the above-mentioned operation, image

information for one frame is stored in the DRAM 612.
The FLC display 608 is connected to a connector 607 via
a cable 662. An image request signal (to be referred
to as a signal FHSYNC hereinafter) transmitted through
5 a signal line 665 is output to a timing generating
circuit 609. Upon reception of the signal FHSYNC, the
timing generating circuit 609 outputs a DMA request
signal to the CPU 615 via a signal line 667. Upon
reception of the DMA request signal, the CPU 615 starts
10 the internal DMAC to DMA-transfer the line address of
1-line data to be displayed on the FLC display 608, and
image information for one line from the DRAM 612 to a
FIFO memory 606 via the CPU bus 660. The timing
generating circuit 609 outputs timing signals via a
15 signal line 663 to read out image information for one
line from the FIFO memory 606, and transfers the
readout information to the FLC display 608. The FLC
display 608 determines an image display position on the
basis of the line address to be displayed, and displays
20 the image information for one line. Upon repetition of
the above-mentioned operation, image information for
one frame is displayed on the entire screen of the FLC
display.

An example of transfer processing for transferring
25 image information in the man-machine interface unit 6
to the file unit 5 will be described below.

The CPU 615 communicates with the CPU 516 of the file unit 5 via the communication circuit 610 to set an image output mode. Image information in the man-machine interface unit 6 is stored in the DRAM 612.

5 Upon reception of a DMA request signal from the timing generating circuit 604 via the signal line 666, the CPU 615 transfers image information for one line from the DRAM 612 to the dual port memory 606. Then, the CPU 615 reads out image information from the dual port

10 memory 605 via a signal line 656 in accordance with a read timing signal output from the timing generating circuit 604 via the signal line 658. The image signal output from the dual port memory 605 is output to the connector 600 via the signal line 656, the buffer 603,

15 and the buffer 601. Since the internal operation of the file unit 5 has already been described, a detailed description thereof will be omitted.

A keyboard interface 618 and a mouse interface 616 respectively communicate with a keyboard and a pointing device (mouse), and issue operation instructions and

20 the like to the man-machine interface unit 6.

The arrangement and operation of the computer interface unit 7 shown in Fig. 1 will be described below with reference to the block diagram in Fig. 8.

25 Fig. 8 is a block diagram showing the detailed arrangement of the computer interface unit 7 shown in Fig. 1.

A connector A 700 and a connector B 701 are those for the SCSI interface. A connector C 702 is one for the Centronics interface. A connector D 703 is one for the RS232C interface. A connector E 707 is one for
5 connecting the core unit 10. A SCSI interface 704 has the two connectors 700 and 701. When a device having a plurality of SCSI interfaces is to be connected, it is cascade-connected using the connectors 700 and 701. When one peripheral device control device 3 is
10 connected to a single computer, the connector 700 is connected to the computer via a cable, and a terminator is connected to the connector 701, or vice versa. Information input from the connector 700 or 701 is output to the SCSI interface 704 via a signal line 751.
15 The SCSI interface 704 executes a procedure based on a SCSI protocol, and then, outputs data to the connector E 707 via a signal line 754. The connector 707 is connected to the CPU bus 1053 of the core unit 10, and the CPU 1003 receives, from the CPU bus 1053,
20 information input to the SCSI interface connector (the connector 700 or 701). Data is output from the CPU 1003 of the core unit 10 to the SCSI connector (the connector 700 or 701) in a procedure opposite to that described above. A Centronics interface 705 is
25 connected to the connector C 702 via a signal line 752. The Centronics interface 705 receives data according to a procedure based on a predetermined protocol, and

outputs the data to the connector E 707 via the signal line 754. The connector 707 is connected to the CPU bus 1053 of the core unit 10, and the CPU 1003 of the core unit 10 receives, from the CPU bus 1053, information input to the Centronics interface connector C (the connector 702).

An RS232C interface 708 is connected to the connector D 703 via a signal line 753. An RS232C interface 706 receives data in a procedure based on a predetermined protocol, and outputs data to the connector E 707 via the signal line 754. The connector 707 is connected to the CPU bus 1053 of the core unit 10, and the CPU 1003 of the core unit 10 receives, from the CPU bus 1053, information input to the RS232C interface connector (the connector 703). Data from the CPU 1003 of the core unit 10 is output to the RS232C interface connector (the connector 703) in a procedure opposite to that described above.

The arrangement and operation of the formatter unit 8 shown in Fig. 1 will be described below with reference to the block diagram shown in Fig. 9.

Fig. 9 is a block diagram for explaining the detailed arrangement of the formatter unit 8 shown in Fig. 1.

Fig. 9 is a block diagram for explaining the detailed arrangement of the formatter unit 8 shown in Fig. 1.

Data from the above-mentioned computer interface unit 7 is discriminated by the core unit 10. When the core unit 10 discriminates that the data from the unit 7 is data associated with the formatter unit 8, the CPU 1003 of the core unit 10 transfers data from the computer to a dual port memory 803 via the connector 1012 of the core unit 10 and a connector 800 of the formatter unit 8. A CPU 809 of the formatter unit 8 receives code data supplied from the computer via the dual port memory 803. The CPU 809 sequentially develops the code data to image data, and transfers the image data to a memory A 806 or B 807 via a memory controller 808. Each of the memories A 806 and B 807 has a memory capacity of 2 Mbytes, and one memory (the memory A 806 or B 807) can store an A4-size image at a resolution of 400 DPI. When an A3-size image at a resolution of 400 DPI is to be stored, the memories A 806 and B 807 are cascade-connected, and image data is developed onto these memories. The above-mentioned memory control is executed by the memory controller 808 in accordance with an instruction from the CPU 809. When turning of character data, figure data, or the like is required upon development of image data, the data is turned by a turning circuit 804, and thereafter, is transferred to the memory A 806 or B 807. Upon completion of development of image data onto the memory A 806 or B 807, the CPU 809 controls the

memory controller 808 to connect a data bus line 858 of
the memory A 806 or a data bus line 859 of the memory B
807 to an output line 855 of the memory controller 808.
Then, the CPU 809 communicates with the CPU 1003 of the
5 core unit 10 via the dual port memory 803 to set a mode
for outputting image information from the memory A 806
or B 807. The CPU 1003 of the core unit 10 sets a
print out mode in the CPU 122 using an internal
communication function of the CPU 122 of the reader
10 unit 1 via the communication circuit 1002 in the core
unit 10. The CPU 1003 of the core unit 10 starts a
timing generating circuit 802 via the connector 1013
and the connector 800 of the formatter unit 8. The
timing generating circuit 802 generates timing signals
15 for reading out image information from the memory A 806
or B 807 in accordance with signals from the core unit
10. Image information from the memory A 806 or B 807
is input to a variable magnification circuit 801 via
the signal lines 858 and 855. The variable
20 magnification circuit 801 performs variable
magnification processing in accordance with an
instruction from the CPU 809, and transfers the
processed information to the core unit 10 via a signal
line 851 and the connector 800. Since the output
25 operation from the core unit 10 to the printer unit 2
has already been described in the description of the

core unit 10, a detailed description thereof will be omitted.

The arrangement and operation of the image memory unit 9 shown in Fig. 1 will be described below with reference to the block diagram shown in Fig. 10.

Fig. 10 is a block diagram for explaining the detailed arrangement of the image memory unit 9 shown in Fig. 1.

The image memory unit 9 is connected to the core unit 10 via a connector 900, and exchanges various signals with the core unit 10. A signal line 951 is a bidirectional 8-bit multi-valued image signal line, and a signal on the signal line 951 is input to a buffer 901. A multi-valued image signal output from the buffer 901 is stored in a memory 904 via a signal line 954 under the control of a memory controller 905. The memory controller 905 has three functions, i.e., a mode for exchanging data between the memory 904 and a CPU bus 957 in accordance with an instruction from a CPU 906, a mode for storing an image signal transmitted via the signal line 954 in the memory 904 under the control of a timing generating circuit 902, and a mode for reading out an image signal from the memory 904 and outputting the readout signal onto a signal line 955. The memory 904 has a storage capacity of 32 Mbytes, and stores an A3-size image or equivalent at a resolution of 400 DPI and 256 gray levels. The timing generating

circuit 902 is connected to the connector 900 via a signal line 952, is started by control signals (HSYNC, HEN, VSYNC, and VEN) from the core unit 10, and generates signals for achieving the following two functions. One function is a function for storing information from the core unit 10 in the memory 904, and the other function is a function for outputting an image signal read out from the memory 904 onto the signal line 955. A dual port memory 903 is connected to the CPU 1003 of the core unit 10 via a signal line 953, and is also connected to the CPU 906 of the image memory unit 9 via the signal line 957. The CPUs 1003 and 906 exchange commands via the dual port memory 903. An example of transfer processing for storing image information in the image memory unit 9, and transferring the stored information will be described below.

An 8-bit multi-valued image signal from the reader unit 1 is input from the connector 900, and is then input to the buffer 901 via the signal line 951. The buffer 901 outputs the signal to the memory controller 905 via the signal line 954 in accordance with setting data of the CPU 906. The memory controller 905 causes the timing generating circuit 902 to generate timing signals in accordance with signals transmitted from the core unit 10 via the signal line 952. A signal on the signal line 954 is stored in the memory 904 in

accordance with the generated timing signals. The CPU 906 connects the memory 904 of the memory controller 905 to the CPU bus 957. The CPU 906 sequentially reads out image information from the memory 904, and
5 transfers the readout information to the dual port memory 903. The CPU 1003 of the core unit 10 reads out image information in the dual port memory 903 of the image memory unit 9 via the signal line 953 and the connector 900, and transfers the readout information to
10 the computer interface unit 7. The information transfer processing to the computer interface unit 7 has already been described, and a detailed description thereof will be omitted. An example of image output processing for outputting image information sent from
15 the computer via the printer unit 2 will be described below.

Image information sent from the computer is supplied to the core unit 10 via the computer interface unit 7. The CPU 1003 of the core unit 10 transfers the
20 image information to the dual port memory 903 of the image memory unit 9 via the CPU bus 1053 and the connector 1013. At this time, the CPU 906 controls the memory controller 905 to connect the CPU bus 957 to the bus of the memory 904. The CPU 906 transfers the image
25 information from the dual port memory 903 to the memory 904 via the memory controller 905. Upon completion of transfer of image information to the memory 904, the

CPU 906 controls the memory controller 905 to connect the data line of the memory 904 to the signal line 955. The CPU 906 communicates with the CPU 1003 of the core unit 10 via the dual port memory 903 to perform a
5 setting operation for printing out an image from the memory 904 by the printer unit 2 via the core unit 10. Upon completion of the setting operation, the CPU 906 starts the timing generating circuit 902 to output predetermined timing signals to the memory controller
10 905 via a signal line 956. The memory controller 905 reads out image information from the memory 904 in synchronism with the signals from the timing generating circuit 902, and transmits the readout information onto the signal line 955. The signal on the signal line 955
15 is input to the buffer 901, and is then output to the connector 900 via the signal line 951. The output operation from the connector 900 to the printer unit 2 has already been described in the description of the core unit 10, and a detailed description thereof will
20 be omitted.

In the above-mentioned arrangement, as various setting/input operation means, the operation unit 124 of the reader unit 1, a keyboard 619 of the file unit 5, the keyboard of the computer or work station 790
25 connected to the connectors A 700 to D 703 of the computer interface unit 7 are available. These operations means are connected to the CPU 1003 of the

core unit 10 via the corresponding communication means,
as has been described above in the corresponding
paragraphs.

5 The CPU 1003 of the core unit 10 always
communicates with the connected peripheral devices.
When an operation setting input is made by some
operation means, a corresponding command code is
transmitted to the CPU 1003. After command
interpretation, a sequence program is executed to
10 generate an operation command to an operation-requested
function. At this time, if priority order setting data
and operation inhibition setting data are registered in
the sequence program, operation matching with the
purpose of use of a user can be realized.

15 When image data is to be received from the
peripheral device control device using the third
function, if conditions set by each peripheral device
are sent in advance in a communication protocol,
various conditions are interpreted by the CPU 412 via
20 the MODEM 414 in a training sequence in a reception
mode. Furthermore, when the CPU 412 sends a command to
the CPU 1003 of the core unit 10 via the dual port
memory 410, the functions of this system can be
remote-controlled.

25 The image input/output control operation in the
image processing apparatus according to the present
invention will be described below.

In this embodiment, a case will be explained below wherein image information is input from the scanner input 104 to the file unit 5 via the core unit 10, while the formatter unit 8 develops command data of, e.g., a document file sent from the computer interface unit 7 into image data, and the image data is output to the printer unit 2 via the core unit 10.

The CPU 516 of the file unit 5 communicates with the CPU 1003 of the core unit 10 via the dual port memory 515 to generate an image input request. Upon generation of the image input request, as shown in Fig. 11, the CPU 516 of the file unit 5 transmits various parameters as a packet to the CPU 1003 of the core unit 10.

Fig. 11 is a view for explaining the format of an image input/output control command packet in the image processing apparatus according to the present invention.

As shown in Fig. 11, the image input/output control command packet includes an image input command code 2000, an image input/output management parameter group 2020, an image attribute information management parameter group 2030, an image processing management parameter group 2040, and the like. Each parameter group includes the following parameters.

More specifically, the image input/output management parameter group 2020 includes an image

request unit ID 2001 serving as an identification code
for discriminating a unit to be used in requested image
processing, an image transmitting side unit ID 2002
serving as an identification code for discriminating an
5 image transmitting side unit, and an image receiving
side unit ID 2003 serving as an identification code for
discriminating an image receiving side unit. In this
embodiment, the request unit ID 2001 corresponds to the
file unit, the image transmitting side unit corresponds
10 to the scanner unit, and the image receiving side unit
corresponds to the file unit.

The image attribute information management
parameter group 2030 includes delay quantities 2004 and
2005 of the horizontal and vertical scanning directions
15 for designating resolution conversion and defining
offsets of image information, the numbers 2006 and 2007
of pixels of the horizontal and vertical scanning
directions, resolutions 2008 and 2009 of the horizontal
and vertical directions of a requested image, and the
20 like.

Furthermore, the image processing management
parameter group 2040 includes a copy number parameter
2010 for designating the number of copies of an image,
a turning angle parameter 2011 serving as an image
25 turning processing request, a resolution conversion
parameter 2012, and the like. The CPU 516 transmits
the command packet with the above-mentioned format to

the CPU 1003 of the core unit 10. Upon reception of this command packet from the CPU 516 of the file unit 5, the CPU 1003 of the core unit 10 sends back a signal indicating that the packet was normally received to the CPU 516 of the file unit 5. Then, the CPU 1003 of the core unit 10 interprets the received command packets, and forms an image transmission job management table, as shown in Fig. 12. The CPU 1003 then registers the received command packet in the memory as a job.

Fig. 12 shows an example of the image transmission job management table in the image processing apparatus according to the present invention.

Referring to Fig. 12, a sequence step 2100 serves as a parameter for managing the progress state of the registered job. A job number 2101 serves as an identification number of the registered job. A registered image request ID 2102 is the same as the image request unit ID 2001. A registered image transmitting side unit ID 2103 is the same as the image transmitting side unit ID 2002. A registered image receiving side unit ID 2104 is the same as the image receiving side unit ID 2003. A resolution conversion unit 2105 serves as a parameter for defining if resolution conversion is performed by the image transmitting side unit or the image receiving side unit when a resolution conversion request is issued. Job status 2106 serves as information for managing the

executing state or execution result of the job. Image transmitting side unit status 2107 serves as a parameter reflecting the operating state of the image transmitting side unit.

5 Image receiving side unit status 2108 serves as a parameter reflecting the operating state of the image receiving side unit. The number 2109 of finished copies serves as a parameter indicating the number of
10 finished. A continuation flag 2110 serves as information for defining if a corresponding page is the last page of originals. A turning angle 2111 serves as a parameter indicating the turning angle of an image. The CPU 1003 of the core unit 10 forms such an image
15 transmission job management table, and also forms an image transmission parameter table shown in Fig. 13 for each of the image transmitting and receiving side units.

Fig. 13 shows an example of the image transmission
20 parameter table in the image processing apparatus according to the present invention.

Referring to Fig. 13, a resolution conversion designation 2200 is a parameter which is set in
25 accordance with the resolution conversion request in the image processing management parameter group 2040 in the command packet. A delay quantity parameter 2201 is set based on the delay quantity 2004 of the horizontal

scanning direction, which defines an offset of image information. A delay quantity parameter 2202 is set based on the delay quantity 2005 of the vertical scanning direction. A pixel number parameter 2203 is
5 set based on the number 2006 of pixels of the horizontal scanning direction. A pixel number parameter 2204 is set based on the number 2007 of pixels of the vertical scanning direction. A resolution parameter 2205 is set based on the
10 resolution 2008 of the horizontal direction of a requested image. A resolution parameter 2206 is set based on the resolution 2009 of the vertical direction of the requested image. A turning request parameter 2207 is set based on the turning angle 2011. A copy
15 number parameter 2208 is set based on the number 2010 of copies.

A case will be explained below wherein the CPU 809 of the formatter unit 8 communicates with the CPU 1003 of the core unit 10 via the dual port memory 803 to
20 issue an image output request. In this case, substantially the same description described above will be given although some parameters in the description of the image input request of the file unit 5 are changed.

The job priority setting control operation in the
25 multiple functions image processing apparatus according to the present invention will be described below with

reference to the flow chart in Fig. 14 and Figs. 15 to 17C.

Fig. 14 is a flow chart showing the job priority setting control sequence in the multiple functions
5 image processing apparatus according to the present invention. Note that (1) to (7) are step numbers.

In step (1), the CPU 1003 of the core unit 10 refers to the image transmission job management table and the image transmission parameter tables of the
10 image transmitting and receiving side units corresponding to the jobs in the image transmission job management table. In step (2), it is checked with reference to the sequence step 2100 if there are registered jobs. If N (NO) in step (2), the flow
15 returns to step (1); otherwise, the flow advances to step (3) to check if the number of registered jobs is "1". If it is determined in step (3) that only one job is currently registered, the flow advances to step (4), and the registered job is set to priority "1" as the
20 highest value. Thereafter, the flow advances to step (6) and subsequent steps.

If it is determined in step (3) that a plurality of jobs are registered, the execution priority levels of a plurality of currently registered jobs, excluding
25 the job being executed, are determined in the following order. The image transmission job management table shown in Fig. 12 and the image transmission parameter

table shown in Fig. 13 are stored in a memory (not shown; comprising, e.g., a ring buffer) of the core unit 10. The memory is designed to be able to store a plurality of sets of these tables, as shown in Fig. 15.

5 Also, a table pointer management area indicating the start addresses of corresponding table storage areas is prepared on the memory of the core unit 10, as shown in Fig. 16. The table pointer management area can time-serially store a plurality of pointers. More
10 specifically, the table storage addresses of the respective jobs are time-serially registered in the table pointer management area after the parameters are stored in the image transmission job management table and the image transmission parameter table. Therefore,
15 only when the image transmission job management table has significant contents, a pointer (storage address) is additionally stored in the table pointer management area. For this reason, at the time of step (5), the storage addresses are time-serially registered in the
20 table pointer management area in the generation order of jobs. Since the number of copies is proportional to the execution time of a job, the registered image transmission job management tables and the numbers 2208 of copies in the image transmission parameter tables
25 are sequentially referred to, and jobs are sorted in an ascending order from those with smaller numbers of copies, thereby re-sorting the pointers in the table

pointer management area. It is checked, with reference to the image transmitting side unit ID 2102 and the image receiving side unit ID 2104 in the image transmission job management table, if the image request
5 is an image input request (i.e., an image input from the reader unit 1) or an image output request (i.e., an image output to the printer unit 2). Based on this checking result, the re-sorted pointers in the table pointer management area are re-sorted again, so that
10 image input and output requests alternately appear. Figs. 17A to 17C show the re-sorting states of the pointers. In Figs. 17A to 17C, a numerical value in parentheses indicates the number of copies.

In step (6), it is checked with reference to
15 sequence step 2100 if there is a job which is being executed. If N in step (6), the flow advances to step (7).

In step (7), the pointer (storage address) registered at the head of the above-mentioned table
20 pointer management area is read out, and a job stored at the storage address is executed. After execution of the job, the flow returns to step (1).

In this embodiment, a case has been exemplified wherein image information is input from the scanner
25 unit 104 to the file unit 5 via the core unit 10, while the formatter unit 8 develops command data of, e.g., a document file sent from the computer interface unit 7

to image data, and the image data is output to the printer unit 2 via the core unit 10. However, the combination of image input/output operations is not limited to that in the above embodiment, and the same
5 processing can be realized between other image input and output units.

Also, the time required for processing may be estimated on the basis of the resolution of an image, the number of pixels, the presence/absence of turning,
10 the number of images, processing contents, and the like in each processing request, jobs may be sorted in an order from those with shorter times. Thereafter, the jobs may be re-sorted, so that input and output requests alternately appear.

15 The present invention is not limited to the above-mentioned embodiment, and various changes and modifications may be made within the scope of appended claims.



THIS SHEET HAS BEEN
REPLACED

6

WHAT IS CLAIMED IS:

1. An image processing apparatus comprising:
input means for inputting a plurality of jobs for
image processing;

5 storage means for storing the plurality of jobs
input by said input means; and

processing means for executing the plurality of
jobs stored in said storage means,

characterized by further comprising:

10 control means for sorting an execution order of
the plurality of jobs stored in said storage means in
accordance with times required for processing of each
of the jobs and/or whether contents of each of the jobs
correspond to an image input or an image output,

15 wherein said control means executes each of the
jobs according to the execution order of the plurality
of sorted jobs.

2. An apparatus according to claim 1,
20 characterized in that said control means sorts the
execution order of the plurality of jobs in an order
from a shorter time required for processing of each of
the jobs, and thereafter, sorts the execution order of
the plurality of jobs, so that the image input and the
25 image output alternately appears.

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

3. An apparatus according to claim 1,
characterized in that said control means estimates the
time required for processing of each of the jobs on the
basis of copy number information included in each of
5 the jobs.

4. An apparatus according to claim 1,
characterized in that said control means sorts the
execution order of jobs except for a job which is being
10 executed.

5. A method of processing multiple image data
representing a plurality of jobs, which include image
input and image output, and in which execution of the
jobs is sorted and carried out in accordance with the
natures of the jobs.

6. A method according to claim 5, wherein the
sorting is carried out on the basis of the time taken
for individual jobs.

7. A method according to claim 5 or claim 6,
wherein the sorting is carried out so that image input
and image output jobs are executed alternately.

This Sheet Has Been Replaced




9

IMAGE PROCESSING APPARATUS WITH MULTIPLE FUNCTIONS

ABSTRACT

An image processing apparatus for controlling an execution order of a plurality of processing operations comprises an input device for inputting a plurality of jobs for image processing, a storage device for storing the plurality of jobs input by the input device, a processing device for executing the plurality jobs stored in the storage device and a controller for sorting an execution order of the plurality of jobs stored in the storage device in accordance with times required for processing of each of the jobs and/or whether contents of each of the jobs correspond to an image input or an image output, wherein the controller executes each of the jobs according to the execution order of the plurality of sorted jobs.

This Sheet Has Been Replaced



81

FIG. 1

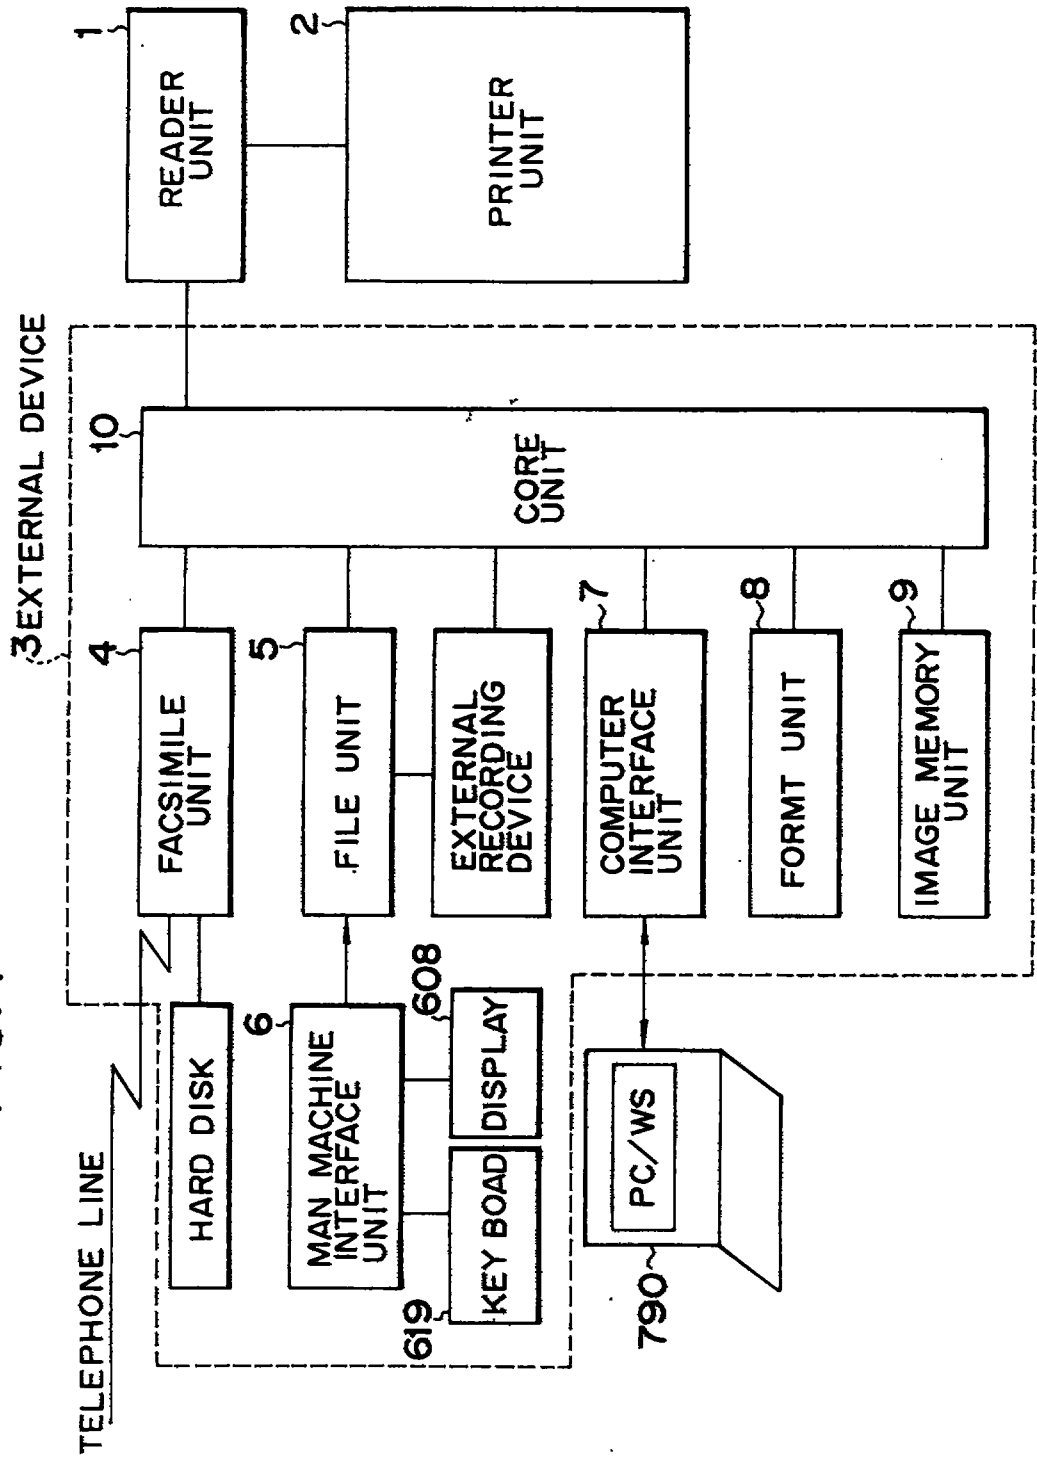


FIG. 2

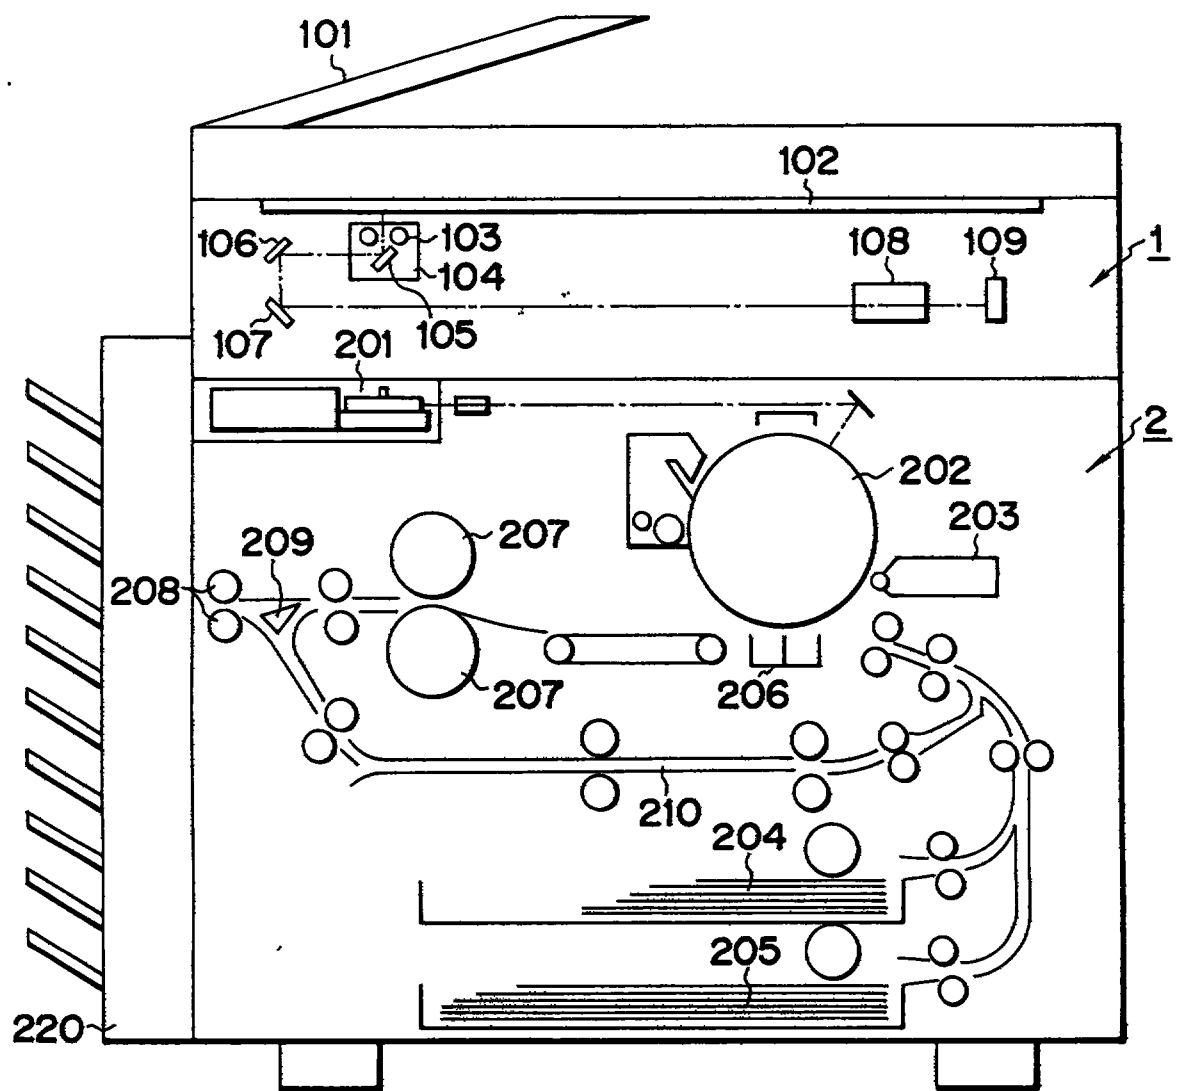
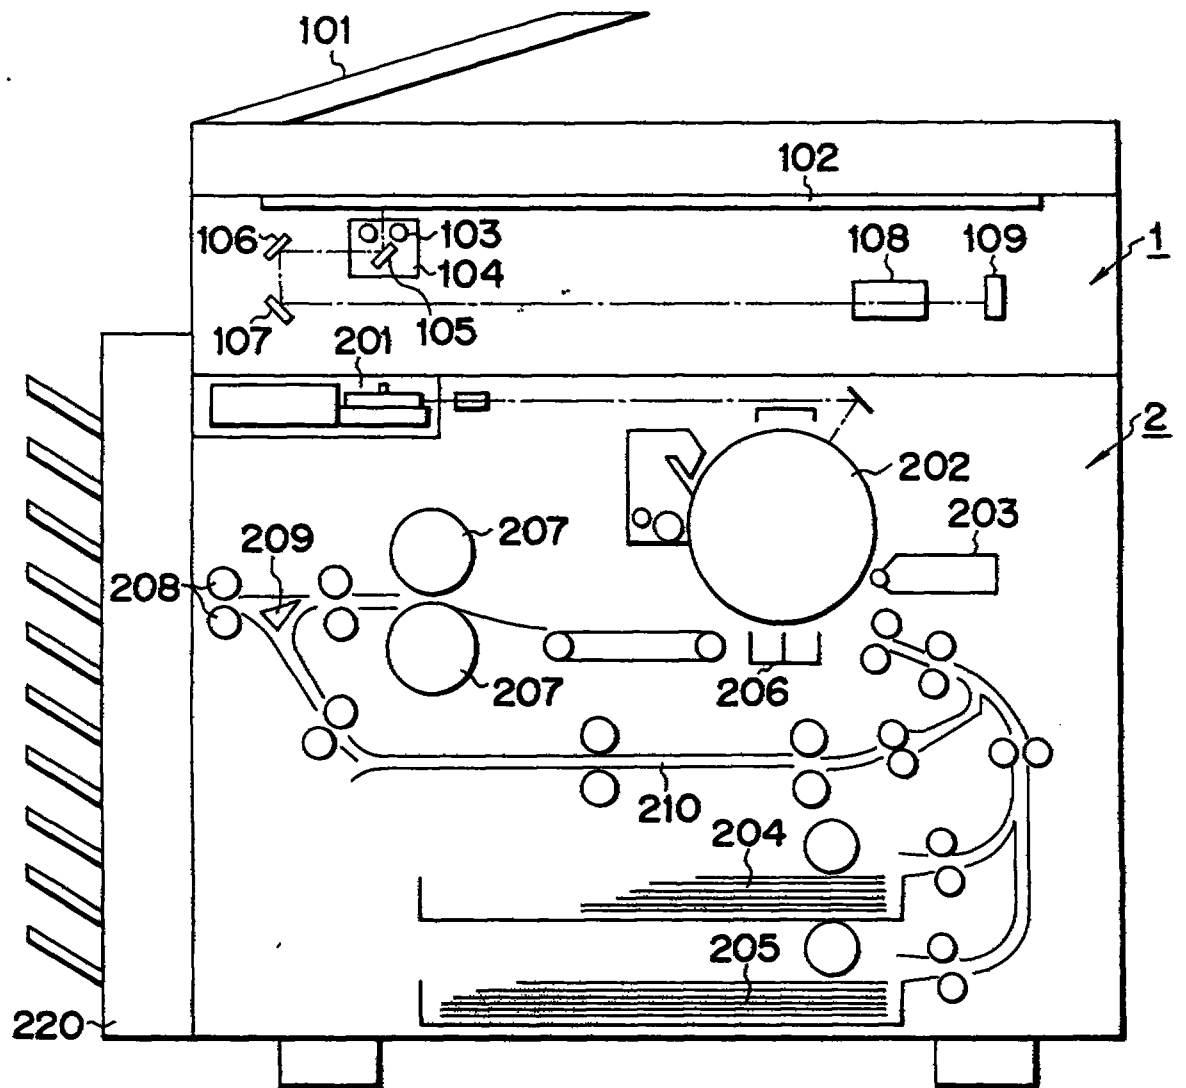


FIG. 2



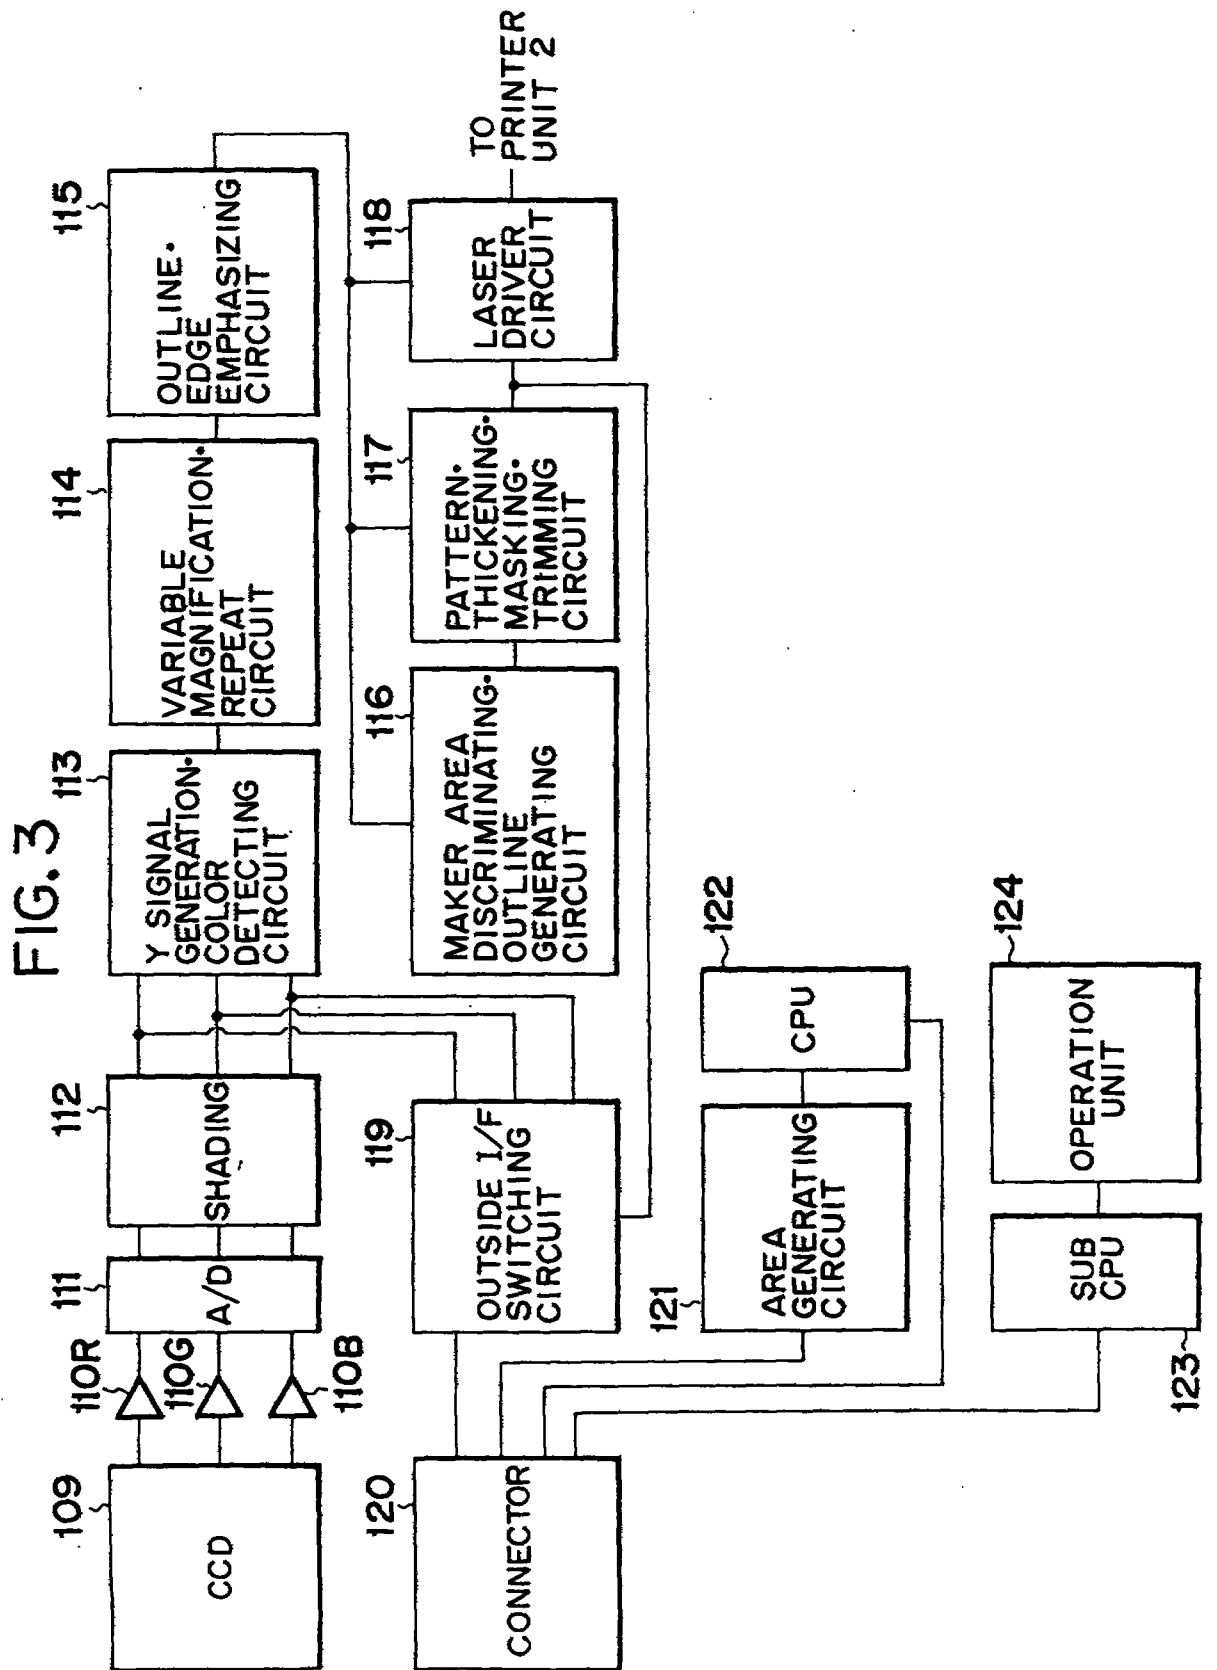
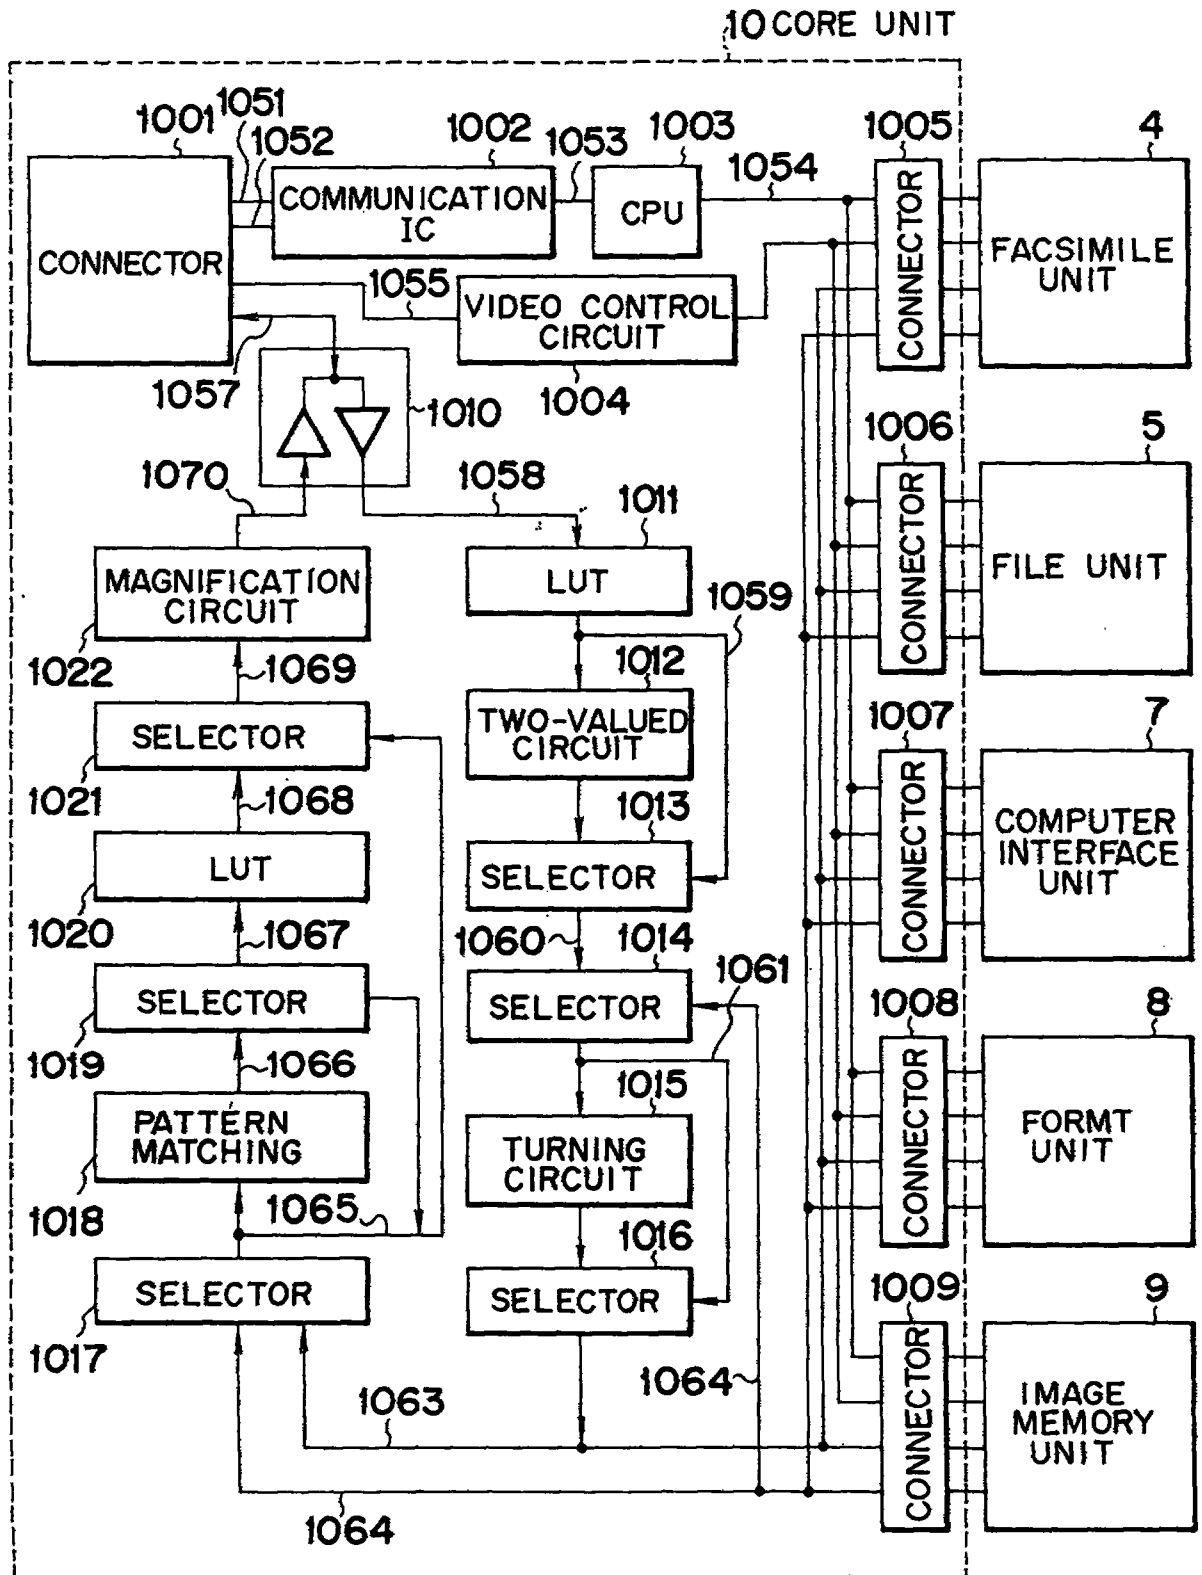


FIG. 4



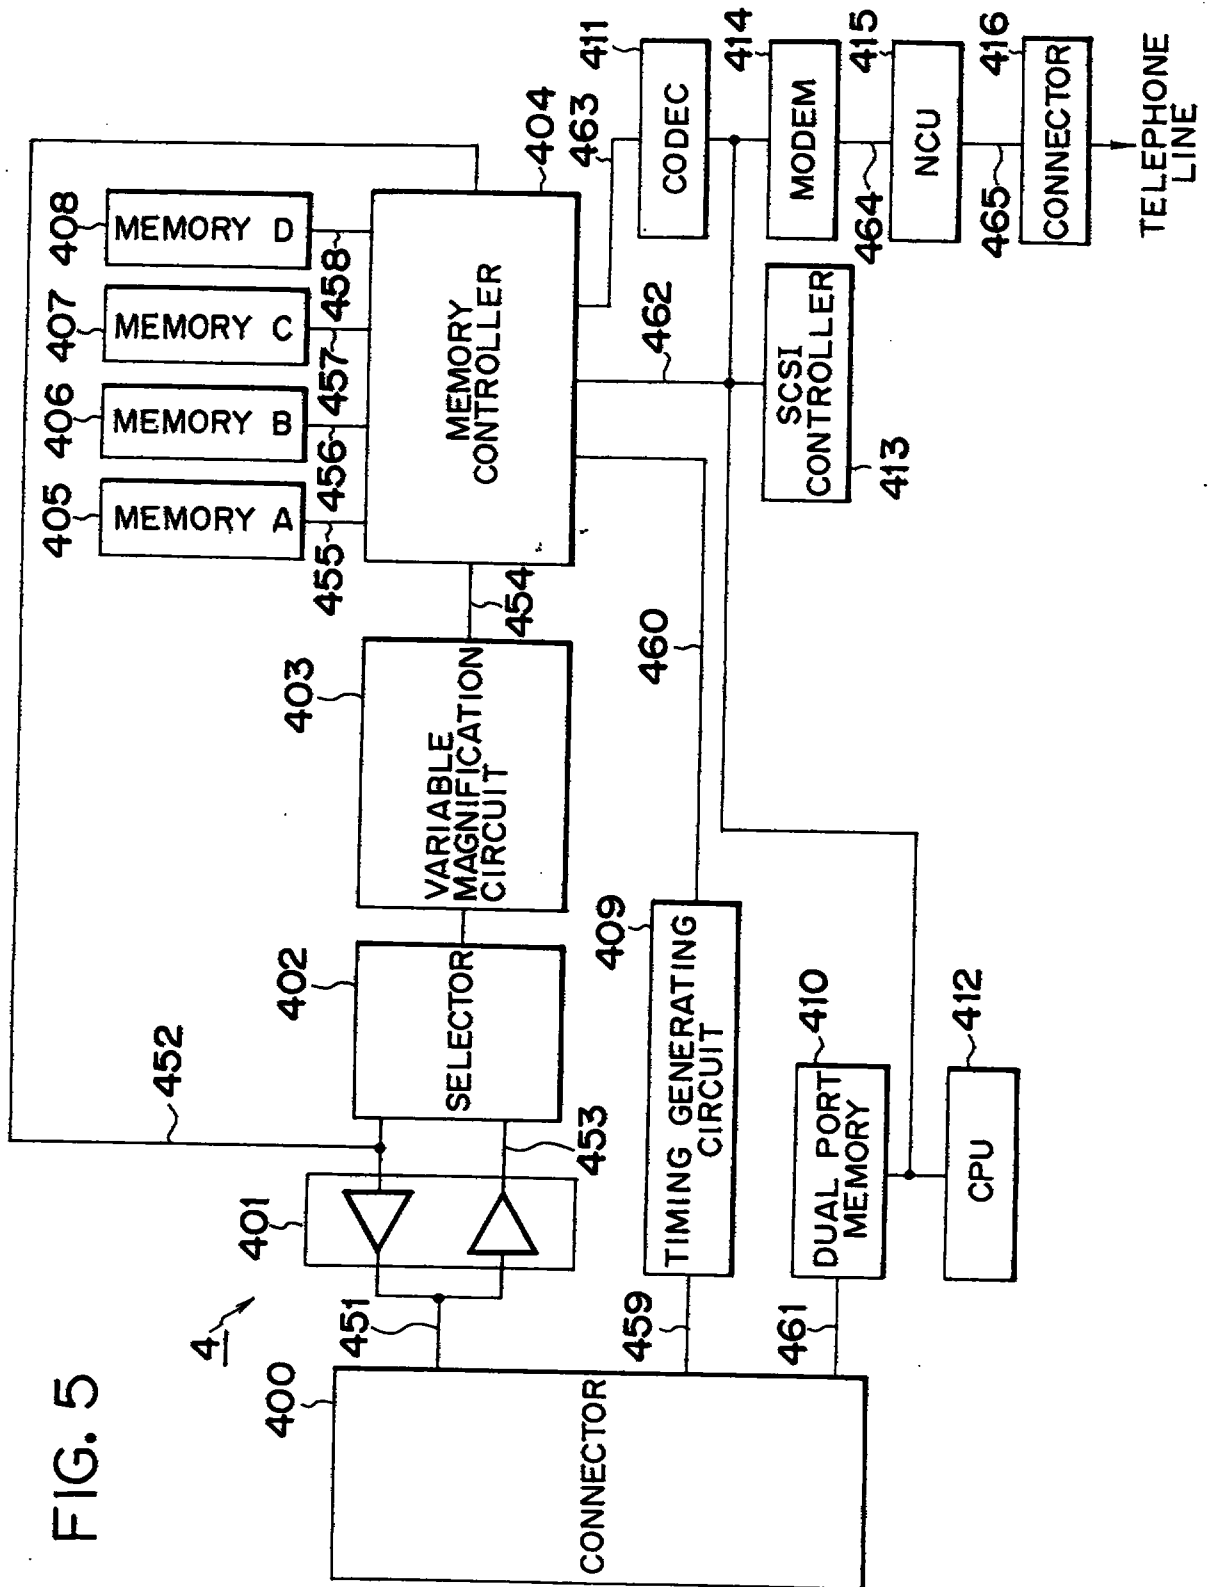


FIG. 6

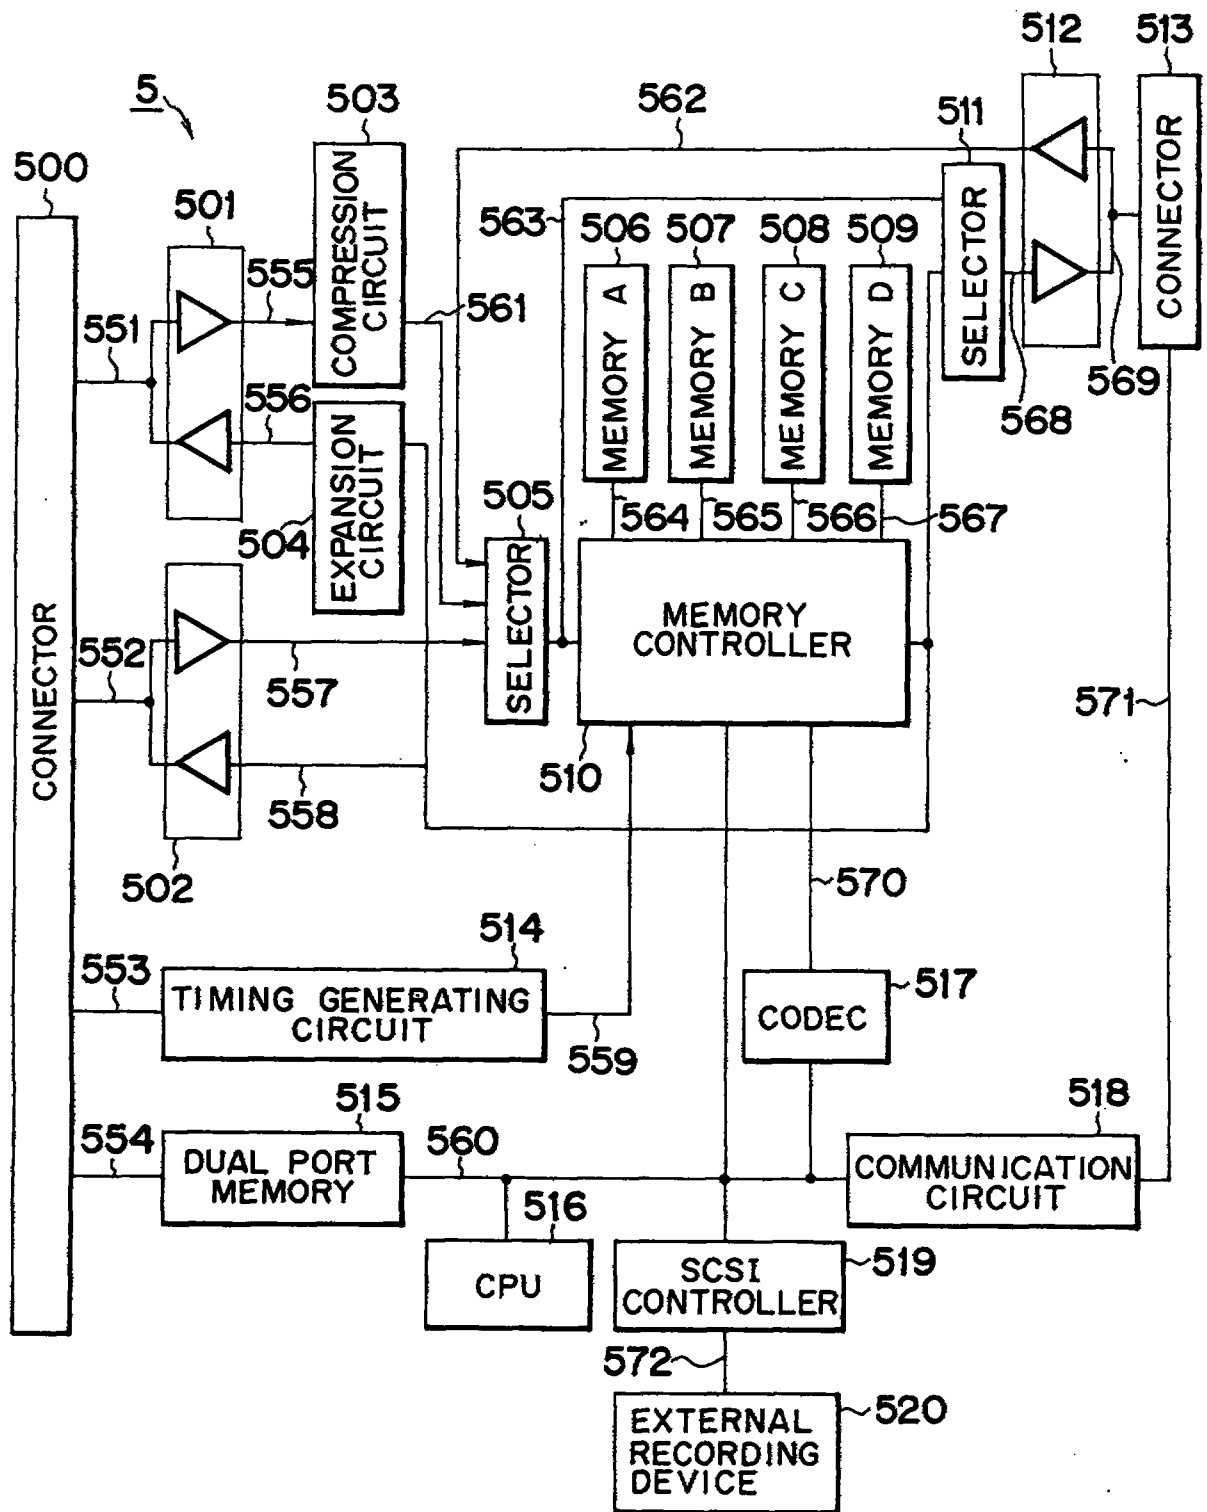


FIG. 7

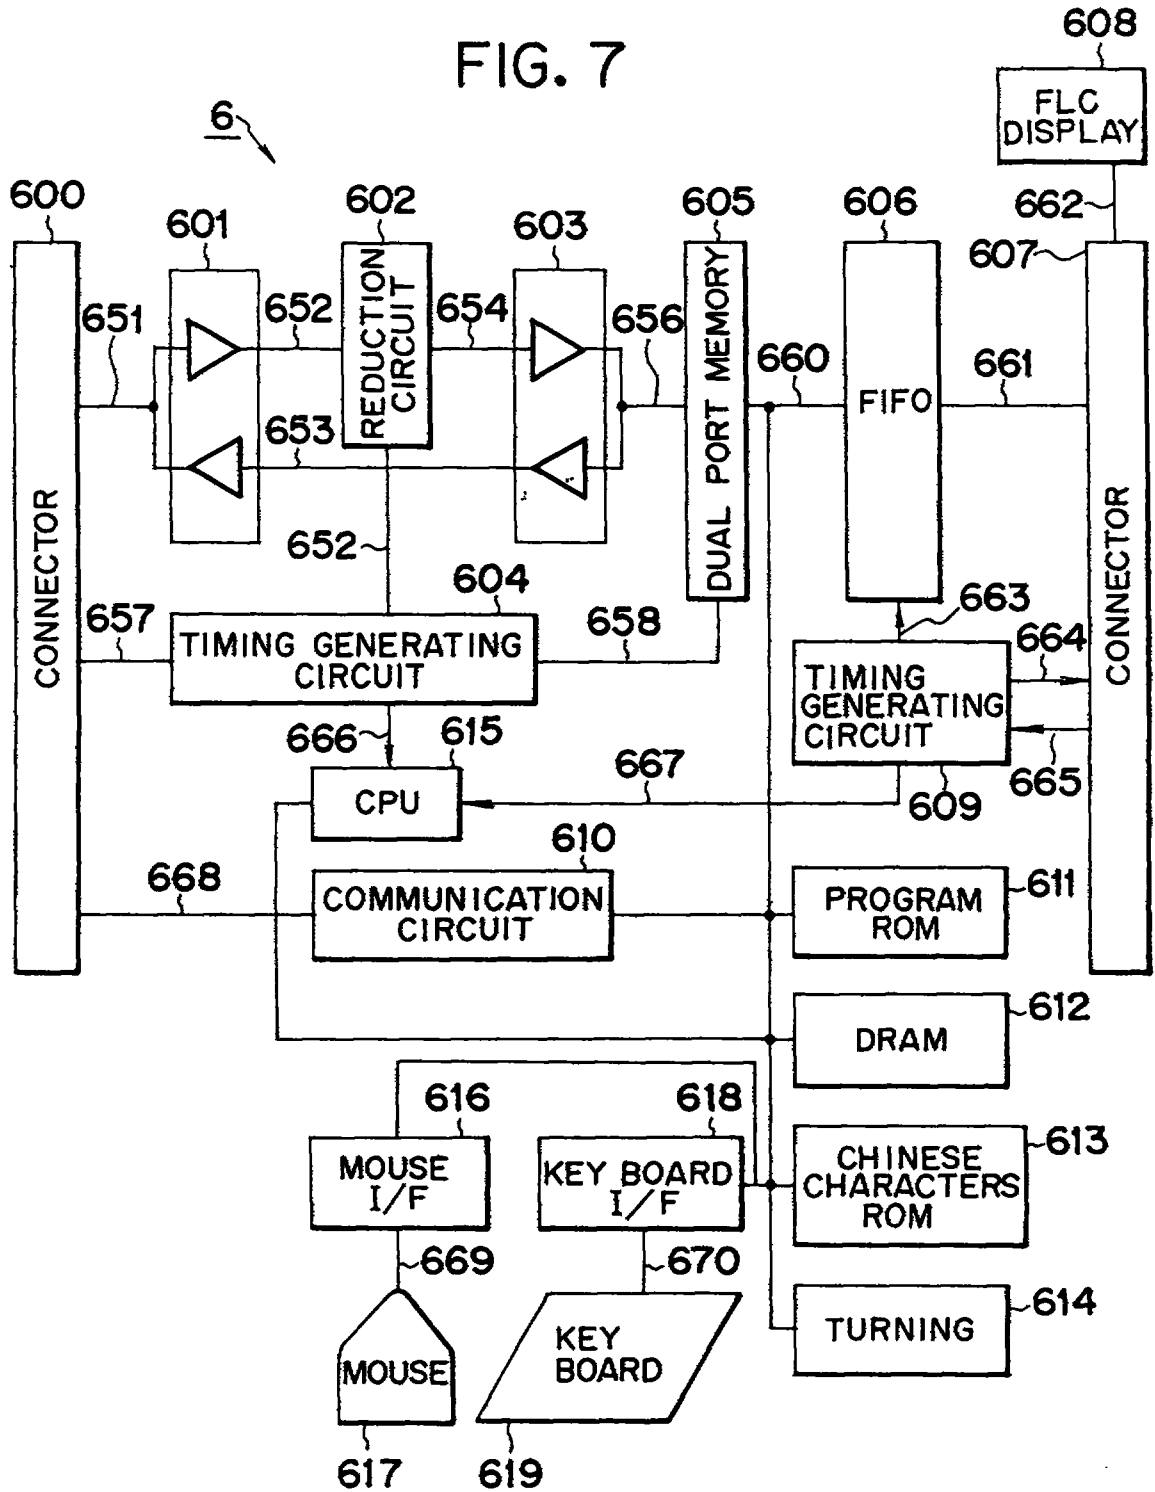


FIG. 8

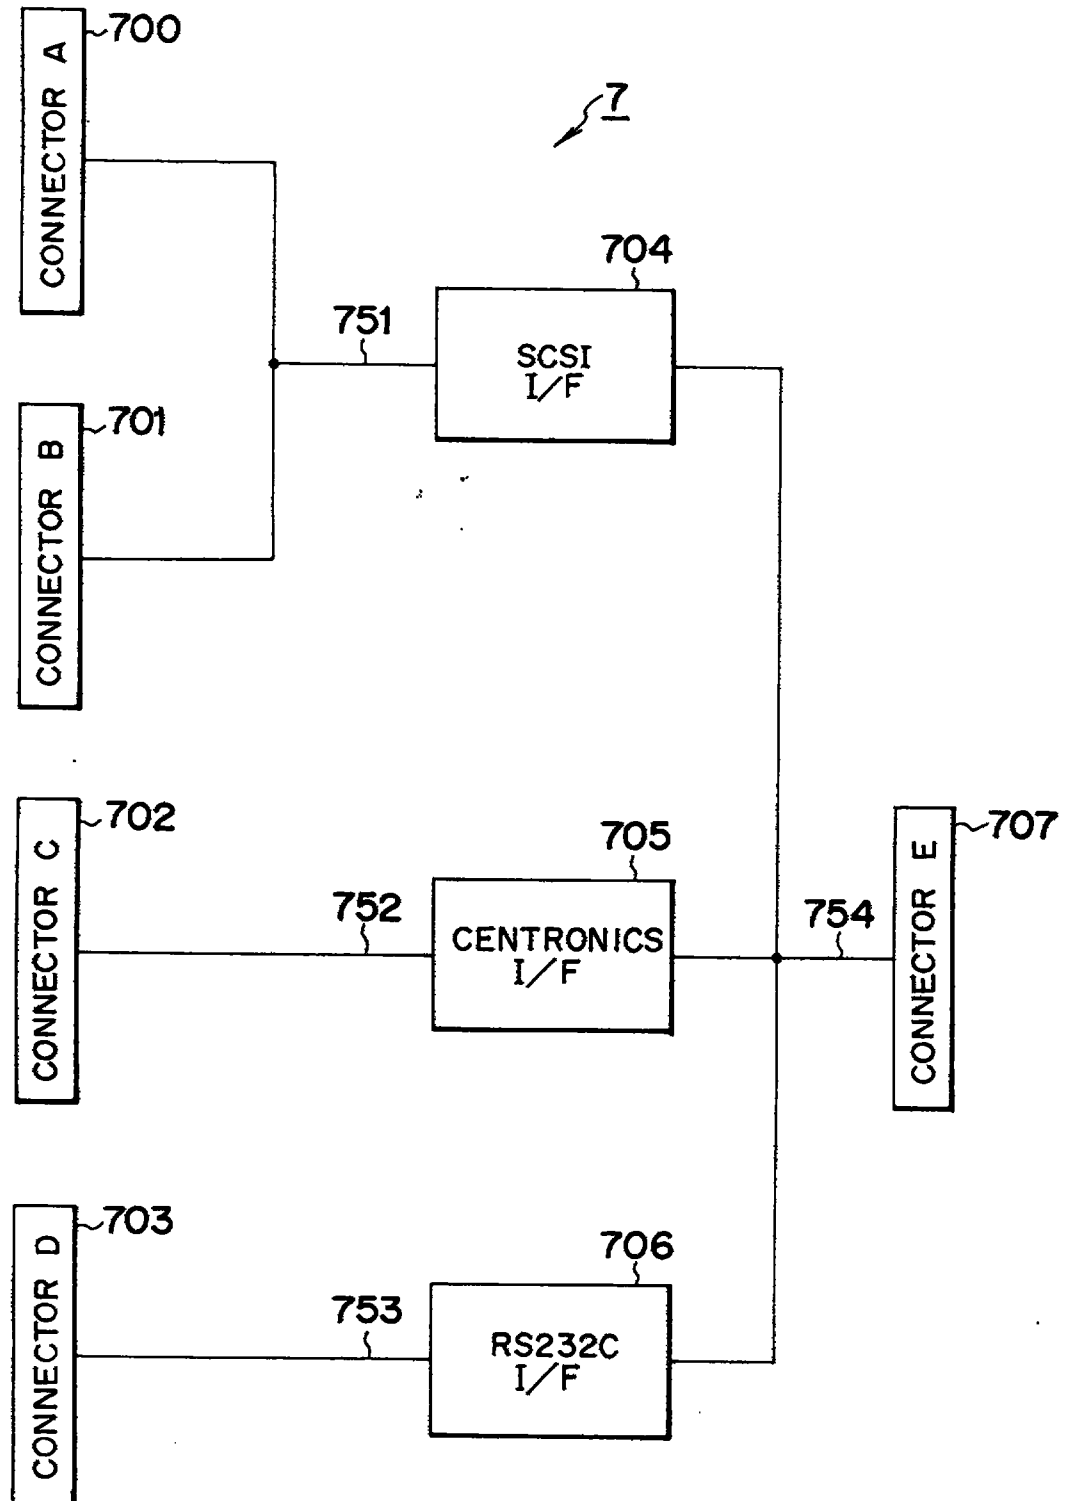


FIG. 9

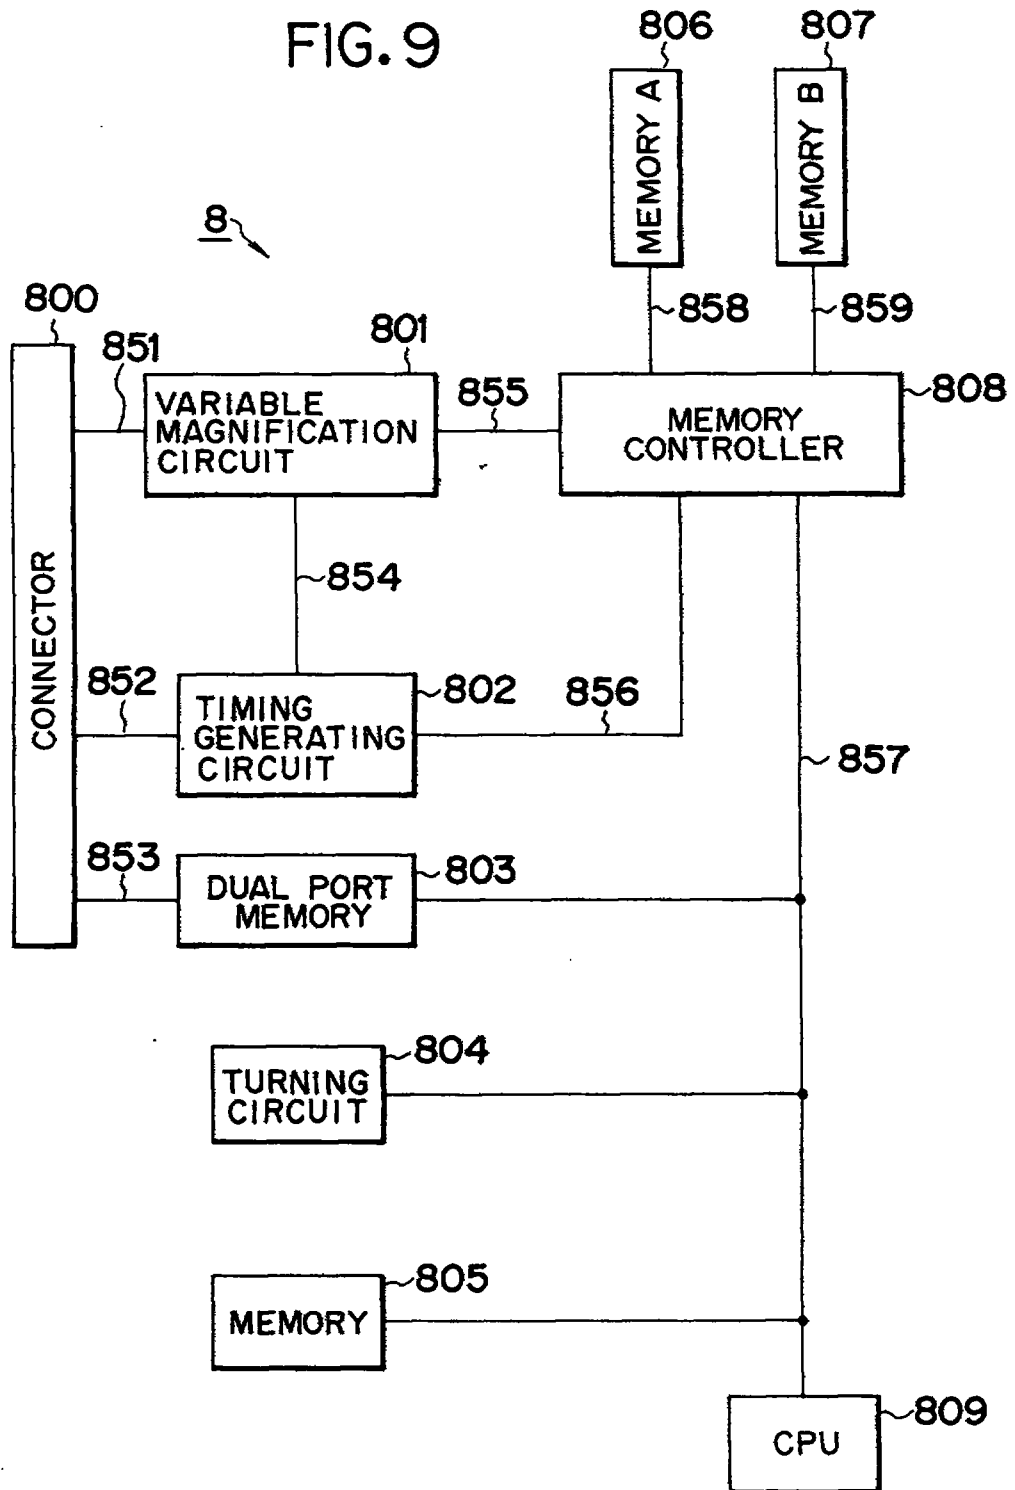


FIG.10

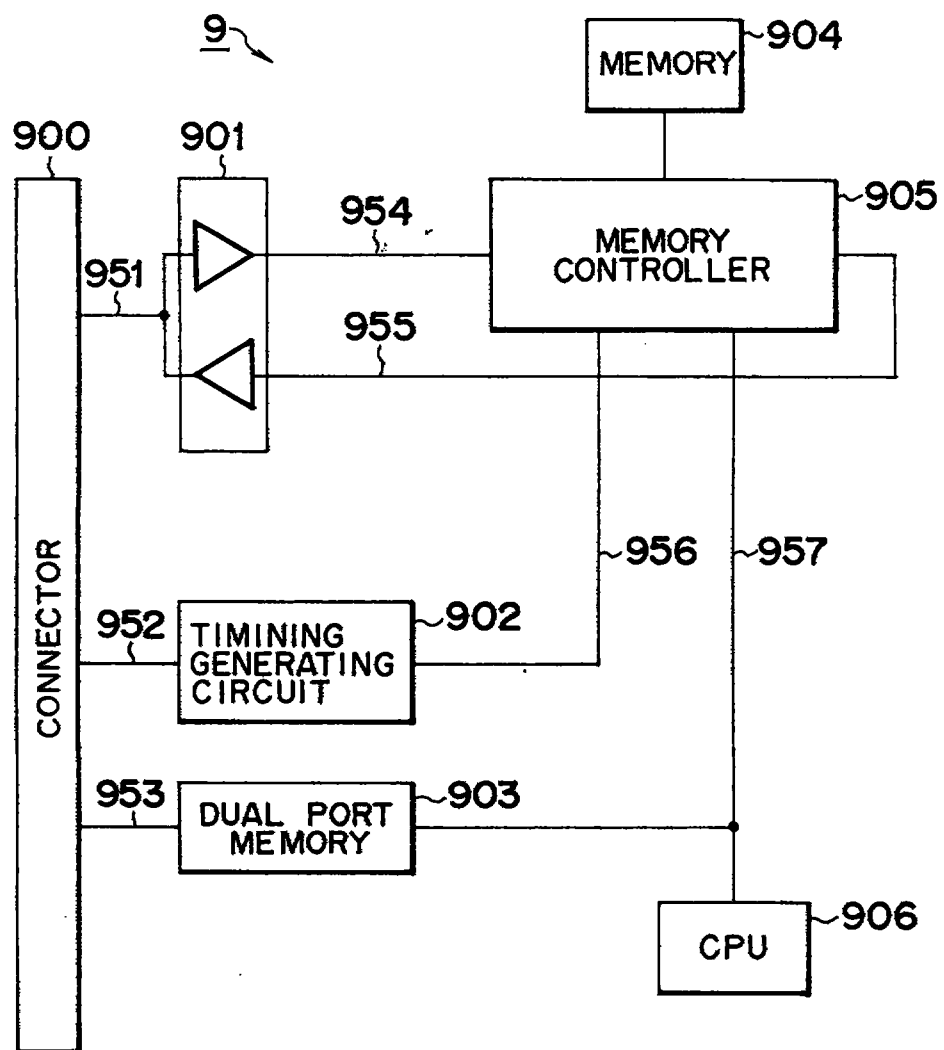


FIG.11

COMMAND	IMAGE INPUT REQUIREMENT COMMAND CODE	2000
IMAGE I/O MANAGEMENT	IMAGE REQUEST UNIT ID	2001
	IMAGE TRANSMITTING SIDE UNIT ID	2002
	IMAGE RECEIVING SIDE UNIT ID	2003
IMAGE ATTRIBUTE INFORMATION MANAGEMENT	DELAY QUANTITY OF HORIZONTAL SCANNING DIRECTION	2004
	DELAY QUANTITY OF VERTICAL SCANNING DIRECTION	2005
	NUMBER OF PIXELS OF HORIZONTAL SCANNING DIRECTION	2006
	NUMBER OF PIXELS OF VERTICAL SCANNING DIRECTION	2007
	RESOLUTION OF HORIZONTAL SCANNING DIRECTION	2008
	RESOLUTION OF VERTICAL SCANNING DIRECTION	2009
IMAGE PROCESSING MANAGEMENT	NUMBER OF COPY OF IMAGE	2010
	TURNING ANGLE	2011
	RESOLUTION CONVERSION	2012

FIG.12

SEQUENCE STEP	~ 2100
JOB NUMBER	~ 2101
IMAGE REQUEST UNIT ID	~ 2102
IMAGE TRANSMITTING SIDE UNIT ID	~ 2103
IMAGE RECEIVING SIDE UNIT ID	~ 2104
RESOLUTION CONVERSION UNIT	~ 2105
JOB STATUS	~ 2106
IMAGE TRANSMITTING SIDE STATUS	~ 2107
IMAGE RECEIVING SIDE STATUS	~ 2108
NUMBER OF FINISHED COPY	~ 2109
CONTINUATION FLAG	~ 2110
TURNING ANGLE	~ 2111

FIG.13

RESOLUTION CONVERSION DESIGNATION	~2200
DELAY QUANTITY OF HORIZONTAL SCANNING DIRECTION	~2201
DELAY QUANTITY OF VERTICAL SCANNING DIRECTION	~2202
NUMBER OF PIXELS OF HORIZONTAL SCANNING DIRECTION	~2203
NUMBER OF PIXELS OF VERTICAL SCANNING DIRECTION	~2204
RESOLUTION OF HORIZONTAL SCANNING DIRECTION	~2205
RESOLUTION OF VERTICAL SCANNING DIRECTION	~2206
TURNING REQUEST	~2207
NUMBER OF COPY	~2208

FIG.14

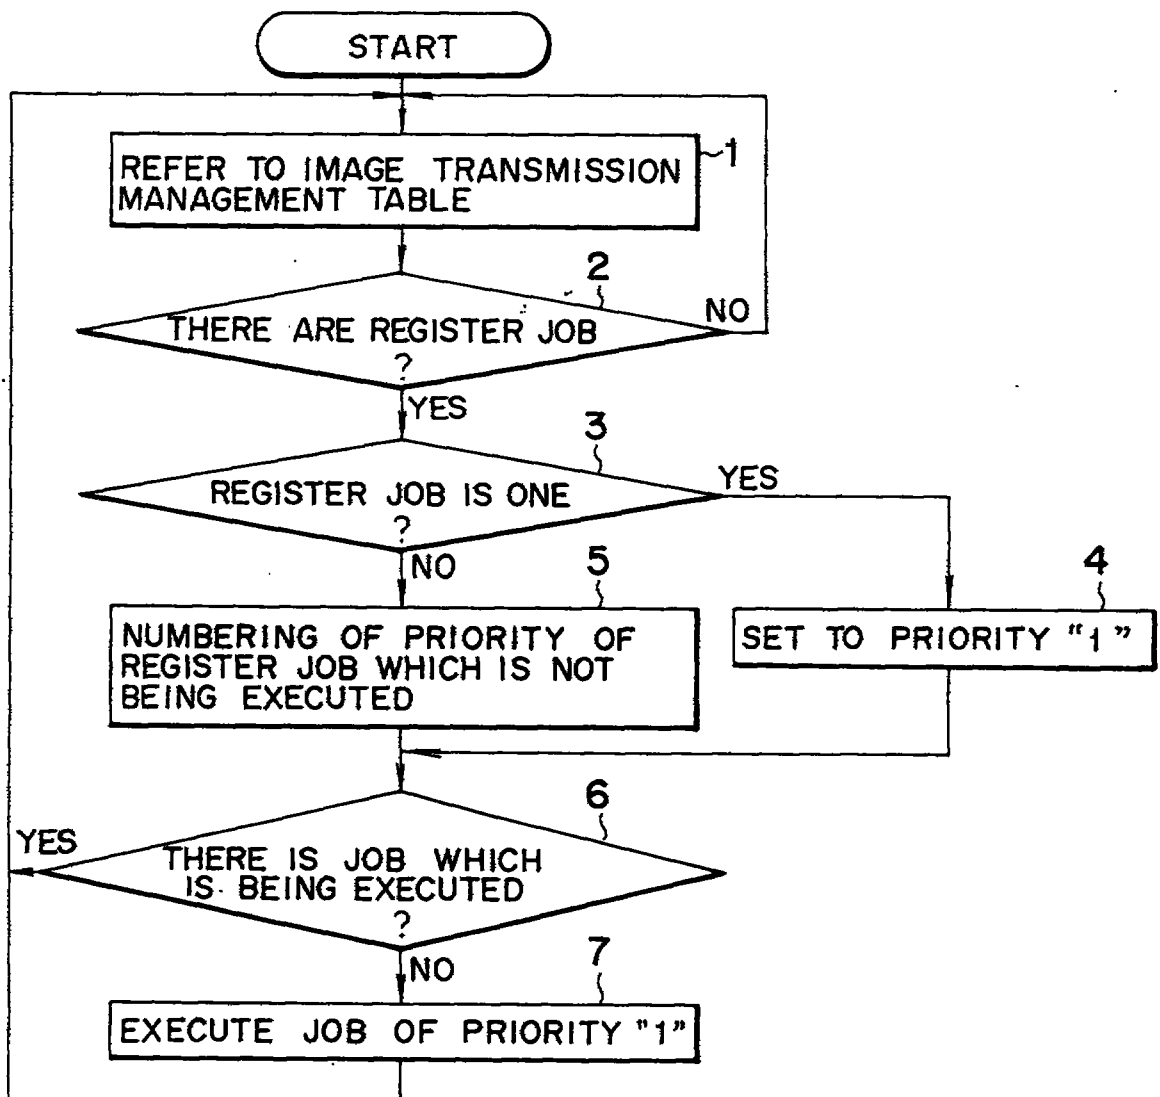


FIG.15




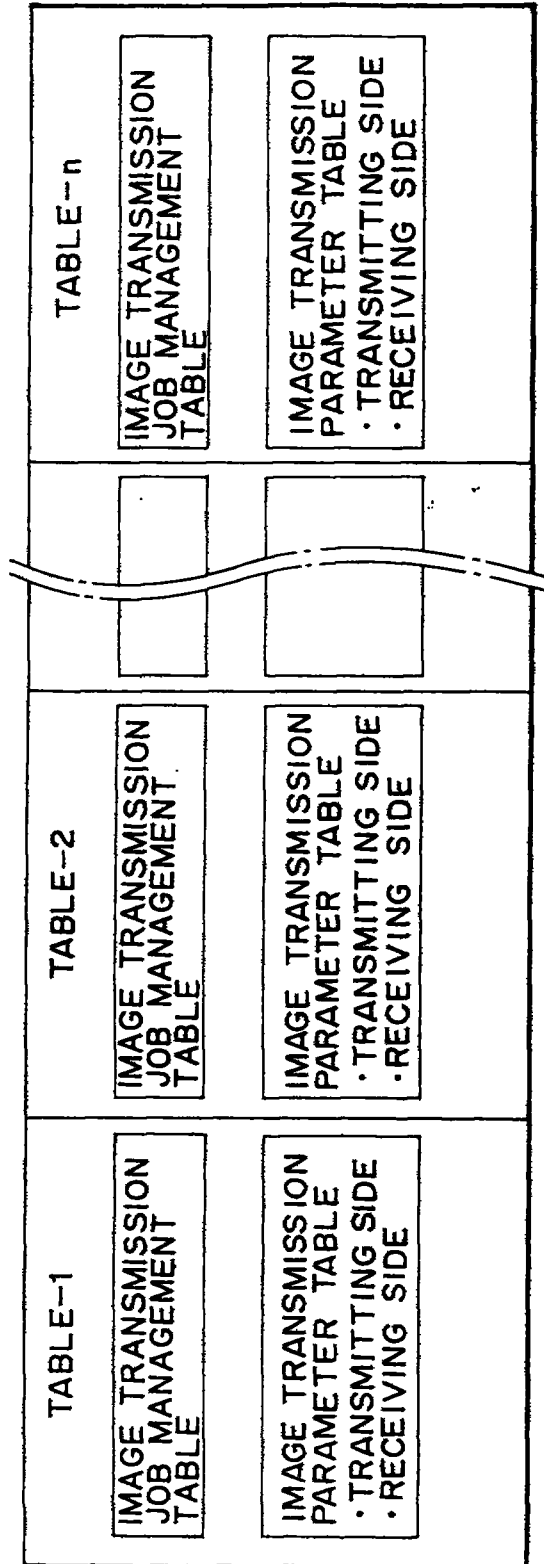


FIG.16

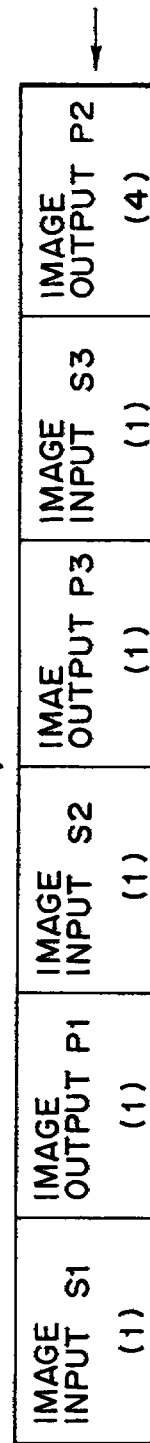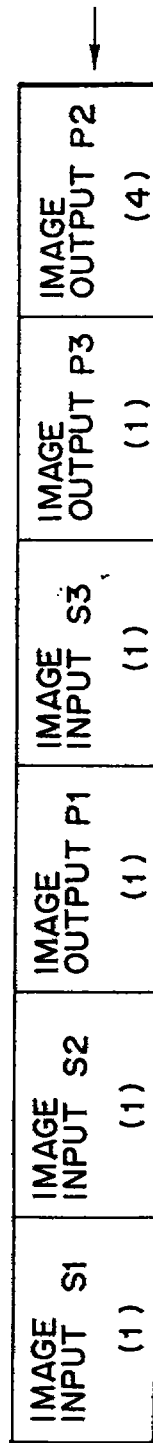

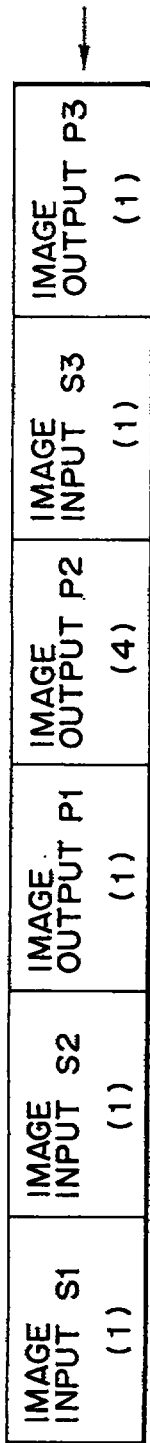

THIS SHEET HAS BEEN
REPLACED

9608911-7
REPLACEMENT SHEET

20 NOV 1996

- 62 -

IMAGE PROCESSING APPARATUS WITH MULTIPLE FUNCTIONS

ABSTRACT

An image processing apparatus for controlling an execution order of a plurality of processing operations comprises an input device for inputting a plurality of jobs for image processing, a storage device for storing the plurality of jobs input by the input device, a processing device for executing the plurality jobs stored in the storage device and a controller for sorting an execution order of the plurality of jobs stored in the storage device in accordance with times required for processing of each of the jobs and/or whether contents of each of the jobs correspond to an image input or an image output, wherein the controller executes each of the jobs according to the execution order of the plurality of sorted jobs.

FIGURE 17A, 17B AND 17C

This Sheet Has Been Replaced



7-1100000



60 -

9606911-7
REPLACEMENT SHEET

19 JUL 1997

CLAIMS

1. An image processing apparatus comprising:
input means (1, 4, 6, 7) for inputting a plurality of job instructions, each of the job instructions relating either to an image output operation or an image input operation;
storage means (9) for storing the plurality of job instructions input by said input means; and
processing means (10) for processing jobs corresponding to each of the stored job instructions, characterized by further comprising:
discrimination means (10) for discriminating whether each individual stored job instruction corresponds to an image input operation or an image output operation; and
control means (10, Figs.17a-17c) for sorting the stored job instructions into an execution order, the execution order being such that jobs relating to image input operations and jobs relating to image output operations are alternately processed in accordance with the output of said discrimination means.
2. An apparatus according to claim 1, characterized in that said control means is adapted further to sort the execution order on the basis of the time taken for individual jobs.
3. An apparatus according to claim 2, characterized in that said control means (10) sorts the execution order by estimating the time taken for each of the individual jobs on the basis of the page number information included in each of the job instructions.
4. An apparatus according to any preceding claim, characterized in that said control means (10) sorts the execution order except for a job which is currently being processed.
5. An apparatus according to any one of the preceding claims and including an image input device (1) in the form of an image reader, and image output device (2) in the form of a printer.



- 61 -

REPLACEMENT SHEET

19 JUL 1997

6. An apparatus according to any one of the preceding claims and including an image input device in the form of a facsimile unit (4) and a format unit (8) for converting data received from a computer into a visual image.

7. A method of processing a plurality of sets of image data representing a plurality of jobs, which jobs include both image input instructions and image output instructions, the processing being carried out on the basis of a plurality of different job instructions, and in which the execution order of the jobs is controlled in accordance with the nature of the job instructions,

characterized in that the method comprises:

discriminating whether the nature of each individual job instruction corresponds to a job relating to an image input operation or a job relating to an image output operation; and

controlling of the execution order of each of the individual job instructions such that jobs relating to image input operations and jobs relating to image output operations are alternately carried out in accordance with the result of the discrimination.

8. A method according to claim 7, wherein additional control of the execution order is carried out on the basis of the time taken for individual jobs, so that input and output jobs are carried out alternately, with shorter jobs given priority.

9. A method according to claim 7 or claim 8, wherein the control does not include a job which is currently being processed.

10. A method according to claim 8, wherein the control on the basis of time is carried out on the basis of the number of information pages included in each of the job instructions.

11. A method according to any claim, in which the discriminating is also carried out in accordance with which

810



- 62 -

REPLACEMENT SHEET

19 JUL 1997

of a number of input or output device is to be used for the
job corresponding to each of the job instructions.

REPLACEMENT SHEET

IMAGE PROCESSING APPARATUS WITH MULTIPLE FUNCTIONS

ABSTRACT

An image processing apparatus for controlling an execution order of a plurality of processing operations comprises an input device for inputting a plurality of jobs for image processing, a storage device for storing the plurality of jobs input by the input device, a processing device for executing the plurality jobs stored in the storage device and a controller for sorting an execution order of the plurality of jobs stored in the storage device in accordance with times required for processing of each of the jobs and/or whether contents of each of the jobs correspond to an image input or an image output, wherein the controller executes each of the jobs according to the execution order of the plurality of sorted jobs.

FIGURE 17A, 17B AND 17C

