

(51) International Patent Classification:
G01V 1/40 (2006.01)(21) International Application Number:
PCT/US2011/024841(22) International Filing Date:
15 February 2011 (15.02.2011)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **HAL-LIBURTON ENERGY SERVICES INC.** [US/US]; 10200 Bellaire Blvd., Houston, Texas 77072 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GOODMAN, George David** [US/US]; 193 East Beacon Drive, Phoenixville, Pennsylvania 19460 (US). **MAKI, Voldi, E., Jr.** [US/US]; 11904 Bell Avenue, Austin, Texas 78759 (US).(74) Agent: **SPEIGHT, Howard**; 12610 Trail Hollow Drive, Houston, TX 77024 (US).

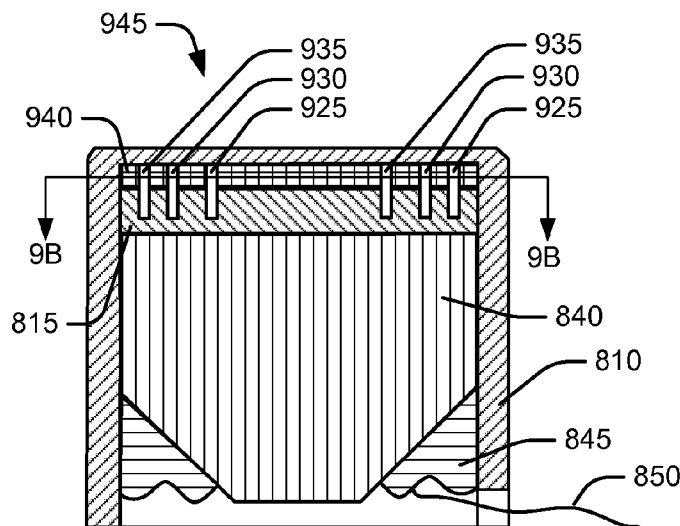
(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ACOUSTIC TRANSDUCER WITH IMPEDANCE MATCHING LAYER

**FIG. 9A**

(57) Abstract: A device includes a piezoelectric transducer. The transducer has N independent transducer regions. N is an integer. Each of the N independent transducer regions has a thickness. Each of the N independent transducer regions has an acoustic impedance AIT. Each of the N independent transducer regions is independently excitable to oscillate in the thickness mode when electrically excited by a potential difference applied across the thickness. The device further includes a first impedance matching layer having an acoustic impedance All between AIT and a borehole fluid acoustic impedance AIBF. The first impedance matching layer is situated such that an acoustic signal emitted by the piezoelectric transducer will pass through the second impedance matching layer. The device further includes a second impedance matching layer having an acoustic impedance AI2 between All and AIBF.