



(43) International Publication Date
4 April 2013 (04.04.2013)

- (51) International Patent Classification:
F41H 7/04 (2006.01) *F41H 5/013* (2006.01)
- (21) International Application Number:
PCT/SE2012/051025
- (22) International Filing Date:
27 September 2012 (27.09.2012)
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data:
1150895-9 29 September 2011 (29.09.2011) SE
- (71) Applicant: **BAE SYSTEMS HÄGGLUNDS AK-
TIEBOLAG** [SE/SE]; S-891 82 Örnsköldsvik (SE).
- (72) Inventor: **MÖLLER, Jan**; Jaktmarksvägen 17, S-892 42
Domsjö (SE).
- (74) Agent: **ZACCO SWEDEN AB**; P.O. Box 5581, Valhal-
lavägen 117, S-114 85 Stockholm (SE).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))*

Published:

- *with international search report (Art. 21(3))*

(54) Title: PROTECTION DEVICE FOR VEHICLE

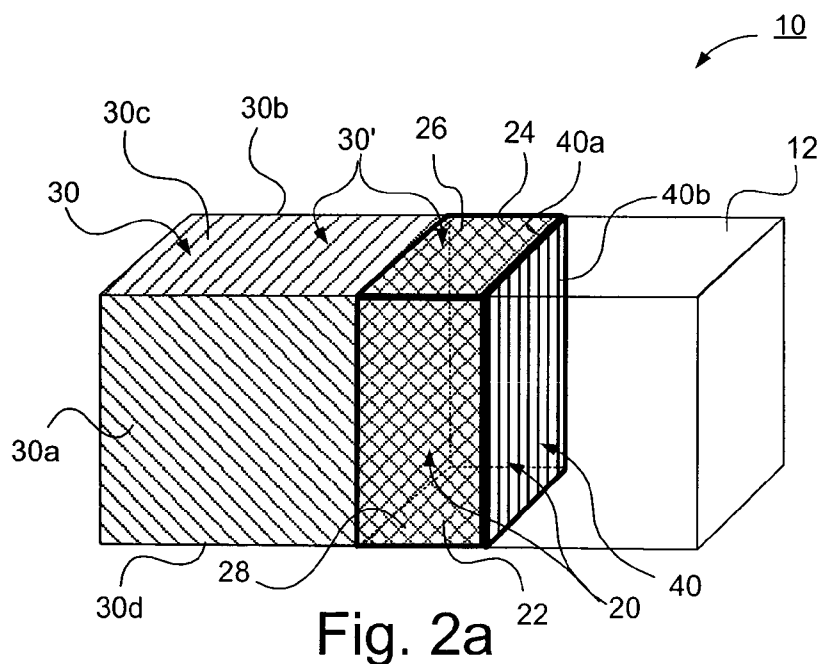


Fig. 2a

(57) Abstract: The present invention relates to a protection device for a vehicle (1) intended for military application comprising a wall configuration with ballistic protection properties arranged to constitute a delimitation of a protection zone (30, 30'; 130, 130') of the vehicle, wherein said wall configuration (2; 40, 22, 24, 26, 28; 140, 122, 124, 126, 128; 240) is movably arranged in the vehicle for adaptation according to needs of the configuration of said protection zone (30, 30'; 130, 130'). The invention also relates to a vehicle.