



(51) International Patent Classification:
A61F 15/00 (2006.01)

(21) International Application Number:
PCT/DK2011/050335

(22) International Filing Date:
9 September 2011 (09.09.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PA 2010 70390 10 September 2010 (10.09.2010) DK

(71) Applicant (for all designated States except US): **EAZY-PAC DANMARK A/S** [DK/DK]; Spånebak 25, DK-4300 Holbæk (DK).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ULRICH, Hans** [DK/DK]; Kærsangervej 54, DK-4300 Holbæk (DK).

(74) Agents: **TRIER, Mikkel Roed** et al.; Awapatent A/S, Røgsgade 11, DK-1316 København K (DK).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: A COTTON PAD DISPENSER AND A METHOD FOR ITS PRODUCTION

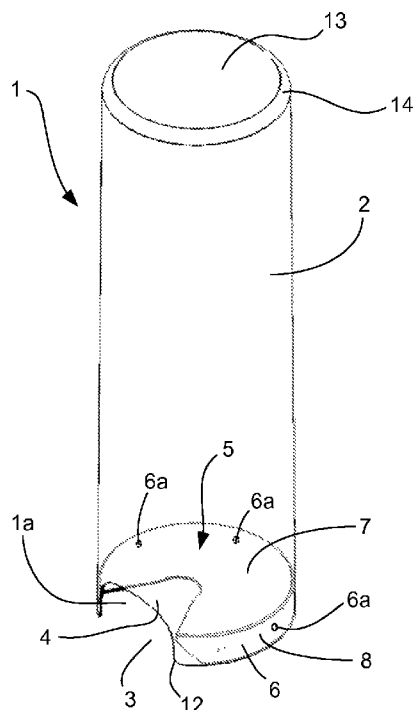


Fig. 1

(57) Abstract: The cotton pad dispenser (1) comprises a side wall (2) extending between a top and a bottom end of the dispenser (1), and an end wall (7) near the bottom end, a plurality of disc-shaped cotton pads (9) being stacked within the dispenser. A first cut-out (3) provided in said side wall (2) extends upwards from the bottom end of the dispenser (1) so as to form an entrance into said volume through the side wall (2), and a second cut-out (4) provided in said end wall (7) extends from the first cut-out (3) such that the cut-outs (3, 4) comprise a mutual transition to form one combined withdrawal aperture (1a). The withdrawal aperture (1a) is arranged such as to enable withdrawal of a bottommost cotton pad by gripping a peripheral portion (9b) of the cotton pad (9) with an indexing finger and a thumb, and pulling the cotton pad out of the withdrawal aperture (1a) by means of deformation of the cotton pad (9).



Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))