A MULTISTAGE LEADING ZERO DETECTOR AND GATE GENERATOR APPARATUS

FIELD OF INVENTION

The invention pertains to the field of floating-point arithmetic processes and more specifically to the detection of mantissa leading zeros and the generation of gate signals for the control of left shift normalization apparatus.

BACKGROUND TO THE INVENTION

An important application for leading zero detection is in the normalization of the mantissa that results from the true subtraction of two floating-point numbers, particularly when the normalized mantissas of the operands have associated exponents that differ by no more than one bit. Clearly, the closer the magnitudes of the operands, the greater number of leading zeros that obtain in the resulting difference of the normalized operand mantissas. The floating-point result is normalized by left shifting the mantissa. For example, if the un-normalized result of the subtraction yields 0.0001XXX...X, the normalized result would be 0.1XXX...X000 or 1.XXX...X0000, depending on the floating-point convention that is used. In the former case. the mantissa is left-shifted by 3-bit positions, causing three zeros to be appended and also causing the associated exponent to be decremented by 3; in the latter case, with the binary point to the right of the leading one (or hidden "1"), the normalization operation required a shift of 4-bit positions and decrementing the associated exponent by 4. Regardless of the convention used, a means for detecting the leading one (or number of leading zeros) is required for control of the post subtraction normalization unit.

Figure 1 is a block diagram of a typical state of the art left-shift normalization unit. The normalization unit consists of a leading zero encoder (LZE) unit 20 that controls left-shift normalizing unit 60. Input data is supplied from subtractor 10 which produces at its output an un-normalized mantissa corresponding to the absolute difference of the operands. (The

signum information is carried as a separate sign bit). This n-bit result is applied to both LZE 20 and shifter 60.

Left shift unit 60 typically comprises barrel shifter means 30 and 40 for rotating the input bit string and a zero mask means 50 for appending zeros. Figure 2 is a truth table for a 16-bit input left-shift normalizing unit 60 in which "Z" represents zero informal by zero-mask unit 50. The 4-bit shift code and 1-bit zeros signal is generated by LZE unit 20. The binary coded shift code is applied to barrel shifter means 30 and 40, while the zeros (active if the difference is zero) is applied to zero-mask unit 50 forcing zeros (Z) in all bit positions.

The reason for using two barrel shifter units (30 and 40) in normalizer 60 is because of the circuit complexity that would obtain if the total shift were to be accomplished in a single stage. This may be best understood by reference to Figure 3, a block diagram of a 3-bit left shifter operating on an input string of 16-bits. The two-bit binary encoded shift input signal is applied to gate decoder 35 that decodes the 4-state input signal and activates one out of four output lines 47. Each of the four output lines is applied to 16 shift cell units 45 as an input to one of four corresponding two-input AND-gates 37. The other input to each of the AND-gates 37 was provided from the input resultant data bit string, $[A_{15} - A_0]$, as shown. For example, line 0, corresponding to a zero shift is connected to the lower set of AND-gates 37 so that when line 0 is active, outputs 15-0 correspond to $[A_{15} - A_0]$. Similarly, line 1, corresponding to a one-bit left shift is applied to the set of gates having $[A_{14} - A_{-1}]$ connected as inputs causing the input string $[A_{14} - A_{-1}]$ to appear at outputs 15-0. Activating line 2 or 3 would cause input string $[A_{13} - A_{-2}]$ or $[A_{12} - A_{-3}]$ to appear at output 15-0. Because decoder 35 selects one out of four output lines, 4-input OR-gates 39 provide the multiplexing required to feed the selected bits to the output terminals.

If input bits $[A_{-1} - A_{-3}]$ are connected to $[A_{15} - A_{13}]$ respectively, the shift operation produces and end-around rotation or barrel shift of the input string $[A_{15} - A_0]$; if $[A_{-1} - A_{-3}]$ are forced inactive, zeros would be appended to the shifted string.

Because floating-point processors accommodate mantissas with 64-bits (or more), extending the structure of Figure 3 to 64-bit shifts would require 64 shift cell units 45, each having 64 AND-gates (or a total of 4096 AND-gates) together with the accompanying interconnect and control complexity. Consequently, the shift process is usually done in two stages as shown in Figure 1.

The first stage shifter 30 may typically accommodate shifts of 0-7 bits while the second stage 40 has 8 shift cells and provides shifts of 0, 8, 16, 24, ... 56. A similar cell structure to that described above is used except that each AND-gate accommodates 8 bundles of 8 input data bits. For a discussion of these techniques, see "Introduction to Arithmetic for Digital Systems Designers," Waser, S., and Flynn, M.J., Holt, Rinchat and Winston, 1982, pp. 106-123.

Referring back to Figure 1, it should be noted that shift units 30 and 40 are designed to accept binary coded shift instruction from LZE 20. As shown, the k-bit shift instruction is split into an l-bit and m-bit field where l corresponds to the group of lower order bits while m corresponds to the higher order bits. Decoder 31 and 41 of units 30 and 40 respectively decode this information to activate 1 out-of 2^l or 1 out-of 2^m gate control lines. Similar decoding of k-bits occurs in zero mask unit 50.

Figure 4 is a truth table for a 32-bit input LZE 20 unit. The input data bits are numbered [31-0] along the top. The output binary shift count of leading zeros is enumerated vertically along the right side. Also, an additional input control bit, E_i, is shown at the extreme left. E_i is an enable control bit that, together with E_0, is used to cascade standard modular LZE networks to accommodate longer bit strings.

Each horizontal line of the table shows the position of the leading 1 and the resulting leading zero count. The symbol X following the leading one indicates that the value may be arbitrarily 0 or 1. Also, note that if all input bit patterns are zero, E_0 is made active while the shift count is made zero (z=0) indicating a zero valued input. If $E_i = 0$, the output is disabled.

Figure 5 shows a programmable logic array (PLA) implementation of a 32-bit input LZE 20. Data input bits [A_{31} - A_0] and their complements [A_{31} -

A_0] are applied to the multi-input AND-gates 71 as indicated by the x-marks on the horizontal lines feeding the gates. The complements are generated by inverting buffers 75. Ei is an enabling input that is used to cascade modular LZE units. The AND-gate outputs P_0 - P_{21} are individually and exclusively activated (1 out of 32) in accordance with the following boolean expressions:

$$
\begin{aligned}
P_{31} &= E_i \cdot \overline{A_{31}} \\
P_{30} &= E_i \cdot \overline{A_{31}} \cdot \overline{A_{30}} \\
P_{29} &= E_i \cdot A_{31} \cdot A_{30} \cdot A_{29} \\
&\vdots \quad\quad \vdots \\
P_1 &= E_i \cdot \overline{A_{31}} \cdot \overline{A_{30}} \cdot A_{29} \cdots \overline{A_2} \cdot A_1 \\
P_0 &= E_i \cdot A_{31} \cdot A_{30} \cdot A_{29} \cdots A_2 \cdot A_1 \cdot A_0
\end{aligned}
$$

These expressions, as implemented in Figure 5 ensure that a particular AND-gate 71 output, P_k, is active only if the network in enabled ($E_i = 1$) and Ak is active while all An n > k are inactive.

OR-gates 73 logically combine selected combinations of AND-gates 71 as indicated by the X-mark on the OR-gate input lines. The output bits, [C4 - C0] are supplied by tri-state buffers 77 which are controlled by the output of OR-gate 79. If the network is enabled (Ei = 1) and all input bits [A31 - A0] are low AND-gate output Z1 is active indicating all input bits are zero. Also, AND-gate output Z2 is active if E1=0. Either of these two conditions will float output buffers 77. This latter feature is useful for cascading two (or more) LZE units as shown in Figure 6.

Two LZE 70 units may be connected to accommodate a 64-bit input data string. LZE #1 accepts bits [A63 - A32] while LZE #2 accepts bits [A31 - A0]. Enable output, E0, from LZE #1 enables LZE #2 when all higher order bits are zero and also asserts output bit C5 indicating that none of the 32-higher order bits active high. The encoded output bits [C4 - C0] of LZE #2, wired-OR with the corresponding disabled outputs of LZE #1, provided the five lower order bits. LZE #2 provides E0 active to indicate that all 64 bits are low.

Some earlier implementations of LZE units used 8-bit priority encoder ICs. Figure 7 shows the logic diagram of an 8-bit priority encoder such as the Motorola 74LS148 or the logically equivalent Natural Semiconductor

CMOS 74HC148. This chip has 8-input lines $\lfloor \bar{A}_7 - \bar{A}_0 \rfloor$ and produces at its outputs $\lfloor \bar{C}_2 - \bar{C}_0 \rfloor$. Also, input enable, $\overline{E_i}$, output enable, $\overline{E_0}$, and $\overline{G_s}$, the complemented zero indicator is provided. Figure 8, the corresponding truth table, clearly shows that these 8-bit priority encoders are the complemented equivalent of the LZE described above.

Cascading of these units may be accomplished as indicated in Figure 9 and extended in multiples of 8-bits.

SUMMARY OF THE INVENTION

An apparatus and method for detecting the number of leading zeros in the mantissa of a floating point number is described. Leading zero detection comprises several steps: the segmentation of the mantissa into bytes (or more generally into groups of 2N, N=1,2,3); OR-ing of the bits in each segment to detect the most significant segment containing a non-zero valued bit; activating a line corresponding to the most significant non-zero segment; processing the most significant non-zero segment to determine the position of the most significant non-zero bit and activating an output line corresponding to the most significant bit position within the selected segment. This process results in two sets of fully decoded gate signals (segment and bit level) for controlling multi-stage left shift units.

This multi-stage leading zero detector is combined with a multi-stage left-shift unit to form a left-shift normalization unit.

One object of the invention is to simplify the left-shift normalization process by providing fully decoded gate thereby eliminating encoding and decoding apparatus in the leading zero detection unit and left shift unit respectively.

Another object is to provide higher processing rates by use of multi-stage left-shift process by first detecting the most significant non-zero segment causing a course left-shift, followed by detection of the most significant non-zero bit causing a fine left-shift. Thus, timing of zero detection more closely matches timing of the left shift apparatus.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram of a floating point subtractor unit and left-shift normalization point subtractor unit and left-shift normalization unit.

Figure 2 is the truth table of a 16-bit left-shift normalization unit.

Figure 3 is a block diagram of a 3-bit left shifter.

Figure 4 is a truth table of a 32-bit leading zero encoder.

Figure 5 shows a block diagram for a programmable logic array implementation of a 32-bit leading zero encoder.

Figure 6 is a block diagram of two 32-bit leading zero encoders cascaded to form a 64-bit unit.

Figure 7 is a logic diagram of an 8-bit priority encoder.

Figure 8 is the truth table of an 8-bit priority encoder.

Figure 9 shows a method for cascading two 8-bit priority encoders.

Figure 10 is a block diagram of a preferred embodiment of a multistage leading zero encoder.

Figure 11 is a programmable logic array implementation of a leading zero gate signal generator.

Figure 12 is the truth table of a 5-bit input leading zero gate signal generator.

Figure 13 is a logic diagram of a 9 to 1 multiplexer unit.

Figure 14 is a block diagram of a three stage left shift normalization unit.

DETAILED DESCRIPTION OF THE INVENTION

Although the following discussion of the present invention is centered around the preferred embodiment of a two stage leading zero decoder, it will become clear that the present invention is not limited to two-stages but also applies to apparatus using three or more stages. Also, the preferred embodiment uses byte (8-bit) segments but clearly is not limited to byte size segments.

The preferred embodiment of a two stage leading zero decoder (LZD) 200 in Figure 10, comprises first stage byte level decoder 201 and second stage bit level decoder 202. It is designed to accommodate a floating-point processor with an extended internal precision mantissa of 69 bits supplied on input data lines 101. This input data is fed to a group of eight 8-bit input OR-gates 103 and a single 5-bit input OR-gate 120. The extreme left OR-gate 103 accommodates the most significant byte comprising the eight most significant bits (msbs); the second from the left, the next most significant byte of eight bits and so on down to the least significant byte (lsbs) of five bits applied to OR-gate 102. The output of each OR-gate is asserted if its input byte contains at least one asserted bit.

The set of eight output bits from OR-gates 103 are applied to NOR-gate 107. Gate 107 output, FALSZERO, is asserted only if all eight of its input bits is zero (unasserted), and is used to control the output stage of the normalization left shift unit.

The set of nine output bits from OR-gates 103 and 102 are provided to the input of the 9-bit fully decoded prioritizer unit 105. The output of prioritizer unit 105 activates 1-out-of-9 output lines rather than provide a 4-bit binary coded output. The activated output line corresponds to the highest level byte having at least one bit as indicated by the outputs of OR-gates 103 and 102. The output is a fully decoded output which is applied directly to selector 109 and made available to the first stage of a three stage left shift normalization unit as BYTSEL.

The operation of the fully decoded 9-bit prioritizer unit may be best understood by reference to Figure 11 showing the logical structure of an m-bit prioritizer unit suitable for implementation of unit 105. The prioritizer

accepts m input bits [D_{m-1} - D0] forming the complement set $\left[\bar{D}_{m-1} - \bar{D}_0\right]$ by means of inverting buffers 131. The output is formed by means of AND-gates 133. (Note that the AND-gate 133 labelled P_{m-1} simply ANDs the single input with itself thus acting as a simple buffer). As in the case of the PLA implementation of Figure 5, the "x" indicates connections to the input of the AND-gate associated with that particular horizontal line. In this manner, only 1-out-of-m output lines are activated corresponding to the most significant bit position in the input bit set [D_{m-1} -D_0], satisfying the following logic expressions:

$$
\begin{aligned}
P_{m-1} &= D_{m-1} \\
P_{m-2} &= D_{m-2} \cdot D_{m-1} \\
P_{m-3} &= D_{m-3} \cdot \bar{D}_{m-2} \cdot \bar{D}_{m-1} \\
&\vdots \quad\quad \vdots \\
P_0 &= D_0 \cdot \bar{D}_1 \cdot \bar{D}_2 \ldots \bar{D}_{m-2} - \bar{D}_{m-1}
\end{aligned}
$$

Thus, P_{m-k} is active only when D_{m-k} is active and no higher order input bit, D_{m-k+n}, is active for $n > 0$. In the preferred embodiment m=9.

Figure 12 is, by of example, the truth table for a 5-bit input fully decoded prioritizer unit. The five input bit states are shown in the left while the state of the five output lines are shown on the right. The position of the leading active input bit on the right corresponds to the activated line on the right independent of the state of the lower order input bits. Also, note that if all input bits are inactive, all output lines are inactive.

Referring back to Figure 10, the fully decoded 9-bit prioritizer 105 output lines, BYTSEL, are applied to multiplexer (MUX) unit 109 as control lines. The purpose of multiplexer unit 109 is to select one-out-of-nine input data bytes each composed of eight contiguous bits except the least significant byte [A_y - A_0] having only 5 bits.

Figure 13 is a logic diagram of a multiplexer unit 109. The nine input lines [P8 - P0] each control a byte selector 153 each comprising a set of 8-AND gates. Whenever an input line [P8 - P1] is activated, it selects a group of data lines [A68 - A61], [A60 - A53], [A52 - A45], [A44 - A37], [36 - A29], [A28 - A21], [A20 - A13] or [A12 - A5]. The 5-bit byte [A4 - A0] is

selected by means of the AND-gate set 151 controlled by activating P0. (Compatibility of byte size requires that three lower order zeros be appended to [A4 - A0] in order to complete the eight bit byte string.) Each of the byte selectors (151 or 153) outputs are OR-ed by the 8 output channel OR-gate unit 155. The output represents the 8-bit byte containing the leading one. Hence, the output of MUX 109 has to be processed by the second level 8-bit input decoded prioritizer unit 111 of Figure 10 to indicate the bit position in the previously selected byte that contains the leading one.

Decoder prioritizer count 111 is logically constructed as shown in Figure 11. The eight bit byte is applied to terminals [D7 - D0]. One-of-eight output lines [P0 - P7], is selected to indicate the position of the leading one. The output signal, BITSEL, is provided to the second stage of the left shift normalization unit.

Figure 14 is a block diagram of the left shift normalizing unit comprising LZD unit 200 and normalizing unit 300. The first stage 301 of unit 300 shifts the data by 0, 8, 16, 24, 32, 40, 48, 56 or 64 bits depending upon the nine most significant lines of byte control signal BYTESEL [8-0] provided by first stage LZD unit 201 of Figure 10. The second stage left shifter 302 shifts the mantissa by 0, 1, 2, 3, 4, 5, 6, or 7 bits depending on the state of the eight lines, BITSEL [7-0] supplied by prioritizer 111 of Figure 10. No decoding of the left shift control signals by units 301 and 302 is required because BYTSEL and BITSEL are fully decoded, mutually exclusive control lines.

The output of unit 300 is finally controlled by the n-channel output AND-gate 173 controlled by FALSZERO generated by the first stage LZD 201 as shown in Figure 10. If all data bits [A68 - A0] are zero, the output of NOR-gate 107 is asserted, causing the inverted FALSZERO signal out of buffer 174 of normalizing unit 300, Figure 14, to be deasserted. This causes AND-gate 173 to create a zero valued output.

If should be noted that even though the preferred embodiment was described using two fully decoded prioritizers 105 and 111 in Figure 10, it may be desirable to use standard large scale integrated chips, such as previously described, as the prioritizer units. If so, the outputs, BYTSEL and

BITSEL, from the first and second stages LZD 20 would be binary encoded requiring a decode means in the normalization unit as shown in Figure 1 and a decode means for multiplexer 109 of Figure 10.

Also, the preferred embodiment used two LZD stages (201, 202) as shown in Figure 14. However, it should be clear that three or more LZD stages may be used to detect the leading zero. Figure 15 is an example of a three stage LZD. A 128-bit mantissa is assumed to be separated into 4 bundles of 32-bits each and applied to four 32-input OR-gates 113. Prioritizer 115 detects which 32-bit bundle has the most significant bit and activating an output line that controls selector 117. The selected segment of 32-bits is applied to eight 4-input OR-gates 123 and to selector 121. The output of prioritizer 119 causes selector 121 to select the 4-bit segment having the most significant bit.

These and other variations would be apparent to one skilled in the art.

CLAIMS

1. A leading zero two-stage detector unit for detecting the number of leading zeros in the mantissa of a floating-point number comprising:

(a) first stage decoder means capable of accepting an unnormalized binary coded mantissa, segmenting said mantissa into contiguous multibit non-overlapping segments arranged in descending order of significance, detecting the presence of a non-zero value in any of said bytes indicated by an ordered set of bits, one for each said bytes;

(b) first stage segment priority detector means connected to said ordered indicating bits for determining the position of the most significant byte containing an asserted bit, providing an output signal indicative of said most significant byte;

(c) selector means controlled by said first stage priority detector output signal for selecting said most significant segment from the string of input bits representative of said un-normalized mantissa; and

(d) second stage bit priority detector means connected to said selector means for determining the position of the most significant asserted bit from said selected most significant segment, providing an output signal indicative of said bit position.

2. A leading zero detector unit as in Claim 1 wherein said first and second stage priority detectors are priority encoders providing binary coded signals indicative of the positions of said most significant first stage segment and said second stage bit, respectively.

3. A leading zero detector unit as in Claim 1 wherein said first and second stage priority detectors are fully decoded priority detectors providing one output segment line for each said ordered segments and one bit line for each bit representative of said selected most significant segment, asserting only the output segment line corresponding to said most significant segment and asserting only the bit line corresponding to said most significant bit position.

* C L M S *

4. A leading zero detector unit as in Claim 1 wherein said first decoder means comprises a multiplicity of multi-input OR-gates, each said OR-gate assigned to a specific mutually exclusive segment, the ordered output of said OR-gates being representative of the non-zero state of each said segment.

5. A leading zero detector unit as in Claim 1 further comprising means for detecting a zero valued mantissa by logically OR-ing said segment output lines.

6. A leading zero multi-stage detector unit comprising:

(a) two or more decoder - selector stages comprising:

(i) multiplicity of multiple input OR-gates, each connected to a distinct contiguous bit segment of the input bit string, coupled into a prioritizer for detecting the most significant sub-field and producing an output control signal;

(ii) selector means for selecting said most significant segment of bits, controlled by said prioritizer output control signal;

said decoder - selector stages connected in tandem for producing an output but field containing the most significant leading non-zero bit; and

(b) terminal prioritizer unit for detecting the position of said leading non-zero bit by prioritizing said output bit field and producing an output signal indicative of said position.

7. A floating-point left shift mantissa normalization unit comprising:

(a) leading zero two-stage detector unit for generating multi-stage left shift control signals indicative of the number of leading zeros in the mantissa; and

(b) left shifter unit for left shifting said mantissa in accordance with said left shift control signals.

8. A floating-point left shift mantissa normalization unit as in Claim 7 wherein said left shifter unit has at least two stages.

9. A method for detecting the number of leading zeros in the mantissa of a floating point number comprising the steps of:

(a) accepting a binary number representative of a mantissa;

(b) segmenting said mantissa into contiguous non-overlapping segments arranged in descending order of significance;

(c) detecting the presence of a non-zero valued bit in any of said segments;

(d) assigning a non-zero value indicating bit to each segment and asserting said bit when a non-zero valued bit is detected in said segment;

(e) determining the most significant non-zero value indicating bit that is asserted;

(f) asserting a two-state output line corresponding to said most significant indicating bit;

(g) selecting the most significant segment corresponding to said most significant indicating bit;

(h) determining the most significant non-zero bit of said most significant segment; and

(i) asserting a two-state output line corresponding to said most significant non-zero bit of said most significant segment.

10. The method as described in Claim 8 wherein said detecting of the presence of a non-zero valued bit in any of said segments is accomplished by logically OR-ing all bits of each said segments.

11. A leading zero two-stage detector unit for detecting the number of leading zeros in the mantissa of a floating-point number substantially as hereinbefore described with reference to the accompanying drawings.

12. A floating-point left shift mantissa normalization unit substantially as hereinbefore described with reference to the accompanying drawings.

13. A method for detecting the number of leading zeros in the mantissa of a floating point number substantially as hereinbefore described

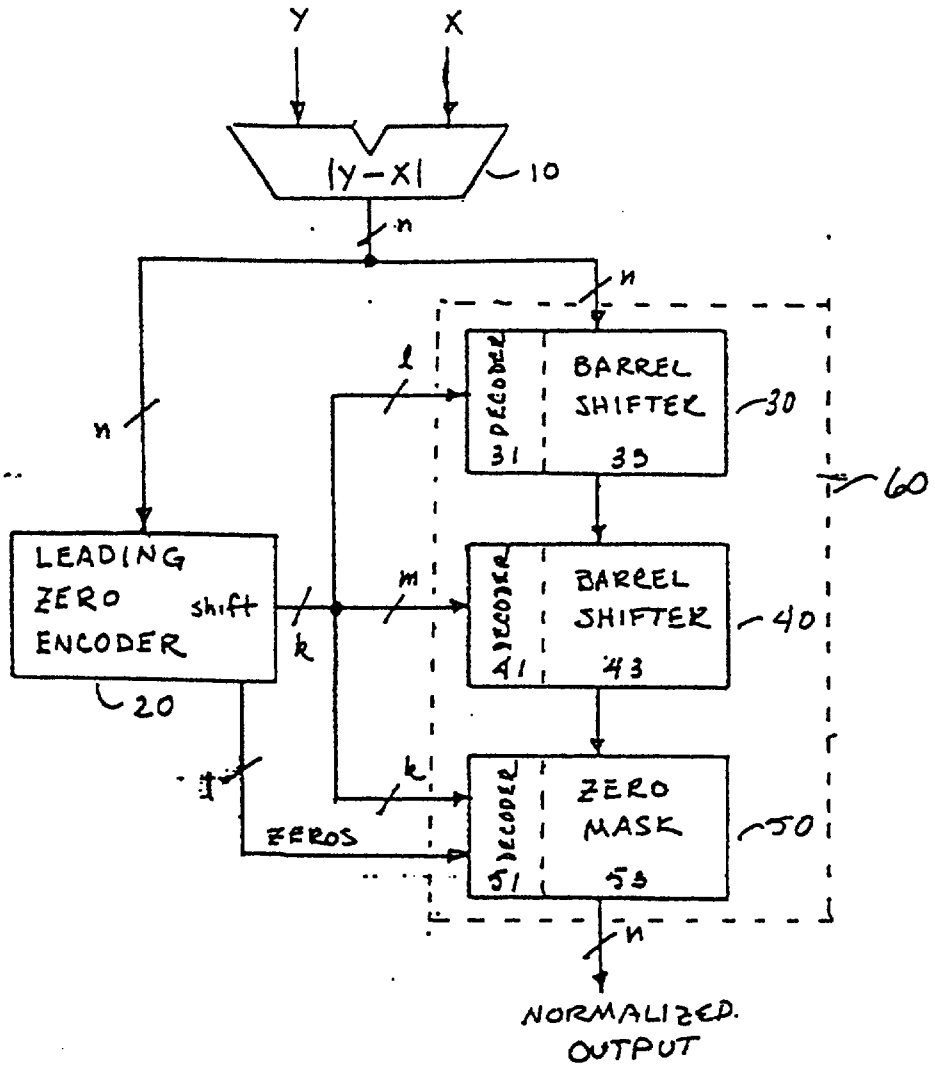
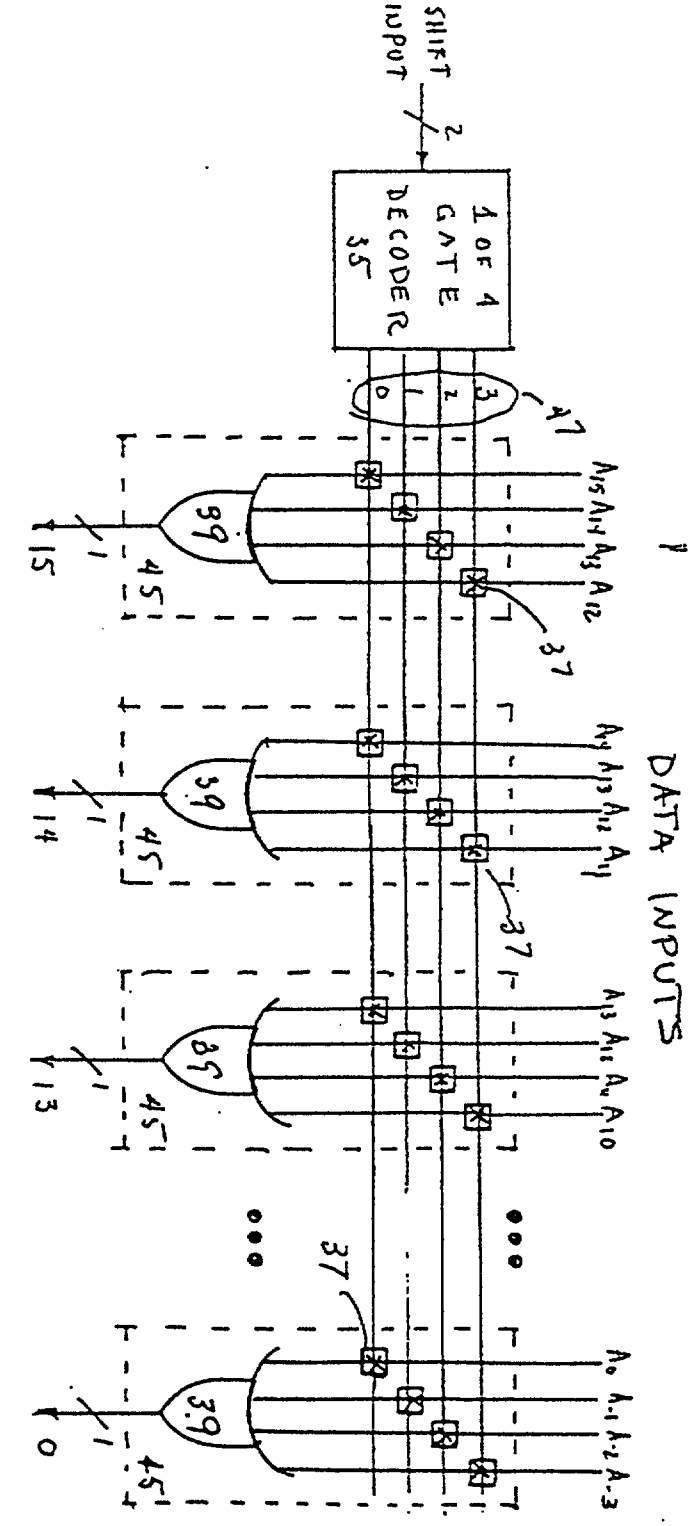

Y
X
|Y-X|
10
n
n
n
l
DECODER
31
BARREL
SHIFTER
33
30
60
LEADING
ZERO
ENCODER
shift
20
k
m
DECODER
41
BARREL
SHIFTER
43
40
1
k
ZEROS
DECODER
51
ZERO
MASK
53
50
n
NORMALIZED
OUTPUT

Figure 1

Figure 2



74LS139

Figure 3

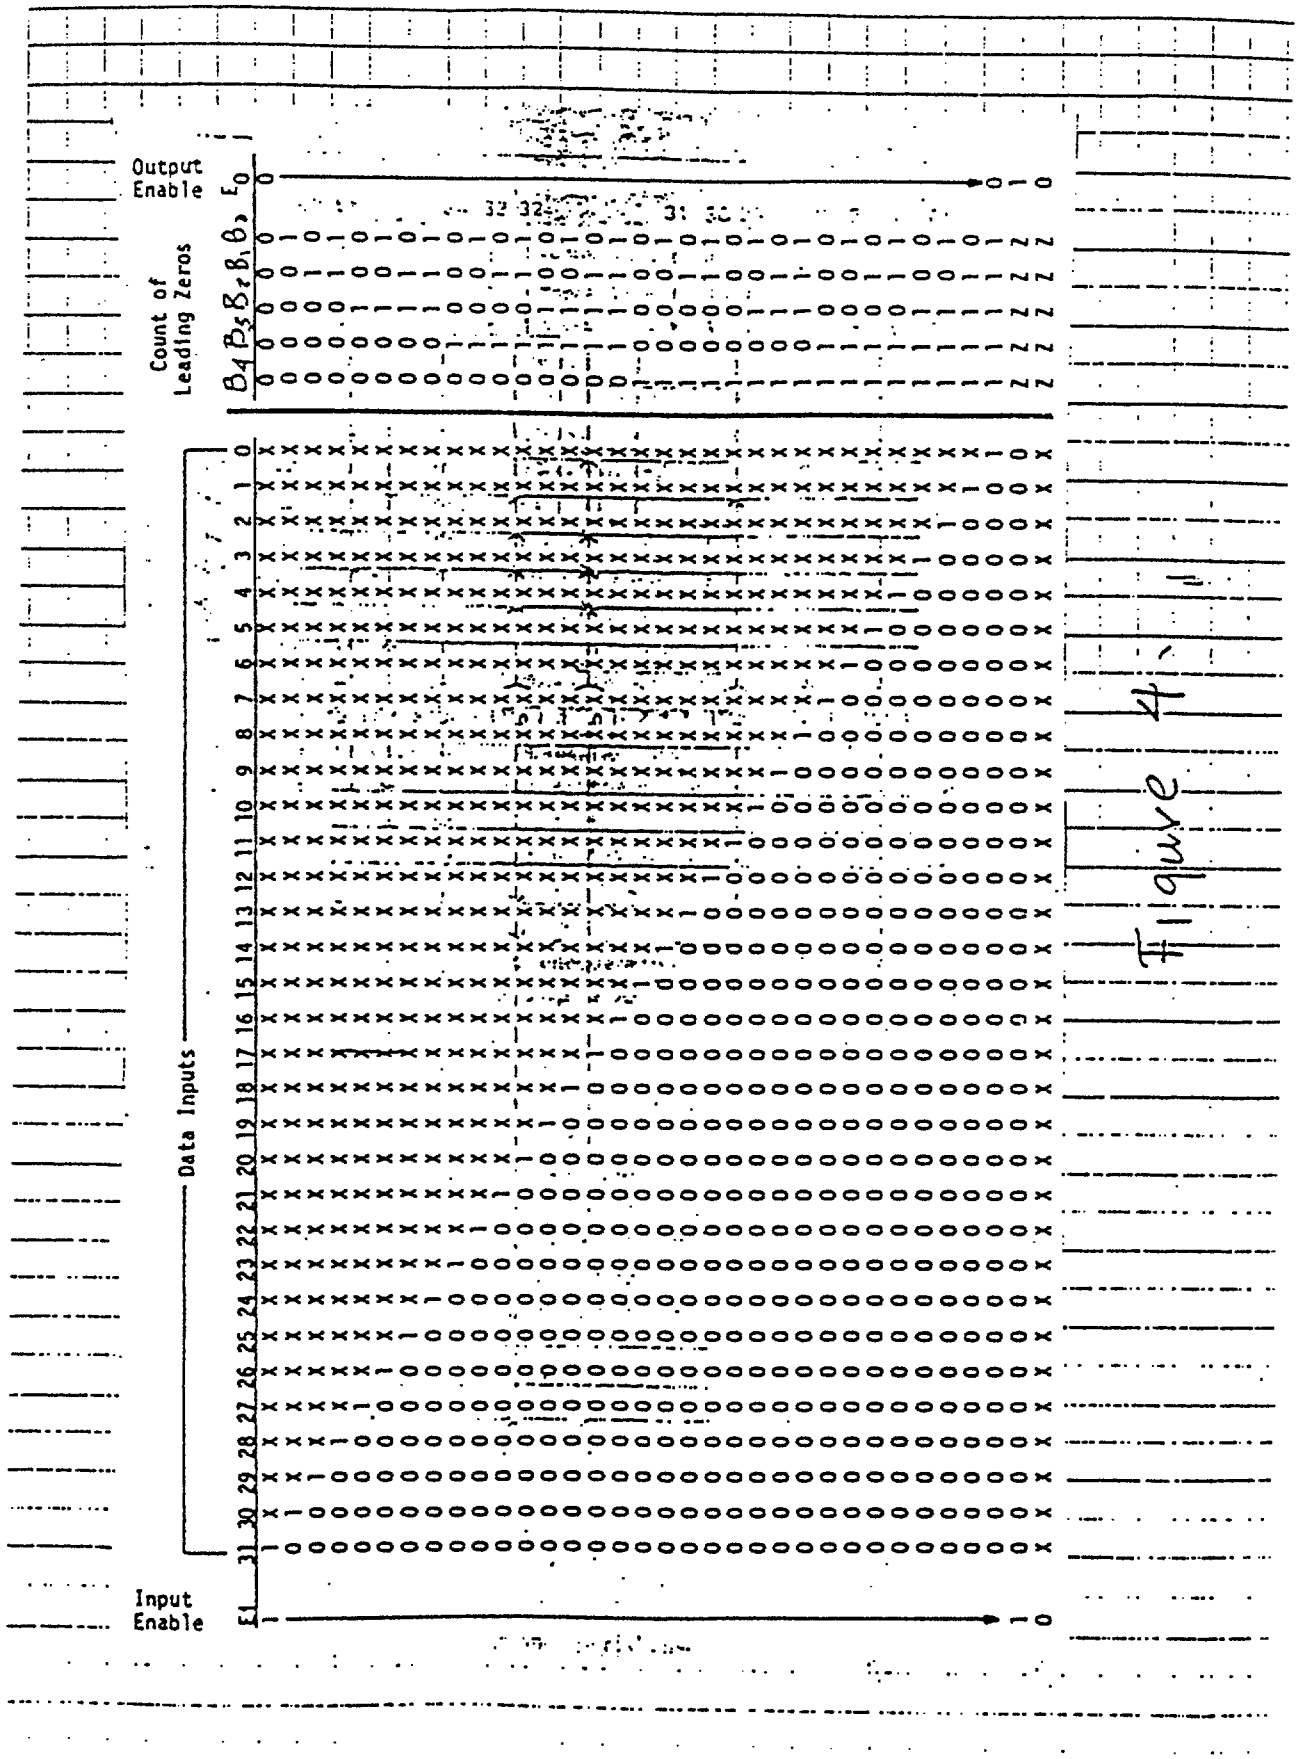

Output Enable
E_0
Count of Leading Zeros
B_4 B_3 B_2 B_1 B_0
32 32 31
Data Inputs
0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31
Input Enable
E_1

Figure 4

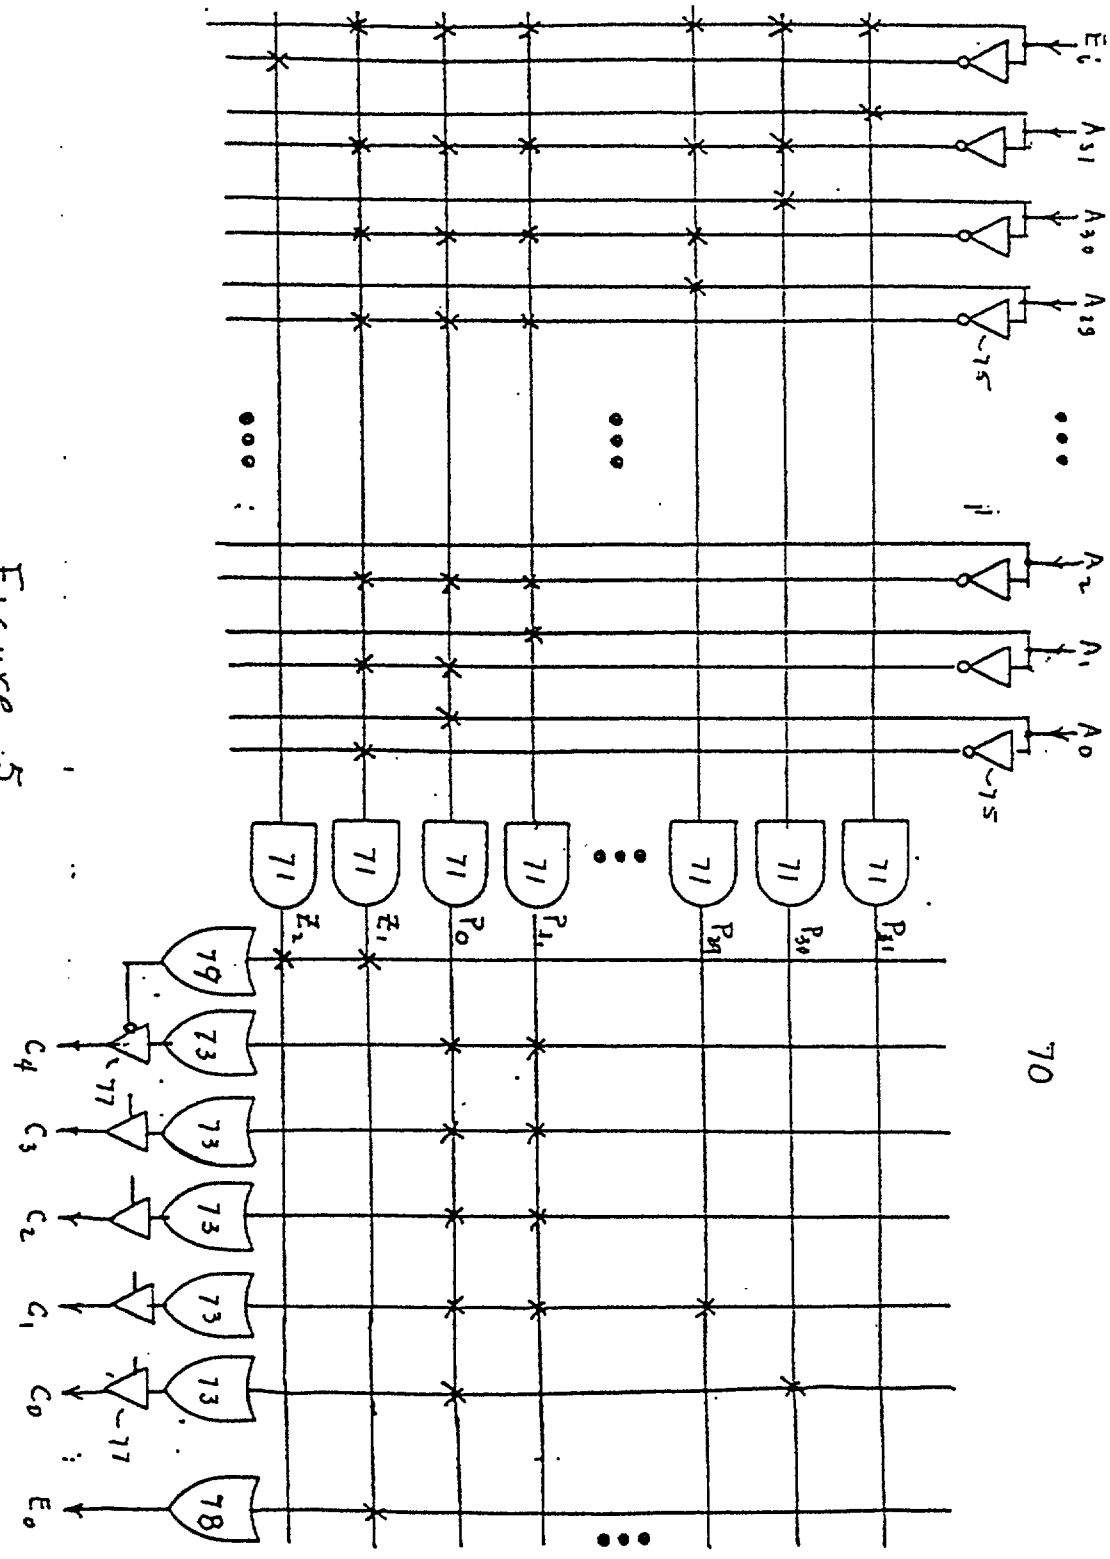

70
71
73
75
77
78
79
E_i
A_{31}
A_{30}
A_{29}
A_2
A_1
A_0
Z_2
Z_1
P_0
P_{31}
P_{30}
P_{31}
C_4
C_3
C_2
C_1
C_0
E_0

Figure 5

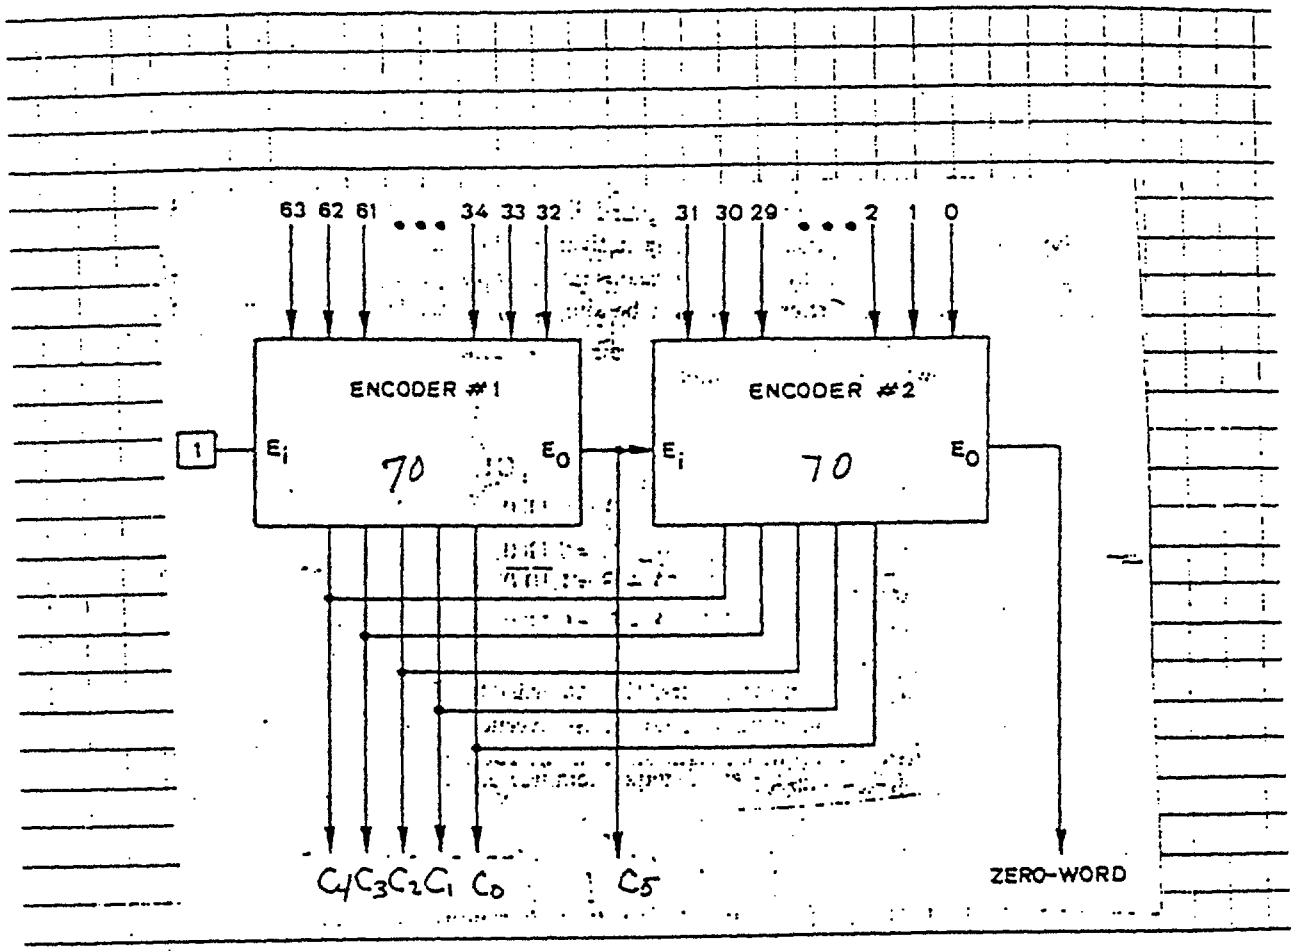

63 62 61 ... 34 33 32
31 30 29 ... 2 1 0
ENCODER #1
ENCODER #2
1
E_i
70
E_o
E_i
70
E_o
$C_4 C_3 C_2 C_1 C_0$
C_5
ZERO-WORD

Figure 6

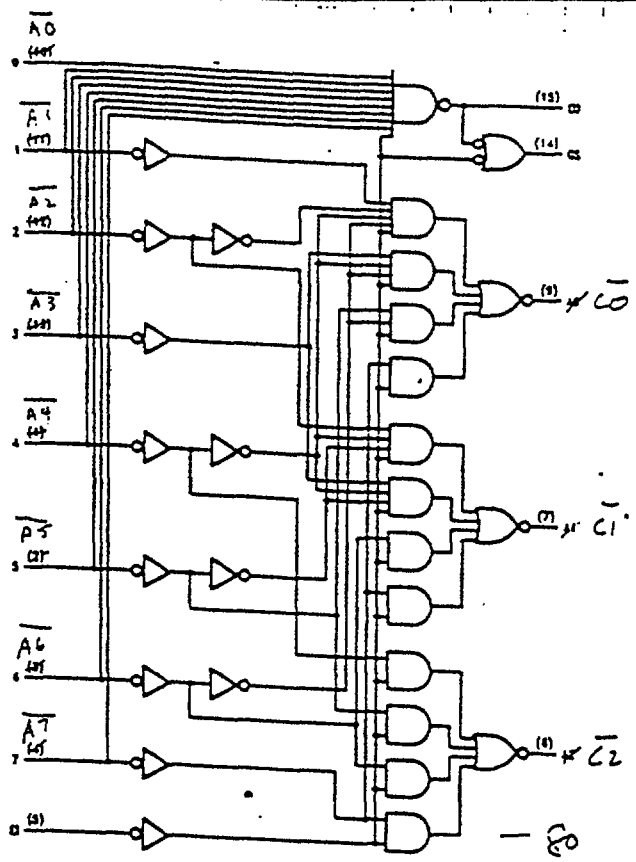


Figure 7

Inputs								Outputs				
EI	0	1	2	3	4	5	6	7	A2	A1	A0	GS	EO
H	X	X	X	X	X	X	X	X	H	H	H	H	H
L	H	H	H	H	H	H	H	H	H	H	H	H	L
L	X	X	X	X	X	X	X	L	L	L	L	L	H
L	X	X	X	X	X	X	L	H	L	L	H	L	H
L	X	X	X	X	X	L	H	H	L	H	L	L	H
L	X	X	X	X	L	H	H	H	L	H	H	L	H
L	X	X	X	L	H	H	H	H	H	L	L	L	H
L	X	X	L	H	H	H	H	H	H	L	H	L	H
L	X	L	H	H	H	H	H	H	H	H	L	L	H
L	L	H	H	H	H	H	H	H	H	H	H	L	H

H = High, L = Low, X = Irrelevant

Figure 8

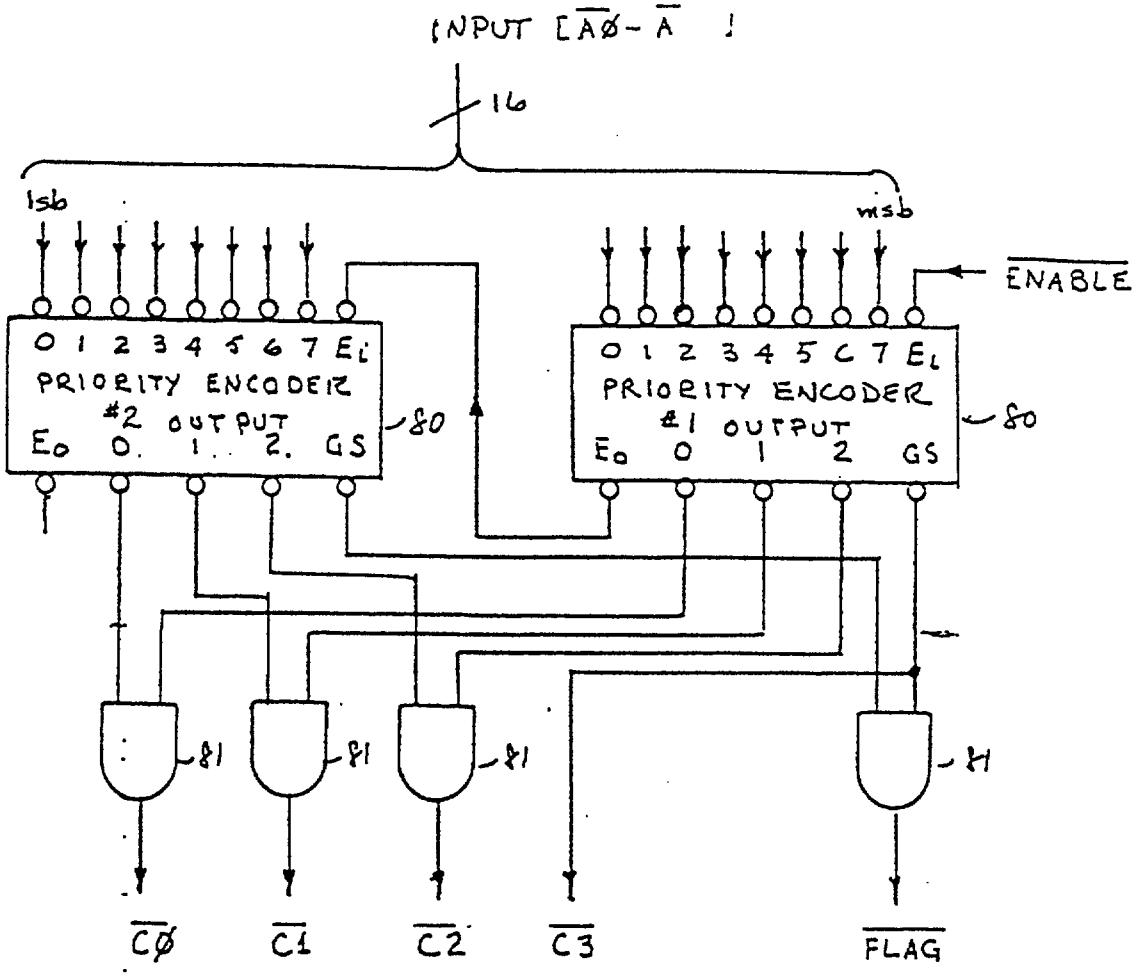

INPUT [A0 - A]
16
lsb
msb
ENABLE
0 1 2 3 4 5 6 7 EI
PRIORITY ENCODER
#2 OUTPUT
EO 0 1 2 GS
80
0 1 2 3 4 5 6 7 EI
PRIORITY ENCODER
#1 OUTPUT
EO 0 1 2 GS
80
81
81
81
H
C0
C1
C2
C3
FLAG

Figure 9

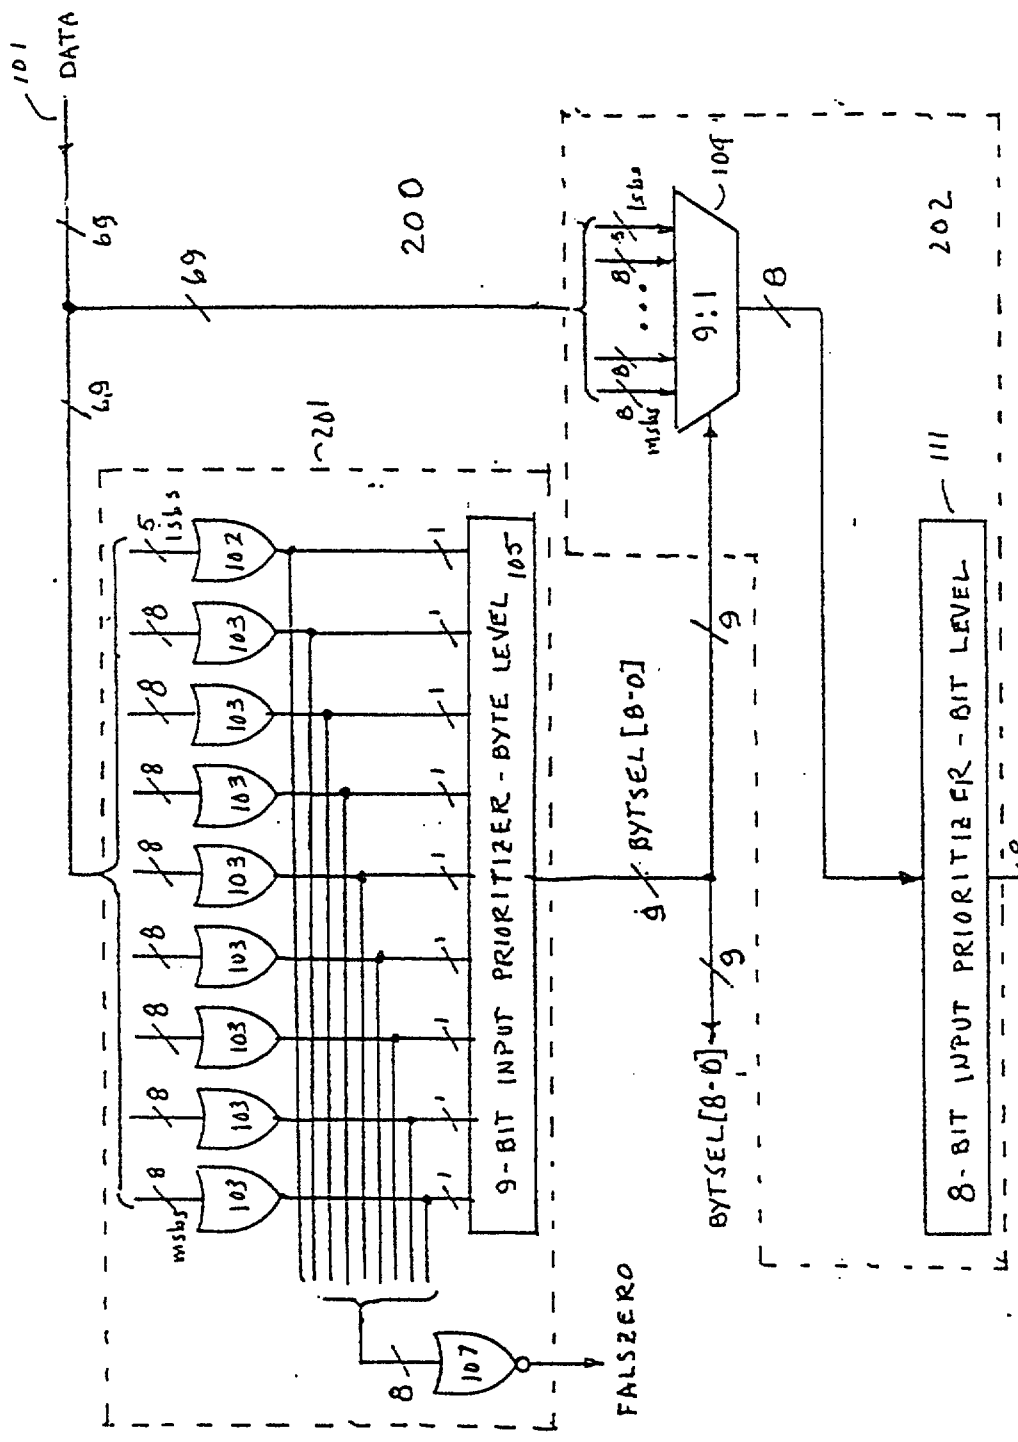

101
DATA
69
69
69
200
201
202
111
104
9:1
8
8
msbs
lsbs
5
lsbs
102
103
107
9-BIT INPUT PRIORITIZER - BYTE LEVEL 105
FALSZERO
BYTSEL[8-0]
BYTSEL[8-0]
8-BIT INPUT PRIORITIZER - BIT LEVEL
BITSEL[7-0]

Figure 10

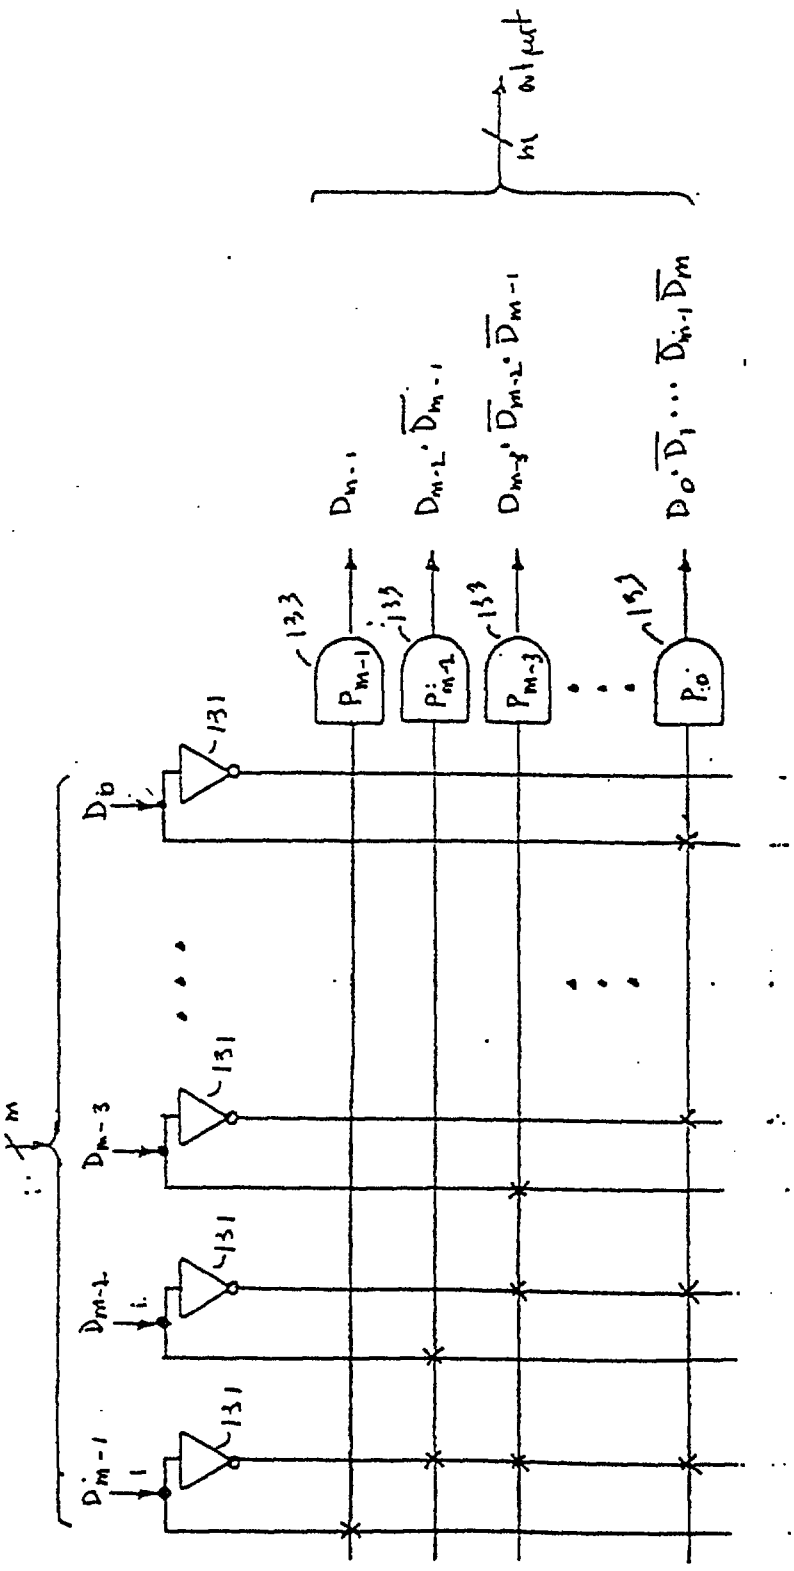

M
M output
D_{M-1}
$D_{M-2}\cdot\overline{D}_{M-1}$
$D_{M-3}\cdot\overline{D}_{M-2}\cdot\overline{D}_{M-1}$
$D_0\cdot\overline{D}_1\cdots\overline{D}_{M-1}\overline{D}_M$
133
131
D_0
D_{M-3}
D_{M-2}
D_{M-1}
P_{M-1}
P_{M-2}
P_{M-3}
P_0

Figure 11.

msb INPUT				lsb	OUTPUT				
Ø	1	2	3	4	Ø	1	2	3	4
0	0	0	0	0	0	0	0	0	0
0	0	0	0	1	0	0	0	0	1
0	0	0	1	0	0	0	0	1	0
0	0	0	1	1	0	0	0	1	0
0	0	1	0	0	0	0	1	0	0
0	0	1	0	1	0	0	1	0	0
0	0	1	1	0	0	0	1	0	0
0	0	1	1	1	0	0	1	0	0
0	1	0	0	0	0	1	0	0	0
0	1	0	0	1	0	1	0	0	0
0	1	0	1	0	0	1	0	0	0
0	1	0	1	1	0	1	0	0	0
0	1	1	0	0	0	1	0	0	0
0	1	1	0	1	0	1	0	0	0
0	1	1	1	0	0	1	0	0	0
0	1	1	1	1		1	0	0	0
1	0	0	0	0	1	0	0	0	0
1	0	0	0	1	1	0	0	0	0
1	0	0	1	0	1	0	0	0	0
1	0	0	1	1	1	0	0	0	0
1	0	1	0	0	1	0	0	0	0
1	0	1	0	1	1	0	0	0	0
1	0	1	1	0	1	0	0	0	0
1	0	1	1	1	1	0	0	0	0
1	1	0	0	0	1	0	0	0	0
1	1	0	0	1	1	0	0	0	0
1	1	0	1	0	1	0	0	0	0
1	1	0	1	1	1	0	0	0	0
1	1	1	0	0	1	0	0	0	0
1	1	1	0	1	1	0	0	0	0
1	1	1	1	0	1	0	0	0	0
1	1	1	1	1	1	0	0	0	0

Figure 12

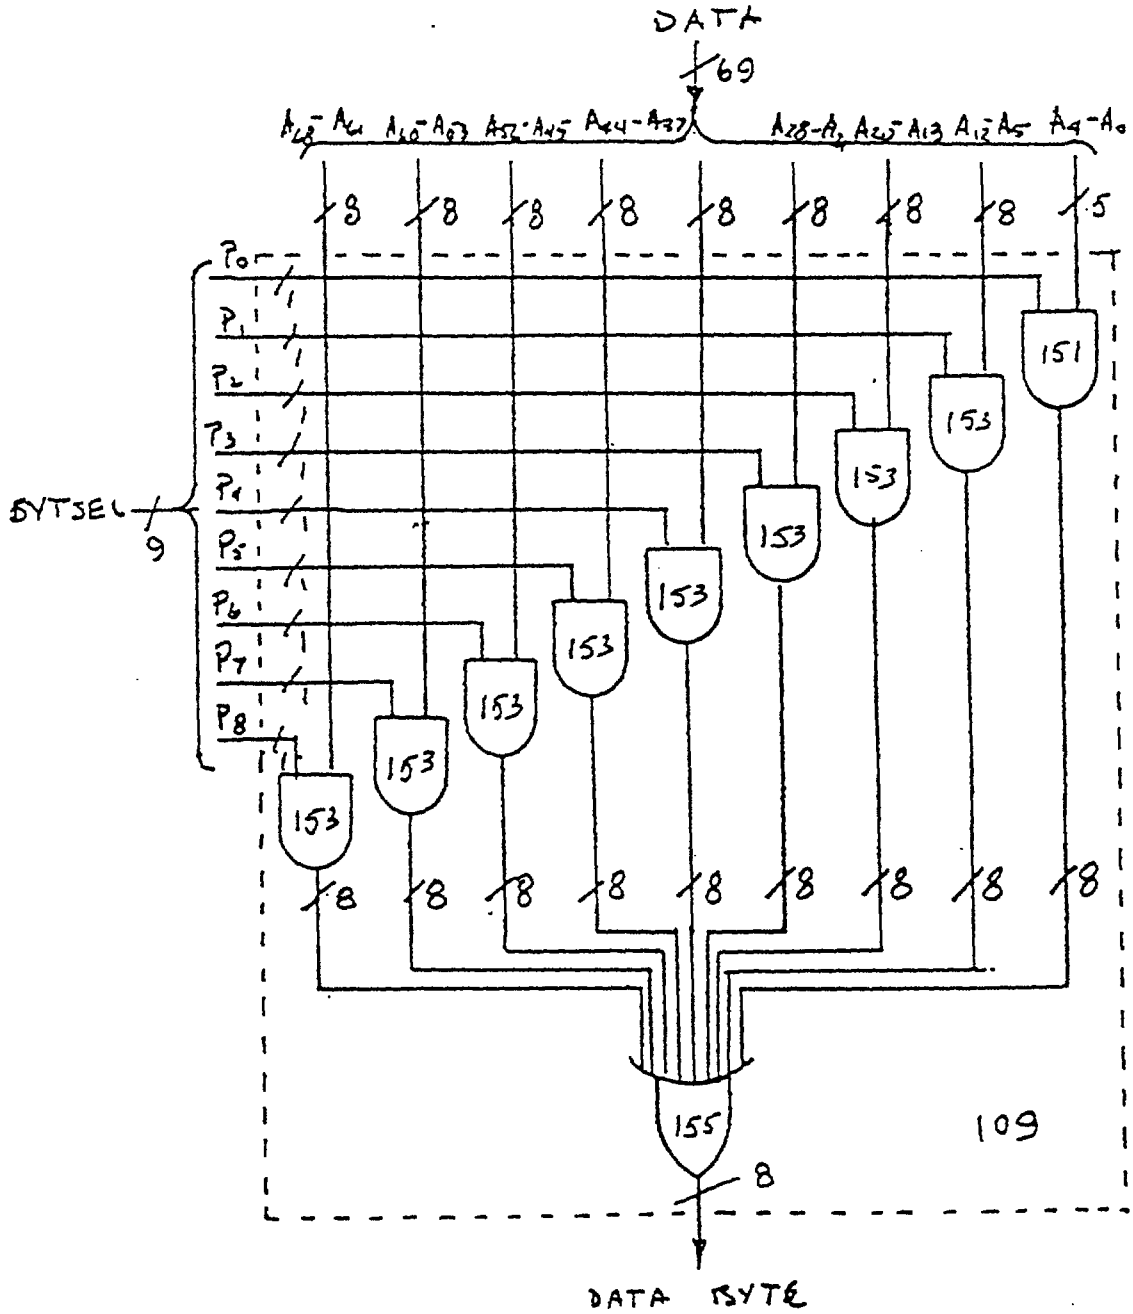


Figure 13

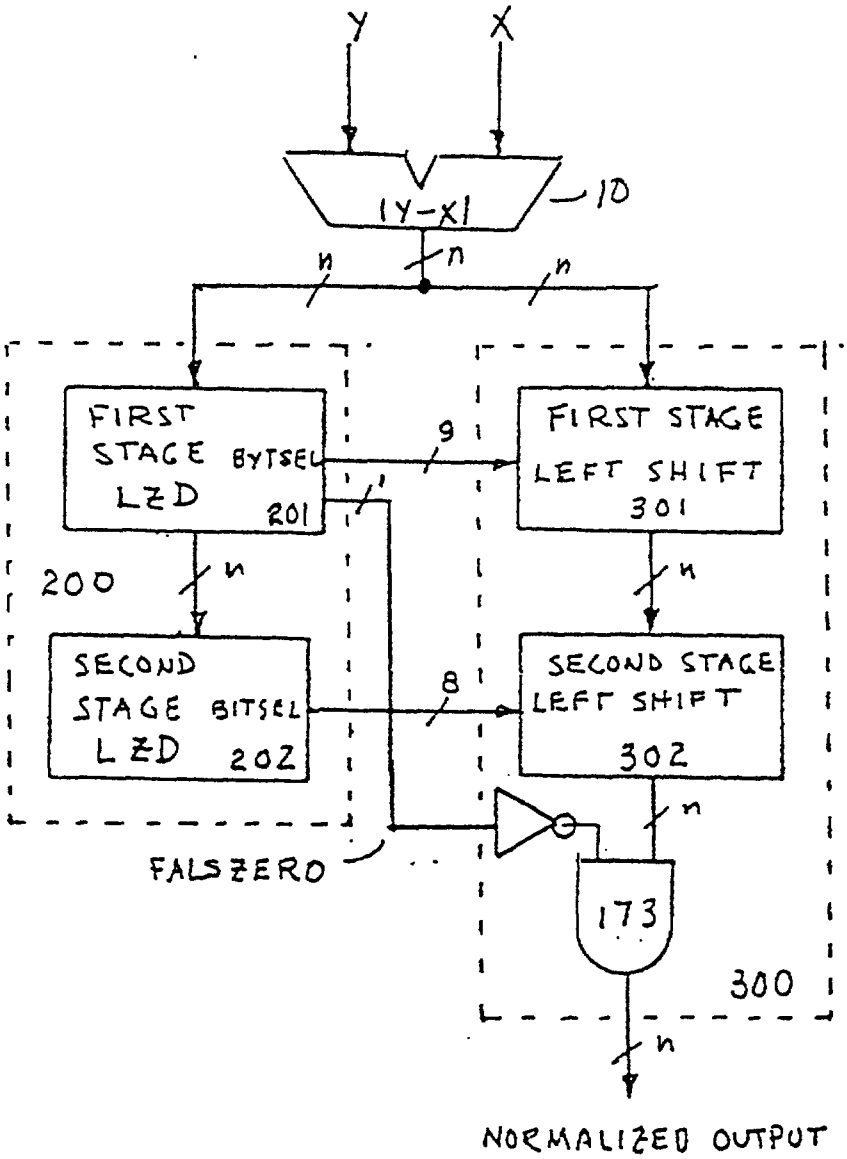

Y
X
|Y-X|
10
n
n
n
FIRST STAGE LZD
BYTSEL
201
9
FIRST STAGE LEFT SHIFT
301
200
n
n
SECOND STAGE LZD
BITSEL
202
8
SECOND STAGE LEFT SHIFT
302
n
FALSZERO
173
300
n
NORMALIZED OUTPUT

Figure 14

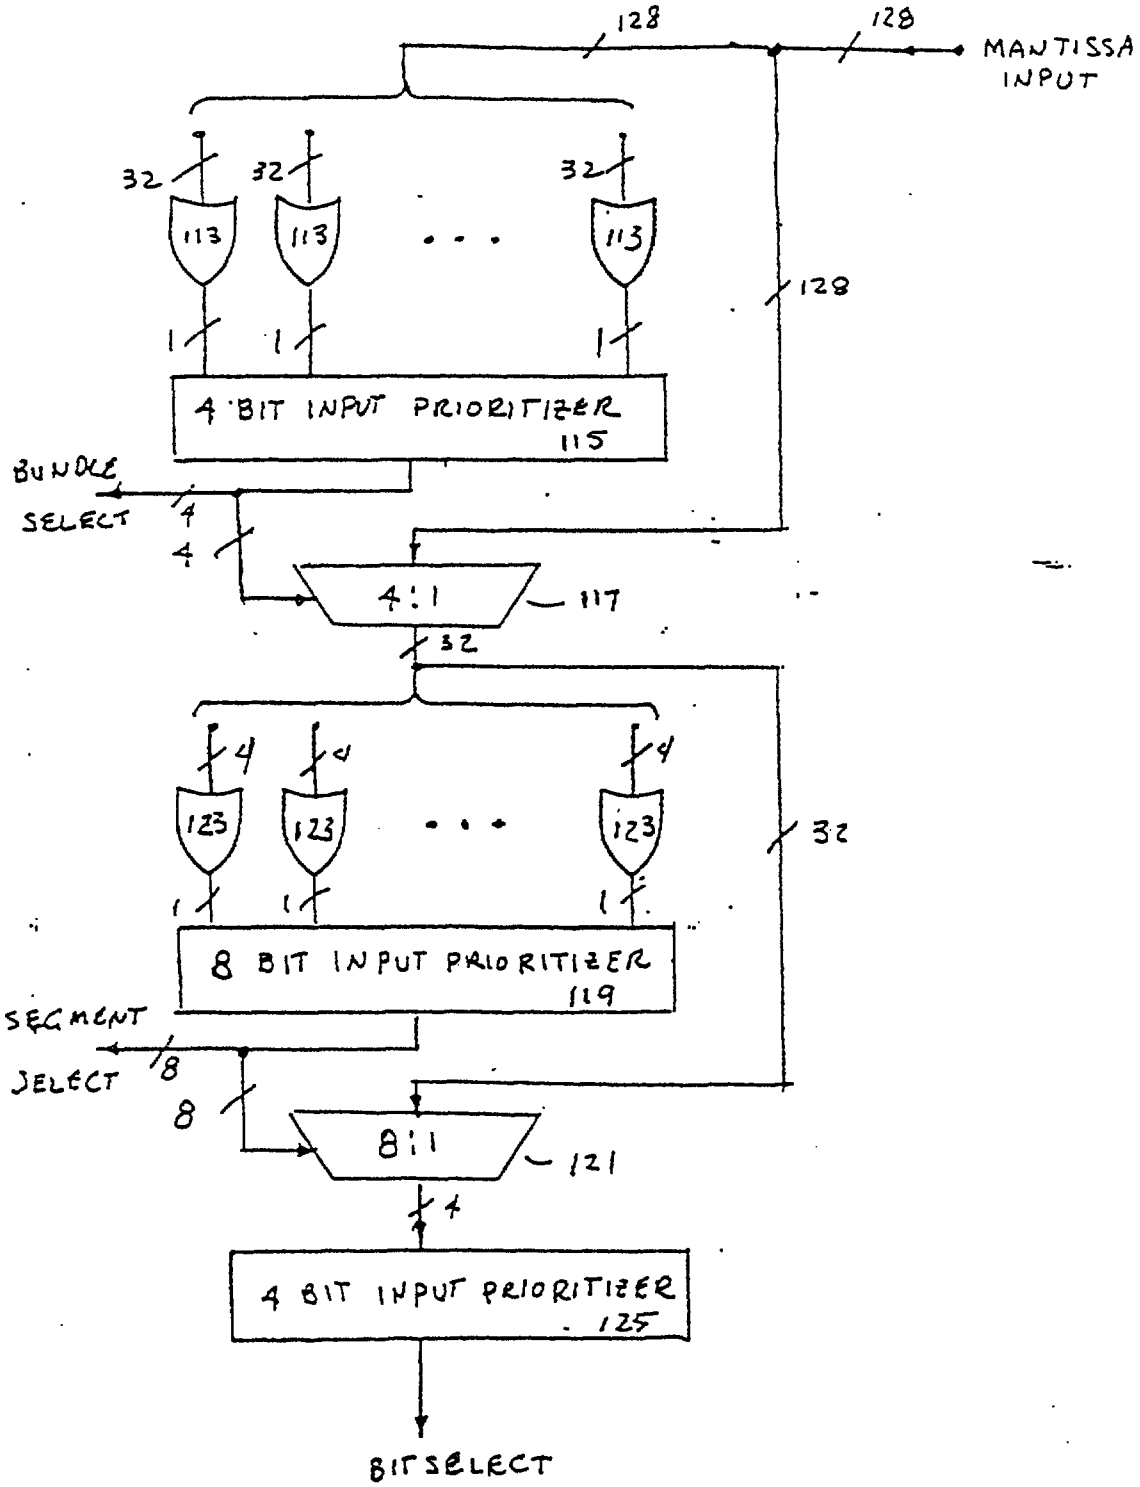

128
128
MANTISSA INPUT
32
32
32
113
113
113
1
1
1
128
4 BIT INPUT PRIORITIZER 115
BUNDLE SELECT
4
4
4:1
117
32
4
4
4
123
123
123
1
1
1
32
8 BIT INPUT PRIORITIZER 119
SEGMENT SELECT
8
8
8:1
121
4
4 BIT INPUT PRIORITIZER 125
BIT SELECT

Figure 15

ABSTRACT

A MULTISTAGE LEADING ZERO DETECTOR AND GATE GENERATOR APPARATUS (Figure 1)

A multistage leading zero detector for use in left-shift normalization of floating-point mantissas is described. Detection of the leading one is accomplished by segmenting the mantissa into non-overlapping segments. The most significant segment containing a non-zero value bit is detected causing the activation of an output line corresponding to the segment position within the mantissa. A second level of detection selects the designated most significant segment and detects the position of the most significant non-zero bit within the segment causing activation of a line within a second set of lines, each corresponding to a bit position within a segment. This leading zero detector is combined with a multi-stage left-shifted unit to form a complete left-shift normalization unit.