



(51) International Patent Classification:

A01G 9/24 (2006.01) A01G 27/00 (2006.01)
A01G 25/00 (2006.01)

(21) International Application Number:

PCT/AU2011/001240

(22) International Filing Date:

27 September 2011 (27.09.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2010904371 29 September 2010 (29.09.2010) AU

(71) Applicant (for all designated States except US): **VERTICAL FARM SYSTEMS PTY LTD** [AU/AU]; PO Box 415, Palmwoods, QLD 4555 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LESLIE, John** [AU/AU]; c/- PO Box 415, Palmwoods, QLD 4555 (AU).

(74) Agent: **COLLISON & CO**; 117 King William Street, Adelaide, S.A. 5000 (AU).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A WATERING AND DRAINAGE ARRANGEMENT FOR A MULTI-LAYER HORTICULTURAL STRUCTURE

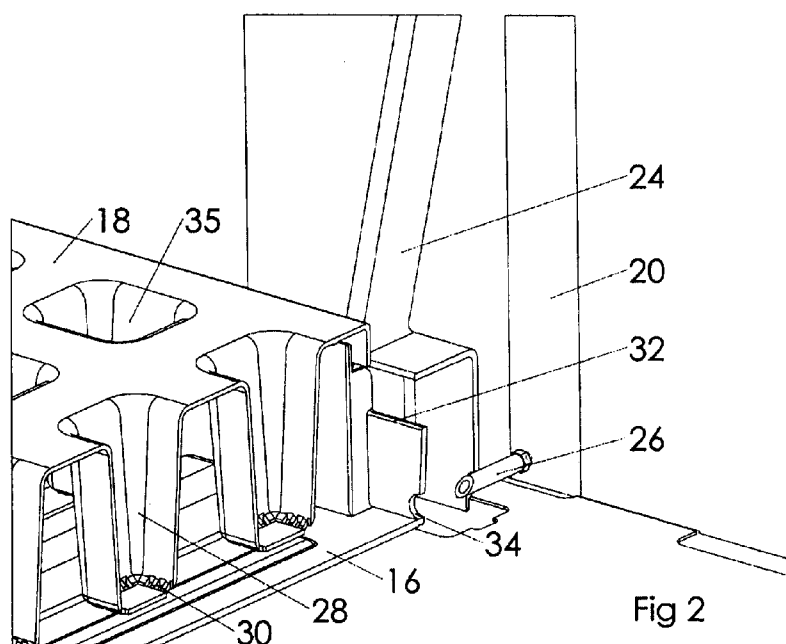

(57) Abstract: A watering/drainage arrangement for a multi-layer horticultural structure wherein during watering, water from a series of water release outlets is sprayed through an aperture of a flood tray which fills to a selected level and maintained at this level by the continued supply of sprayed water through the water release outlets and the drainage of overflow via a weir edge of the flood tray and during drainage, supply of water to the release outlets is terminated thereby preventing water being sprayed into the aperture of the flood tray thereby allowing the discharge of water through the aperture of the flood tray.