



(51) International Patent Classification:
B01D 35/00 (2006.01)

(21) International Application Number:
PCT/US2011/035726

(22) International Filing Date:
9 May 2011 (09.05.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/780,416 14 May 2010 (14.05.2010) US

(71) Applicant (for all designated States except US):
PARAGON WATER SYSTEMS [US/US]; 14001 63rd
Way, Clearwater, FL 33760 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SWAIN, David** [US/
US]; 4408 Roanoke Way, Palm Harbor, FL 34685 (US).

(74) Agent: **HERMANSON, Christopher, S.**; Greer, Burns &
Crain, 300 S. Wacker Drive, Suite 2500, Chicago, IL
60606 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FILTER SYSTEM WITH REMOVABLE ENHANCEMENT MEDIA

(57) Abstract: A water filter system including a base configured for re-
ceiving water from a faucet and a filter cartridge seated in the base. The
filter cartridge defines a first chamber having at least one filter element,
and a second chamber in fluid communication with the first chamber. An
enhancement cartridge is removably inserted in the second chamber and
includes an enhancement material for adding minerals to the water. The
enhancement cartridge is removable from the system separate from the fil-
ter cartridge.

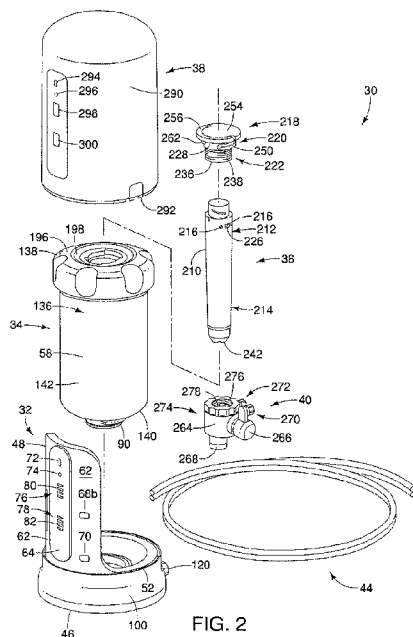


FIG. 2