



(51) International Patent Classification:

A61M 1/00 (2006.01) A61M 27/00 (2006.01)
A61M 3/02 (2006.01)

(21) International Application Number:

PCT/US2009/057428

(22) International Filing Date:

18 September 2009 (18.09.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/098,164 18 September 2008 (18.09.2008) US

(71) Applicant (for all designated States except US): **KCI LICENSING, INC.** [US/US]; Legal Department - Intellectual Property, P.O. Box 659508, San Antonio, TX 78265-9508 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **WILKES, Robert, Peyton** [US/US]; 13538 Crescent Creek, San Antonio, TX 78231 (US).


(74) Agents: **HILTON, Robert, C.** et al.; Sonnenschein, Nath & Rosenthal LLP, P.O. Box 061080, Wacker Drive Station, Sears Tower, Chicago, IL 60606 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,

[Continued on next page]

(54) Title: A SYSTEM AND METHOD FOR DELIVERING REDUCED PRESSURE TO SUBCUTANEOUS TISSUE

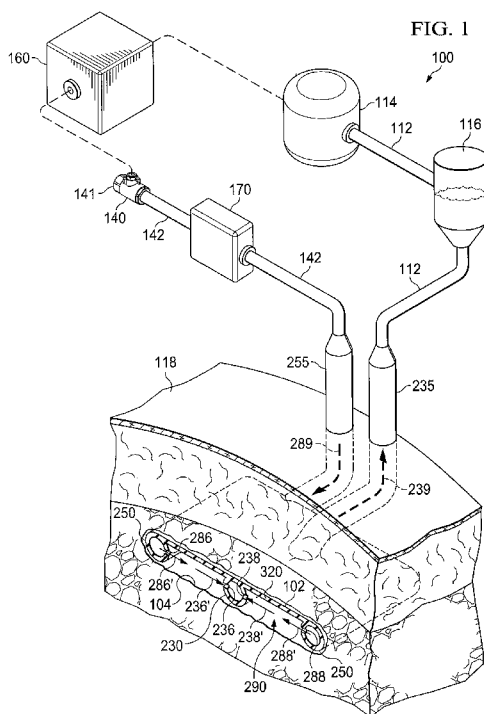

(57) Abstract: A reduced pressure treatment system (100) includes a first fluid pathway (112) in communication with a reduced pressure source and a second fluid pathway (142). The system includes a reduced pressure manifold (102) having a substantially gas impermeable barrier (320) and at least one outer conduit (250) defining a lateral edge of an interior region. The outer conduit and the substantially gas impermeable barrier enclose a portion of the interior region. The outer conduit is in fluid communication with one of the first and second fluid pathways. The outer conduit has at least one opening in fluid communication with the interior region. An inner conduit (230) is at least partially disposed within the interior region and is in fluid communication with another of the first and second fluid pathways. The inner conduit has at least one opening in fluid communication with the interior region.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, **Published:**
ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*