

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局

(43) 国际公布日
2020 年 4 月 2 日 (02.04.2020)



(10) 国际公布号
WO 2020/063269 A1

(51) 国际专利分类号:
H04W 4/06 (2009.01)

(21) 国际申请号: PCT/CN2019/104103

(22) 国际申请日: 2019 年 9 月 3 日 (03.09.2019)

(25) 申请语言: 中文

(26) 公布语言: 中文

(30) 优先权:
201811133953.X 2018 年 9 月 27 日 (27.09.2018) CN

(71) 申请人: 中兴通讯股份有限公司 (ZTE CORPORATION) [CN/CN]; 中国广东省深圳市南山区高新技术产业园科技南路中兴通讯大厦, Guangdong 518057 (CN)。

(72) 发明人: 沙秀斌 (SHA, Xiubin); 中国广东省深圳市南山区高新技术产业园科技南路中兴通讯大厦, Guangdong 518057 (CN)。 戴博 (DAI, Bo);

中国广东省深圳市南山区高新技术产业园科技南路中兴通讯大厦, Guangdong 518057 (CN)。


陆婷 (LU, Ting); 中国广东省深圳市南山区高新技术产业园科技南路中兴通讯大厦, Guangdong 518057 (CN)。 高音 (GAO, Yin); 中国广东省深圳市南山区高新技术产业园科技南路中兴通讯大厦, Guangdong 518057 (CN)。

(74) 代理人: 北京康信知识产权代理有限公司 (KANGXIN PARTNERS, P.C.); 中国北京市海淀区知春路甲 48 号盈都大厦 A 座 16 层, Beijing 100098 (CN)。

(81) 指定国 (除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK,

(54) Title: SERVICE TRANSMISSION METHOD AND DEVICE

(54) 发明名称: 业务传输方法及装置

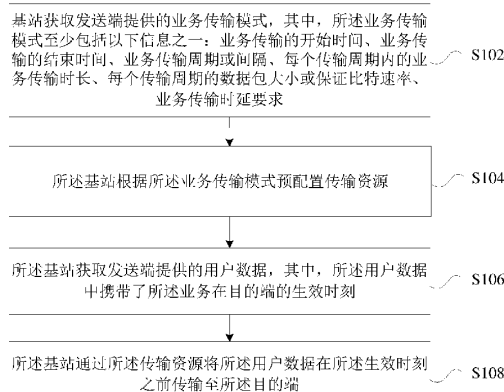

S102 A base station obtains a service transmission mode provided by a sending end, wherein the service transmission mode at least comprises one of the following pieces of information: a start time of a service transmission, an end time of the service transmission, a service transmission cycle or interval, a service transmission duration in each transmission cycle, a data packet size or a guaranteed bit rate in each transmission cycle, and a service transmission delay requirement

S104 The base station pre-configures a transmission resource according to the service transmission mode

S106 The base station obtains user data provided by the sending end, wherein the user data carries an effective point in time of a service at a destination end

S108 The base station transmits the user data to the destination end by means of the transmission resource before the effective point in time

图 1

(57) Abstract: Provided are a service transmission method and device, wherein the method comprises: a base station obtains a service transmission mode provided by a sending end, wherein the service transmission mode at least comprises one of the following pieces of information: a start time of a service transmission, an end time of the service transmission, a service transmission cycle or interval, a service transmission duration in each transmission cycle, a data packet size or a guaranteed bit rate in each transmission cycle, and a service transmission delay requirement; the base station pre-configures a transmission resource according to the service transmission mode; the base station obtains user data provided by the sending end, wherein the user data carries an effective point in time of a service at a destination end; the base station transmits the user data to the destination end by means of the transmission resource before the effective point in time. In the present invention, a terminal is pre-configured with the corresponding transmission resource according to the service transmission mode, such that the service transmission delay between nodes can be controlled to ensure that the service

[见续页]



WO 2020/063269 A1

LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX,
MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL,
PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL,
SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG,
US, UZ, VC, VN, ZA, ZM, ZW。

- (84) 指定国 (除另有指明, 要求每一种可提供的地区
保护): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ,
NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), 欧亚 (AM,
AZ, BY, KG, KZ, RU, TJ, TM), 欧洲 (AL, AT, BE, BG,
CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU,
IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT,
RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI,
CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG)。

本国际公布:

- 包括国际检索报告 (条约第21条(3))。

reaches the destination end before the destination end takes effect.

(57) 摘要: 本发明提供了一种业务传输方法及装置, 该方法包括: 基站获取发送端提供的业务传输模式, 其中, 所述业务传输模式至少包括以下信息之一: 业务传输的开始时间、业务传输的结束时间、业务传输周期或间隔、每个传输周期内的业务传输时长、每个传输周期的数据包大小或保证比特速率、业务传输时延要求; 所述基站根据所述业务传输模式预配置传输资源; 所述基站获取发送端提供的用户数据, 其中, 所述用户数据中携带了所述业务在目的端的生效时刻; 所述基站通过所述传输资源将所述用户数据在所述生效时刻之前传输至所述目的端。在本发明中, 根据业务传输模式给终端预配置相应的传输资源, 因此可以控制各节点之间的业务传输时延, 保证业务在目的端生效前到达目的端。