



MICROCOMPUTER SYSTEM INCLUDING A MICROPROCESSOR RESET CIRCUIT

The present invention relates to a microprocessor based computer systems and, more particularly, to reset circuitry for such computer systems.

Microprocessors such as the Intel 386 (TM) and i486 (TM) include a reset input to enable the microprocessor to be initialized in a known or defined state when power to the microprocessor is turned on. (386 and i486 are trademarks of Intel Corporation.)

To provide the computer user with a processor upgrade path in a 386-based computer system, a daughter card is provided which includes a microprocessor, a coprocessor, a cache controller, a cache and associated reset circuitry. This daughter card is alternatively referred to as a processor complex. The daughter card plugs into a planar board or motherboard containing other components and devices of the computer system. In this manner, a daughter card containing a different microprocessor configuration than that originally provided with the computer system can be plugged into the planar board to improve computer performance. An example of one computer employing such a daughter card arrangement is the IBM Personal System/2 Model 70 A21 computer. (Personal System/2 is a registered trademark of the International Business Machines Corporation.)

Microprocessor technology has advanced beyond the level of the 386 based computer system mentioned above. More specifically, Intel Corporation has recently introduced the i486 microprocessor which offers significant processor performance benefits by incorporating a microprocessor, coprocessor, cache memory and cache controller on a single chip.

Unfortunately, a number of difficulties are encountered when attempting to outfit an existing computer such as a 386-based computer system with a i486 microprocessor. The 386-based computer system

REPLACED SHEETS		SG
☒	Description : paged ...1... to paged ...22...	
☒	Claim(s) : paged ...24... to paged ...26...	
☐	Drawing(s) : paged to paged	
☒	Abstract : paged ...27... to paged ...28...	
DATE OF RECEIPT		



includes an external two-times (2X) clock generator (CLK2), and the 386 microprocessor of the computer system includes a CLK2 input to which the 2X clock signal is provided. The 386 microprocessor further includes an internal divide by two circuit for generating an internal one-times (1X) clock signal in response to the external 2X clock signal. The 386 microprocessor also includes a phase correction circuit responsive to a reset signal on the reset input for synchronising the internal 1X clock signal to an external 1X clock signal generated from the 2X clock signal to drive other devices in the computer system. In contrast, the i486 microprocessor does not use the same internal clock phase setting approach via the microprocessor reset input as does the 386 microprocessor, but rather the i486 microprocessor employs a simple 1X clock input. This means that a 25 MHz i486 operates from a 25 MHz clock input. In further contrast to the 386 microprocessor, the i486 microprocessor uses an internal frequency doubling circuit to generate an internal 2X clock.

Due to this arrangement, the i486 microprocessor assumes that the proper CLK phasing is implicit in the 1X clock input to the i486. Thus, the i486 microprocessor does not sample its reset input to achieve clock phase correction. This difference in reset/clock phasing between the 386 microprocessor and the i486 microprocessor causes 1X clock synchronization difficulties in an application where a processor upgrade from a 386 microprocessor to an i486 microprocessor is attempted, when minimal change to the remaining circuitry of the 386-based computer system or other computer system is desired.

An aim of the present invention is to provide reset circuitry for an advanced microprocessor based computer system.

In accordance with the present invention, there is now provided a computer system comprising: a microprocessor having a reset input and further exhibiting a clock input to which a clock signal is provided; means for generating a microprocessor reset signal; characterised in that the system further includes a reset circuit external to the

microprocessor comprising: phase error detecting means for detecting a phase error between the clock signal and the reset signal; phase error correcting means, coupled to the phase error detecting means, for adjusting the phase of the clock signal if a phase error is detected so as to substantially minimise the phase error, and regenerating means for providing a new reset signal to the reset input of the microprocessor whenever the phase of the clock signal is adjusted. Preferably, the clock input of the microprocessor is responsive to a first clock signal, and wherein the system comprises means for generating a second clock signal which is a frequency multiple of the first clock signal, and wherein the microprocessor reset circuit further comprises dividing means external to the microprocessor for dividing the second clock signal by the frequency multiple to produce the first clock signal. In a preferred embodiment, the phase error detecting means is responsive to the first clock signal, for detecting a phase error between the first clock signal and the reset signal; and wherein the phase error correcting means is operable for adjusting the phase of the first clock signal. In a preferred arrangement of the present invention, the second clock signal is twice the frequency of the first clock signal.

Viewing the present invention from a second aspect, there is now provided a computer system including a microprocessor, such microprocessor exhibiting a reset input and further exhibiting a clock input to which a clock signal is provided. The computer system includes a microprocessor reset circuit which is capable of generating a microprocessor reset signal. The microprocessor reset circuit includes a phase error detector for detecting a phase error between the clock signal and the reset signal. The reset circuit further includes a phase error corrector, coupled to the phase error detecting means, for adjusting the phase of the clock signal if a phase error is detected so as to substantially minimize such phase error. The reset circuit also includes a reset signal regenerator for providing a new reset signal to the reset input of the microprocessor when the phase of the clock signal is adjusted.

This Sheet Has Been Replaced



Viewing the present invention from a third aspect, there is now provided, in a computer system including a microprocessor, the microprocessor exhibiting a reset input and further exhibiting a clock input to which a clock signal is provided, a microprocessor reset circuit comprising: reset signal generating means for generating an initial reset signal; phase error detecting means for detecting a phase error between the clock signal and the initial reset signal; phase error correcting means, coupled to the phase error detecting means, for adjusting the phase of the clock signal if a phase error is detected so as to substantially minimize the phase error, and reset signal regenerating means, coupled to clock input of the microprocessor, for providing a new reset signal to the reset input of the microprocessor whenever the phase of the clock signal is adjusted.

Viewing the present invention from a fourth aspect, there is now provided, in a computer system including a microprocessor, the microprocessor exhibiting a reset input and further exhibiting a clock input responsive to a 1X clock signal, the system being capable of generating a microprocessor reset signal, the system further being capable of generating a 2X clock signal, a microprocessor reset circuit comprising: dividing means for dividing the 2X clock signal by 2 external to the microprocessor to produce the 1X clock signal; means for supplying the 1X clock signal to the clock input of the microprocessor; phase error detecting means, responsive to the 1X clock signal, for detecting a phase error between the 1X clock signal and the reset signal; phase error correcting means, coupled to the phase error detecting means, for adjusting the phase of the 1X clock signal if a phase error is detected so as to substantially minimize the phase error, and regenerating means, responsive to the phase error correcting means, for providing a new reset signal to the reset input of the microprocessor whenever the phase of the 1X clock signal is adjusted.

Viewing the present invention from a fifth aspect, there is now provided a computer system comprising: a microprocessor including a reset input and further exhibiting a clock input responsive to a 1X

This Sheet Has Been Replaced



clock signal, memory means, coupled to the microprocessor, for storing information therein; a bus coupling the microprocessor to the memory means; reset signal generating means for generating an initial reset signal; clock signal generating means for generating a 2X clock signal; dividing means for dividing the 2X clock signal by 2 external to the microprocessor to produce the 1X clock signal; means for supplying the 1X clock signal to the clock input of the microprocessor; phase error detecting means, responsive to the 1X clock signal, for detecting a phase error between the 1X clock signal and the reset signal; phase error correcting means, coupled to the phase error detecting means, for adjusting the phase of the 1X clock signal if a phase error is detected so as to substantially minimize the phase error, and regenerating means, responsive to the phase error correcting means, for providing a new reset signal to the reset input of the microprocessor whenever the phase of the 1X clock signal is adjusted.

Viewing the present invention from a sixth aspect, there is now provided, in a computer system including a microprocessor, the microprocessor exhibiting a reset input and further exhibiting a clock input to which a clock signal is provided, the system being capable of generating a microprocessor reset signal, a method for resetting the microprocessor comprising the steps of: detecting a phase error between the clock signal and the reset signal; adjusting the phase of the clock signal if a phase error is detected so as to substantially minimize the phase error, and providing a new reset signal to the reset input of the microprocessor whenever the phase of the clock signal is adjusted.

Viewing the present invention from an seventh aspect there is now provided, in a computer system including a microprocessor, the microprocessor exhibiting a reset input and further exhibiting a clock input responsive to a 1X clock signal, the system being capable of generating a microprocessor reset signal, a method for resetting the microprocessor comprising the steps of: generating a 2X clock signal; dividing the 2X clock signal by 2 external to the microprocessor to produce the 1X clock signal; providing the 1X clock signal to the clock

This Sheet Has Been Replaced



input of the microprocessor; detecting a phase error between the 1X clock signal and the reset signal; adjusting the phase of the 1X clock signal if a phase error is detected so as to substantially minimize the phase error, and providing a new reset signal to the reset input of the microprocessor whenever the phase of the 1X clock signal is adjusted.

In a preferred embodiment of the present invention, there is provided reset circuitry which requires minimal change to the circuitry of a 386 microprocessor computer when such computer is upgraded or redesigned to accommodate an i486 microprocessor.

In a particularly preferred embodiment of the present invention to be described later, there is provided reset circuitry which permits an i486 microprocessor to operate in a computer which originally employed a 386 microprocessor.

It will be appreciated that the present invention is also applicable to devices that are similar to the i486 and the 386 microprocessors.

An example of the present invention will now be described with reference to the accompanying drawings in which:

FIG. 1 is a high level block diagram of a conventional dual bus computer.

FIG. 2 is a timing diagram which shows the relationship between the internal 1X clock signal and the external 2X (CLK2) clock signal.

FIG. 3 is a high level block diagram of the computer system of the present invention.

FIG. 4 is a low level, more detailed block diagram of the reset circuitry portion of the computer system of FIG. 3.

This Sheet Has Been Replaced



FIG. 5 is a timing diagram showing the operation of the reset circuitry of FIG. 4 when no phase error occurs.

FIG. 6 is a timing diagram showing the operation of the reset circuitry of FIG. 4 when a phase error occurs.

FIG 7 is a timing diagram employing a time compressed time axis to show the operation of the reset circuitry of FIG. 4.

This Sheet Has Been Replaced



Figure 1 shows a computer 10 of the prior art employing an Intel 386 microprocessor and associated power reset circuitry. Computer 10 is a dual bus computer which includes the aforementioned microprocessor now designated as microprocessor 100. Microprocessor 100 includes a reset input shown in FIG. 1 as RESET.

Microprocessor 100 is coupled via a CPU local bus 105 to a buffer 110 which couples CPU local bus 105 to a system local bus 115. System local bus 115 is coupled via a latch/buffer/decoder 120 to a planar I/O (input/output) bus 125 to which peripheral devices such as device 130 are connected. System local bus 115 is further coupled to a memory controller and memory 135. System local bus 115 is also coupled via a buffer 140 and a Micro Channel (TM) bus 145 to Micro Channel (TM) sockets or slots 150 into which various adapter cards may be inserted. (Micro Channel is a trademark of the International Business Machines Corporation.) A direct memory access (DMA) controller 155 is coupled to system local bus 115 to facilitate direct access to memory 135 without the intervention of microprocessor 100. Computer 10 further includes a bus control and timing circuit 160 which is coupled to system local bus 115 to permit control and timing of bus 115. A central arbitration point 165 is coupled to both bus control and timing circuit 160 and Micro Channel sockets 150. Central arbitration point 165 determines which functional entity gets access to the Micro Channel bus 145, be it microprocessor 100, a bus master plugged into one of Micro Channel sockets 145 or DMA controller 155, for example.

A cache memory 170 is coupled to CPU local bus 105 and microprocessor 100 as shown. To control the operation of cache memory 170, an Intel 82385 cache controller 175 is coupled to CPU local bus 105 and system local bus 115 as shown. When computer 10 is being referred to as a dual bus computer, it is the CPU local bus 105 and the system local bus 115 which are the two busses being referenced. Each of busses 105 and 115 includes respective address, data and control busses. To facilitate the processing of floating point operations, a math coprocessor 180 is coupled to CPU local bus 105.

This Sheet Has Been Replaced



As mentioned earlier, microprocessor 100 includes a reset input designated RESET. Microprocessor 100 further includes a clock input designated CLK2 to which a clock frequency of double (2X) the microprocessor internal clock frequency is provided. The internal clock frequency of microprocessor 100 is defined to be equal to 1X.

A divide by two and phase correction circuit 100A is included within microprocessor 100 such that the CLK2 or 2X clock signal (for example, at 50 MHz) provided to the microprocessor CLK2 input is divided down to 1X (or 25 MHz, for example) for use internal to microprocessor 100. A CLK2 generation circuit or clock oscillator 185 is provided to generate the CLK2 signal. CLK2 generation circuit 190 includes a CLK2 output which is coupled to RESET LOGIC 190, a divide by 2 circuit 195, bus control and timing circuit 160, cache controller 175, microprocessor 100 and coprocessor 180 to provide clock information thereto. Reset logic 180 includes a RESET output which is coupled to the microprocessor RESET input, math coprocessor 180, cache controller 175 and bus control and timing circuit 160 to provide an appropriate reset pulse to such devices when system reset is desired. From FIG. 1 it is seen that divider circuit 195 divides the CLK2 clock signal by 2 to produce an external clock signal designated CLK which is provided to RESET LOGIC 190 and to bus control and timing circuitry 160. It is noted that the external clock CLK signal generated at the CLK output of divider circuit 195 exhibits a frequency substantially the same as the 1X internal clock frequency of microprocessor 100. For this reason, the CLK signal is referred to alternatively as the 1X external clock signal.

An overview of the operation of the 386 microprocessor with respect to clocking operations is now presented. As mentioned above, the 386 microprocessor operates from a two-times external clock or 2X clock external input. Thus, a 20 MHz 386 microprocessor requires a 40 MHz external clock signal at its CLK2 input and a 25 MHz 386 microprocessor requires a 50 MHz external clock signal at its CLK2 input.

This Sheet Has Been Replaced



Internally, the 386 microprocessor generates its own one-times (1X) clock by dividing the CLK2 input signal by two. This 1X internal clock signal is used inside the 386 microprocessor to determine the timing of the various internal logic operations including operations which appear as microprocessor outputs. This 1X clock signal is also used internal to the 386 microprocessor to determine the appropriate sample time for external inputs. The timing relationship of this 1X internal clock signal to the CLK2 clock signal is shown in FIG. 2 in which the 1X internal clock signal is shown in the lowermost portion thereof and the CLK2 clock signal is shown in the uppermost portion thereof. The timing relationships relative to this 1X clock are documented by Intel in the 80386 Hardware Manual. The 1X internal clock signal is used to determine the appropriate phase of the CLK2 signal since multiple CLK2 phases are required to complete a 386 microprocessor bus cycle.

The typical 386 microprocessor based computer system will generate, external to the 386 microprocessor, its own 1X external clock signal since there is no 1X external clock output from the 386 microprocessor. As seen in FIG. 1, this external 1X clock signal is generated in computer 10 at the CLK output of divider circuit 195 as the CLK signal is. This 1X external clock signal or CLK signal is used by external logic to monitor or sample the 386 microprocessor and to control the necessary 386 microprocessor inputs.

The two separately generated 1X clocks, namely the internal 1X clock and the external 1X clock (CLK at divider 195) may undesirably differ in their phasing unless some means is provided to achieve synchronization of the internal 1X clock and the external 1X clock during the power up of microprocessor 100. This required synchronization action is typically provided by generation of the signal RESET which is provided to the RESET input of microprocessor 100. External logic, namely reset logic 190, triggers the active edge of the RESET signal relative to the externally generated 1X clock.

This Sheet Has Been Replaced



That is, there is a known and fixed relationship between the active edge of the RESET signal and the externally generated 1X clock signal. The RESET signal is sampled by the 386 microprocessor on each CLK2 rising edge. The resulting RESET sample information is used by internal divide by 2 and phase correction circuitry 100A to change the phasing of the internal 1X clock if required to bring the internal 1X clock into sync with the external 1X clock.

To provide the computer user with a processor upgrade path in one type of computer 10, a daughter card (not shown) is provided which includes microprocessor 100, coprocessor 180, cache controller 175, cache 170 and the associated reset circuitry. This daughter card is alternatively referred to as a processor complex. The daughter card plugs into a planar board or motherboard containing the remaining components and devices of computer 10 shown in FIG. 1. In this manner, a daughter card containing a different microprocessor configuration than that originally provided with computer 10 can be plugged into the planar board to improve computer performance. An example of one computer employing such a daughter card arrangement is the IBM Personal System/2 Model 70 A21 computer. (Personal System/2 is a registered trademark of the International Business Machines Corporation.)

FIG. 3 is a high level block diagram which depicts the computer system of the present invention as computer system 200. Computer system 200 has elements in common with computer system 10 of FIG. 1 with the exception of the modifications shown in FIG. 3 and now discussed. Like numerals are used to indicate like elements in FIG. 3 and FIG. 1.

In the preferred embodiment of the invention, computer system 200 includes an i486 microprocessor designated microprocessor 205 having a 1X clock input designated CPUCLK and a reset input designated MPRESET input as shown in FIG. 3. The internal clock frequency of microprocessor 205 is defined to be equal to 1X and the frequency of the clock signal provided to the CPUCLK input is also 1X. Microprocessor



205 is coupled to CPU local bus 105 as shown. The CLK2 output of CLK2 clock signal generation circuit 185 is coupled to the CPUCLK clock input of microprocessor 205 via a divide by two with phase correction circuit 210. The CLK2 output of CLK2 generation circuit 185 is also coupled to a time base input or clock input (DCLK2, CLK2C) of the input of a phase checker circuit 215 via a time delay circuit 212. In this manner, a time delayed version of the CLK2 clock signal, namely the DCLK2 signal, which is produced at the DCLK2 output of time delay circuit 212, is provided as the time base for phase checker 215. The DCLK2 output of time delay circuit 212 is also coupled to a time base input of reset logic circuit 190 such that the same delayed clocking information or time base signal DCLK2 is provided to phase checker 215 and reset logic 190.

Phase checker circuit 215 includes phase inputs 215A and 215B and a phase error output designated PHERR at which a phase error signal PHERR is generated which represents the phase error between signals (later described) which are provided to phase inputs 215A and 215B. The CPUCLK output of divide by 2 with phase correction circuit 210 is coupled via a time delay circuit 217 to phase input 215A of phase checker 215 such that a delayed version of the CPUCLK signal (DCLK) produced at the output of delay circuit 217 is provided to phase input 215A.

The RESET output of RESET logic circuit 190 is coupled to the remaining phase input 215B of phase checker 215 to provide reset pulse phase information thereto. Providing the DCLK and RESET signals to phase inputs 215A and 215B in this manner permits phase checker 215 to compare the phase of the delayed CPUCLK signal (DCLK) with the implicit phase of the RESET signal. If phase checker 215 detects a phase error between the DCLK signal and the RESET signal, then phase checker 215 generates a phase error signal PHERR at the PHERR output of phase checker 215. This phase error indicates that an undesirable phasing relationship exists between the CPUCLK signal (as represented by DCLK) and the CLK signal provided by divider 195. The PHERR output of phase

This Sheet Has Been Replaced



checker 215 is coupled to the PHERR input of divided by 2 with phase correction circuit 210 to provide the PHERR signal thereto. The PHERR signal is also provided to the PHERR input of a reset regeneration generation circuit 220 which is discussed later.

Although phase checker 215 is checking the phase of the CPUCLK signal (as represented by DCLK) with respect to the RESET signal, it effectively checks the phase of the CPUCLK signal (internal microprocessor clock) with respect to the phase of the external clock signal CLK generated at the output of divider 195. This is so because the falling edge of the RESET signal generated by reset logic 190 contains clocking information with respect to the CLK external clock signal, since reset logic 190 follows the earlier timing convention compatible with the 386 microprocessor.

If phase checker 215 determines that a phase error exists between the delayed CPUCLK signal (DCLK) and the RESET signal such as during power up of microprocessor 205, then a PHERR signal is generated which drives divide by 2 with phase correction circuit 210 to bring the delayed CPUCLK signal (DCLK) into phase with the RESET signal. In this manner the phase of the CPUCLK signal is adjusted and corrected. However, when such a phase adjustment occurs, the t_{1a} clock stability specification of the i486 microprocessor is violated as discussed later in more detail. When such a specification violation occurs, then reset regeneration circuit 220 regenerates or produces a new reset signal pulse (NEWRESET) which is provided to the MPRESET input of microprocessor 205 to reset microprocessor 205. As seen in FIG. 3, the RESET output of RESET logic 190 is coupled to the RESET input of RESET regeneration circuit 220 to provide the RESET signal thereto. Reset regeneration circuit 220 includes a RCLK output which is coupled to an input of a timing element 225, such timing element 225 including an RCNT6 output which is coupled back to reset regeneration circuit 220 as will be explained later. The PHERR output of phase checker 215 is coupled to a PHERR input of reset regeneration circuit 220 to inform reset regeneration circuit 220 as to when regeneration of the reset



signal is required. In this manner, reset regeneration circuit 220 is informed as to when the generation of the NEWRESET pulse is needed. It is noted that supplying this NEWRESET pulse to the RESET input of microprocessor 205 results in microprocessor 205 desirably being returned to an known state.

FIG. 4 is a lower level, more detailed block diagram showing the reset circuitry portion of microprocessor based computer system 200. In comparing the diagrams of FIG. 4 and FIG. 3, it will be noted that some signals, inputs and outputs have been renamed or are given alternative names as explained subsequently or as shown by the labelling in FIG. 4. This has been done to facilitate the implementation of the reset circuitry portion in programmable array logic or PAL form as will be explained in more detail later. (PAL is a registered trademark of Monolithic Memories, Inc.) Signals which are generated and used internally within the various blocks of FIG. 4 are shown in parenthesis.

The signals employed in the reset circuitry portion of FIG. 4 are the same as the signals in the reset circuitry portion of FIG. 3 except for the differences subsequently discussed. The CLK2 signal generated at the output of CLK2 clock signal generator 185 is also referred to as CLK2ALSO. The DCLK2 signal produced at the output of delay element 212 is alternatively designated CLK2A, CLK2B and CLK2C. The CPUCLK signal produced at the output of divide by 2 with phase correction circuit 210 is also referred to as CLK and CLKX. The RESET signal generated by reset logic 190 is shown in more detail in the reset circuitry of FIG. 4 as including a CPURESET signal which is supplied to reset regeneration logic 220 and further including a CACHERESET signal which is provided to reset regeneration logic 220 and phase checker 215.

A delayed version DPHERR of the phase error signal PHERR is generated internal to the divide by 2 with phase correction circuit 210 as shown in FIG. 4 and indicated in parenthesis. A CRESETSYNC signal is generated internal to phase checker 215 and is supplied to timing



element 225. CRESETSYNC is a delayed and inverted version of the CACHERESET signal generated by reset logic 190.

In one embodiment of the invention, timing element 225 is a 74LS590 counter manufactured by Texas Instruments, Inc. This timing element is used to determine the required pulse width of the NEWRESET pulse, such pulse width being approximately 1 millisecond.

An input signal BHOLD is provided to reset regeneration circuit 220 as seen in FIG. 4.

BHOLD is employed as an accessible timing signal which pulses once every approximately 15.6 microseconds and is used to generate the clock pulse for counter of timing element 225. RCLK is derived from BHOLD and is provided to timing element 225 as will be discussed later.

Divide by 2 with phase correction circuit 210, delay circuit 217 and delay circuit 212 are conveniently fabricated in a first PAL device as specified by the following PAL inputs, outputs and logic equations. In the subsequent logic equations, the following symbols have the meaning designated below:

<u>SYMBOL</u>	<u>DEFINITION</u>
/	Negation
:=	A registered term, equal to
=	A combinatorial term, equal to
&	Logical AND
+	Logical OR

The first PAL device is defined to exhibit the following input pins:

INPUT PIN	COMMENT
CLK2	- 50 MHz TTL oscillator
CLKALSO	- 50 MHz TTL oscillator
PHERR	- phase error

This Sheet Has Been Replaced



The first PAL is defined to exhibit the following output pins:

OUTPUT PIN	COMMENT
CLK2A	- 50 MHz buffered CLK2
DCLK	- delayed 25 MHz clock
CLK	- 25 MHz clock to i486 and PALS
DPHERR	- phase error pulse
CLKX	- 25 MHz clock to i486 and PALS
CLK2C	- 50 MHz buffered CLK2
CLK2B	- 50 MHz buffered CLK2

The following logic equations describe the logic implementation within the first PAL device:

```

CLK2A    = CLK2ALSO
CLK2B    = CLK2ALSO
CLK2C    = CLK2ALSO
!CLK     := (CLK & PHERR)
          # (CLK & !PHERR & !DPHERR)
!CLKX    := (CLK & PHERR)
          # (CLK & !PHERR & !DPHERR)
!DPHERR := (!PHERR & CLK)
          # (!DPHERR & !CLK)
DCLK     = CLK

```

Phase checker 215 and reset-regeneration logic 220 are conveniently fabricated in a second PAL device as specified by the following PAL inputs, outputs and logic equations. Accordingly, the second PAL device is defined to exhibit the following input pins:

INPUT PIN	COMMENT
CLK2C	- 50 MHz TTL CLK2
DCLK	- 25 MHz delay CPU clock
CACHERESET	- cache reset pulse
CPURESET	- CPU reset pulse

This Sheet Has Been Replaced



HOLD - CPU hold request
 RCNT6 - reset counter bit 6

The second PAL is defined to exhibit the following output pins:

OUTPUT PIN	COMMENT
NEWRESET -	new CPURESET including phasing
RCLK -	reset counter clock
PHERR -	phase error pulse
CRESETSYNC -	delayed and inverted CACHERESET
RCNTSYNC -	sampled version of input RCNT6

The following logic equations describe the logic implementation within the second PAL device.

```

!CRESETSYNC := CACHERESET
NEWRESET := CPURESET
            # !PHERR & !CACHERESET
            # NEWRESET & !RCNTSYNC & CRESETSYNC
            & !PHERR
!PHERR := DCLK & !CRESETSYNC & !CACHERESET
        # !PHERR & !RCNTSYNC & !CACHERESET
        # !PHERR & !DCLK
!RCLK := !DCLK & !PHERR & CRESETSYNC & HOLD
        # RCLK & !DCLK & CACHERESET
        # !RCLK & DCLK
RCNTSYNC := RCNT6 & !DCLK
        # RCNTSYNC & DCLK
  
```

FIG. 5 is a timing diagram which shows the operation of the reset circuitry of FIG. 4 by illustrating the CLK2/CLK2ALSO, CACHERESET, RCNT6, CLK2C, CRESETSYNC, PHERR, DPHERR, CLK/CLKX/, CPUCLK, DCLK, NEWRESET, RCLK, CLK2A, BHOLD and CPURESET signals of such reset circuitry on a common time axis. FIG. 5 illustrates the case where no

This Sheet Has Been Replaced



phase error occurs as seen by observing the consistently high PHERR signal.

FIG. 6 is a timing diagram which shows the operation of the reset circuitry of FIG. 4 by illustrating the CLK2/CLK2ALSO, CACHERESET, RCNT6, CLK2C, CRESETSYNC, PHERR, DPHER, CLK/CLKX/, CPUCLK, DCLK, NEWRESET, RCLK, CLK2A, BHOLD and CPURESET signals of such reset circuitry on a common time axis. FIG. 6 illustrates the case where a phase error occurs as observed at the falling edge of the PHERR signal at 300. The reset circuitry corrects this phase error as seen at the lengthened CLK pulse at 305.

FIG. 7 is a timing diagram which shows the operation of the reset circuitry of FIG. 4 by illustrating the CLK2/CLK2ALSO, CACHERESET, RCNT6, CLK2C, CRESETSYNC, PHERR, DPHER, CLK/CLKX/, CPUCLK, DCLK, NEWRESET, RCLK, CLK2A, BHOLD and CPURESET signals of such reset circuitry on a common time axis over a longer duration of time than in the timing diagrams of FIG. 5 and FIG. 6 by compressing the time axis. The timing diagram of FIG. 7 illustrates how the RCLK and BHOLD signals operate to time out the counter within timing element 225. RCNT6 provides the return signal from this counter. As illustrated in FIG. 7, for convenience of presentation, BHOLD pulses at less than the previously stated 15.6 microsecond rate, and RCLK is counted for only two counts here instead of 2^7 counts as it does in actual practice in one embodiment of the invention.

The following is a summary of the operation of the reset circuitry portion of computer system 200 of FIG. 3 and FIG. 4. When computer 200 is initially powered up or when reset logic 190 is otherwise instructed to generate a reset pulse, reset logic 190 generates an initial reset pulse designated RESET. The initial reset pulse RESET is supplied to reset regeneration circuit 220 which passes this initial RESET pulse on to microprocessor 205 via the NEWRESET line which is later used to transmit the NEWRESET pulse to microprocessor 205. Thus, the initial RESET pulse causes microprocessor 205 to execute an internal

This Sheet Has Been Replaced



microprocessor reset operation. This initial RESET pulse is also provided to phase checker 215 which uses this RESET pulse in the manner described below in the discussion of phase checker 215.

The logic provided in the reset circuitry performs a divide by two operation at divider/phase corrector 210 on the CLK2 clock signal of the CLK2 generator which exhibits a 2X clock frequency to provide microprocessor 205 with an appropriate clock signal exhibiting a 1X clock frequency at the CPUCLK input thereof. Phase checker 215 then determines if a phase error occurs between the CPUCLK signal and the RESET signal generated by reset logic 190. (The RESET signal carries indicia of the phase of the CLK 1X external clock signal.) Such a phase error is typical at microprocessor power up. If such a phase error is detected, then the phase of the CPUCLK signal is corrected by divider/phase corrector 210. However, when the phase of the CPUCLK signal is so corrected and shifted, the Intel timing specification for the i486 clock stability is violated (t_{1a} specification is .1% maximum change between adjacent CPUCLK clock pulses).

If a corrective CPUCLK phase shift is required, then reset regeneration circuit 220 generates a new reset pulse NEWRESET which is supplied to the MPRESET input of microprocessor 205 to reset microprocessor 205 to a known state. In other words, if a CPUCLK phase shift is required due a detected phase error, the MPRESET input of microprocessor 205 is redriven to its active state and held there for a full reset interval (approximately 1 millisecond), thus clearing any errors internal to microprocessor 205 caused by the CPUCLK phase error.

Additional operational details of the reset circuit of FIG. 3 and FIG. 4 are now discussed together with a summary of the various signals or terms employed in the reset circuit of FIG. 4. The output terms CPUCLKA, CPUCLKB and CPUCLKC shown in FIG. 4 are delayed versions of the CLK2 clock signal from CLK2 generator 185. The terms are employed to compensate for time delays resulting from divider/phase corrector 210. The time delay element 212 used to generate these terms assures



minimal skewing of the timing requirements in the remainder of the system circuitry.

CLK and CLKX in FIG. 4 are duplicate versions of the divided by 2 or 1X CPUCLK signal which is used to clock microprocessor 205. DCLK is a time delayed version of the CPUCLK, such DCLK signal being one input to phase checker 215 as already described. DPHERR is a logic term used internally to divider/phase corrector 210 in setting the proper phase of CPUCLK, CLK and CLKX. It is noted that the output PHERR will go active (low) if a phase error is detected between the CPUCLK signal (as represented by DCLK) and the RESET (CACHERESSET) signal provided to phase checker 215. As discussed above, the phase error signal PHERR is employed in reset regeneration circuit 220 to drive the NEWRESET signal active (high) into the MPRESET input of microprocessor 205 thus returning microprocessor 205 to a known state.

As seen in FIG. 3, the central arbitration point includes a bus hold request output BHOLD. When the aforementioned phase error is detected, depending on the timing of the BHOLD signal, output RCLK will pulse low, following the state of the BHOLD signal (inverted). The BHOLD signal, shown in FIG. 4 as being provided to reset regeneration logic 220, is employed as a timer signal. In this particular embodiment of the invention wherein CPUCLK exhibits a frequency of 25 MHz, the BHOLD signal pulses once every approximately 15.6 microseconds. These BHOLD pulses pulse the RCLK output of reset regeneration logic 220. This action in turn increments the 74LS590 counter in timing element 225 once every approximately 15.6 microseconds. This counter increments for 2^7 counts, yielding a total of approximately 1 millisecond, before the 2^7 counter bit connected to RCNT6 goes active. When this timer bit RCNT6 goes active, it is employed to deactivate the NEWRESET signal, the generation of which was described earlier. In this manner, the duration of the NEWRESET pulse is controlled and set. After NEWRESET goes inactive, both the microprocessor 205 and the remainder of computer system 200 are synchronized and operation of computer system 200 can begin.

This Sheet Has Been Replaced



The terms CRESETSYNC and RCNTSYNC are used internally within the PAL logic implementation of the reset circuit of FIG.'s 3 and 4. Additionally, CRESETSYNC is used externally to clear the 74LS590 counter to its initial zero count.

While a computer system reset circuit apparatus has been described above, it will be appreciated that a method for resetting a microprocessor has also been disclosed. Such method is employed in a computer system including a microprocessor, such microprocessor exhibiting a reset input and further exhibiting a clock input to which a clock signal is provided. The computer system in which the method is practiced is capable of generating a microprocessor reset signal. More specifically, a method for resetting the microprocessor in such system is disclosed and includes the step of detecting a phase error between the clock signal and the reset signal. The method further includes the step of adjusting the phase of the clock signal if a phase error is detected so as to substantially minimize the phase error. The method also includes the step of providing a new reset signal to the reset input of the microprocessor in the event that the phase of the clock signal is adjusted.

The foregoing has described an apparatus and method for resetting the reset input in a microprocessor based computer system. The apparatus and method disclosed provides reset circuitry which, in one embodiment of the invention, permits an i486 microprocessor to operate in a computer which originally employed a 386 microprocessor. The apparatus and method provides reset circuitry which requires minimal change to the circuitry of a 386 microprocessor computer when such computer is upgraded with an i486 microprocessor. In one embodiment of the invention, the apparatus and method desirably overcomes reset timing difficulties experienced in a computer system in which a processor upgrade from a 386 microprocessor to an i486 microprocessor is attempted.

This Sheet Has Been Replaced



While only certain preferred features of the invention have been shown by way of illustration, many modifications and changes will occur to those skilled in the art. It is, therefore, to be understood that the present claims are intended to cover all such modifications and changes which fall within the true spirit of the invention.

This Sheet Has Been Replaced



CLAIMS

1. A computer system comprising: a microprocessor (205) having a reset input and further exhibiting a clock input to which a clock signal is provided; means (190) for generating a microprocessor reset signal; characterised in that the system further includes a reset circuit external to the microprocessor (100,205) comprising:

phase error detecting means (215) for detecting a phase error between the clock signal and the reset signal;

phase error correcting means (210), coupled to the phase error detecting means (215), for adjusting the phase of the clock signal if a phase error is detected so as to substantially minimise the phase error, and

regenerating means for providing a new reset signal to the reset input of the microprocessor (205) whenever the phase of the clock signal is adjusted.

2. A computer system as claimed in claim 1 wherein:

the clock input of the microprocessor (205) is responsive to a first clock signal;

the system comprises means (185) for generating a second clock signal which is a frequency multiple of the first clock signal;

and the microprocessor reset circuit further comprises dividing means (210) external to the microprocessor (205) for dividing the second clock signal by the frequency multiple to produce the first clock signal.

3. A computer system as claimed in claim 2 wherein:





the phase error detecting means is responsive to the first clock signal, for detecting a phase error between the first clock signal and the reset signal;

and, the phase error correcting means is operable for adjusting the phase of the first clock signal.

4. A computer system as claimed in claim 3 wherein the second clock signal is twice the frequency of the first clock signal.

5. A computer system as claimed in any preceding claim further comprising:

memory means, coupled to the microprocessor, for storing information therein;

a bus coupling the microprocessor to the memory means.

6. A computing system as claimed in any preceding claim wherein the microprocessor is an i486 microprocessor.

7. A computer system as claimed in any preceding claim wherein the reset circuit comprises a programmable array logic circuit.

8. In a computer system including a microprocessor, the microprocessor exhibiting a reset and further exhibiting a clock input to which a clock signal is provided; the system being capable of generating a microprocessor reset signal, a microprocessor reset circuit comprising:

phase error detecting means for detecting a phase error between the clock signal and the reset signal;





phase error correcting means, coupled to the phase error detecting means, for adjusting the phase of the clock signal if a phase error is detected so as to substantially minimize the phase error, and

reset signal regenerating means for providing a new reset signal to the reset input of the microprocessor whenever the phase of the clock signal is adjusted.

9. A computer system comprising:

a microprocessor including a reset input and further exhibiting a clock input responsive to a first clock signal,

memory means, coupled to the microprocessor, for storing information therein;

a bus coupling the microprocessor to the memory means;
reset signal generating means for generating an initial reset signal;

clock signal generating means for generating a second clock signal;

dividing means for dividing the second clock signal by two external to the microprocessor to produce the first clock signal;

means for supplying the first clock signal to the clock input of the microprocessor;

phase error detecting means, responsive to the first clock signal, for detecting a phase error between the first clock signal and the reset signal;





phase error correcting means, coupled to the phase error detecting means, for adjusting the phase of the first clock signal if a phase error is detected so as to substantially minimize the phase error, and

regenerating means, responsive to the phase error correcting means, for providing a new reset signal to the reset input of the microprocessor whenever the phase of the first clock signal is adjusted.

10. In a computer system including a microprocessor, the microprocessor exhibiting a reset input and further exhibiting a clock input responsive to a first clock signal, the system being capable of generating a microprocessor reset signal, a method for resetting the microprocessor comprising the steps of:

generating a second clock signal;

dividing the second clock signal by two external to the microprocessor to produce the first clock signal;

providing the first clock signal to the clock input of the microprocessor;

detecting a phase error between the first clock signal and the reset signal;

adjusting the phase of the first clock signal if a phase error is detected so as to substantially minimize the phase error, and

providing a new reset signal to the reset input of the microprocessor whenever the phase of the first clock signal is adjusted.



MICROCOMPUTER SYSTEM INCLUDING A MICROPROCESSOR RESET CIRCUITABSTRACT


A microprocessor based computer system is provided which includes a reset circuit having a phase error detector for detecting a phase error between an initial reset signal and a clock signal provided to the microprocessor clock input. The reset circuit further includes a phase error corrector for adjusting the phase of the clock signal if a phase error is detected so as to substantially minimize the phase error. The reset circuit includes a reset signal regenerator for providing a new reset signal to the reset input of the microprocessor when the phase of the clock signal is adjusted.

This Sheet Has Been Replaced



FIG. 1


(PRIOR ART)

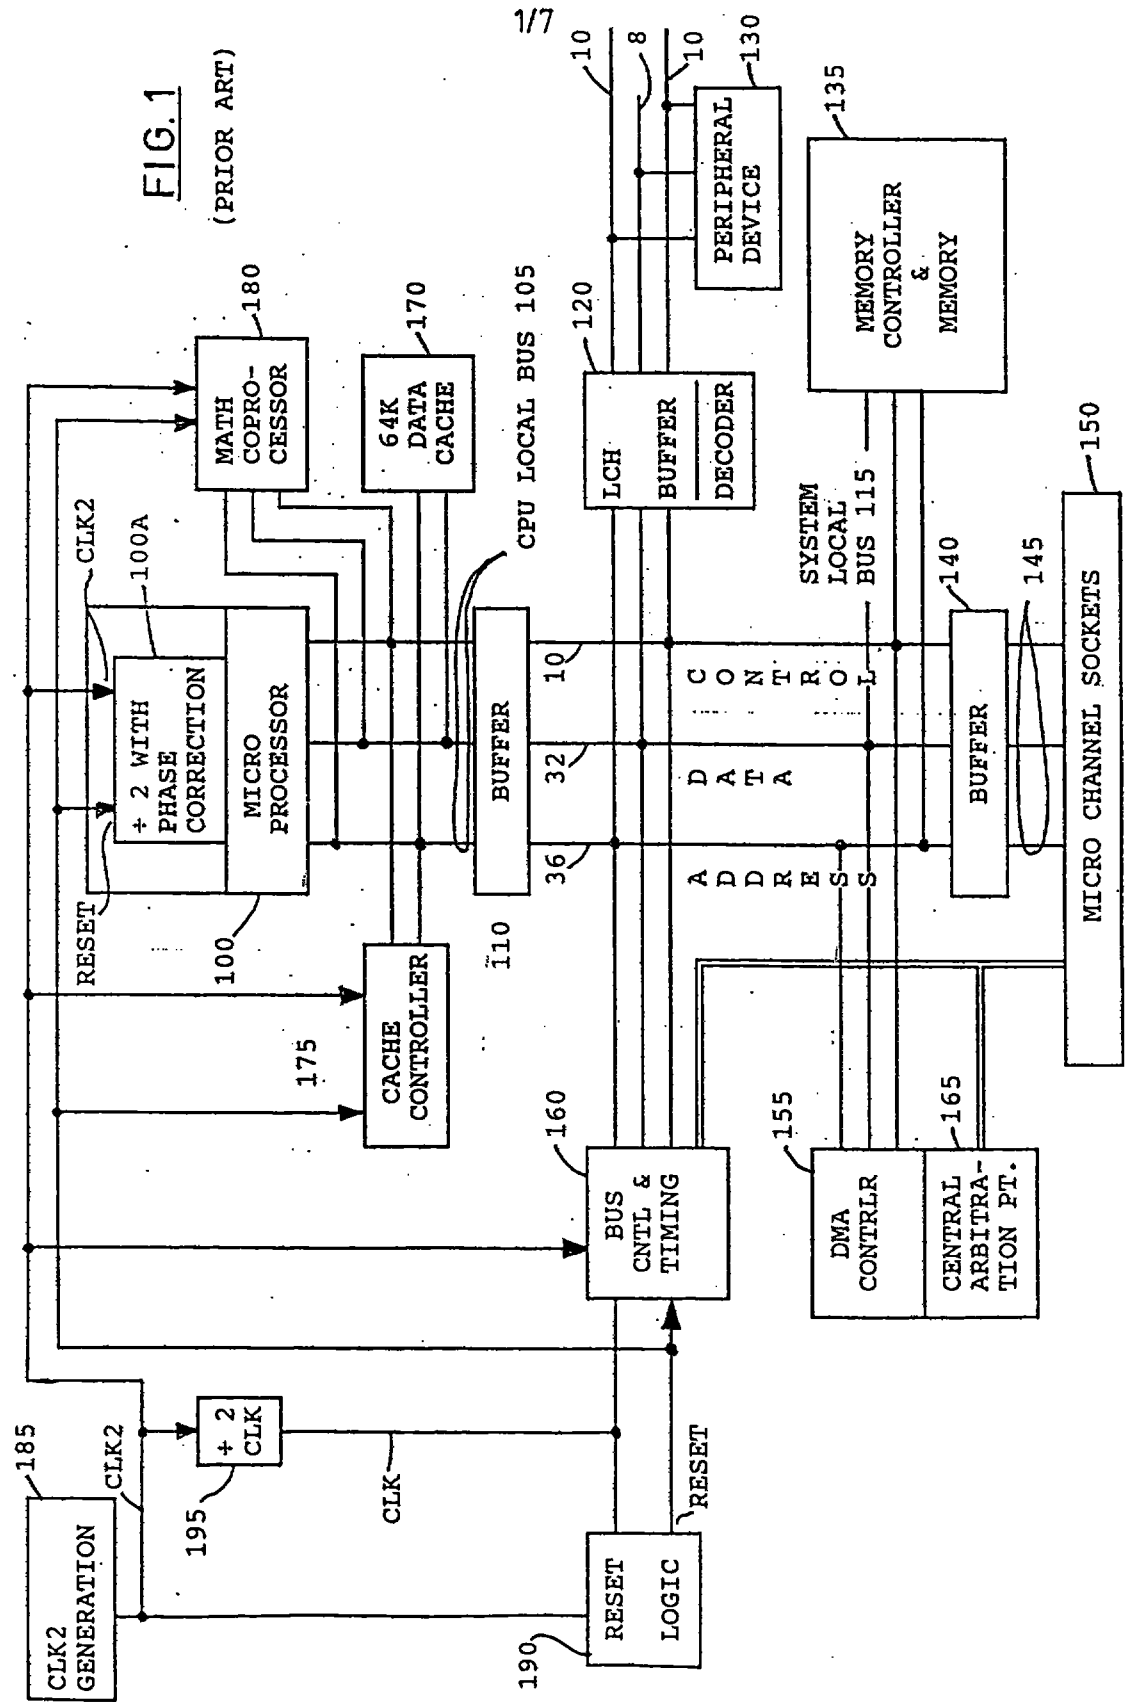

This Sheet Has Been Replaced



2X EXTERNAL CLOCK (CLK2)

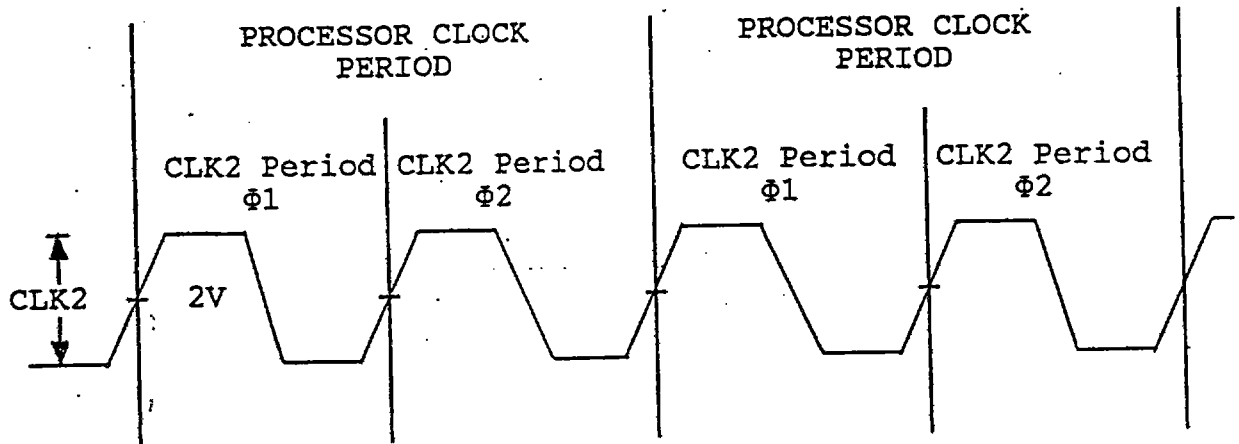

2X INTERNAL CLOCK

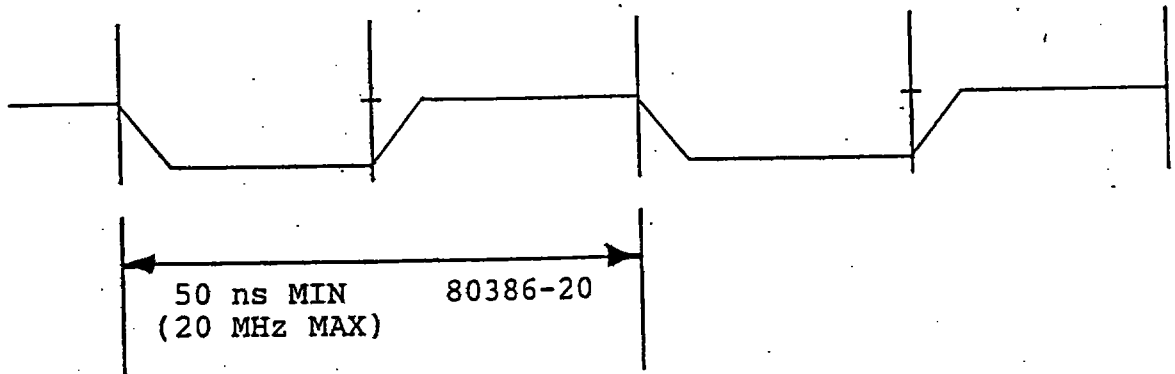
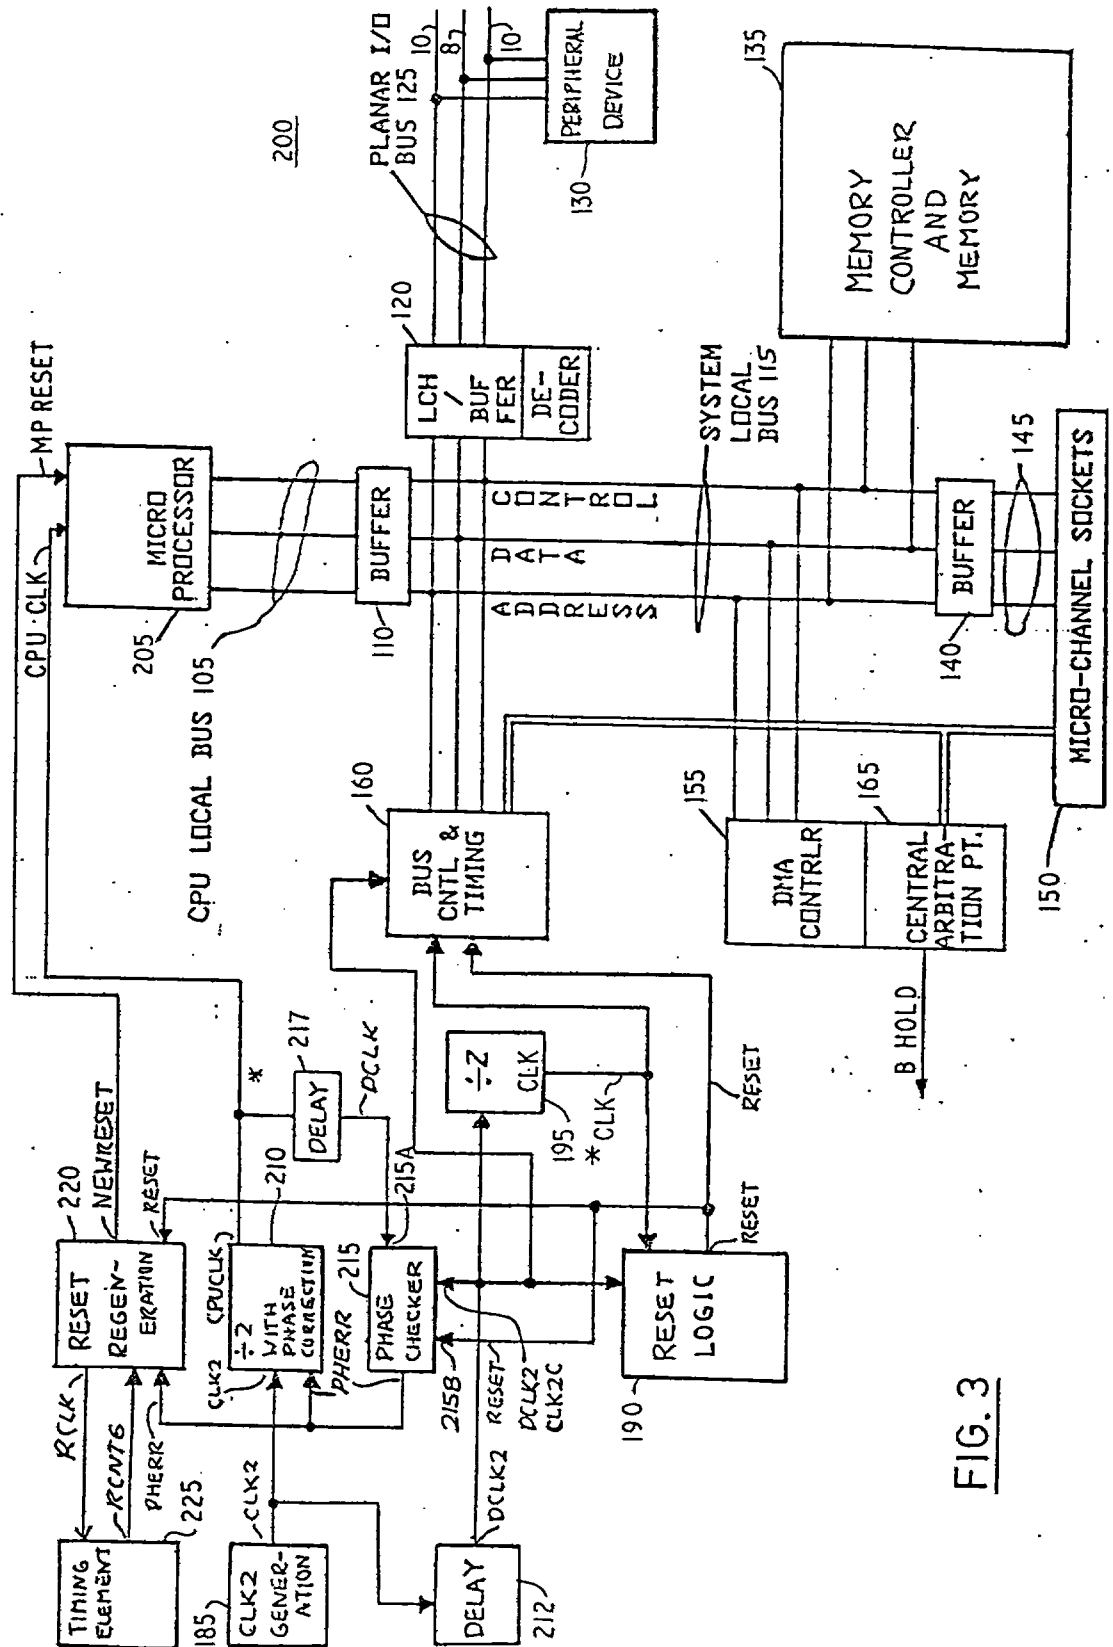


FIG. 2

This Sheet Has Been Replaced





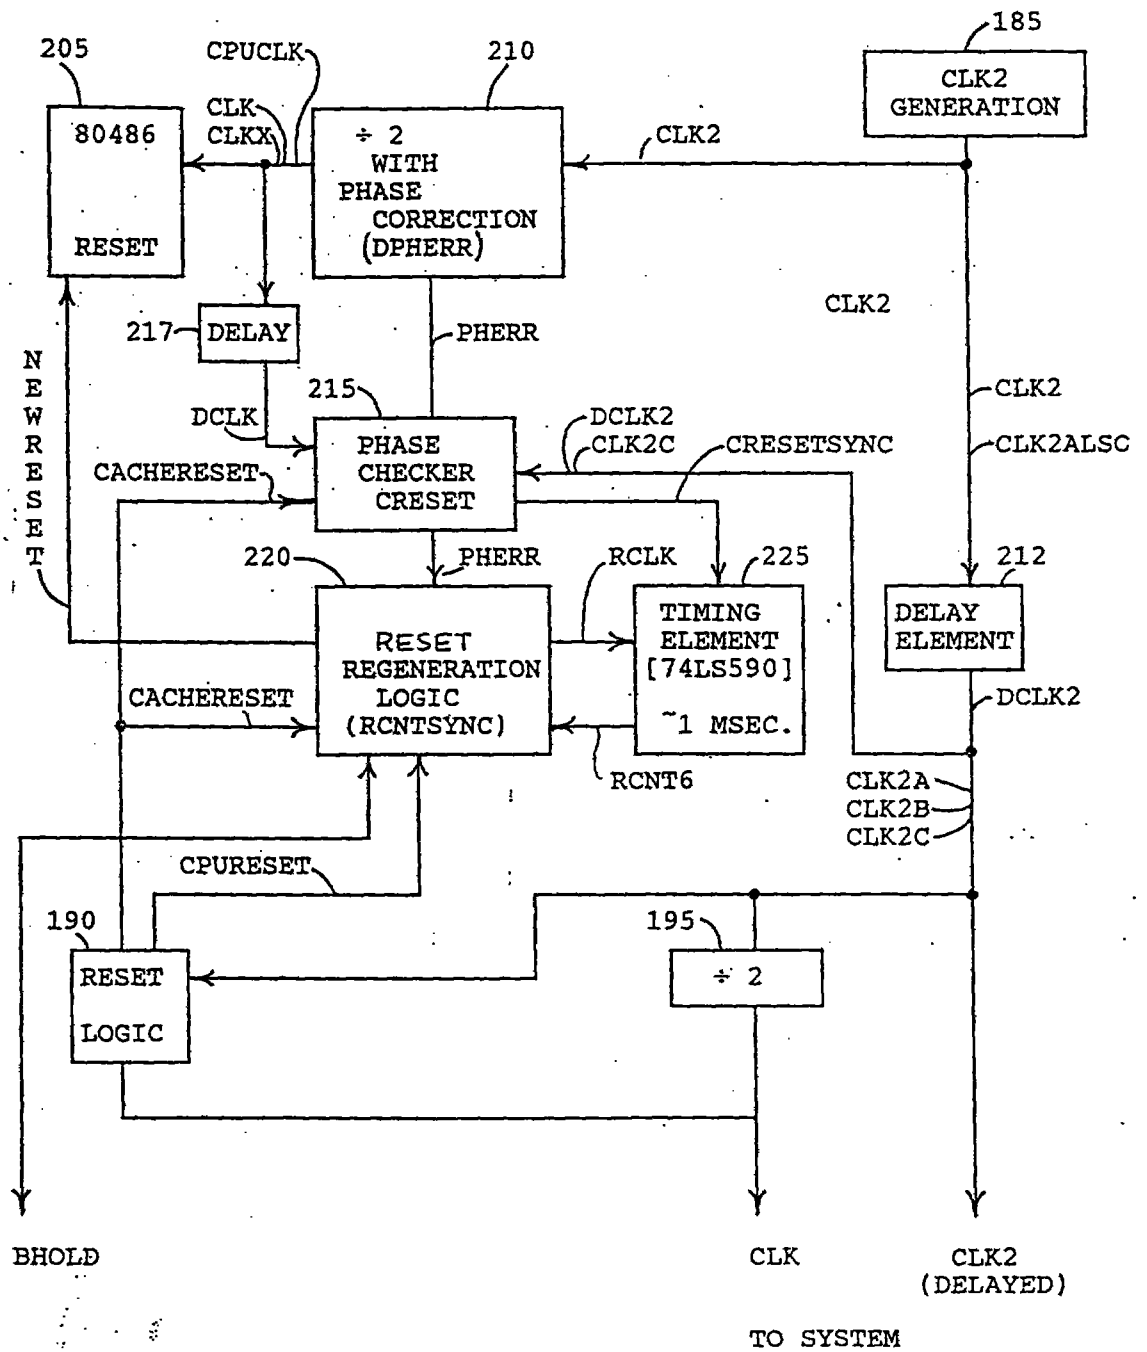


FIG. 4



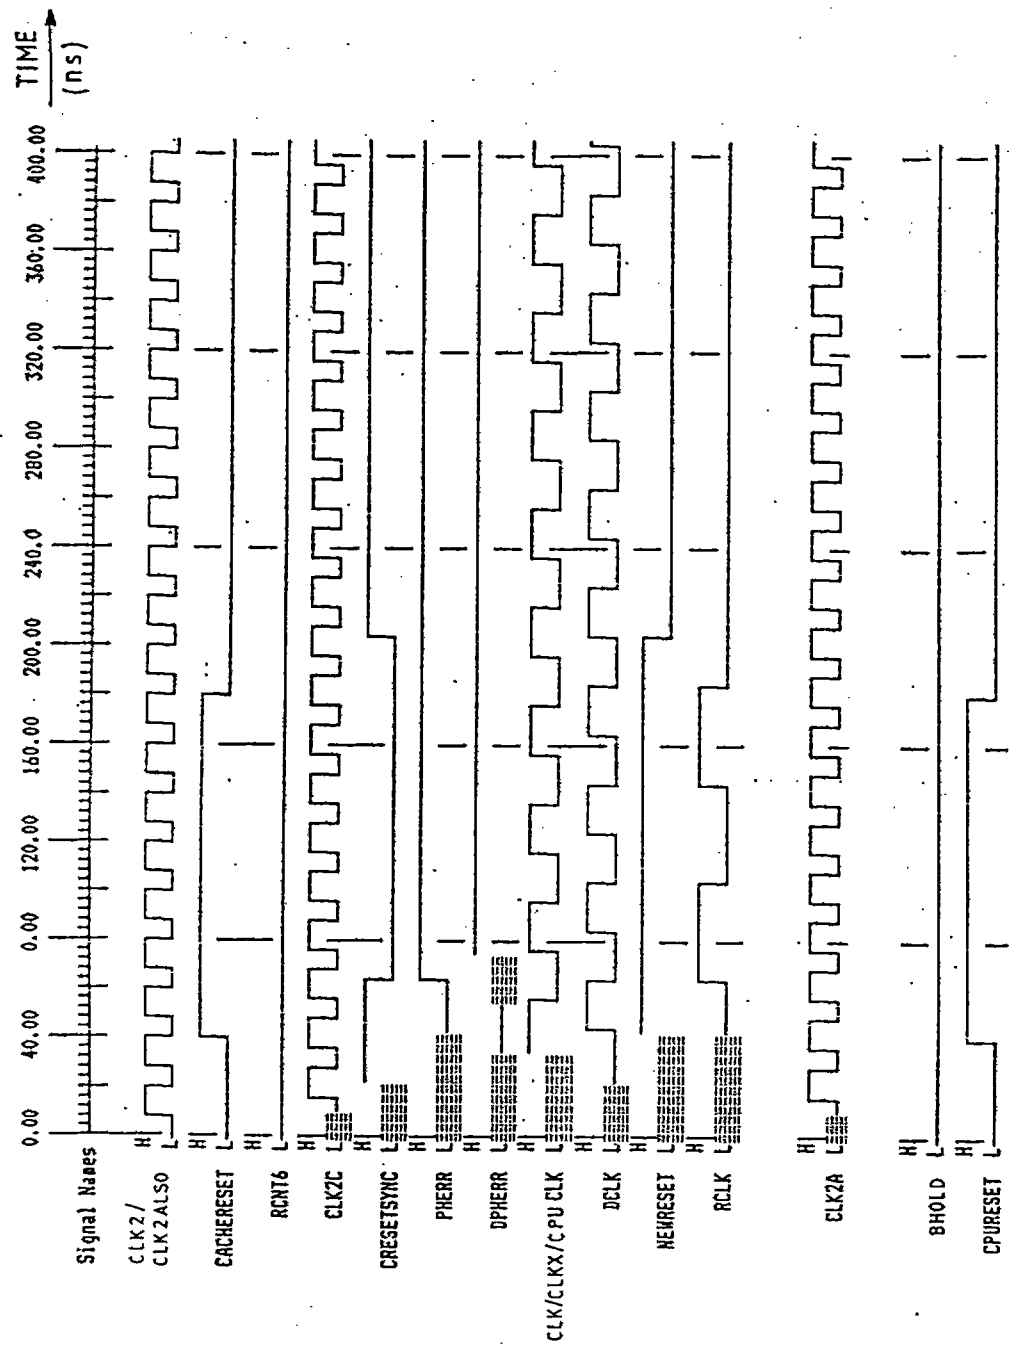


FIG. 5

This Sheet Has Been Replaced



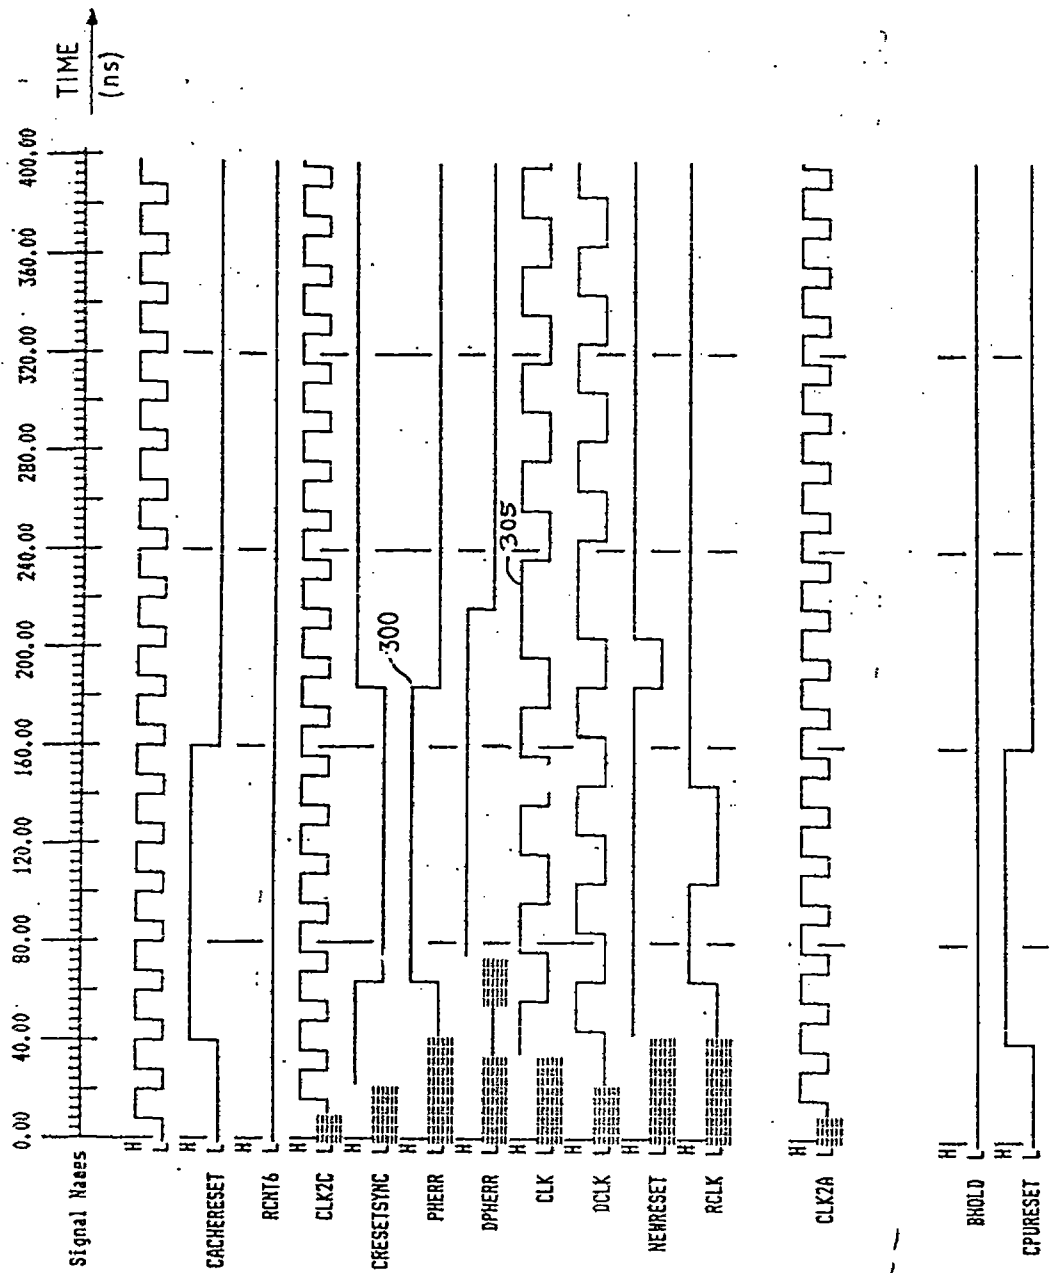


FIG 6

PHASE ERROR

This Sheet Has Been Replaced



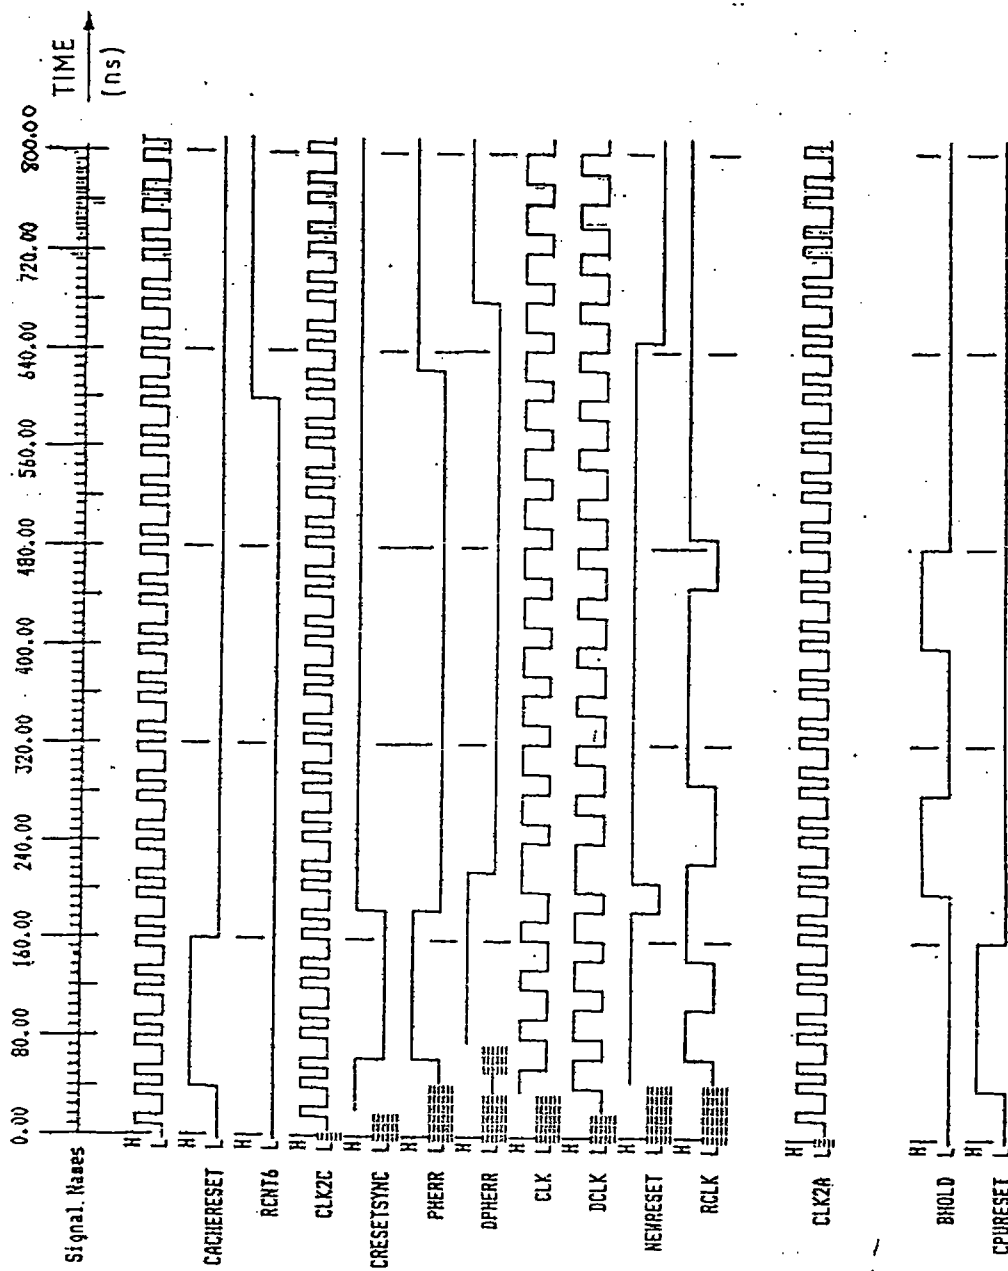


FIG. 7

This Sheet Has Been Replaced



REPLACED SHEETS		SG
☒	Description : paged ... ¹ ... to paged ... ⁴ ...	
☒	Claim(s) : paged ... ² ... to paged ... ²⁶ ...	
☐	Drawing(s) : paged to paged	
☒	Abstract : paged ... ²⁷ ... to paged ... ²⁸ ...	
DATE OF RECEIPT		

1

REPLACEMENT SHEET		SG
☒	Description : paged ... ¹ ... to paged ... ²² ...	
☒	Claim(s) : paged ... ²³ ... to paged ... ²⁴ ...	
☐	Drawing(s) : paged to paged	
☒	Abstract : paged ... ²⁷ ... to paged ... ²⁸ ...	
DATE OF RECEIPT ... ²⁵ / ⁹¹ ...		

MICROCOMPUTER SYSTEM INCLUDING A MICROPROCESSOR RESET CIRCUIT

The present invention relates to a microprocessor based computer systems and, more particularly, to reset circuitry for such computer systems.

Microprocessors such as the Intel 386 (TM) and i486 (TM) include a reset input to enable the microprocessor to be initialized in a known or defined state when power to the microprocessor is turned on. (386 and i486 are trademarks of Intel Corporation.)

To provide the computer user with a processor upgrade path in a 386-based computer system, a daughter card is provided which includes a microprocessor, a coprocessor, a cache controller, a cache and associated reset circuitry. This daughter card is alternatively referred to as a processor complex. The daughter card plugs into a planar board or motherboard containing other components and devices of the computer system. In this manner, a daughter card containing a different microprocessor configuration than that originally provided with the computer system can be plugged into the planar board to improve computer performance. An example of one computer employing such a daughter card arrangement is the IBM Personal System/2 Model 70 A21 computer. (Personal System/2 is a registered trademark of the International Business Machines Corporation.)

Microprocessor technology has advanced beyond the level of the 386 based computer system mentioned above. More specifically, Intel Corporation has recently introduced the i486 microprocessor which offers significant processor performance benefits by incorporating a microprocessor, coprocessor, cache memory and cache controller on a single chip.

Unfortunately, a number of difficulties are encountered when attempting to outfit an existing computer such as a 386-based computer system with a i486 microprocessor. The 386-based computer system

This is the replacement sheet

Date: 2 MAY 1996



includes an external two-times (2X) clock generator (CLK2), and the 386 microprocessor of the computer system includes a CLK2 input to which the 2X clock signal is provided. The 386 microprocessor further includes an internal divide by two circuit for generating an internal one-times (1X) clock signal in response to the external 2X clock signal. The 386 microprocessor also includes a phase correction circuit responsive to a reset signal on the reset input for synchronising the internal 1X clock signal to an external 1X clock signal generated from the 2X clock signal to drive other devices in the computer system. In contrast, the i486 microprocessor does not use the same internal clock phase setting approach via the microprocessor reset input as does the 386 microprocessor, but rather the i486 microprocessor employs a simple 1X clock input. This means that a 25 MHz i486 operates from a 25 MHz clock input. In further contrast to the 386 microprocessor, the i486 microprocessor uses an internal frequency doubling circuit to generate an internal 2X clock.

Due to this arrangement, the i486 microprocessor assumes that the proper CLK phasing is implicit in the 1X clock input to the i486. Thus, the i486 microprocessor does not sample its reset input to achieve clock phase correction. This difference in reset/clock phasing between the 386 microprocessor and the i486 microprocessor causes 1X clock synchronization difficulties in an application where a processor upgrade from a 386 microprocessor to an i486 microprocessor is attempted, when minimal change to the remaining circuitry of the 386-based computer system or other computer system is desired.

An aim of the present invention is to provide reset circuitry for an advanced microprocessor based computer system.

In accordance with the present invention, there is now provided a computer system comprising: a microprocessor having a reset input and further exhibiting a clock input to which a clock signal is provided; means for generating a microprocessor reset signal; characterised in that the system further includes a reset circuit external to the

This is the replacement sheet

Date: 2 MAY 1996



microprocessor comprising: phase error detecting means for detecting a phase error between the clock signal and the reset signal; phase error correcting means, coupled to the phase error detecting means, for adjusting the phase of the clock signal if a phase error is detected so as to substantially minimise the phase error, and regenerating means for providing a new reset signal to the reset input of the microprocessor whenever the phase of the clock signal is adjusted. Preferably, the clock input of the microprocessor is responsive to a first clock signal, and wherein the system comprises means for generating a second clock signal which is a frequency multiple of the first clock signal, and wherein the microprocessor reset circuit further comprises dividing means external to the microprocessor for dividing the second clock signal by the frequency multiple to produce the first clock signal. In a preferred embodiment, the phase error detecting means is responsive to the first clock signal, for detecting a phase error between the first clock signal and the reset signal; and wherein the phase error correcting means is operable for adjusting the phase of the first clock signal. In a preferred arrangement of the present invention, the second clock signal is twice the frequency of the first clock signal.

Viewing the present invention from a second aspect, there is now provided a computer system including a microprocessor, such microprocessor exhibiting a reset input and further exhibiting a clock input to which a clock signal is provided. The computer system includes a microprocessor reset circuit which is capable of generating a microprocessor reset signal. The microprocessor reset circuit includes a phase error detector for detecting a phase error between the clock signal and the reset signal. The reset circuit further includes a phase error corrector, coupled to the phase error detecting means, for adjusting the phase of the clock signal if a phase error is detected so as to substantially minimize such phase error. The reset circuit also includes a reset signal regenerator for providing a new reset signal to the reset input of the microprocessor when the phase of the clock signal is adjusted.

This is the replacement sheet

Date: 2 MAY 1996



Viewing the present invention from a third aspect, there is now provided, in a computer system including a microprocessor, the microprocessor exhibiting a reset input and further exhibiting a clock input to which a clock signal is provided, a microprocessor reset circuit comprising: reset signal generating means for generating an initial reset signal; phase error detecting means for detecting a phase error between the clock signal and the initial reset signal; phase error correcting means, coupled to the phase error detecting means, for adjusting the phase of the clock signal if a phase error is detected so as to substantially minimize the phase error, and reset signal regenerating means, coupled to clock input of the microprocessor, for providing a new reset signal to the reset input of the microprocessor whenever the phase of the clock signal is adjusted.

Viewing the present invention from a fourth aspect, there is now provided, in a computer system including a microprocessor, the microprocessor exhibiting a reset input and further exhibiting a clock input responsive to a 1X clock signal, the system being capable of generating a microprocessor reset signal, the system further being capable of generating a 2X clock signal, a microprocessor reset circuit comprising: dividing means for dividing the 2X clock signal by 2 external to the microprocessor to produce the 1X clock signal; means for supplying the 1X clock signal to the clock input of the microprocessor; phase error detecting means, responsive to the 1X clock signal, for detecting a phase error between the 1X clock signal and the reset signal; phase error correcting means, coupled to the phase error detecting means, for adjusting the phase of the 1X clock signal if a phase error is detected so as to substantially minimize the phase error, and regenerating means, responsive to the phase error correcting means, for providing a new reset signal to the reset input of the microprocessor whenever the phase of the 1X clock signal is adjusted.

Viewing the present invention from a fifth aspect, there is now provided a computer system comprising: a microprocessor including a reset input and further exhibiting a clock input responsive to a 1X

This is the replacement sheet

- 2 MAY 1996

Date:



clock signal, memory means, coupled to the microprocessor, for storing information therein; a bus coupling the microprocessor to the memory means; reset signal generating means for generating an initial reset signal; clock signal generating means for generating a 2X clock signal; dividing means for dividing the 2X clock signal by 2 external to the microprocessor to produce the 1X clock signal; means for supplying the 1X clock signal to the clock input of the microprocessor; phase error detecting means, responsive to the 1X clock signal, for detecting a phase error between the 1X clock signal and the reset signal; phase error correcting means, coupled to the phase error detecting means, for adjusting the phase of the 1X clock signal if a phase error is detected so as to substantially minimize the phase error, and regenerating means, responsive to the phase error correcting means, for providing a new reset signal to the reset input of the microprocessor whenever the phase of the 1X clock signal is adjusted.

Viewing the present invention from a sixth aspect, there is now provided, in a computer system including a microprocessor, the microprocessor exhibiting a reset input and further exhibiting a clock input to which a clock signal is provided, the system being capable of generating a microprocessor reset signal, a method for resetting the microprocessor comprising the steps of: detecting a phase error between the clock signal and the reset signal; adjusting the phase of the clock signal if a phase error is detected so as to substantially minimize the phase error, and providing a new reset signal to the reset input of the microprocessor whenever the phase of the clock signal is adjusted.

Viewing the present invention from an seventh aspect there is now provided, in a computer system including a microprocessor, the microprocessor exhibiting a reset input and further exhibiting a clock input responsive to a 1X clock signal, the system being capable of generating a microprocessor reset signal, a method for resetting the microprocessor comprising the steps of: generating a 2X clock signal; dividing the 2X clock signal by 2 external to the microprocessor to produce the 1X clock signal; providing the 1X clock signal to the clock

This is the replacement sheet

Date:

5 2 MAY 1996



input of the microprocessor; detecting a phase error between the 1X clock signal and the reset signal; adjusting the phase of the 1X clock signal if a phase error is detected so as to substantially minimize the phase error, and providing a new reset signal to the reset input of the microprocessor whenever the phase of the 1X clock signal is adjusted.

In a preferred embodiment of the present invention, there is provided reset circuitry which requires minimal change to the circuitry of a 386 microprocessor computer when such computer is upgraded or redesigned to accommodate an i486 microprocessor.

In a particularly preferred embodiment of the present invention to be described later, there is provided reset circuitry which permits an i486 microprocessor to operate in a computer which originally employed a 386 microprocessor.

It will be appreciated that the present invention is also applicable to devices that are similar to the i486 and the 386 microprocessors.

An example of the present invention will now be described with reference to the accompanying drawings in which:

FIG. 1 is a high level block diagram of a conventional dual bus computer.

FIG. 2 is a timing diagram which shows the relationship between the internal 1X clock signal and the external 2X (CLK2) clock signal.

FIG. 3 is a high level block diagram of the computer system of the present invention.

FIG. 4 is a low level, more detailed block diagram of the reset circuitry portion of the computer system of FIG. 3.

This is the replacement sheet

Date:

2 MAY 1996

FIG. 5 is a timing diagram showing the operation of the reset circuitry of FIG. 4 when no phase error occurs.

FIG. 6 is a timing diagram showing the operation of the reset circuitry of FIG. 4 when a phase error occurs.

FIG 7 is a timing diagram employing a time compressed time axis to show the operation of the reset circuitry of FIG. 4.

This is the replacement sheet

Date: - 2 MAY 1996

Figure 1 shows a computer 10 of the prior art employing an Intel 386 microprocessor and associated power reset circuitry. Computer 10 is a dual bus computer which includes the aforementioned microprocessor now designated as microprocessor 100. Microprocessor 100 includes a reset input shown in FIG. 1 as RESET.

Microprocessor 100 is coupled via a CPU local bus 105 to a buffer 110 which couples CPU local bus 105 to a system local bus 115. System local bus 115 is coupled via a latch/buffer/decoder 120 to a planar I/O (input/output) bus 125 to which peripheral devices such as device 130 are connected. System local bus 115 is further coupled to a memory controller and memory 135. System local bus 115 is also coupled via a buffer 140 and a Micro Channel (TM) bus 145 to Micro Channel (TM) sockets or slots 150 into which various adapter cards may be inserted. (Micro Channel is a trademark of the International Business Machines Corporation.) A direct memory access (DMA) controller 155 is coupled to system local bus 115 to facilitate direct access to memory 135 without the intervention of microprocessor 100. Computer 10 further includes a bus control and timing circuit 160 which is coupled to system local bus 115 to permit control and timing of bus 115. A central arbitration point 165 is coupled to both bus control and timing circuit 160 and Micro Channel sockets 150. Central arbitration point 165 determines which functional entity gets access to the Micro Channel bus 145, be it microprocessor 100, a bus master plugged into one of Micro Channel sockets 145 or DMA controller 155, for example.

A cache memory 170 is coupled to CPU local bus 105 and microprocessor 100 as shown. To control the operation of cache memory 170, an Intel 82385 cache controller 175 is coupled to CPU local bus 105 and system local bus 115 as shown. When computer 10 is being referred to as a dual bus computer, it is the CPU local bus 105 and the system local bus 115 which are the two busses being referenced. Each of busses 105 and 115 includes respective address, data and control busses. To facilitate the processing of floating point operations, a math coprocessor 180 is coupled to CPU local bus 105.

This is the replacement sheet

Date: - 2 MAY 1996

As mentioned earlier, microprocessor 100 includes a reset input designated RESET. Microprocessor 100 further includes a clock input designated CLK2 to which a clock frequency of double (2X) the microprocessor internal clock frequency is provided. The internal clock frequency of microprocessor 100 is defined to be equal to 1X.

A divide by two and phase correction circuit 100A is included within microprocessor 100 such that the CLK2 or 2X clock signal (for example, at 50 MHz) provided to the microprocessor CLK2 input is divided down to 1X (or 25 MHz, for example) for use internal to microprocessor 100. A CLK2 generation circuit or clock oscillator 185 is provided to generate the CLK2 signal. CLK2 generation circuit 190 includes a CLK2 output which is coupled to RESET LOGIC 190, a divide by 2 circuit 195, bus control and timing circuit 160, cache controller 175, microprocessor 100 and coprocessor 180 to provide clock information thereto. Reset logic 180 includes a RESET output which is coupled to the microprocessor RESET input, math coprocessor 180, cache controller 175 and bus control and timing circuit 160 to provide an appropriate reset pulse to such devices when system reset is desired. From FIG. 1 it is seen that divider circuit 195 divides the CLK2 clock signal by 2 to produce an external clock signal designated CLK which is provided to RESET LOGIC 190 and to bus control and timing circuitry 160. It is noted that the external clock CLK signal generated at the CLK output of divider circuit 195 exhibits a frequency substantially the same as the 1X internal clock frequency of microprocessor 100. For this reason, the CLK signal is referred to alternatively as the 1X external clock signal.

An overview of the operation of the 386 microprocessor with respect to clocking operations is now presented. As mentioned above, the 386 microprocessor operates from a two-times external clock or 2X clock external input. Thus, a 20 MHz 386 microprocessor requires a 40 MHz external clock signal at its CLK2 input and a 25 MHz 386 microprocessor requires a 50 MHz external clock signal at its CLK2 input.

This is the replacement sheet

Date: - 2 MAY 1995

Internally, the 386 microprocessor generates its own one-times (1X) clock by dividing the CLK2 input signal by two. This 1X internal clock signal is used inside the 386 microprocessor to determine the timing of the various internal logic operations including operations which appear as microprocessor outputs. This 1X clock signal is also used internal to the 386 microprocessor to determine the appropriate sample time for external inputs. The timing relationship of this 1X internal clock signal to the CLK2 clock signal is shown in FIG. 2 in which the 1X internal clock signal is shown in the lowermost portion thereof and the CLK2 clock signal is shown in the uppermost portion thereof. The timing relationships relative to this 1X clock are documented by Intel in the 80386 Hardware Manual. The 1X internal clock signal is used to determine the appropriate phase of the CLK2 signal since multiple CLK2 phases are required to complete a 386 microprocessor bus cycle.

The typical 386 microprocessor based computer system will generate, external to the 386 microprocessor, its own 1X external clock signal since there is no 1X external clock output from the 386 microprocessor. As seen in FIG. 1, this external 1X clock signal is generated in computer 10 at the CLK output of divider circuit 195 as the CLK signal is. This 1X external clock signal or CLK signal is used by external logic to monitor or sample the 386 microprocessor and to control the necessary 386 microprocessor inputs.

The two separately generated 1X clocks, namely the internal 1X clock and the external 1X clock (CLK at divider 195) may undesirably differ in their phasing unless some means is provided to achieve synchronization of the internal 1X clock and the external 1X clock during the power up of microprocessor 100. This required synchronization action is typically provided by generation of the signal RESET which is provided to the RESET input of microprocessor 100. External logic, namely reset logic 190, triggers the active edge of the RESET signal relative to the externally generated 1X clock.

This is the replacement sheet

Date: - 2 MAY 1996

That is, there is a known and fixed relationship between the active edge of the RESET signal and the externally generated 1X clock signal. The RESET signal is sampled by the 386 microprocessor on each CLK2 rising edge. The resulting RESET sample information is used by internal divide by 2 and phase correction circuitry 100A to change the phasing of the internal 1X clock if required to bring the internal 1X clock into sync with the external 1X clock.

To provide the computer user with a processor upgrade path in one type of computer 10, a daughter card (not shown) is provided which includes microprocessor 100, coprocessor 180, cache controller 175, cache 170 and the associated reset circuitry. This daughter card is alternatively referred to as a processor complex. The daughter card plugs into a planar board or motherboard containing the remaining components and devices of computer 10 shown in FIG. 1. In this manner, a daughter card containing a different microprocessor configuration than that originally provided with computer 10 can be plugged into the planar board to improve computer performance. An example of one computer employing such a daughter card arrangement is the IBM Personal System/2 Model 70 A21 computer. (Personal System/2 is a registered trademark of the International Business Machines Corporation.)

FIG. 3 is a high level block diagram which depicts the computer system of the present invention as computer system 200. Computer system 200 has elements in common with computer system 10 of FIG. 1 with the exception of the modifications shown in FIG. 3 and now discussed. Like numerals are used to indicate like elements in FIG. 3 and FIG. 1.

In the preferred embodiment of the invention, computer system 200 includes an i486 microprocessor designated microprocessor 205 having a 1X clock input designated CPUCLK and a reset input designated MPRESET input as shown in FIG. 3. The internal clock frequency of microprocessor 205 is defined to be equal to 1X and the frequency of the clock signal provided to the CPUCLK input is also 1X. Microprocessor

This is the replacement sheet

Date: - 2 MAY 1996

205 is coupled to CPU local bus 105 as shown. The CLK2 output of CLK2 clock signal generation circuit 185 is coupled to the CPUCLK clock input of microprocessor 205 via a divide by two with phase correction circuit 210. The CLK2 output of CLK2 generation circuit 185 is also coupled to a time base input or clock input (DCLK2, CLK2C) of the input of a phase checker circuit 215 via a time delay circuit 212. In this manner, a time delayed version of the CLK2 clock signal, namely the DCLK2 signal, which is produced at the DCLK2 output of time delay circuit 212, is provided as the time base for phase checker 215. The DCLK2 output of time delay circuit 212 is also coupled to a time base input of reset logic circuit 190 such that the same delayed clocking information or time base signal DCLK2 is provided to phase checker 215 and reset logic 190.

Phase checker circuit 215 includes phase inputs 215A and 215B and a phase error output designated PHERR at which a phase error signal PHERR is generated which represents the phase error between signals (later described) which are provided to phase inputs 215A and 215B. The CPUCLK output of divide by 2 with phase correction circuit 210 is coupled via a time delay circuit 217 to phase input 215A of phase checker 215 such that a delayed version of the CPUCLK signal (DCLK) produced at the output of delay circuit 217 is provided to phase input 215A.

The RESET output of RESET logic circuit 190 is coupled to the remaining phase input 215B of phase checker 215 to provide reset pulse phase information thereto. Providing the DCLK and RESET signals to phase inputs 215A and 215B in this manner permits phase checker 215 to compare the phase of the delayed CPUCLK signal (DCLK) with the implicit phase of the RESET signal. If phase checker 215 detects a phase error between the DCLK signal and the RESET signal, then phase checker 215 generates a phase error signal PHERR at the PHERR output of phase checker 215. This phase error indicates that an undesirable phasing relationship exists between the CPUCLK signal (as represented by DCLK) and the CLK signal provided by divider 195. The PHERR output of phase

This is the replacement sheet

Date: - 2 MAY 1996

checker 215 is coupled to the PHERR input of divider 210 with phase correction circuit 210 to provide the PHERR signal thereto. The PHERR signal is also provided to the PHERR input of a reset regeneration generation circuit 220 which is discussed later.

Although phase checker 215 is checking the phase of the CPUCLK signal (as represented by DCLK) with respect to the RESET signal, it effectively checks the phase of the CPUCLK signal (internal microprocessor clock) with respect to the phase of the external clock signal CLK generated at the output of divider 195. This is so because the falling edge of the RESET signal generated by reset logic 190 contains clocking information with respect to the CLK external clock signal, since reset logic 190 follows the earlier timing convention compatible with the 386 microprocessor.

If phase checker 215 determines that a phase error exists between the delayed CPUCLK signal (DCLK) and the RESET signal such as during power up of microprocessor 205, then a PHERR signal is generated which drives divider 210 to bring the delayed CPUCLK signal (DCLK) into phase with the RESET signal. In this manner the phase of the CPUCLK signal is adjusted and corrected. However, when such a phase adjustment occurs, the t_{1a} clock stability specification of the i486 microprocessor is violated as discussed later in more detail. When such a specification violation occurs, then reset regeneration circuit 220 regenerates or produces a new reset signal pulse (NEWRESET) which is provided to the MPRESET input of microprocessor 205 to reset microprocessor 205. As seen in FIG. 3, the RESET output of RESET logic 190 is coupled to the RESET input of RESET regeneration circuit 220 to provide the RESET signal thereto. Reset regeneration circuit 220 includes a RCLK output which is coupled to an input of a timing element 225, such timing element 225 including an RCNT6 output which is coupled back to reset regeneration circuit 220 as will be explained later. The PHERR output of phase checker 215 is coupled to a PHERR input of reset regeneration circuit 220 to inform reset regeneration circuit 220 as to when regeneration of the reset

This is the replacement sheet

Date: - 2 MAY 1996

signal is required. In this manner, reset regeneration circuit 220 is informed as to when the generation of the NEWRESET pulse is needed. It is noted that supplying this NEWRESET pulse to the RESET input of microprocessor 205 results in microprocessor 205 desirably being returned to an known state.

FIG. 4 is a lower level, more detailed block diagram showing the reset circuitry portion of microprocessor based computer system 200. In comparing the diagrams of FIG. 4 and FIG. 3, it will be noted that some signals, inputs and outputs have been renamed or are given alternative names as explained subsequently or as shown by the labelling in FIG. 4. This has been done to facilitate the implementation of the reset circuitry portion in programmable array logic or PAL form as will be explained in more detail later. (PAL is a registered trademark of Monolithic Memories, Inc.) Signals which are generated and used internally within the various blocks of FIG. 4 are shown in parenthesis.

The signals employed in the reset circuitry portion of FIG. 4 are the same as the signals in the reset circuitry portion of FIG. 3 except for the differences subsequently discussed. The CLK2 signal generated at the output of CLK2 clock signal generator 185 is also referred to as CLK2ALSO. The DCLK2 signal produced at the output of delay element 212 is alternatively designated CLK2A, CLK2B and CLK2C. The CPUCLK signal produced at the output of divide by 2 with phase correction circuit 210 is also referred to as CLK and CLKX. The RESET signal generated by reset logic 190 is shown in more detail in the reset circuitry of FIG. 4 as including a CPURESET signal which is supplied to reset regeneration logic 220 and further including a CACHERESET signal which is provided to reset regeneration logic 220 and phase checker 215.

A delayed version DPHERR of the phase error signal PHERR is generated internal to the divide by 2 with phase correction circuit 210 as shown in FIG. 4 and indicated in parenthesis. A CRESETSYNC signal is generated internal to phase checker 215 and is supplied to timing

This is the replacement sheet

Date: 2 MAY 1996

element 225. CRESETSYNC is a delayed and inverted version of the CACHERESET signal generated by reset logic 190.

In one embodiment of the invention, timing element 225 is a 74LS590 counter manufactured by Texas Instruments, Inc. This timing element is used to determine the required pulse width of the NEWRESET pulse, such pulse width being approximately 1 millisecond.

An input signal BHOLD is provided to reset regeneration circuit 220 as seen in FIG. 4.

BHOLD is employed as an accessible timing signal which pulses once every approximately 15.6 microseconds and is used to generate the clock pulse for counter of timing element 225. RCLK is derived from BHOLD and is provided to timing element 225 as will be discussed later.

Divide by 2 with phase correction circuit 210, delay circuit 217 and delay circuit 212 are conveniently fabricated in a first PAL device as specified by the following PAL inputs, outputs and logic equations. In the subsequent logic equations, the following symbols have the meaning designated below:

<u>SYMBOL</u>	<u>DEFINITION</u>
/	Negation
:=	A registered term, equal to
=	A combinatorial term, equal to
&	Logical AND
+	Logical OR

The first PAL device is defined to exhibit the following input pins:

INPUT PIN	COMMENT
CLK2	- 50 MHz TTL oscillator
CLKALSO	- 50 MHz TTL oscillator
PHERR	- phase error

This is the replacement sheet

Date: 2 MAY 1990

The first PAL is defined to exhibit the following output pins:

OUTPUT PIN	COMMENT
CLK2A	- 50 MHz buffered CLK2
DCLK	- delayed 25 MHz clock
CLK	- 25 MHz clock to i486 and PALS
DPHERR	- phase error pulse
CLKX	- 25 MHz clock to i486 and PALS
CLK2C	- 50 MHz buffered CLK2
CLK2B	- 50 MHz buffered CLK2

The following logic equations describe the logic implementation within the first PAL device:

```

CLK2A    = CLK2ALSO
CLK2B    = CLK2ALSO
CLK2C    = CLK2ALSO
!CLK     := (CLK & PHERR)
          # (CLK & !PHERR & !DPHERR)
!CLKX    := (CLK & PHERR)
          # (CLK & !PHERR & !DPHERR)
!DPHERR := (!PHERR & CLK)
          # (!DPHERR & !CLK)
DCLK     = CLK

```

Phase checker 215 and reset regeneration logic 220 are conveniently fabricated in a second PAL device as specified by the following PAL inputs, outputs and logic equations. Accordingly, the second PAL device is defined to exhibit the following input pins:

INPUT PIN	COMMENT
CLK2C	- 50 MHz TTL CLK2
DCLK	- 25 MHz delay CPU clock
CACHERESET	- cache reset pulse
CPURESET	- CPU reset pulse

This is the replacement sheet

Date: 2 MAY 1996

HOLD - CPU hold request
 RCNT6 - reset counter bit 6

The second PAL is defined to exhibit the following output pins:

OUTPUT PIN	COMMENT
NEWRESET -	new CPURESET including phasing
RCLK -	reset counter clock
PHERR -	phase error pulse
CRESETSYNC -	delayed and inverted CACHERESET
RCNTSYNC -	sampled version of input RCNT6

The following logic equations describe the logic implementation within the second PAL device.

```

!CRESETSYNC := CACHERESET
NEWRESET := CPURESET
            # !PHERR & !CACHERESET
            # NEWRESET & !RCNTSYNC & CRESETSYNC
            & !PHERR
!PHERR := DCLK & !CRESETSYNC & !CACHERESET
        # !PHERR & !RCNTSYNC & !CACHERESET
        # !PHERR & !DCLK
!RCLK := !DCLK & !PHERR & CRESETSYNC & HOLD
        # RCLK & !DCLK & CACHERESET
        # !RCLK & DCLK
RCNTSYNC := RCNT6 & !DCLK
            # RCNTSYNC & DCLK
  
```

FIG. 5 is a timing diagram which shows the operation of the reset circuitry of FIG. 4 by illustrating the CLK2/CLK2ALSO, CACHERESET, RCNT6, CLK2C, CRESETSYNC, PHERR, DPHERR, CLK/CLKX/, CPUCLK, DCLK, NEWRESET, RCLK, CLK2A, BHOLD and CPURESET signals of such reset circuitry on a common time axis. FIG. 5 illustrates the case where no

This is the replacement sheet

Date: - 2 MAY 1996

phase error occurs as seen by observing the consistently high PHERR signal.

FIG. 6 is a timing diagram which shows the operation of the reset circuitry of FIG. 4 by illustrating the CLK2/CLK2ALSO, CACHERESET, RCNT6, CLK2C, CRESETSYNC, PHERR, DPHERR, CLK/CLKX/, CPUCLK, DCLK, NEWRESET, RCLK, CLK2A, BHOLD and CPURESET signals of such reset circuitry on a common time axis. FIG. 6 illustrates the case where a phase error occurs as observed at the falling edge of the PHERR signal at 300. The reset circuitry corrects this phase error as seen at the lengthened CLK pulse at 305.

FIG. 7 is a timing diagram which shows the operation of the reset circuitry of FIG. 4 by illustrating the CLK2/CLK2ALSO, CACHERESET, RCNT6, CLK2C, CRESETSYNC, PHERR, DPHERR, CLK/CLKX/, CPUCLK, DCLK, NEWRESET, RCLK, CLK2A, BHOLD and CPURESET signals of such reset circuitry on a common time axis over a longer duration of time than in the timing diagrams of FIG. 5 and FIG. 6 by compressing the time axis. The timing diagram of FIG. 7 illustrates how the RCLK and BHOLD signals operate to time out the counter within timing element 225. RCNT6 provides the return signal from this counter. As illustrated in FIG. 7, for convenience of presentation, BHOLD pulses at less than the previously stated 15.6 microsecond rate, and RCLK is counted for only two counts here instead of 2^7 counts as it does in actual practice in one embodiment of the invention.

The following is a summary of the operation of the reset circuitry portion of computer system 200 of FIG. 3 and FIG. 4. When computer 200 is initially powered up or when reset logic 190 is otherwise instructed to generate a reset pulse, reset logic 190 generates an initial reset pulse designated RESET. The initial reset pulse RESET is supplied to reset regeneration circuit 220 which passes this initial RESET pulse on to microprocessor 205 via the NEWRESET line which is later used to transmit the NEWRESET pulse to microprocessor 205. Thus, the initial RESET pulse causes microprocessor 205 to execute an internal

This is the replacement sheet

Date: - 2 MAY 1996

microprocessor reset operation. This initial RESET pulse is also provided to phase checker 215 which uses this RESET pulse in the manner described below in the discussion of phase checker 215.

The logic provided in the reset circuitry performs a divide by two operation at divider/phase corrector 210 on the CLK2 clock signal of the CLK2 generator which exhibits a 2X clock frequency to provide microprocessor 205 with an appropriate clock signal exhibiting a 1X clock frequency at the CPUCLK input thereof. Phase checker 215 then determines if a phase error occurs between the CPUCLK signal and the RESET signal generated by reset logic 190. (The RESET signal carries indicia of the phase of the CLK 1X external clock signal.) Such a phase error is typical at microprocessor power up. If such a phase error is detected, then the phase of the CPUCLK signal is corrected by divider/phase corrector 210. However, when the phase of the CPUCLK signal is so corrected and shifted, the Intel timing specification for the i486 clock stability is violated (t_{1a} specification is .1% maximum change between adjacent CPUCLK clock pulses).

If a corrective CPUCLK phase shift is required, then reset regeneration circuit 220 generates a new reset pulse NEWRESET which is supplied to the MPRESET input of microprocessor 205 to reset microprocessor 205 to a known state. In other words, if a CPUCLK phase shift is required due a detected phase error, the MPRESET input of microprocessor 205 is redriven to its active state and held there for a full reset interval (approximately 1 millisecond), thus clearing any errors internal to microprocessor 205 caused by the CPUCLK phase error.

Additional operational details of the reset circuit of FIG. 3 and FIG. 4 are now discussed together with a summary of the various signals or terms employed in the reset circuit of FIG. 4. The output terms CPUCLKA, CPUCLKB and CPUCLKC shown in FIG. 4 are delayed versions of the CLK2 clock signal from CLK2 generator 185. The terms are employed to compensate for time delays resulting from divider/phase corrector 210. The time delay element 212 used to generate these terms assures

This is the replacement sheet

Date: - 2 MAY 1996

minimal skewing of the timing requirements in the remainder of the system circuitry.

CLK and CLKX in FIG. 4 are duplicate versions of the divided by 2 or 1X CPUCLK signal which is used to clock microprocessor 205. DCLK is a time delayed version of the CPUCLK, such DCLK signal being one input to phase checker 215 as already described. DPHERR is a logic term used internally to divider/phase corrector 210 in setting the proper phase of CPUCLK, CLK and CLKX. It is noted that the output PHERR will go active (low) if a phase error is detected between the CPUCLK signal (as represented by DCLK) and the RESET (CACHERESET) signal provided to phase checker 215. As discussed above, the phase error signal PHERR is employed in reset regeneration circuit 220 to drive the NEWRESET signal active (high) into the MPRESET input of microprocessor 205 thus returning microprocessor 205 to a known state.

As seen in FIG. 3, the central arbitration point includes a bus hold request output BHOLD. When the aforementioned phase error is detected, depending on the timing of the BHOLD signal, output RCLK will pulse low, following the state of the BHOLD signal (inverted). The BHOLD signal, shown in FIG. 4 as being provided to reset regeneration logic 220, is employed as a timer signal. In this particular embodiment of the invention wherein CPUCLK exhibits a frequency of 25 MHz, the BHOLD signal pulses once every approximately 15.6 microseconds. These BHOLD pulses pulse the RCLK output of reset regeneration logic 220. This action in turn increments the 74LS590 counter in timing element 225 once every approximately 15.6 microseconds. This counter increments for 2^7 counts, yielding a total of approximately 1 millisecond, before the 2^7 counter bit connected to RCNT6 goes active. When this timer bit RCNT6 goes active, it is employed to deactivate the NEWRESET signal, the generation of which was described earlier. In this manner, the duration of the NEWRESET pulse is controlled and set. After NEWRESET goes inactive, both the microprocessor 205 and the remainder of computer system 200 are synchronized and operation of computer system 200 can begin.

This is the replacement sheet

Date: 2 MAY 1996

The terms CRESETSYNC and RCNTSYNC are used internally within the PAL logic implementation of the reset circuit of FIG.'s 3 and 4. Additionally, CRESETSYNC is used externally to clear the 74LS590 counter to its initial zero count.

While a computer system reset circuit apparatus has been described above, it will be appreciated that a method for resetting a microprocessor has also been disclosed. Such method is employed in a computer system including a microprocessor, such microprocessor exhibiting a reset input and further exhibiting a clock input to which a clock signal is provided. The computer system in which the method is practiced is capable of generating a microprocessor reset signal. More specifically, a method for resetting the microprocessor in such system is disclosed and includes the step of detecting a phase error between the clock signal and the reset signal. The method further includes the step of adjusting the phase of the clock signal if a phase error is detected so as to substantially minimize the phase error. The method also includes the step of providing a new reset signal to the reset input of the microprocessor in the event that the phase of the clock signal is adjusted.

The foregoing has described an apparatus and method for resetting the reset input in a microprocessor based computer system. The apparatus and method disclosed provides reset circuitry which, in one embodiment of the invention, permits an i486 microprocessor to operate in a computer which originally employed a 386 microprocessor. The apparatus and method provides reset circuitry which requires minimal change to the circuitry of a 386 microprocessor computer when such computer is upgraded with an i486 microprocessor. In one embodiment of the invention, the apparatus and method desirably overcomes reset timing difficulties experienced in a computer system in which a processor upgrade from a 386 microprocessor to an i486 microprocessor is attempted.

This is the replacement sheet

Date: - 2 MAY 1996

While only certain preferred features of the invention have been shown by way of illustration, many modifications and changes will occur to those skilled in the art. It is, therefore, to be understood that the present claims are intended to cover all such modifications and changes which fall within the true spirit of the invention.

This is the replacement sheet

Date: 2 MAY 1996

This Sheet Has Been Replaced

CLAIMS

1. A computer system comprising: a microprocessor (205) having a reset input and further exhibiting a clock input to which a clock signal is provided; means (190) for generating a microprocessor reset signal; characterised in that the system further includes a reset circuit external to the microprocessor (100,205) comprising:

phase error detecting means (215) for detecting a phase error between the clock signal and the reset signal;

phase error correcting means (210), coupled to the phase error detecting means (215), for adjusting the phase of the clock signal if a phase error is detected so as to substantially minimise the phase error, and

regenerating means for providing a new reset signal to the reset input of the microprocessor (205) whenever the phase of the clock signal is adjusted.

2. A computer system as claimed in claim 1 wherein:

the clock input of the microprocessor (205) is responsive to a first clock signal;

the system comprises means (185) for generating a second clock signal which is a frequency multiple of the first clock signal;

and the microprocessor reset circuit further comprises dividing means (210) external to the microprocessor (205) for dividing the second clock signal by the frequency multiple to produce the first clock signal.

3. A computer system as claimed in claim 2 wherein:



This is the replacement sheet

Date: - 2 MAY 1996



the phase error detecting means is responsive to the first clock signal, for detecting a phase error between the first clock signal and the reset signal;

and, the phase error correcting means is operable for adjusting the phase of the first clock signal.

4. A computer system as claimed in claim 3 wherein the second clock signal is twice the frequency of the first clock signal.

5. A computer system as claimed in any preceding claim further comprising:

memory means, coupled to the microprocessor, for storing information therein;

a bus coupling the microprocessor to the memory means.

6. A computing system as claimed in any preceding claim wherein the microprocessor is an i486 microprocessor.

7. A computer system as claimed in any preceding claim wherein the reset circuit comprises a programmable array logic circuit.

8. In a computer system including a microprocessor, the microprocessor exhibiting a reset and further exhibiting a clock input to which a clock signal is provided; the system being capable of generating a microprocessor reset signal, a microprocessor reset circuit comprising:

phase error detecting means for detecting a phase error between the clock signal and the reset signal;





phase error correcting means, coupled to the phase error detecting means, for adjusting the phase of the clock signal if a phase error is detected so as to substantially minimize the phase error, and

reset signal regenerating means for providing a new reset signal to the reset input of the microprocessor whenever the phase of the clock signal is adjusted.

9. A computer system comprising:

a microprocessor including a reset input and further exhibiting a clock input responsive to a first clock signal,

memory means, coupled to the microprocessor, for storing information therein;

a bus coupling the microprocessor to the memory means;
reset signal generating means for generating an initial reset signal;

clock signal generating means for generating a second clock signal;

dividing means for dividing the second clock signal by two external to the microprocessor to produce the first clock signal;

means for supplying the first clock signal to the clock input of the microprocessor;

phase error detecting means, responsive to the first clock signal, for detecting a phase error between the first clock signal and the reset signal;



This is the replacement sheet

Date: 2 MAY 1995



phase error correcting means, coupled to the phase error detecting means, for adjusting the phase of the first clock signal if a phase error is detected so as to substantially minimize the phase error, and

regenerating means, responsive to the phase error correcting means, for providing a new reset signal to the reset input of the microprocessor whenever the phase of the first clock signal is adjusted.

10. In a computer system including a microprocessor, the microprocessor exhibiting a reset input and further exhibiting a clock input responsive to a first clock signal, the system being capable of generating a microprocessor reset signal, a method for resetting the microprocessor comprising the steps of:

generating a second clock signal;

dividing the second clock signal by two external to the microprocessor to produce the first clock signal;

providing the first clock signal to the clock input of the microprocessor;

detecting a phase error between the first clock signal and the reset signal;

adjusting the phase of the first clock signal if a phase error is detected so as to substantially minimize the phase error, and

providing a new reset signal to the reset input of the microprocessor whenever the phase of the first clock signal is adjusted.



This is the replacement sheet

Date: 2 MAY 1996



MICROCOMPUTER SYSTEM INCLUDING A MICROPROCESSOR RESET CIRCUIT

ABSTRACT

A microprocessor based computer system (200) is provided which includes a reset circuit having a phase error detector for detecting a phase error between an initial reset signal and a clock signal provided to the microprocessor clock input. The reset circuit (190) further includes a phase error corrector for adjusting the phase of the clock signal if a phase error is detected so as to substantially minimize the phase error. The reset circuit (190) includes a reset signal regenerator (220) for providing a new reset signal to the reset input of the microprocessor (205) when the phase of the clock signal is adjusted.

Fig. 3

This is the replacement sheet

Date: - 2 MAY 1996