(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
7 January 2010 (07.01.2010)

PCT

(10) International Publication Number
WO 2010/001402 A1

(51) International Patent Classification:
G01C 23/00 (2006.01)

(21) International Application Number:
PCT/IL2009/000663

(22) International Filing Date:
2 July 2009 (02.07.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
192601 3 July 2008 (03.07.2008) IL

(71) Applicant *(for all designated States except US)*: **ELTA SYSTEMS LTD.** [IL/IL]; 100 Yitzchak Hanassi Blvd., P.O.B. 330, 77102 Ashdod (IL).

(72) Inventor; and

(75) Inventor/Applicant *(for US only)*: **BAUMATZ, David** [IL/IL]; 4 Rakefet Street, 99797 Carmei Yosef (IL).

(74) Agent: **REINHOLD COHN AND PARTNERS**; P.O. Box 13239, 61131 Tel Aviv (IL).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

WO 2010/001402 A1

(54) **Title**: SENSING/EMITTING APPARATUS, SYSTEM AND METHOD

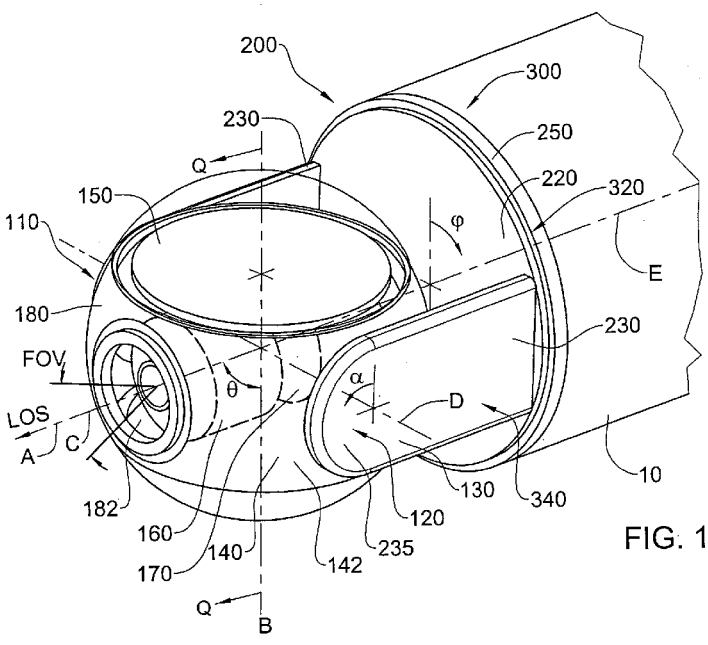


FIG. 1

(57) **Abstract**: A number of apparatuses are provided, for sensing and/or emitting energy along one or more desired apparatus line of sights (LOS) with respect to the respective apparatus. In at least one embodiment, the apparatus includes an assembly that is rotatably mounted on a base with respect to a switching axis. The assembly has two or more sensing/emitting units, each having a respective sensing/emitting unit line of sight (ULOS). Each sensing/emitting unit has an operative state, wherein the respective unit ULOS is pointed along a LOS of the apparatus for sensing and/or emitting energy along the LOS, and a corresponding inoperative state, where the respective unit ULOS is pointed along a direction different from this LOS. A switching mechanism enables switching between the sensing/emitting units to selectively bring a desired sensing/emitting unit exclusively into its respective operative state while concurrently bringing a remainder of the sensing/emitting units each to a respective non-operative state. Corresponding systems and methods are also provided.