

-1-

PRESSURE SENSORS AND PRESSURE TRANSMITTERS

BACKGROUND OF THE INVENTION

The present invention relates to the process control industry. In particular, the invention relates to a pressure sensor in a pressure transmitter.

Pressure transmitters in process applications measure pressure of a process and responsively communicate the information over a two-wire process application loop, for example a 4-20 mA current loop.

Pressure sensors in transmitters typically comprise some type of a pressure responsive structure which has a deflectable diaphragm that moves in response to applied pressure. These structures can be used to measure both absolute and differential pressure. As used herein, a differential pressure sensor is a sensor which measures a relatively small pressure differential (such as that generated across an orifice in a flow tube or between two different heights in a fluid filled container) over a relatively wide absolute pressure range. In a typical prior art transmitter, to measure differential pressure, two different pressures are applied to opposing sides of the structure causing a relative deformation in the structure which is measured. Measurement of the deformation, for example, can be by measuring a change in electrical capacitance due to movement of capacitor plates carried on the structure or by change in resistance of a resistive strain gauge.

Highly accurate absolute pressure sensors have been desired. However, it has been difficult to obtain an absolute pressure sensor which can deliver an accurate output over a wide pressure range, from 0.4 psi to 4000 psi for example. It would also be desirable to measure differential pressure with two absolute pressure sensors because this is mechanically much simpler than

-2-

it is to mechanically couple two pressures to a differential pressure sensor. Additionally, an over-pressure in a such a differential pressure sensor can damage the differential pressure sensor.

5 However, it has been difficult to obtain absolute pressure sensors with sufficient accuracy to allow differential pressures in the 0.4 psi to 40 psi range to be measured in a device which must withstand static or line pressure extremes of as much as 4000
10 psia. For example, 0.01% of 4 psid requires 0.00001% of 4000 psia (10^{-7} or 0.1 ppm).

 Typical known pressure sensors used in process applications have unit-to-unit variations in sensitivity to sensed pressure as well as unit-to-unit variations in
15 undesired responses to extraneous parameters such as temperature. This can be a particular problem when the outputs of two absolute or gauge pressure sensors are combined to provide an output representing differential pressure or when the sensor is used over a large
20 pressure range. Additionally, mechanical stress associated with mounting the sensor to the pressure transmitter results in relatively large errors in pressure measurement.

SUMMARY OF THE INVENTION

25 A pressure transmitter in a process control application for transmitting pressure on a process control loop includes an absolute pressure sensor. The absolute pressure sensor has a cavity therein in which cavity walls deform or are placed under stress as the
30 walls respond to applied pressure. The pressure sensor includes a support structure which provides stress isolation. A sensor coupled to the cavity walls provides a pressure related output signal. In one embodiment, the sensor and support structure are

-3-

integral with one another such that there are no joints between the sensor structure and the support structure. The material and dimensions of the pressure sensor are selected such that the pressure related signal is very accurate and may be used over a wide pressure range or in pairs as differential pressure sensors.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a cross-sectional view of a pressure transmitter.

10 Figure 2 is a cut-away perspective view of an insert which carries a pressure sensor.

Figure 3 is a cross-sectional perspective view of a pressure sensor.

15 Figure 4 is a graph which illustrates operation of the present invention.

Figure 4A is a graph of stress attenuation versus L/W for a pressure sensor.

Figure 5 is a displacement plot of one-quarter of a pressure sensor where l/T equals 1.0.

20 Figure 6 is a cross sectional view of another embodiment of the pressure sensor.

Figure 7 is a cross-sectional view of a pressure sensor.

25 Figure 8 is a cross-sectional view of the pressure sensor of Figure 7.

Figure 9 is a top plan view of a top substrate of the pressure sensor of Figure 7.

Figure 10 is a top plan view of a bottom substrate of the pressure sensor of Figure 7.

30 Figure 11 is a schematic diagram of circuitry for measuring capacitance of a pressure sensor.

Figure 12 is a cross-sectional view of a sensor body.

-4-

Figure 13 is a bottom plan view of the sensor body of Figure 12.

Figure 14 is a cross-sectional view of a sensor body.

5 Figure 15 is a bottom plan view of the sensor body of Figure 14.

Figures 16A through 16G show cross-sectional views of various embodiments of the invention.

10 Figures 17A and 17B show two embodiments of capacitor plates.

Figure 18 is a graph of bonding temperature as a percent of melting point temperature versus bonding strength as a percent of material strength.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

15 Figure 1 shows pressure transmitter 50 having transmitter body 52, sensor body 54 and flange 55. Sensor body 54 includes pressure sensors 70A and 70B which measure absolute pressure P1 and absolute pressure P2, respectively, of process fluid. Transmitter body 52
20 includes transmitter (I/O) circuitry 60 which sends information related to pressures P1 and P2 over a two-wire process control loop, such as a 4-20 mA current loop. Circuit board 57 couples sensor circuit board 58 to sensors 70A and 70B and receives electrical signals
25 related to pressures P1 and P2. Circuitry on sensor circuit board 58 digitizes and processes these signals, and communicates pressure information to transmitter circuitry 60 using data bus 62. Inserts 67A and 67B carry sensors 70A and 70B. A process barrier 71 forms
30 cavity 75 and prevents pressures P1 and P2 from escaping sensor body 54 should insert 67A or 67B fail. Cavity 75 may be a vacuum or filled with an inert gas. Feed-throughs 73A, 73B and 73C provide electrical pathways across barrier 71 between circuit boards 57 and 58.

-5-

Figure 2 is a cut-away perspective view of insert 67A which carries sensor 70A. In one embodiment, insert 70A comprises alumina. Additionally, sensor 70A should be small relative to housing 54 and positioned relatively close to sensor 70B to reduce thermal variations and thereby improve accuracy. This is achieved because the thermal time constant of the sensor is significantly less than the thermal time constant of the housing to minimize temperature gradients within the sensing element.

Figure 3 shows sensor 70A in accordance with one embodiment. Sensor 70A includes upper substrate 72 and lower substrate 74 which form cavity 76 therebetween. Figure 3 shows overall length L , thickness T , width W , minimum cavity width w of the deflecting structure of the sensing cavity and central deflection y due to applied pressure P .

Typical prior art sensors have a ratio of maximum to minimum pressure range which can be accurately sensed of about 100:1. This is primarily limited by non-repeatable errors in the structure and noise. Further, prior art sensors are typically limited by the use of materials with imperfect elasticity, inadequate stress isolation and poor signal-to-noise ratio of the sensing element. For example, metal based pressure sensors have problems with hysteresis, material creep and relaxation. Ceramic based sensors are formed of a matrix of crystals typically bonded with silicon glass and also exhibit these problems. Glass-based sensors are subject to instability due to phase changes and viscosity of the glass. It has been recognized that single crystal materials have superior elastic properties and that sensors based on such materials can have improved accuracy. Single crystal diaphragm

-6-

sensors have also been used, however they have typically been placed under high tensile stress due to internal pressurization. Additionally, this type of sensor typically includes glass or metal structural elements and uses a low strength bonding material such as glass frit, solder or epoxy. Further, this type of sensor has typically had inadequate stress isolation.

Additionally, typical prior art sensors have used an oil fill, such as silicon oil, for use with over-pressure protection mechanisms. The oil fill is also used when coupling a corrosion resistant isolation diaphragm to the pressure sensor. These sensors are subject to failure due to loss of fill fluid. Typical prior art isolating diaphragms have been formed in metal and are used to keep particles and corrosive materials away from the pressure sensor. These diaphragms must be thin in order to minimize errors, however this makes the diaphragm particularly fragile and limits life of the diaphragm. Further, different diaphragm materials are required for different applications and there is no metal which can be used universally.

The present disclosure sets forth a pressure sensing structure formed of a single crystal material. Joints in the material are formed using fusion bonding such that they are substantially free of foreign materials which could lead to inaccuracies. The structure may be surrounded by process fluid which applies pressure to the structure. This is possible because the structure is formed of a corrosion resistant material. The brittle material is deformed by compression which provides a higher ratio of working stress-to-error stress and therefore a higher signal-to-noise ratio. This results because brittle materials are

-7-

stronger in compression than in tension. This configuration causes the sensor to be less sensitive to corrosion of the outer surface because the output is less dependent on the cube of thickness and more closely linearly related to thickness. Placement of the structure in the process fluid improves reliability because the isolation diaphragms and oil fill are eliminated. An elongated shaft provides stress isolation and is formed of the same single crystal material to help reduce errors. Electrical leads are provided through the elongated shaft and isolated from process fluid. A path through the shaft can also be used to apply a reference pressure. In one embodiment, corrosion resistant material such as sapphire is used and an internal sensor is used which allows the oil fill and isolating diaphragms to be eliminated. In one embodiment, matched sensors are used as dual sensors to measure differential pressure, which helps reduce errors common to the two sensors. Capacitance sensing is desirable because it provides a stable, low noise signal. Capacitors have no inherent thermal noise and they have a high gauge factor with a correspondingly high output which minimizes the noise contribution of electronic detection circuitry. They also have excellent zero stability and very low zero temperature coefficients. These factors make it practical to detect the very low pressure changes in a high pressure sensor that are encountered in a differential pressure transmitter based on two independent sensing elements. Improved pressure resolution is achieved by use of electronic circuitry.

It is well known that the deflection y due to bending in a diaphragm is proportional to $\left(\frac{w^3}{T^2}\right)$ where w

-8-

is the effective minimum width of the diaphragm and T is its thickness $\left(y \propto \frac{w^3}{T^2}\right)$. The sensor output is therefore highly dependent on dimensional variations.

It is known that deflection due to shear in a diaphragm proportional to w^2/T . $\left(y \propto \frac{w^2}{T}\right)$ This reduces the variation in output versus sensor dimensions but this variation can be further reduced by relying on "bulk" deflection as defined below.

The deflection y of cavity 76 will depend on the effects of bending deflection, shear deflection and "bulk" deflection. Assuming that W/w equals a constant which is greater than 2, this can be expressed as follows:

$$\frac{Y}{w} = K_1 \frac{P}{E} + K_2 \frac{P}{G} \left(\frac{w}{T}\right) + K_3 \frac{P}{E} \left(\frac{w}{T}\right)^3 \quad \text{Equation 1}$$

where:

	K_1	=	"bulk" deflection constant for material;
20	K_2	=	shear deflection constant for material;
	K_3	=	bending deflection constant for material;
	W	=	sensor width;
25	P	=	external pressure;
	y	=	central deflection of cavity 76 due to applied pressure P;
	w	=	width of cavity 76;
	T	=	thickness at slot 76 of sensor 70 (for a square cross section, $T=W/2$);
30	t	=	depth of cavity 76;

-9-

L = sensor length which is much greater than sensor width W and sensor thickness T;

E = Young's modulus; and

5 G = shear modulus.

Equation 1 illustrates that shear and bending deflection on cavity 76 are dependent on cavity width w and sensor thickness T.

10 The term "bulk" deflection as used herein describes the K_P/E component of Equation 1, where y is directly proportional to width w of cavity 76. ($y \propto w$) Therefore, bulk deflection is highly accurate and desirable in determining pressure and is substantially independent of variations in thickness T such as those
15 which occur with corrosion. One aspect of the present invention includes providing a pressure sensor having dimensions such that bulk mode deflection component of total deflection of the sensor is increased.

Figure 4 is a graph of Equation 1 which shows
20 total deflection and its individual components: bulk deflection, shear deflection and bending deflection. When w/T is between 1 and 4, shear deflection predominates total deflection. As w/T gets smaller, the contribution of shear deflection relative to bulk
25 deflection gets smaller. For w/T less than 1.0, bulk deflection is the predominant factor contributing to total deflection of sensor 70A due to applied pressure. Thus, one aspect of the invention includes pressure sensors having a ratio of w (cavity width) divided by T
30 (thickness from an outer surface to an inner surface) of less than or equal to about 1.0. For shear deflection to exceed bending deflection w/T should be less than 4.0. In one embodiment, the ratio of w/T is: $0.05 \leq w/T \leq 1.0$. The minimum w/T value is determined by how

-10-

small w can be practically made and inaccuracies due to thermal gradients as T is made large.

It is desirable to minimize tensile stresses in sensors made of brittle materials because this reduces the possibility of failure due to cracking of the sensor. One aspect of the invention includes surrounding the sensor with the measured pressure and suitably dimensioning the sensor such that the hydrostatic compressive stress can be made to exceed the tensile bending stresses. Since the stresses are generally additive, the entire structure can be kept in compression. This occurs when w/T is less than about 2.3.

Stress isolation of sensor 70A is also achieved. Stress due to mounting sensor 70A to housing 54 causes a force to be exerted on the sensor (in addition to the force due to applied pressure) and introduces an error into pressure measurements. The elongated structure reduces the effects of mounting stress to provide accurate measurement of differential pressures and a wide operating span. Generally, mounting stress attenuates distal to the mount as sensor length L increases. Any mounting stress errors must be sufficiently attenuated over length L to achieve the desired pressure error. Figure 4A is a graph which shows a relationship between stress attenuation and L/W for the sensor of Figure 3. The vertical axis of Figure 4A shows the ratio of the stress at the mounting point (σ_{MOUNT}) to the measured stress due to the mounting stress (σ_{MEASURED}). A change in the mounting stress ($\Delta\sigma_{\text{MOUNT}}$) causes an error in the pressure measurement due to the change in mounting stress at the pressure sensor ($\Delta\sigma_{\text{MEASURED}}$). In one embodiment, a 0.01% accuracy is required such that when measuring a pressure of 4 psi

-11-

the error due to mounting stress must be less than 4×10^{-4} psi. A typical $\Delta\sigma_{\text{MOUNT}}$ value is 400 psi such that the attenuation of the mounting stress must be 4×10^{-4} psi/by 400 psi = 10^{-6} . As shown in Figure 4A, this occurs at approximately L/W of 4. In an embodiment in which two sensors are used for differential pressure measurement and they are matched within 10% accuracy, $\sigma_{\text{MEASURED}}/\sigma_{\text{MOUNT}}$ is reduced by a factor 10 such that L/W is approximately 3. In one embodiment, L/W is between 3 and 5.

Figure 5 is a cross-sectional view showing a displacement plot for sensor 70A. Figure 5 shows one-quarter of the cross section of sensor 70A. In Figure 5, sensor thickness T is approximately equal to cavity width w. An applied pressure P of 4500 psi displaces sensor 70A. In Figure 5, about half the deflection is due to shear tension and about half is due to "bulk" deflection. This is shown in Figure 4 where shear and bulk deflection meet. If sensor 70 were entirely in bulk mode compression, sensor 70 would retain its rectangular shape as pressure was applied. The shape distortion is due primarily to shear deflection.

Figure 6 is a cross sectional view of sensor 120 including elongated portion 122 and end portion 124 which form cavity 125 having width w. In one embodiment, cavity 125 is square. Dimensions T, W and L are also shown in Figure 3. End portion 124 carries capacitive plate 128 which forms a capacitor with plate 126 carried on portion 122. Conductors 130 and 132 connect to plate 126 and 128, respectively. Pressure P causes cavity 125 to deform, thereby changing the capacitance between plates 126 and 128.

Figure 7 is a cross-sectional view of pressure sensor 200. Pressure sensor 200 includes top substrate

-12-

202 and lower substrate 204. Via hole 203 extends through substrate 202 for coupling to electrical conductors in cavity 205. Figure 8 shows top guard conductor 210, top capacitor conductor 212, top guard conductor 214, bottom guard conductor 216, bottom capacitor conductor 218 and bottom guard conductor 220. Figure 9 is a top plan view of substrate 202 in which electrical conductors on the under side of substrate 202 are visible therethrough. Figure 9 shows capacitor plate 222 connected to conductor 212 and surrounded by guard 224 which connects to conductors 214 and 210. Figure 9 also shows vias 203 and 226 which extend through substrate 202 to conductors 210 and 212, respectively.

Figure 10 is a top plan view of bottom substrate 204 in which electrical conductors carried on the underside of substrate 204 are visible therethrough. In the example, substrate 104 is sapphire. Figure 10 shows capacitor plate 228 which capacitively interacts with capacitor plate 222. Plate 228 is surrounded by electrical guard 230 and temperature sensor 232. Guard 230 shields plate 228 from stray capacitance and temperature probe 232 changes resistance based upon temperature. This provides temperature measurement of sensor 200, and allows compensation of pressure measurements based upon temperature for increased accuracy. Bonding is preferably fusion bonding, also known as direct fusion bonding, or wafer bonding in which flat, polished surfaces are mated and are bonded with the application of heat. Etching is with POCl_3 gas at 900 to 1100° C with an SiO_2 mask. It is desirable to align the crystal structure of the substrates such that the resulting crystal structure is substantially continuous after bonding. Further, the fusion bond

-13-

should be made at a temperature as close as possible to the melting point. For this reason, the electrode material should be capable of withstanding the high fusion bond temperatures. For example, chrome, tungsten, tantalum, platinum and iridium allow bond temperatures in the 1300° C to 1700° C range so that bond strength is maximized and healing of discontinuities in the crystal can occur. A typical bonding time is one hour. Other conductors include metal silicides such as molybdenum silicide.

In a differential pressure transmitter, a temperature difference between the two sensors will cause an error. Acceptable performance will require that the difference be less than about 1° F and that the difference be measured to a precision of better than about 0.1° F and compensated. In a typical application, this will require that the sensor spacing be less than 0.5 inches.

A temperature gradient within a sensing element will also cause an error. Acceptable performance will require that the temperature difference between the inside and outside of the sensor be less than about 0.001° F and that the sensors be closely matched. A sensor width or thickness of greater than about 0.25 inches will place unreasonable demands on sensor matching in a typical application.

Figure 11 is a simplified schematic diagram of circuitry 250 for sensing differential pressure using two absolute pressure sensors having pressure responsive capacitors C_1 and C_2 carried therein. Each pressure sensor includes guard electrodes 252 which form capacitors connected to earth ground 253 of transmitter 50. The housing of the transmitter thus provides a shield or guard to stabilize the capacitance signal and

-14-

prevent electrical noise from being coupled into the circuit. In addition, a guard electrode can be formed on the exterior surface of the sensor or the interior surface of the ceramic inserts shown in Figure 1.

5 Electrical isolation can be provided to accommodate 4-20 mA circuits that have connections to earth ground in other places. Capacitor C_1 is driven by square wave generator 254 and capacitor C_2 is driven by square wave generator 256. The negative input of low noise
10 differential amplifier 258 is connected to the undriven plates of capacitors C_1 and C_2 , and the positive input of differential amplifier 258 is connected to electrical ground. Differential amplifier 258 has negative feedback through capacitor C_1 and has charge ΔQ from
15 capacitor C_1 and C_2 flowing in and out of the negative input. The output of differential amplifier 258 is a square wave representative of differential capacitance which is converted into a digital format by A/D converter 260. In circuit 250, ΔQ is given as:

20

$$\Delta Q = V_{PPIN}(C_1 - C_2) \quad \text{Equation 2}$$

And, the amplifier output is:

25

$$\begin{aligned} V_{PPOUT} &= \Delta Q / C_1 \\ &= V_{PPIN}(C_1 - C_2 / C_1) \end{aligned} \quad \text{Equation 3}$$

30

C_1 should be selected to be approximately equal to $(C_1 - C_2)/2$ at maximum differential pressure, for example, 1 pF. Additionally, to compensate for manufacturing variations, it is desirable to have separate gain adjustments for each sensor. Additionally, circuitry should be included to measure

-15-

C_1 , C_2 or C_1+C_2 , independently, in order to compensate for variations in output due to common mode or line pressure. Circuitry for detecting capacitance output is set forth in U.S. Patent 5,083,091, entitled "Charge
5 Balanced Feedback Measurement Circuit," commonly assigned with the present application.

The output from converter 260 is provided to interface circuitry 262. Interface 262 is connected to a 4-20 mA current loop and provides the digital signal
10 from A/D converter 260 to current loop 264 in either a digital or analog format. Interface 262 also provides power to circuitry 250 from loop 264. Interface 262 is also capable of receiving commands, such as those pursuant to the HART® communications standard.

15 Figures 12 and 13 show another embodiment having sensor body 300 which carries pressure sensors 200A and 200B. Figure 12 is a side cross-sectional view of sensor body 300 and Figure 13 is a bottom plan view of body 300. Body 300 includes circuit boards 57 and 58
20 connected by wires through feed-throughs 73A, 73B and 73C through process barrier 71. Sensors 200A and 200B are carried in alumina insert 302. Process barrier 71 forms chamber 75 which may be a vacuum or filled with an inert gas. A groove 304 extends around alumina insert
25 302 and provides thermal and stress isolation. Mounting holes 306 are used to couple body 300 to a conduit (not shown). In another embodiment, a bond between the sensor and the transmitter body is a fusion bond.

30 Figures 14 and 15 show sensor body 310 including middle shell 312 which carries alumina insert 314. Sensors 200A and 200B are seated in alumina insert 314 which also carries ASIC chip 316. ASIC chip 316 performs the same functions as circuit board 57. Groove 318 provides stress isolation for insert 314 and sensors

-16-

200A and 200B. Process barrier 320 seals shell 312 and provides a second barrier to process fluid. Cavity 322 in shell 312 may carry a vacuum or inert gas. Feed-throughs 324 provide a path for electric connections from ASIC chip 316 to circuit board 326. The design shown in Figure 3 allows the sensor assembly to be tested prior to welding shell 312 into sensor body 310. High temperature operations (such as brazing the sensor to the alumina insert) can be conducted before mounting the sensor assembly in the housing.

In one embodiment, a pressure sensor of the invention has dimensions as follows:

TABLE 1

Dimension	Size (Range)	Preferred
T	0.02 to 0.2 inches	0.05 inch
L	0.15 to 1.5 inches	0.6 inch
W	0.02 to 0.2 inches	0.1 inch
w	0.01 to 0.1 inches	0.05 inch
Cavity Thickness t	5×10^{-6} to 1×10^{-4} inches	0.000020 inch
y (gap deflection) at 4500 psi	2×10^{-6} to 5×10^{-5} inches	0.000012 inch

A typical capacitance for the sensor is 42 pF at zero psi.

In one embodiment, parameters of a pressure sensor are as follows:

-17-

TABLE 2

PROPERTY	ZERO (0 psi)	FULL SCALE (4500 psi)	SPAN (4500 psi)
5 Gap (At Center) (μ Inches)	20	11.25	8.75
Gap (Effective Average) (μ Inches)	20	12.37	7.63
10 Sensor Capacitance (No Parasitics) (pf)	42.2	68.2	26.0
15 Parasitic Capacitor (w/o Guard Shield and assumes 0.6 inch length) (pf)	1.97	1.994	0.024
20 Sensor Temperature Coefficient (PSI/C)	-0.059	0.534	0.593
25 [ppm/C]	-13.1	118.6	131.7

Figures 16A through 16G show cross-sections of a pressure sensor in accordance with one aspect of the invention. Figure 16A shows a rectangular structure in which all interior angles are 90°. Figure 16B shows a hexagonal sensor structure in which all interior angles are 60°. A rhombus structure is shown in Figure 16C in which two inner angles are 60° and two angles are 30°. Figure 16D shows a triangular structure in which all interior angles are 60°. The structures shown in Figure 16A through 16D are convenient structures for sapphire because they tend to lie along planes of a sapphire crystal. Figure 16E shows a sensor 340 in which a

-18-

rounded portion 342 is coupled to a rectangular portion 344. Cavity 346 is formed in rectangular portion 344. Figure 16F shows another embodiment in which the cavity is formed in the rounded portion. Various alternatives are also available including rounding both portions, such as shown in Figure 16G. A round cross section is desirable because it can be closely fit into a round hole and can be sealed with a round O-ring. It can be fabricated by machining a square structure with a diamond grinding wheel.

Figures 17A through 17B show example configurations of the electrodes for capacitive plates. Electrode instability causes errors in capacitive pressure sensors which have small gaps. Residual stress causes the pressure sensor structure to warp. Further, dimensional changes in the electrode surface change the gap dimension t . These changes can be caused by oxidation and reduction or migration of atoms on the opposing surfaces. Figures 17A and 17B show examples of a solution to this problem in which the capacitor plates are broken apart into strips having widths and spacings which result in a capacitance that is substantially equal to a solid electrode. For example, if the substrate has a dielectric constant of 10 times the gap dielectric constant, then the spacings could be about 10 times the gap dimension and the widths could be less than about the gap dimension. This reduces the amount of material available to warp the sensor structure. Further, the strips can be configured so that most of the electrical flux emerges from the back side of the electrodes. As the back side of the electrode is in contact with sapphire, it is protected from surface effects and will provide a stable capacitance even if the inside surface changes dimensions. Figures 17A and

-19-

17B show two example configurations which increase the amount of flux emanating from the back side of the electrodes. Variations on this embodiment include providing guard electrodes (298) which overlie each plate electrode and shield each plate electrode. Although these plates are spaced apart, they are similar to a continuous capacitor plate because of their spacing and relative size.

In one embodiment, the capacitor electrodes are implanted into the surface of the substrate. This provides electrode stability by protecting the electrode and helping to reduce the amount of the change in the capacitance over time. A sapphire substrate is implanted with V ions at a dose of 1×10^{18} ions/cm² and an energy level of 200 KeV. This changes the resistivity of the sapphire from very highly resistant to about 15 Ohms/sq. The implanting process concentrates most of the V approximately 1000 Å beneath the original sapphire surface. An example of an implanted electrode 300 is shown in phantom in Figure 17B.

Figure 18 is a graph of bonding temperature as a percent of melting point temperature versus bond strength as a percent of material strength. For maximum stability and accuracy, it is desirable to have the bond strength as close as possible to the material strength so that the sensor structure behaves as a unitary body. In one embodiment of the invention, bonding temperature is the range indicated at 350 in Figure 18. Sapphire, quartz or silicon can be used in forming a pressure sensor, and their melting points are 2050° C, 1723° C and 1415° C, respectively. The desired range 350 shown in Figure 18 is from a temperature of about 68% of the melting point absolute temperature. In one embodiment, bonding temperature should not exceed about 95% of the

-20-

melting point temperature. The desired fusion bond as used herein is a bond having a strength which is substantially the same as the strength of the underlying crystal material, and is formed by the application of heat with substantially no foreign material in the bond.

Although the present invention has been described with reference to preferred embodiments, workers skilled in the art will recognize that changes may be made in form and detail without departing from the spirit and scope of the invention. Single crystal materials include sapphire, silicon, quartz, ruby and diamond. Generally, these are materials with low hysteresis which are highly stable thereby providing little creep. In general, materials with higher melting points will be more stable thus, sapphire is one preferred material. The cavity of the sensor can be a vacuum or filled with a fluid or gas. The electrodes can include conductors such as metals, metal oxides or doped semiconductors and can be protected with an insulating dielectric material such as quartz. In another embodiment, the stress isolation structure is formed of a polycrystalline material. Further, the bonding can be formed with or without the use of pressure.

25

30



☐ Description : paged to paged
☒ Claim(s) : paged 21 to paged 29
☐ Drawing(s) : paged to paged
☐ Abstract : paged to paged

WHAT IS CLAIMED IS:

1. A pressure transmitter in a process control system for transmitting pressure on a process control loop, the transmitter comprising:

I/O circuitry coupling to the loop for transmitting information on the loop;
compensation circuitry receiving a pressure related signal and responsively controlling the I/O circuitry to transmit pressure information on the loop;

a transmitter housing containing the I/O circuitry and the compensation circuitry;

a mounting portion in the housing formed of a mounting portion material;

a process barrier in the housing which isolates the I/O circuitry and the compensation circuitry from the mounting portion;

an elongated member formed substantially of a brittle, corrosion-resistant material which is different than the mounting portion material coupled to the mounting portion at a proximal end and having a passageway extending therethrough;

a pressure responsive portion at a distal end of the elongated member for immersion in a process fluid and deforming in response to process fluid pressure; and

a sensor coupled to the pressure responsive portion and having an electrical connection to the compensation circuitry through the passageway of the elongated





-22-

portion and a feed-through in the process barrier, wherein the sensor and electrical connection are isolated from process fluid by the elongated member.

2. The pressure transmitter of claim 1 wherein the elongated member defines a cavity therethrough for applying a reference pressure to the pressure responsive structure.

3. The pressure transmitter of claim 1 including a second elongated member coupled to the mounting portion and carrying a second pressure responsive portion having a second sensor coupled to the compensation circuitry, wherein the pressure information relates to a differential pressure.

4. The pressure transmitter of claim 1 wherein the elongated member and pressure responsive portion include bonds which are substantially free of foreign material.

5. The pressure transmitter of claim 1 wherein the elongated member and the pressure responsive portion have a width w and a thickness T , and w/T is less than about 4.0.

6. The pressure transmitter of claim 5 wherein the elongated member and the pressure responsive portion have a width w and a thickness T , and w/T is less than about 2.3.

7. The pressure transmitter of claim 6 wherein the elongated member and the pressure responsive portion have a width w and a thickness T , and w/T is less than about 1.0.

8. The pressure transmitter of claim 1 including electrical conductors implanted in the elongated member and providing the electrical connection between the sensor and the compensation circuitry.



* C L M S *



-23-

9. The pressure transmitter of claim 1 wherein the elongated member has a length L exposed to process fluid and a maximum width w and L/w is greater than about 3.0.

10. A pressure sensor in a pressure transmitter, comprising:

a pressure responsive structure of a brittle, corrosion resistant material comprising more than one substrate of single crystal material bonded to at least a second substrate of single crystal material;

a capacitance sensor coupled to the pressure responsive structure providing a capacitive output in response to deformation of the pressure responsive structure due to an applied pressure; and

wherein the bond between the substrates is a fusion bond which has a bond strength of crystal substantially equal to the single crystal material strength and is formed at a temperature between about 65 percent and 95 percent of an absolute temperature corresponding to a melting point of the material.

11. The pressure sensor of claim 10 wherein the pressure responsive structure has a cavity width w and a thickness T , and w/T is less than about 4.0.

12. The pressure sensor of claim 10 wherein the pressure responsive structure includes a passageway therethrough for providing a reference pressure proximate the capacitance sensor.





-24-

13. The pressure sensor of claim 10 wherein the pressure responsive structure includes electrical conductors extending therethrough able to withstand a temperature used to form the bond.

14. The pressure sensor of claim 13 wherein the electrical conductors are implanted in the pressure responsive structure.

15. The pressure sensor of claim 13 wherein the material comprises sapphire.

16. A pressure sensor in a pressure transmitter, comprising:

an elongated pressure responsive structure of a single crystal, corrosion-resistant material, the elongated structure having a pressure sensor width w and a thickness T ;

a capacitance sensor coupled to the pressure responsive structure providing a capacitive output in response to deformation of the pressure responsive structure due to an applied pressure; and

wherein w/T is less than about 4.0.

17. The pressure sensor of claim 16 wherein the pressure responsive structure includes more than one substrate and a bond between substrates is a fusion bond which has a strength substantially equal to the single crystal material strength and is formed at a bonding temperature between about 65 percent and about 95 percent of an absolute temperature corresponding to a melting point of the material.

18. The pressure sensor of claim 16 wherein the elongated pressure responsive structure includes a





-25-

cavity extending therethrough for providing a reference pressure proximate the capacitance sensor.

19. The pressure sensor of claim 16 including electrical conductors implanted in the pressure responsive structure.

20. The pressure sensor of claim 17 including electrical conductors in the pressure responsive structure having a melting point greater than the bonding temperature.

21. The pressure sensor of claim 16 wherein the pressure responsive structure is coupled to a pressure transmitter housing by a stress isolating structure of the same single crystal, corrosion-resistant material.

22. The pressure sensor of claim 21 wherein the joint between the pressure sensing structure and the pressure transmitter housing is a fusion bond.

23. The pressure sensor of claim 16 wherein the capacitance sensor includes conducting electrodes formed of conducting strips on opposing surfaces of a cavity gap.

24. The pressure sensor of claim 23 wherein the conducting strips have width and spacing substantially equal or less than a cavity gap spacing.

25. The pressure sensor of claim 21 wherein the pressure responsive structure and stress isolating structure are surrounded by and directly exposed to process pressure fluid.

26. The pressure sensor of claim 16 wherein the material comprises sapphire.

27. A pressure sensor in a pressure transmitter, comprising:

a pressure responsive structure;



* C L H S *



-26-

a first capacitor plate having a back side attached to the pressure responsive structure and a front side;

a second capacitor plate having a back side attached to the pressure responsive structure and a front side, the first and second capacitor plates positioned to provide relative deflection therebetween in response to pressure applied to the pressure responsive structure; and

wherein the electric field between the first and second capacitor plates emanates substantially between the back sides of the first and second capacitor plates.

28. The pressure sensor of claim 27 wherein the pressure responsive structure includes a cavity and the capacitor plates are positioned on opposite sides of the cavity.

29. The pressure sensor of claim 28 including a plurality of first capacitor plates on a first side of the cavity adjacent the first capacitor plate and a plurality of second capacitor plates on a second side of the cavity adjacent the second capacitor plate.

30. The pressure sensor of claim 29 wherein the first capacitor plates are laterally offset relative to the second capacitor plates.

31. The pressure sensor of claim 27 wherein the pressure responsive material comprises sapphire.

32. The pressure sensor of claim 27 wherein the pressure responsive structure comprises first and second portions fusion bonded together and forming a gap therebetween which carries the first and second capacitor plates.





-27-

33. The pressure sensor of claim 27 wherein the pressure responsive structure has a length between a mounting portion and a sensing portion selected to provide a desired stress isolation.

34. A transmitter for providing an output related to a differential pressure, comprising:

- a transmitter body;

- a first pressure responsive structure formed substantially of a single crystal material coupled to a first process pressure;

- a first sensing means coupled to the first pressure responsive structure having an output related to the response of the first pressure responsive structure to the first process pressure;

- a first stress isolation member coupling the first pressure responsive structure to the transmitter body, the first stress isolation member formed substantially of the single crystal material;

- a second pressure responsive structure formed substantially of a single crystal material coupled to a second process pressure;

- a second sensing means coupled to the second pressure responsive structure having an output related to the response of the second pressure responsive structure to the second process pressure;

- a second stress isolation member coupling the second pressure responsive structure to the transmitter body, the second stress



* C L M S *



-28-

isolation member formed substantially of the single crystal material; and output means in the transmitter body coupled to the first and second sensors for determining the difference in pressure between the first and second process pressures and providing an output related to a differential pressure therebetween.

35. The transmitter of claim 34 wherein the first and second pressure responsive members are exposed directly to the process fluid and the single crystal material is substantially resistant to corrosion due to the process fluid.

36. The transmitter of claim 34 wherein the sensing means comprises capacitor electrodes and the output is a capacitance related to pressure.

37. The transmitter of claim 34 wherein the first and second pressure sensing structures are coupled to first and second reference pressures and the pressure sensing structures are responsive to a difference between a reference pressure and a process pressure.

38. The transmitter of claim 37 wherein the reference pressures are coupled together and are equal.

39. The transmitter of claim 38 wherein the reference pressures are substantially independent of process pressure.

40. The transmitter of claim 37 wherein the reference pressure is substantially a vacuum.

41. The transmitter of claim 37 wherein the reference pressure is transmitted via a gas.

42. The transmitter of claim 34 wherein the single crystal material is sapphire.



* C L N S *

-29-

43. The transmitter of claim 34 wherein the first and second pressure responsive structures are maintained at substantially the same temperature by the transmitter housing.

44. The transmitter of claim 43 wherein the pressure responsive structures are spaced apart such that they maintain a temperature differential within a predetermined range over a predetermined temperature gradient in the transmitter housing.

45. The transmitter of claim 34 wherein a process pressure range is greater than 1000 psi and a differential pressure range is less than 30 psi.

46. The transmitter of claim 34 wherein each pressure responsive structure is maintained at a substantially uniform temperature throughout.


47. The transmitter of claim 34 wherein there are joints between the pressure responsive structure and the stress isolating means and the joints are substantially free of foreign material.

48. The transmitter of claim 47 wherein the joints are fusion bonds.

This Sheet Has Been Replaced



* C L M S *

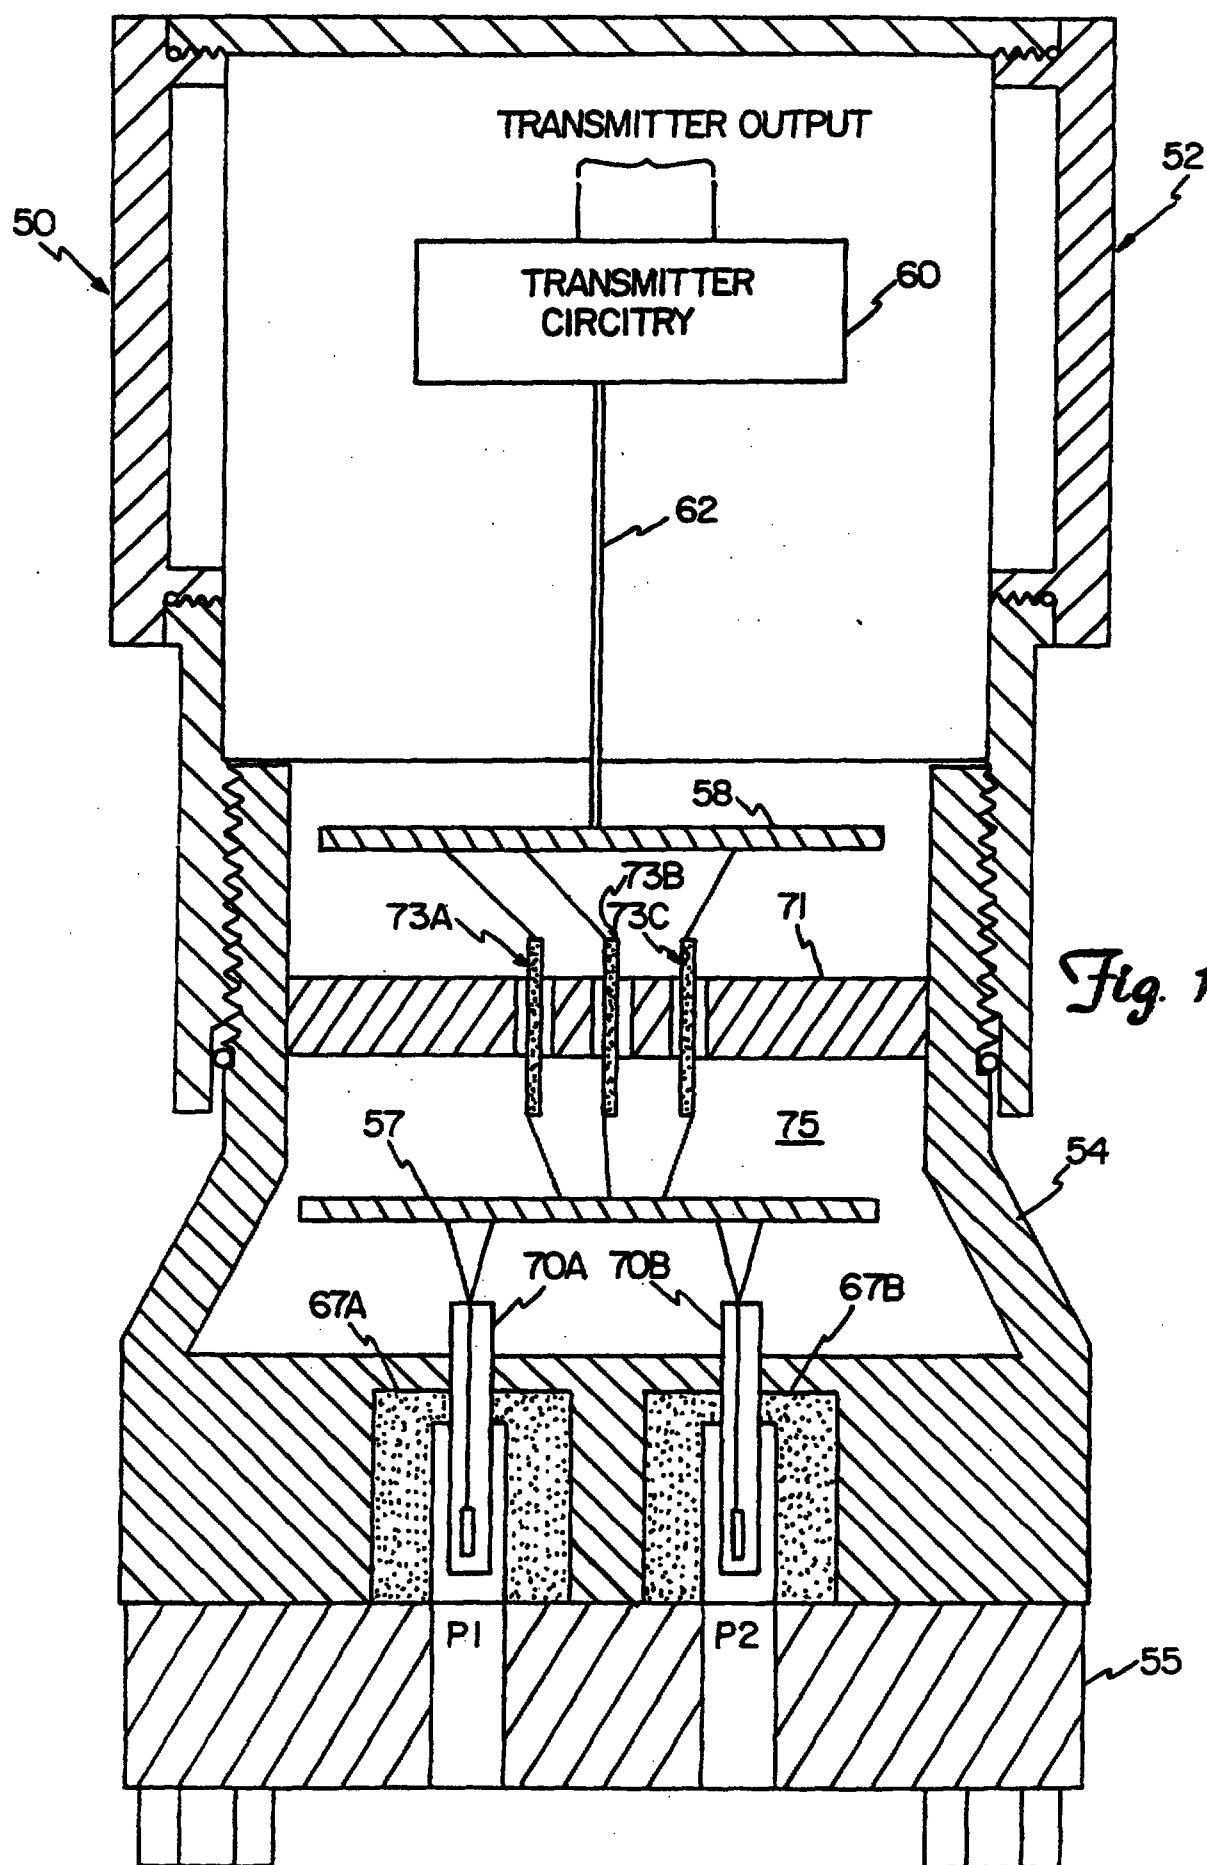


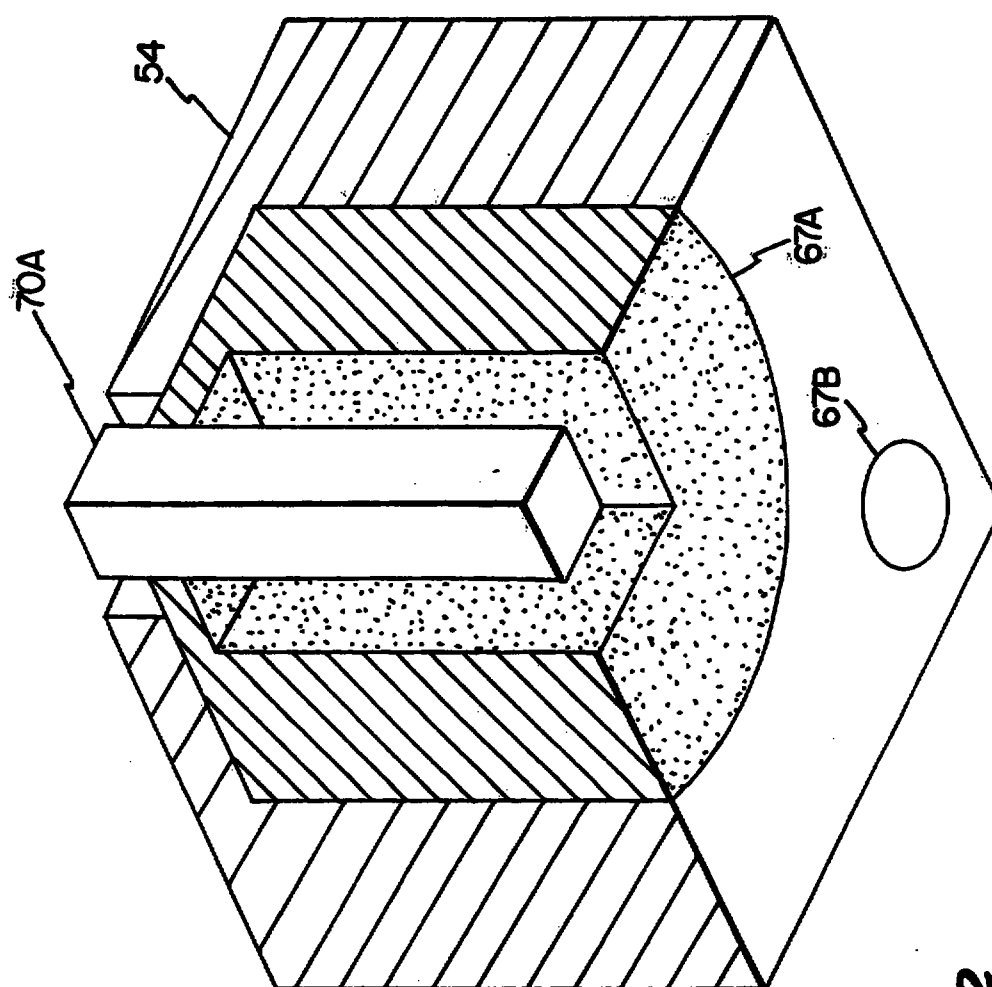


Fig. 2

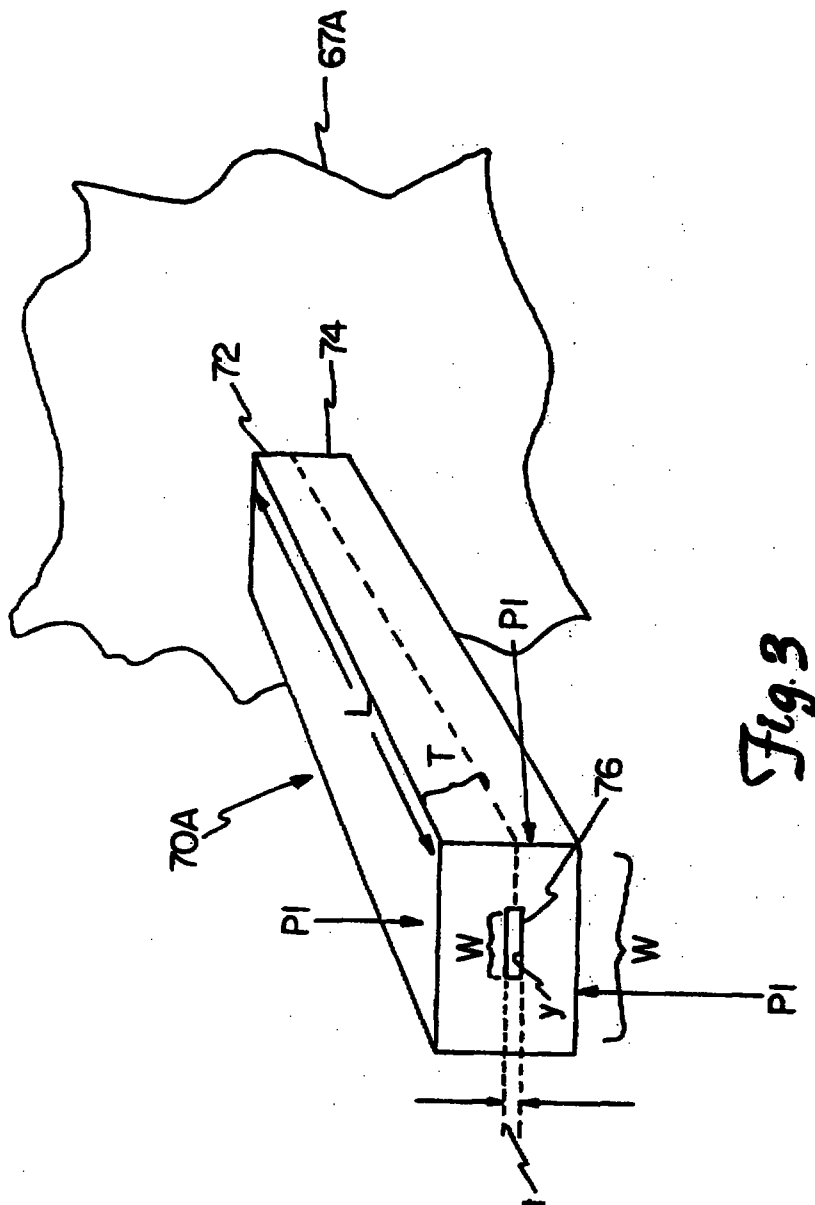

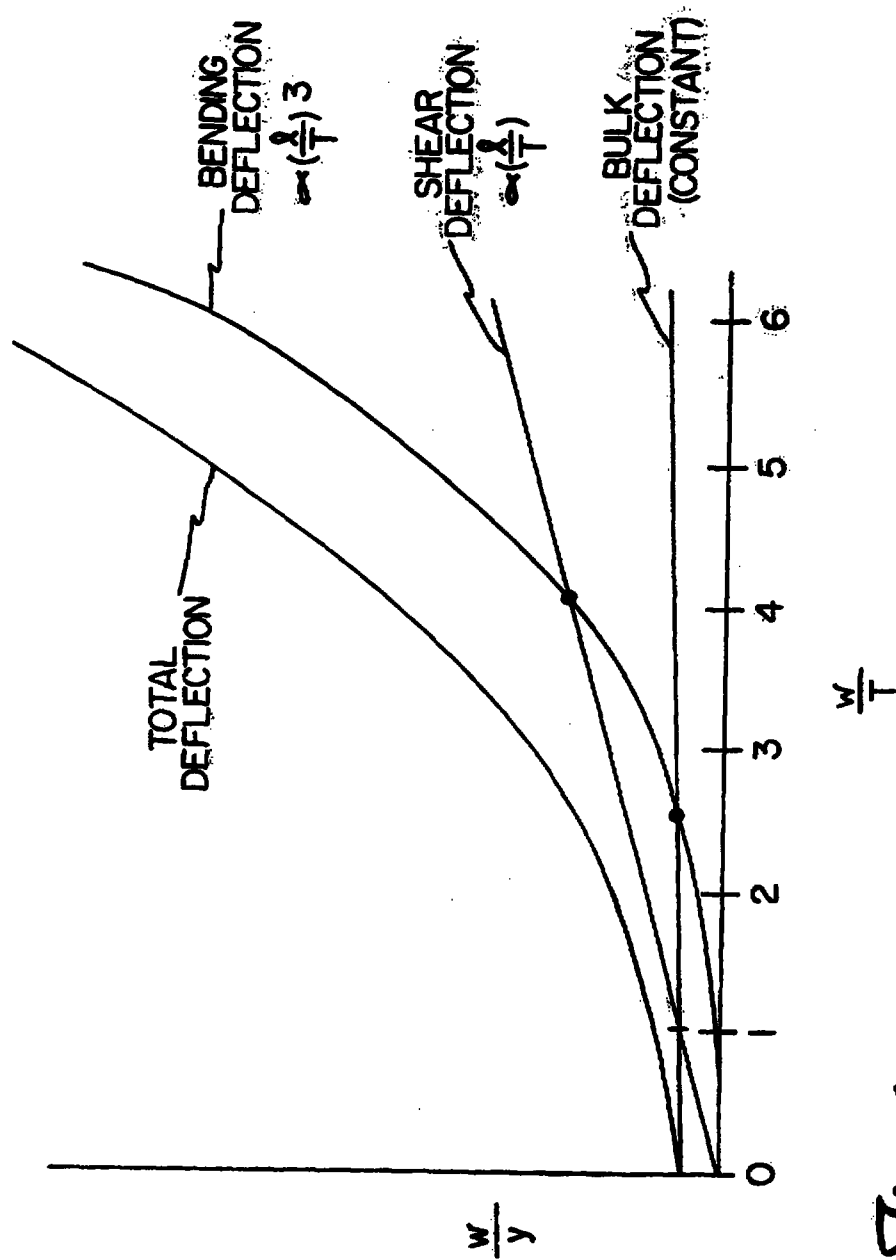


Fig. 4

05 / 16

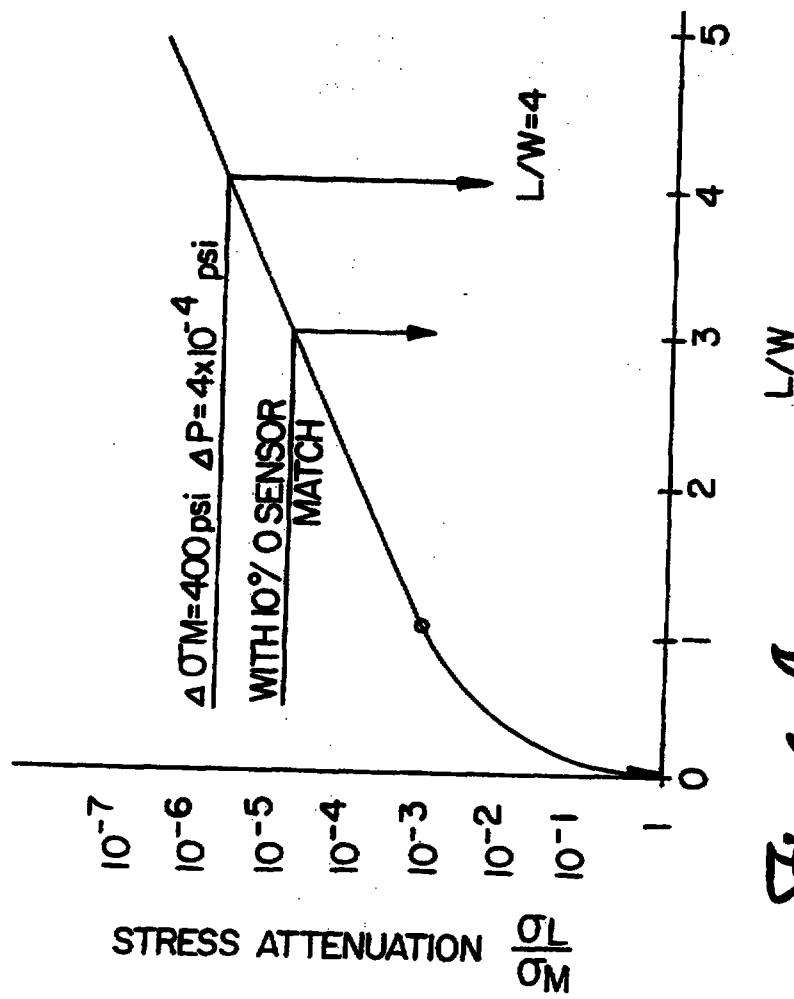


Fig. 4a

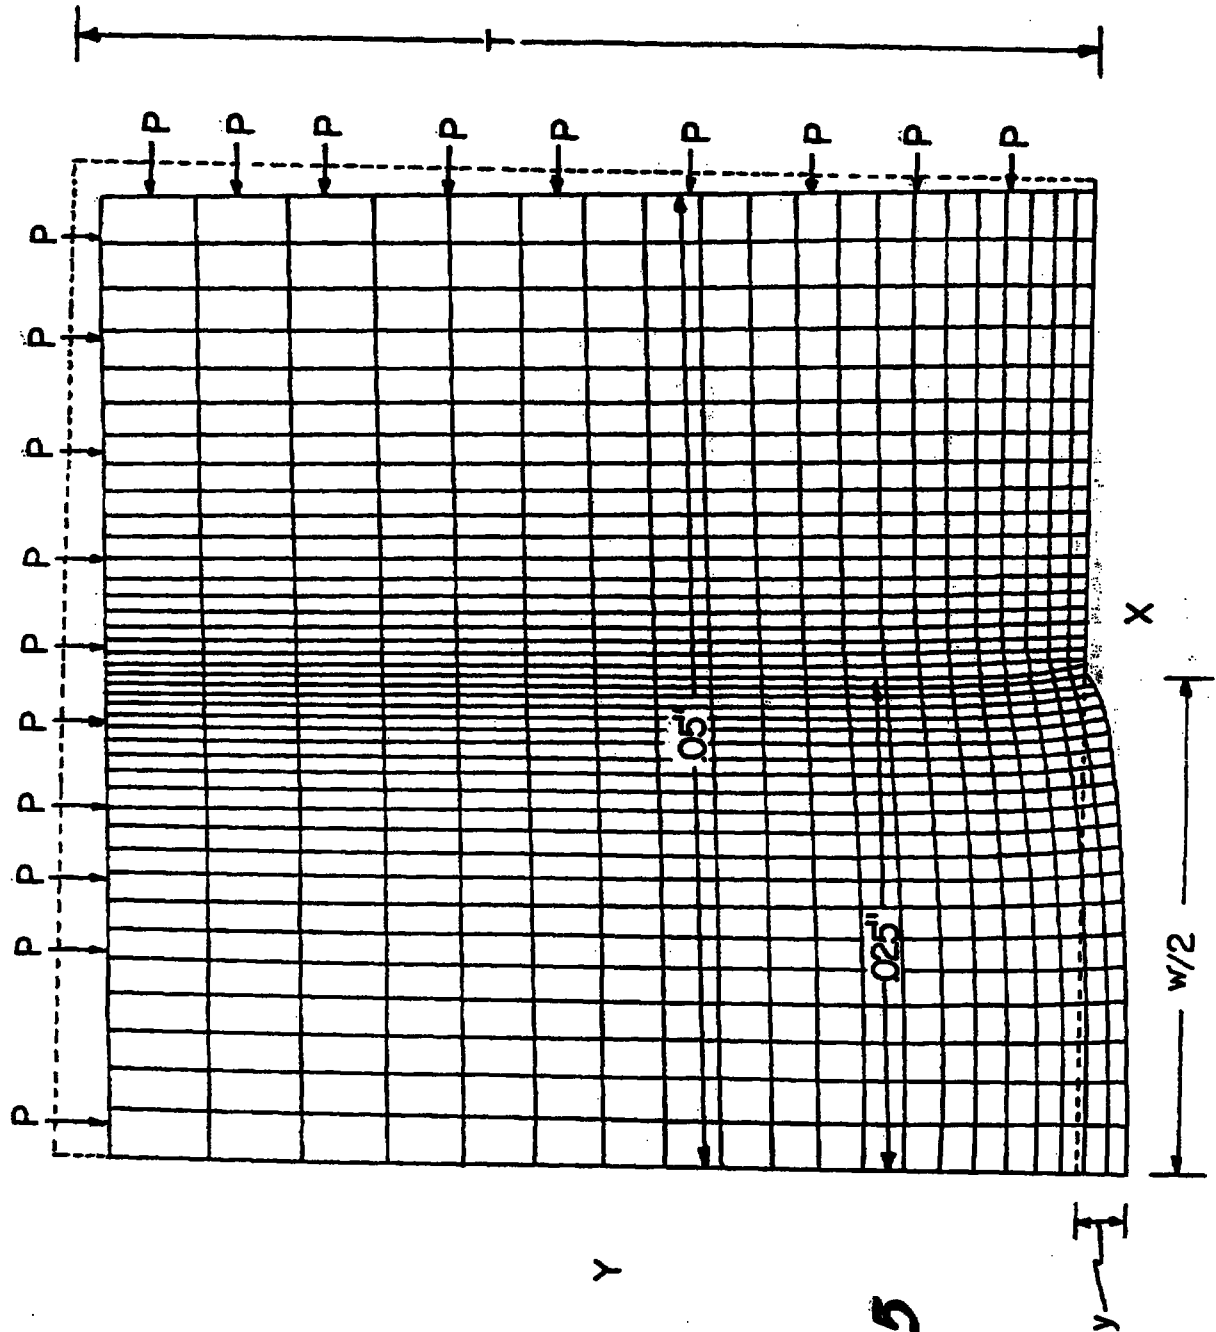


Fig. 5

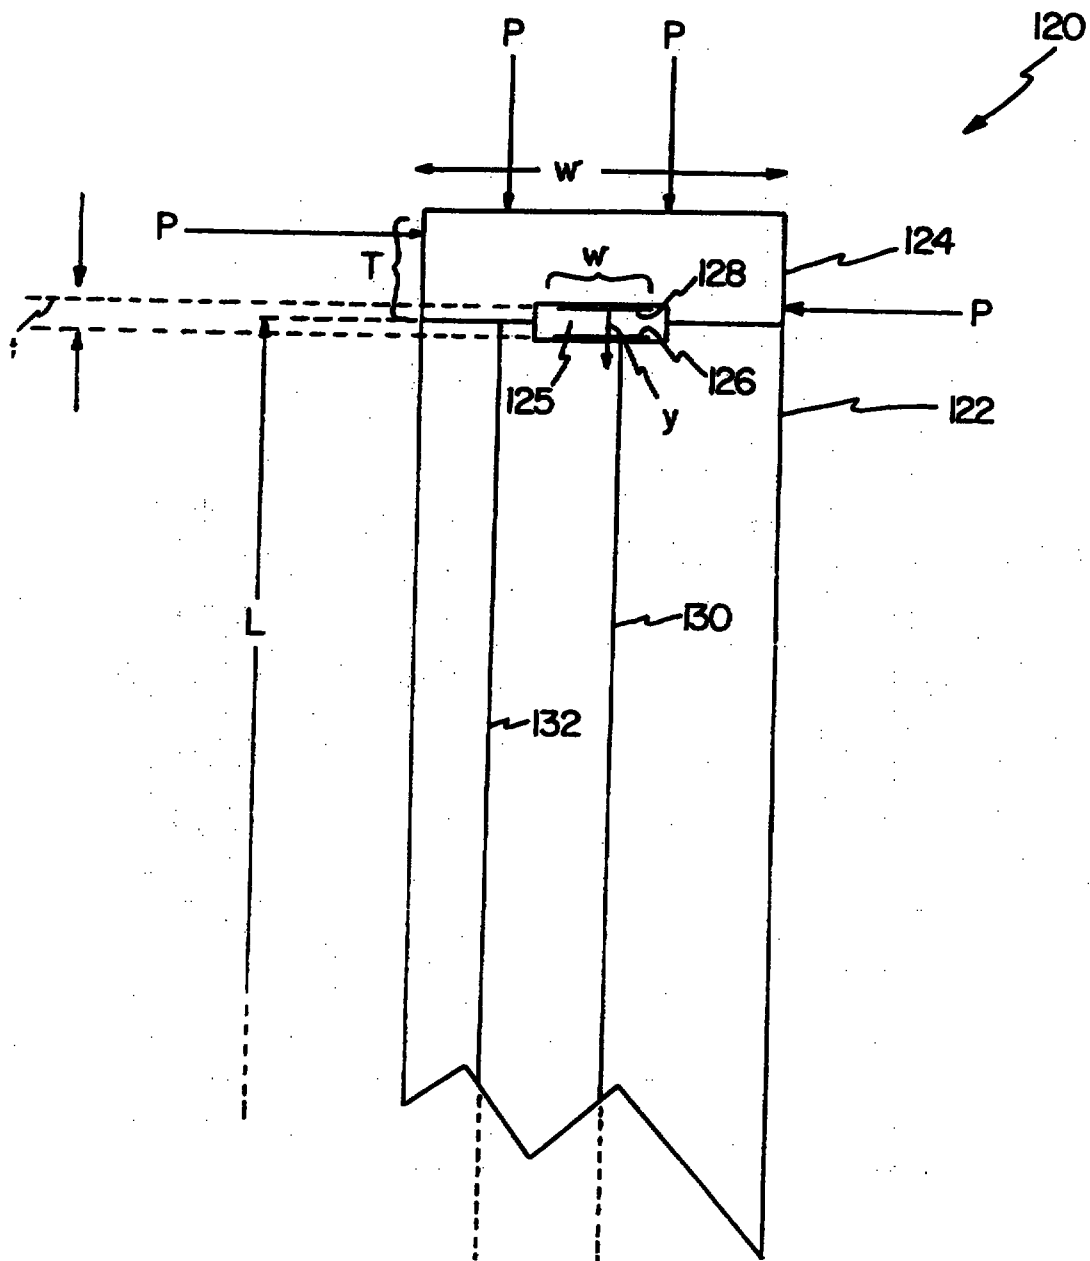


Fig. 6

08 / 16

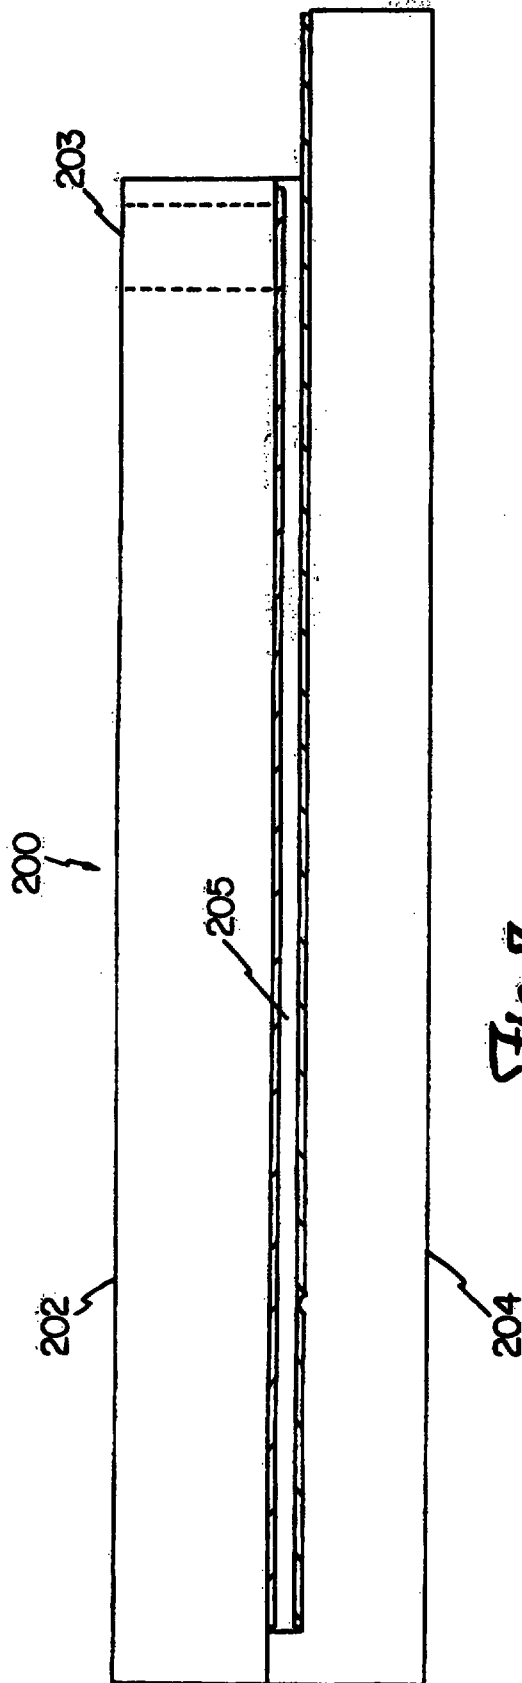


Fig. 7

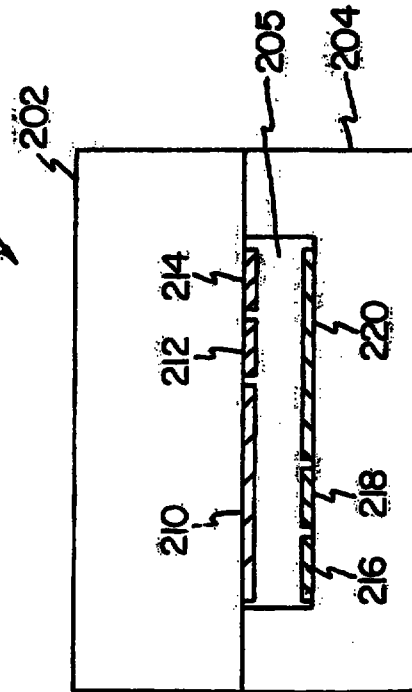


Fig. 8

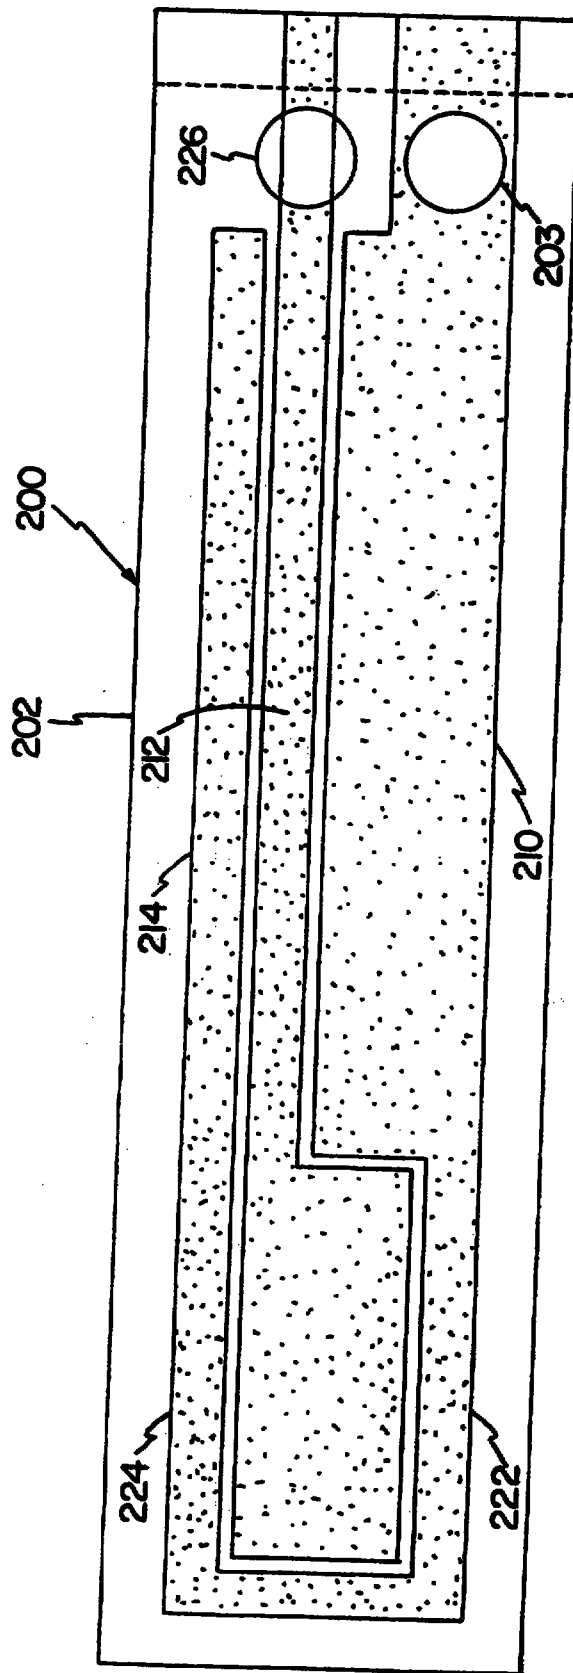
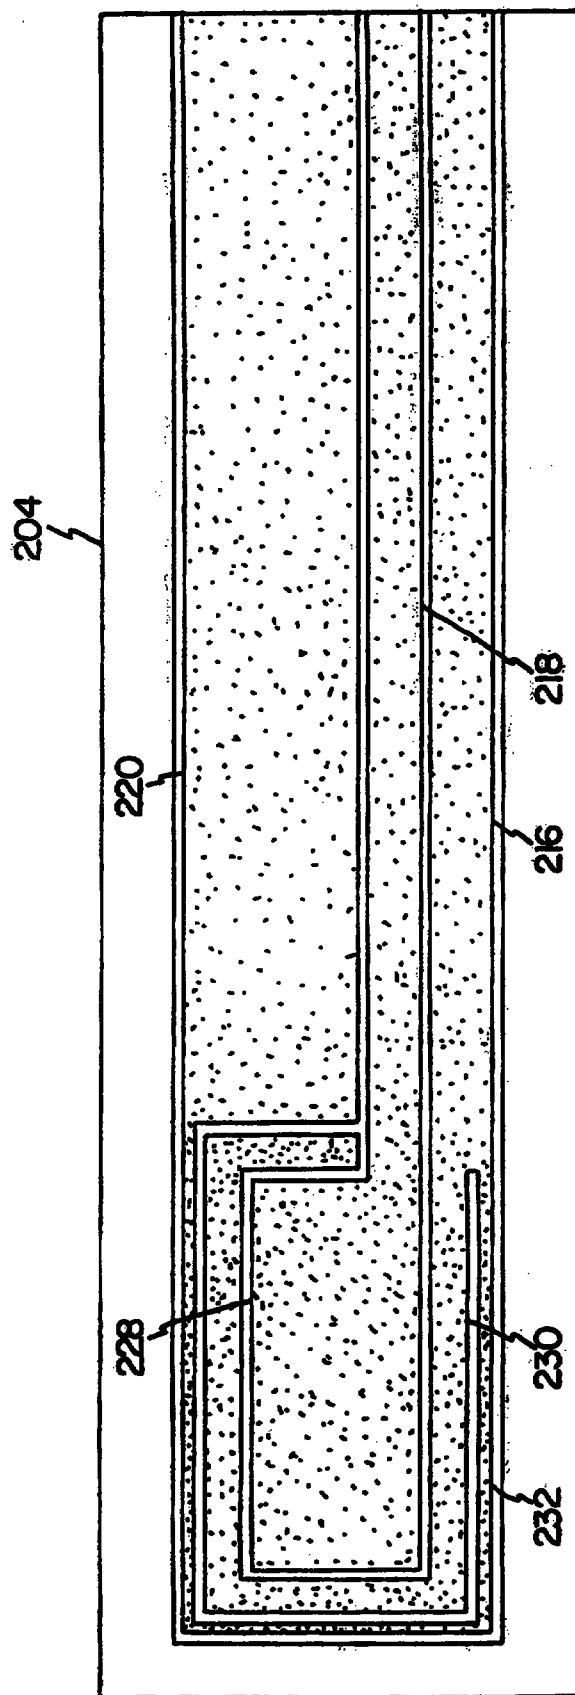


Fig. 9

*Fig. 10*

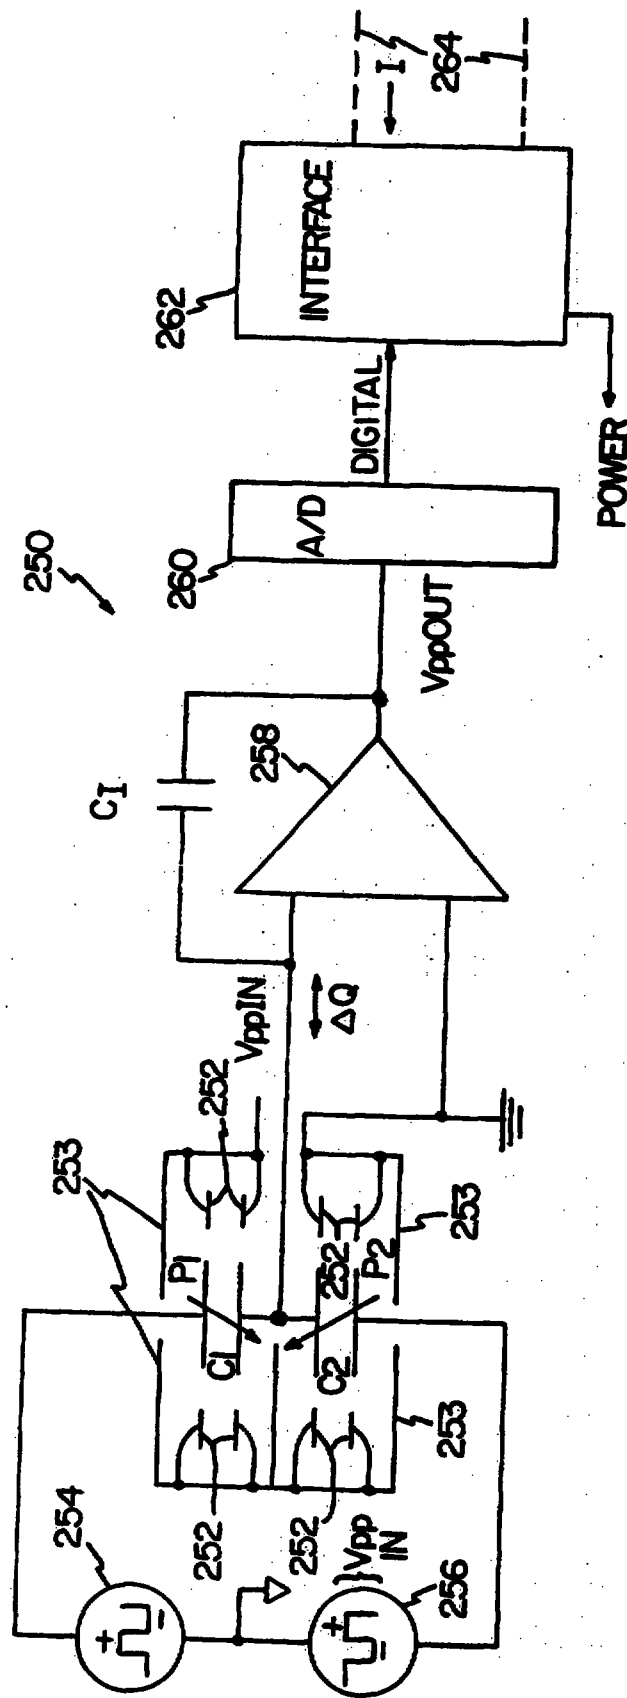


Fig. 11

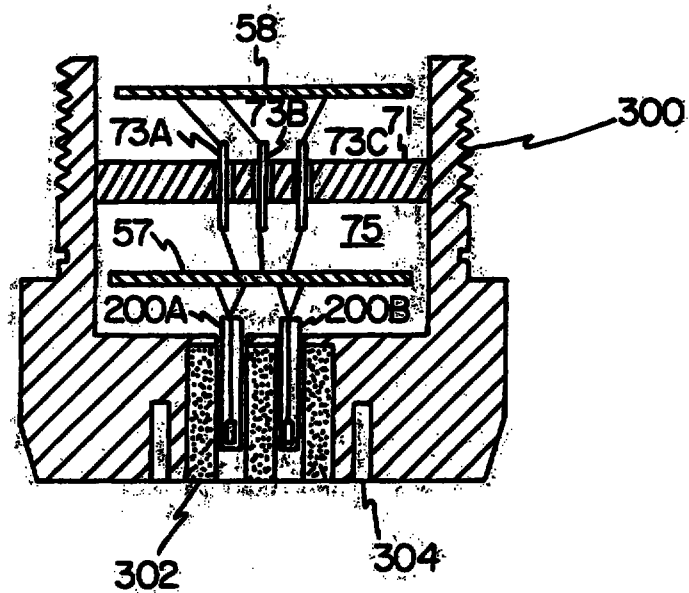


Fig. 12

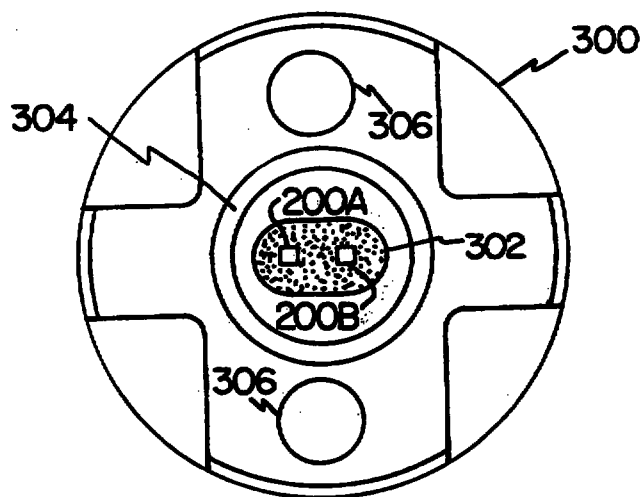


Fig. 13

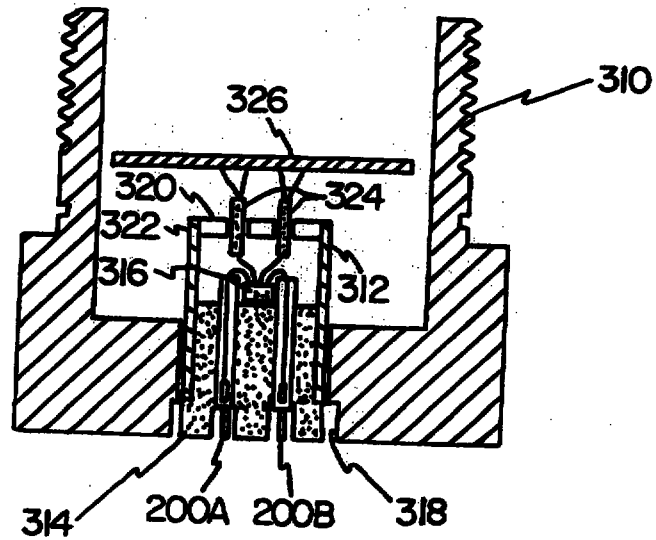


Fig. 14

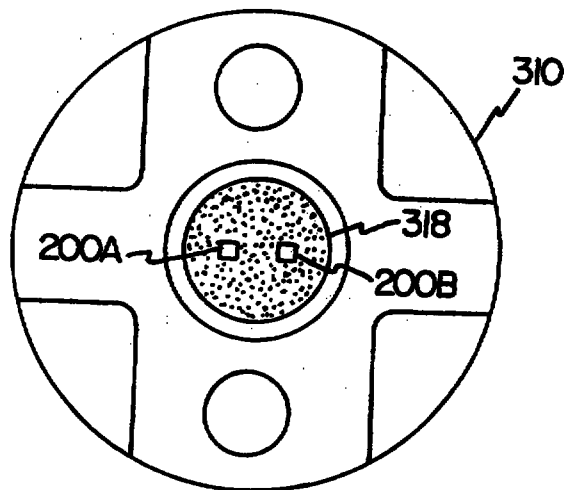


Fig. 15


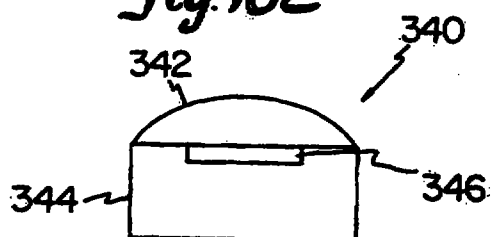


Fig. 16B*Fig. 16C**Fig. 16A**Fig. 16D**Fig. 16E**Fig. 16F**Fig. 16G*

Fig. 17A


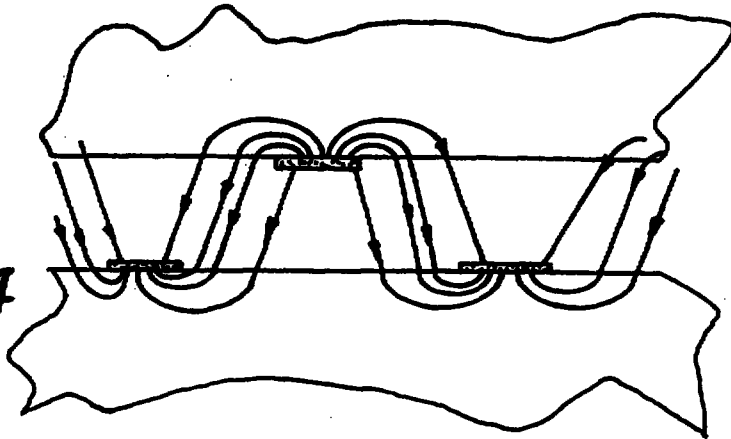


Fig. 17B

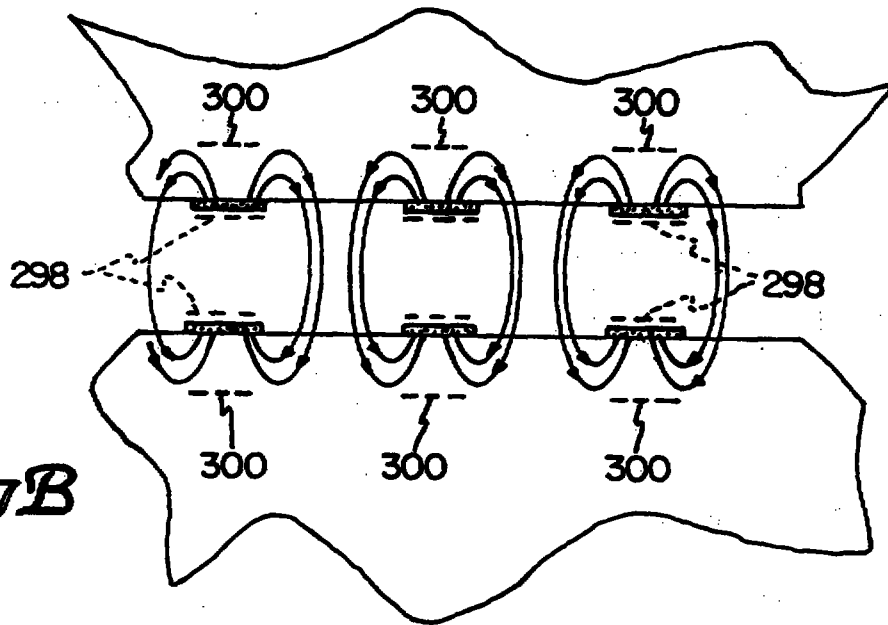

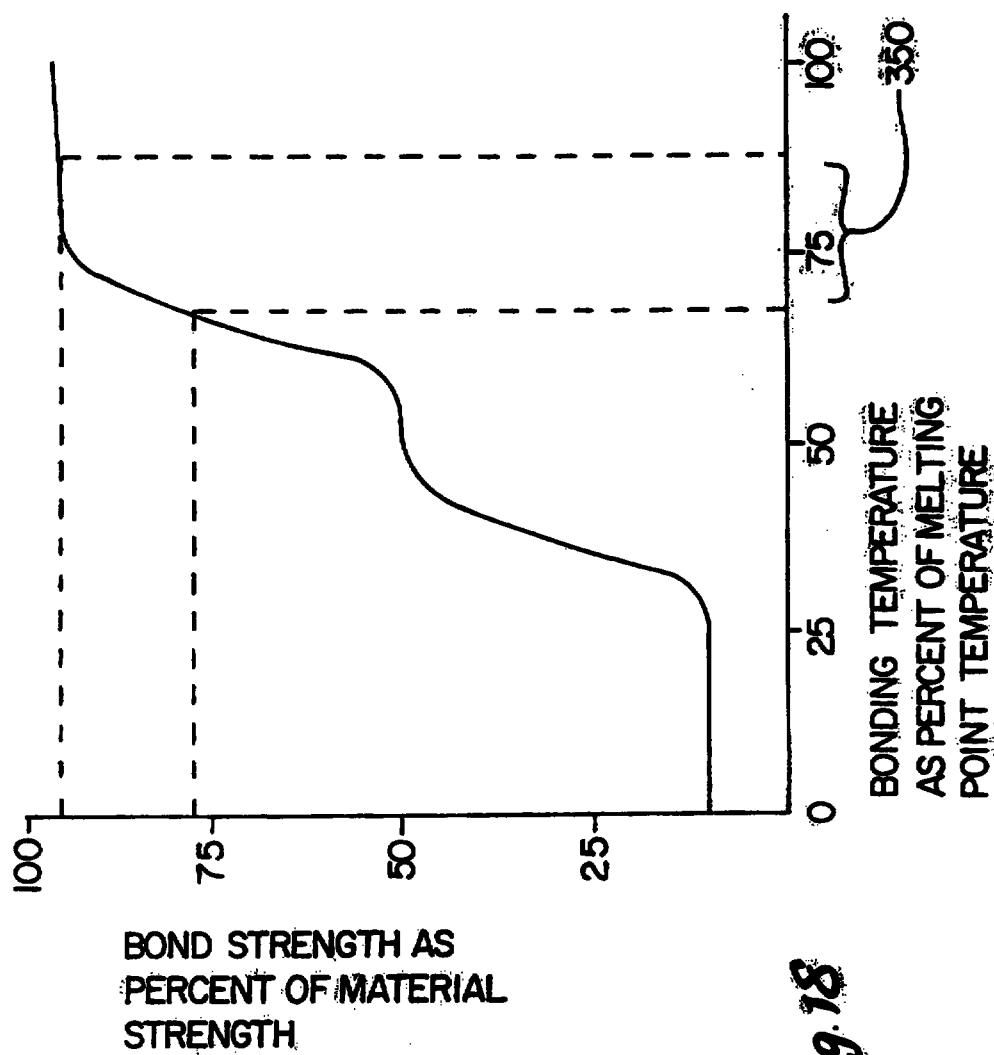


Fig. 18

CLAIMS

- 21

REPLACEMENT SHEETS		SG
☐ Description :	paged	REPLACEMENT SHEET
☐ Claim(s) :	paged 21 to paged 27	
☐ Drawing(s) :	paged to paged	
☐ Abstract :	paged to paged	
DATE OF RECEIPT		27 AUG 1996

1. A pressure transmitter for use in an industrial process control system for transmitting pressure on a process control loop, the transmitter comprising:
 - I/O circuitry coupling to the loop for transmitting information on the loop;
 - compensation circuitry receiving a pressure related signal and responsively controlling the I/O circuitry to transmit pressure information on the loop;
 - a transmitter housing containing the I/O circuitry and the compensation circuitry;
 - a mounting portion in the housing formed of a mounting portion material;
 - a process barrier in the housing positioned between the I/O circuitry and the compensation circuitry which isolates the I/O circuitry from the compensation circuitry and the mounting portion;
 - an elongated member formed substantially of a brittle, corrosion-resistant material which is different from the mounting portion material and is coupled to the mounting portion at a proximal end and having a passageway extending therethrough;
 - a pressure responsive portion at a distal end of the elongated member for immersion in a fluid which is at a pressure related to the process fluid pressure and deforming in response to process fluid pressure; and
 - a sensor coupled to the pressure responsive portion and having an electrical connection to the compensation circuitry through the passageway of the elongated portion and a sealed feed-through in the process barrier, wherein the sensor and electrical connection are isolated from process fluid by the elongated member;
 - wherein the elongated member and pressure responsive portion include fusion bonds which are substantially free of foreign material.
2. The pressure transmitter of claim 1 wherein the elongated member defines a cavity therethrough for applying a reference pressure to the pressure responsive portion.



* C L M S *

27 AUG 1998

3. The pressure transmitter of claim 1 including a second elongated member coupled to the mounting portion and carrying a second pressure responsive portion having a second sensor coupled to the compensation circuitry, wherein the pressure information relates to a differential pressure.
4. The pressure transmitter of claim 1 wherein the elongated member and the pressure responsive portion have a width w and a thickness T , and w/T is less than about 4.0.
5. The pressure transmitter of claim 4 wherein the elongated member and the pressure responsive portion have a width w and a thickness T , and w/T is less than about 2.3.
6. The pressure transmitter of claim 5 wherein the elongated member and the pressure responsive portion have a width w and a thickness T , and w/T is less than about 1.0.
7. The pressure transmitter of claim 1 including electrical conductors implanted in the elongated member and providing the electrical connection between the sensor and the compensation circuitry.
8. The pressure transmitter of claim 1 wherein the elongated member has a length L exposed to process fluid and a maximum width W and L/W is greater than about 3.0.
9. A pressure transmitter for use in an industrial process control system for transmitting a process variable related to pressure on a process control loop, comprising:
an elongated stress isolated pressure responsive structure of a brittle, corrosion resistant material comprising a first substrate of single crystal material bonded to a second substrate of single crystal material and having a passageway extending through a pressure responsive portion to a distal end;
a capacitance sensor coupled to the pressure responsive portion of the pressure responsive structure providing a capacitive output in response to deformation of the pressure responsive portion due to an applied pressure from a process fluid; and



27 AUG 1998

transmitter circuitry coupled to the sensor adapted to measure the process variable related to the applied pressure and responsively transmit the process variable on the process control loop;

wherein the bond between the substrates is a fusion bond which is substantially free of foreign material and has a bond strength substantially equal to the single crystal material strength and is formed at a temperature between about 65 percent and 95 percent of an absolute temperature corresponding to a melting point of the material.

10. The pressure transmitter of claim 9 wherein the pressure responsive structure has a cavity formed therein with a width w and a thickness T, and w/T is less than about 4.0.

11. The pressure transmitter of claim 9 wherein the passageway provides a reference pressure proximate the capacitance sensor.

12. The pressure transmitter of claim 9 wherein the pressure responsive structure includes electrical conductors extending therethrough able to withstand a temperature used to form the bond.

13. The pressure transmitter of claim 12 wherein the electrical conductors are implanted in the pressure responsive structure.

14. The pressure transmitter of claim 9 wherein the material comprises sapphire.

15. A pressure transmitter for use in an industrial process control system for transmitting a process variable related to pressure of a process fluid on a process control loop, comprising:

an elongated pressure responsive structure of a single crystal, corrosion-resistant material, the elongated structure having a width w and a thickness T for coupling to a process fluid;



27 AUG 1998

a capacitance sensor coupled to a distal end of the pressure responsive structure providing a capacitive output in response to deformation of the distal end of the pressure responsive structure due to an applied pressure from a process fluid; and
transmitter circuitry coupled to the sensor adapted to measure the process variable related to the applied pressure and responsively transmit the process variable on the process control loop;
wherein w/T is less than about 4.0 and the elongated pressure responsive structure is bonded together by fusion bonds which are substantially free of foreign material.

16. The pressure transmitter of claim 15 wherein the pressure responsive structure includes more than one substrate and a bond between substrates is a fusion bond which has a strength substantially equal to the single crystal material strength and is formed at a bonding temperature between about 65 percent and about 95 percent of an absolute temperature corresponding to a melting point of the material.

17. The pressure transmitter of claim 15 wherein the elongated pressure responsive structure includes a cavity extending therethrough for providing a reference pressure proximate the capacitance sensor.

18. The pressure transmitter of claim 15 including electrical conductors implanted in the pressure responsive structure.

19. The pressure transmitter of claim 15 including electrical conductors in the pressure responsive structure having a melting point greater than the bonding temperature.

20. The pressure transmitter of claim 15 wherein the pressure responsive structure is coupled to a pressure transmitter housing by a stress isolating structure of the same single crystal, corrosion-resistant material.



* C L M S *

21. The pressure transmitter of claim 20 wherein the joint between the pressure sensing structure and the pressure transmitter housing is a fusion bond.
22. The pressure transmitter of claim 15 wherein the capacitance sensor includes conducting electrodes formed of conducting strips on opposing surfaces of a cavity gap.
23. The pressure transmitter of claim 22 wherein the conducting strips have width and spacing substantially equal or less than a cavity gap spacing.
24. The pressure transmitter of claim 20 wherein the pressure responsive structure and stress isolating structure are surrounded by and directly exposed to process pressure fluid.
25. The pressure transmitter of claim 15 wherein the material comprises sapphire.
26. A transmitter for use in an industrial process control system for providing an output related to a differential pressure of a process fluid, comprising:
- a transmitter body;
 - a first pressure responsive structure formed substantially of a single crystal material coupled to a first process pressure;
 - a first sensing element coupled to the first pressure responsive structure having an output related to the response of the first pressure responsive structure to the first process pressure;
 - a first elongated stress isolation member extending between and coupling the first pressure responsive structure to the transmitter body, the first stress isolation member formed substantially of the single crystal material;
 - a second pressure responsive structure formed substantially of a single crystal material coupled to a second process pressure;
 - a second sensing element coupled to the second pressure responsive structure having an output related to the response of the second pressure responsive structure to the second process pressure;



a second elongated stress isolation member extending between and coupling the second pressure responsive structure to the transmitter body, the second stress isolation member formed substantially of the single crystal material; and

output circuitry in the transmitter body coupled to the first and second sensing elements for determining the difference in pressure between the first and second process pressures and providing an output related to a differential pressure therebetween;

wherein the pressure responsive structures and the elongated stress isolation members included are formed by substrates coupled together by fusion bonds which are substantially free from foreign material.

27. The transmitter of claim 26 wherein the first and second pressure responsive members are exposed directly to the process fluid and the single crystal material is substantially resistant to corrosion due to the process fluid.

28. The transmitter of claim 26 wherein the first and second sensing elements comprise capacitor electrodes and the output is a capacitance related to pressure.

29. The transmitter of claim 26 wherein the first and second pressure responsive structures are coupled to first and second reference pressures and the pressure sensing structures are responsive to a difference between a reference pressure and a process pressure.

30. The transmitter of claim 29 wherein the reference pressures are coupled together and are equal.

31. The transmitter of claim 29 wherein the reference pressures are substantially independent of process pressure.

32. The transmitter of claim 29 wherein the reference pressures are substantially a vacuum.



33. The transmitter of claim 29 wherein the reference pressures are transmitted via a gas.
34. The transmitter of claim 26 wherein the single crystal material is sapphire.
35. The transmitter of claim 26 wherein the first and second pressure responsive structures are maintained at substantially the same temperature by the transmitter housing.
36. The transmitter of claim 35 wherein the pressure responsive structures are spaced apart such that they maintain a temperature differential within a predetermined range over a predetermined temperature gradient in the transmitter housing.
37. The transmitter of claim 26 wherein a process pressure range is greater than 1000 psi and a differential pressure range is less than 30 psi.
38. The transmitter of claim 26 wherein each pressure responsive structure is maintained at a substantially uniform temperature throughout.



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01L 7/02, 9/12, 13/06	A1	(11) International Publication Number: WO 96/27123 (43) International Publication Date: 6 September 1996 (06.09.96)
(21) International Application Number: PCT/US96/02522 (22) International Filing Date: 22 February 1996 (22.02.96) (30) Priority Data: 08/395,778 28 February 1995 (28.02.95) US (71) Applicant: ROSEMOUNT INC. [US/US]; 12001 Technology Drive, Eden Prairie, MN 55344 (US). (72) Inventors: FRICK, Roger, L.; HC74 Box 1443, Hackensack, MN 56452 (US); LOUWAGIE, Bennett, L.; 211 Union Terrace Lane North, Plymouth, MN 55441 (US); TOY, Adrian, C.; 9692 Clark Circle, Eden Prairie, MN 55347 (US). (74) Agents: CHAMPLIN, Judson, K. et al.; Westman, Champlin & Kelly, International Centre, Suite 1600, 900 Second Avenue South, Minneapolis, MN 55402-3319 (US).		(81) Designated States: BR, BY, CA, CN, JP, RU, (SG) European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: PRESSURE SENSORS AND PRESSURE TRANSMITTERS (57) Abstract First capacitance pressure sensor (70A, B) has a fusion bonded single crystal structure: (sapphire with cavity). Second one (70A, B) has an elongated and thick single crystal structure. Third one (70A, B) uses the electric field emanating from the back sides of the capacitor plates. First differential pressure transmitter uses a process barrier (71) and an elongated member as a sensor (70A, B). Second differential pressure transmitter uses single crystal structures with stress isolation members as sensors (70A, B). Basically thick slab cavity capacitance sapphire sensors are directly exposed to a process fluid. Slab: 15x3x2 cubic mm, cavity cross section: 1mm x 0.5 micro m, capacitance: 42 pF.		