

(51) International Patent Classification:
G01F 1/66 (2006.01)(21) International Application Number:
PCT/US2009/053538(22) International Filing Date:
12 August 2009 (12.08.2009)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **MICRO MOTION, INC.** [US/US]; 7070 Winchester Circle, Boulder, CO 80301 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HAYS, Paul, J.** [US/US]; 4091 Longhorn Drive, Lafayette, CO 80026 (US). **WEINSTEIN, Joel** [US/US]; 2954 Kalmia Avenue, Apt. 40, Boulder, CO 80301 (US). **ALVES, Goldino** [US/US]; 835 East Heartstrong Street, Superior, CO 80027 (US).(74) Agents: **WILBERT, David, W.** et al.; The Ollila Law Group LLC, 2569 Park Lane, Suite 202, Lafayette, Colorado 80026 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: METHOD AND APPARATUS FOR DETERMINING AND COMPENSATING FOR A CHANGE IN A DIFFERENTIAL ZERO OFFSET OF A VIBRATING FLOW METER

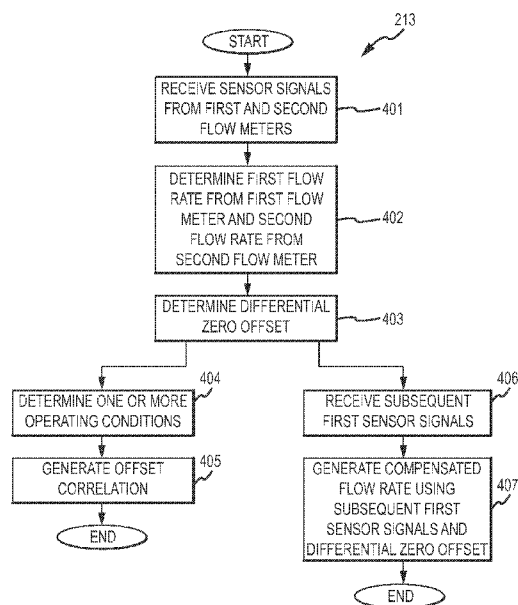


FIG. 4

(57) Abstract: A method for operating a vibrating flow meter system is provided. The method includes the step of receiving a first sensor signal from a first vibrating flow meter. A second sensor signal is received from a second vibrating flow meter. A first flow rate is generated from the first sensor signal and a second flow rate is generated from the second sensor signal. The method further includes the step of determining a differential zero offset of the first vibrating flow meter based on the first and second flow rates.