

This Sheet Has Been Replaced



REPLACED SHEETS	SG
☒ Description	: paged ...1... to paged ...14...
☒ Claim(s)	: paged ...15... to paged ...23...
☒ Drawing(s)	: paged ...1/4... to paged ...4/4...
☒ Abstract	: paged ...1/2... to paged ...7...
DATE OF RECEIPT	

- 1 -

MOSGATE DRIVER FOR BALLAST CIRCUITS

BACKGROUND OF THE INVENTION

5 This invention relates to a gate driver circuit for MOS gated devices, and more specifically relates to a monolithic gate driver circuit for MOS gated circuit devices, particularly those used in lamp ballast circuits.

10 Electronic ballasts for gas discharge circuits are coming into widespread use because of the availability of power MOSFET switching devices to replace previously used power bipolar transistor devices. Most electronic ballasts use two power MOSFET switches in a totem pole (half bridge) topology, with the gas discharge tube circuits consisting of L-C series resonant circuits in which the lamp or lamps are connected across one of the reactances of the L-C circuit. The power MOSFET switches are then driven to conduct alternately by inputs from secondary windings on a current transformer, the primary winding of which conducts the current of the lamp circuits. The primary winding current alternates at the resonant frequency of the resonant circuit.

Such prior art circuits have numerous drawbacks. For example, such circuits:

- 25 1. Are not self-starting and require a DIAC type device to initially pulse the circuit into operation.
2. They have poor switch times.
3. They are labor intensive due particularly to the need for a toroidal current transformer.
- 30 4. The circuits are not amenable to dimming.



5. The circuits are not amenable to mass production manufacture.

BRIEF SUMMARY OF THE INVENTION

5 The present invention provides a novel monolithic MOS gate driver which permits the driving of low side and high side power MOSFETS or IGBTs (or any other MOS gated type device) from logic level, ground referenced inputs. Such circuits are particularly well adapted for the driving of gas discharge lamp ballast
10 circuits.

More specifically, the MOS gate driver of the invention can be used for the drive of lamp ballast circuits or, more generally, any desired MOS gated circuit, and provides the following features:

15 1. It provides gate drive voltage signals for two MOS gated power semiconductors such as power MOSFETS or IGBTs, one designated as a "Low-side switch" and the other as a "High-side switch". The two power switches are commonly connected in a totem pole or half-bridge
20 circuit.

2. It provides level shifting circuits with a voltage offset capability up to about 600 volts to translate ground (substrate) referenced signals via an isolated portion of the silicon die to facilitate the
25 drive function of the high side switch.

3. A logic circuit referenced to ground (substrate) that consists of comparators, a voltage regulator to control the magnitude of the output signals when the driver is supplied from non-regulated d-c
30 supplies, undervoltage lockout circuits to prevent marginal operation of the MOS power switches, both low side and high side, a dead band delay circuit that



- 3 -

prevents "shoot through" currents from flowing in the MOS power switches, and a logic function that allows the high side and low side drive outputs to alternate on a 50% time basis.

- 5 4. An additional logic output is provided so that the driver can self-oscillate at a frequency determined by external resistors and capacitors R_T and C_T , respectively, where the frequency of oscillation f_o is set by the relationship:

$$f_o = \frac{1}{1.4 R_T \times C_T}$$

- 10 5. The monolithic die can be packaged in a conventional 8-pin DIP or SMD package.

DETAILED DESCRIPTION OF THE DRAWINGS

Figure 1 shows a prior art electronic ballast using a current transformer drive.

- 15 Figure 2 shows a generalized electronic ballast for gas discharge lamps, which uses the monolithic circuit of the present invention.

- 20 Figure 3 shows a circuit diagram of a "double 40" fluorescent ballast, which uses the monolithic MOS gate driver of the invention.

Figure 4 shows a circuit diagram of a high pressure sodium ballast, using the novel MOS gate driver of the present invention.

- 25 Figure 5 is a block diagram of the novel monolithic gate driver shown in Figures 2, 3 and 4.



DETAILED DESCRIPTION OF THE DRAWINGS

Referring first to Figure 1, there is shown a prior art ballast using a current transformer drive. The circuit employs power MOSFETs 20 and 21 connected in a "totem pole", a half-bridge circuit, and driven from a d-c power source at terminals 22 and 23. The output circuit includes a gas discharge tube 24 of any desired type which is connected to a series L-C circuit consisting of inductor 25 and capacitors 26-27. A current transformer 28 has a primary winding 29 in series with tube 24 and secondary windings 30 and 31 connected to the gates of MOSFETs 20 and 21, respectively. A diac 32 is connected from the node between resistor 33 and capacitor 34 and the gate of MOSFET 21 to provide a starting pulse to start the circuit into oscillation. Once started, the circuit will operate at the resonant frequency of inductor 25 and capacitor 26.

More specifically, after MOSFET 21 turns on, oscillation is sustained, and a high frequency (30 to 80 kHz) excites the L-C circuit. The sinusoidal voltage across capacitor 27 is magnified by the circuit Q at resonance, and develops a sufficient magnitude to strike the lamp 24.

The circuit of Figure 1 is a holdover from known ballast designs using bipolar transistors and is not well suited to power MOSFETs because of poor waveforms.

The novel monolithic chip of the invention permits the drive of a ballast circuit which is self-starting, has improved switching time, is amenable to dimming, and avoids labor intensive inductor components such as the current transformer 28 of Figure 1.




Figure 2 shows the novel monolithic MOS gate driver 40 of the invention in the ballast circuit of a gas discharge lamp. More specifically, the circuit of Figure 2 has a gas discharge lamp 24 associated with the series L-C circuits 25, 26, 27 as in Figure 1. Two power MOSFETs 20 and 21 are also connected to d-c source terminals 22 and 23 as in Figure 1. Power MOSFETs 20 and 21 may be any power device which has a MOS gate, for example, an IGBT or a MOS gated thyristor. The chip 40 of Figure 2 provides drive signals to the MOSFETs 20 and 21 which avoids the drawbacks of the prior art circuit of Figure 1.

More specifically, chip 40 may be housed in an 8-pin DIP or surface mount package, and has the following pinouts:

H_0 - an output pin to the gate of the high side MOSFET 20;


V_s - a pin to the center tap of the totem-pole or half bridge connected MOSFETs 20 and 21.

L_0 - an output pin to the gate of the low side MOSFET 21.

G - a pin connected to the negative terminal 23 of the d-c source.

C_T - a single input control pin which is connected to the node between timing capacitor C_T and timing resistor R_T . The other side of capacitor C_T is connected to inductor 25. Control signals to single pin C_T controls both outputs H_0 and L_0 .

R_T - a pin which is connected to the other terminal of timing resistor R_T .



- 6 -

V_{cc} - a pin which receives a chip operating voltage from the node between resistor 41 and capacitor 42.

5 V_B - a pin connected to the node of diode 43 and capacitor 44, which acts as a "bootstrap" circuit to provide power for the operation of the high side switch.

Also provided in Figure 2 are two back-to-back diodes 50 and 51 in series with the lamp circuit. These diodes 50 and 51 form a zero-crossing detector for lamp
10 24.

In operation, and before tube 24 strikes, the resonant circuit consists of inductor 24 and both capacitors 26 and 27. The capacitance of capacitor 27 is lower than that of capacitor 26 so that it operates at a
15 higher a-c voltage than that of capacitor 26. This voltage on capacitor 27 strikes the lamp 24. After lamp 24 strikes, capacitor 27 is effectively short circuited by the lamp voltage drop and the frequency of the resonant lamp circuit now depends on inductor 25 and
20 capacitor 26.

This causes a shift to a lower resonant frequency during normal operation, synchronized by the zero crossing of the a-c current at diodes 50 and 51, and using the resultant voltage to control the oscillator
25 within chip 40. As will be shown, the oscillation frequency of the circuit is synchronized by the addition of resistor R_T and capacitor C_T .

The chip 40 provides offset voltage capability up to or higher than 600 volts d-c and has a "front end"
30 capability similar in function to that of the well known CMOS 555 timer i.c.



Chip 40 also has interior circuitry to provide a nominal 1 microsecond dead time between outputs of the alternating high side and low side outputs for driving switches 20 and 21.

5 As will also be later shown, the chip 40 will be supplied at terminal 22 by a rectified a-c voltage and, therefore, is designed for a minimum quiescent current, and has a 15 volt interval shunt regulator. Thus, a single one-half watt dropping resistor 41 can be
10 used.

In addition to the quiescent current there are two other components of d-c supply current that are a function of the actual application circuit.

- 15 1) Current due to charging the input capacitance of the power switches.
- 2) Current due to charging and discharging the junction isolation capacitance of the gate driver chip.

Both components of current are charge related
20 and therefore follow the rules:

$$Q = CV$$

It can readily be seen, therefore, that to charge and discharge the power switch input capacitances, the required charge is a product of the gate drive
25 voltage and the actual input capacitances and the input power required is directly proportional to the product of charge and frequency and voltage squared:

$$Power = \frac{C V^2}{2} \times f$$



When designing an actual ballast circuit and because of the above relationships, the following should be observed:

- 5 1) Select the lowest operating frequency consistent with minimizing inductor size.
- 2) Select the smallest die size for the power switches consistent with low conduction losses. (This reduces the charge requirements.)
- 10 3) Use the lowest possible d-c voltage.

 In summary, the circuit of Figure 2, when driven by chip 40, provides a self-oscillating square wave generator with dead time control and level shifting for the MOS gated devices in the circuit. Unlike the
15 prior art current transformer driver, the novel system provides clean "text book" waveforms to minimize switch losses. In many cases, smaller size MOSFETs can be selected or, alternatively, heat sinks may be reduced or eliminated.

20 Figure 3 shows an exemplary ballast circuit which could employ the chip 40 of the Figure 2 for a "double 40" fluorescent lamp ballast. In Figure 3, components similar to those of Figure 2 have the same identifying numerals. The lamp circuit in Figure 3
25 employs two 40 watt fluorescent lamps 60 and 61 in a common reflector which have respective series inductors 62 and 63 and series capacitor 64. Each of tubes 60 and 61 have parallel capacitors 66 and 67, respectively, and parallel positive temperature coefficient thermistors 68
30 and 69, respectively. A snubber consisting of capacitor 70 and resistor 70a is connected from the node between MOSFETs 20 and 21 to the neutral line.



The input a-c circuit includes an a-c source having two a-c terminals L_1 and L_2 and a neutral terminal N. A conventional filter circuit including 30 microhenry inductors 71a and 71b is connected to a single phase full wave rectifier 74 having a positive output connected to resistor 41 and a negative terminal connected to capacitor 42, providing a 320 volt d-c output from a 220 volt a-c input. The input filter further includes capacitors 75, 76 and 77 as well as d-c capacitors 78 and 79.

Note that chip 40 of Figure 3 operates directly off the d-c bus through dropping resistor 41 and oscillates at around 45kHz in compliance with the following relationship:

$$f_{osc} = \frac{1}{1.4 R_T C_T}$$

Power for the high side switch gate drive comes from bootstrap capacitor 44 ($0.1\mu F$) which is charged to approximately 14 volts whenever pin V_s is pulled low during the low side power switch conduction. The bootstrap diode 43 (11DF4) blocks the d-c bus voltage when the high side switch conducts. Diode 43 is a fast recovery diode ($<100nSec$) to ensure that the bootstrap capacitor 44 is not partially discharged as the diode 43 recovers and blocks the high voltage bus.

The high frequency output from the half bridge 20-21 is a square wave with very fast transition times (approximately $50nSec$). In order to avoid excessive radiated noise from the fast wave fronts, a 0.5 watt snubber 70-70a (10Ω and $0.001\mu F$, respectively), is used to slow down the switch times to approximately $0.5\mu Sec$.



Note that there is a built-in dead time of $1\mu\text{Sec}$ to prevent shoot-through currents in the half bridge.

5 The fluorescent lamps 60 and 61 are operated in parallel, each with its own L-C resonant circuit. Any number of tube circuits can be driven from the single pair of MOSFETs 20 and 21 sized to suit the power level.

The reactance values for the lamp circuit are selected from L-C reactance tables or from the equation for series resonance:

$$f = \frac{1}{2\pi\sqrt{LC}}$$

10 The Q of the lamp circuits is fairly low because of the need for operation from a fixed frequency which, of course, can vary because of R_T and C_T tolerances. Fluorescent lamps do not normally require very high striking voltages so a Q of two or three is
15 sufficient. "Flat" Q curves tend to result from larger inductors and small capacitor ratios where:

$$Q = \frac{2\pi fL}{R}$$

and R tends to be larger as more turns are used.

Soft-starting with tube filament pre-heating is accomplished by P.T.C. thermistors 68 and 69 across each
20 lamp. In this way the voltage across the lamp gradually increases as the P.T.C. thermistor self-heats until finally the striking voltage with hot filaments is reached and the lamp strikes.

25 The following table gives the values of components used for a preferred embodiment of Figure 3:



- 11 -

	MOSFETs 20, 21	Type IRF 720 (International Rectifier)
	PTC 68,69	TDK 911P97ES014U10
	Bridge 74	4 x IN 4007
5	Diode 43	11DF4
	Resistor 41	91 KOHMS, 1/2 watt
	Resistor 70a	10 OHMS, 1/2 watt
	Resistor R _T	15 KOHMS
	Capacitor 42	47 μ f, 20v
10	Capacitor 64	1 μ f, 400v
	Capacitor 66, 67	0.01 μ f, 600v
	70	0.001 μ f, 600v
	75,76,77	0.22 μ f, 250 v a-c
	78, 79	100 μ f, 200v
15	C _T	0.001 μ f
	Inductors 62, 63	1.35 millihenry

Figure 4 shows another embodiment of the invention for the drive of a high pressure sodium lamp ballast. The circuit of Figure 4 has the synchronization circuit of Figure 2 and also has an automatic shut-down circuit. In Figure 4, components similar to those of Figures 2 and 3 have similar identifying numerals. In Figure 4, the lamp is a high pressure sodium lamp 90 having a parallel capacitor 91 and an inductor 92. Inductor 92 has a tap which is part of a shut-down circuit, and includes resistor 93, diodes 94 and 95 and capacitor 96.

In Figure 4, the synchronizing circuit consists of the zero crossing detector diodes 50 and 51 which synchronize the self-oscillation frequency to the true resonance of the LC circuit 91, 92. The Q of the series resonant circuit is made to be about 20 and provides



sufficient voltage to strike lamp 90. The synchronizing capability of the chip 40 allows the series tuned circuit of Figure 4 to resonate at high Q to provide the 3kv starting voltage for lamp 90 without the use of a
5 separate igniter.

In a hot restrike situation, where Q is insufficient to provide the necessary restrike voltage, the shutdown circuit including diodes 95 and 96 provides a d-c bias voltage which prevents the voltage at pin C_T
10 from reaching the $1/3 V_{CC}$ valley switching point. Thus, the circuit provides "burps" of oscillation until restrike is accomplished (approximately 90 seconds) and sustained, and destructive high MOSFET currents avoided.

Figure 5 is a block diagram of the circuit of
15 chip 40 of the preceding Figures 2, 3 and 4. The eight pinouts of chip 40 are repeated in Figure 5. All circuit blocks to be described in Figure 5 are integrated into a common silicon chip. The first circuit block is the clamp circuit 100, consisting of a plurality of zener
20 diodes. These are connected from pin V_{CC} and pin V_{SS} which is connected to the silicon substrate which acts as the chip ground. A digital supply line and analog supply line both extend from pin V_{CC} . An analog ground line and a digital ground line are also connected to pin V_{SS} .

25 The next group of circuit blocks form a timer circuit. These include divider circuit 101 connected to the analog supply line to the analog ground, N comparator 102, P comparator 103 and an RS latch 104. Two taps from divider 101 are connected to the positive inputs of
30 comparators 102 and 103. Input pin C_T is connected to the negative input of comparator 103. The output of



comparators 102 and 103 are connected to the RS latch 104 as shown.

5 The RS latch 104 is also connected to under-voltage lock-out circuit 105 which is integrated into the chip circuit. Thus if V_{cc} reduces too low, the RS latch 104 is locked out.

10 A bias circuit 106 provides bias outputs to the RS latch 104, the lockout circuit 105, and to dead time delay circuits 107 and 108 in the high side and low side circuit lines. Time delay circuits 107 and 108 provide a dead time or delay of about 1 microsecond between the turn on of the high side or low side switch after the turn off of the other. This dead time ensures that a "shoot through" circuit cannot be formed in which both
15 power MOSFETs 20 and 21 are simultaneously on.

The output of dead time circuit 108 is applied to low side delay circuit 109 and low side driver 110 which is connected to pin L_0 .

20 The output of dead time circuit 107 is applied to level shift pulse generator 111 in the high side output line. The high side line also includes a high side bias supply circuit 112 which drives a dv/dt filter circuit 113 which filters noise from the pulse passed by circuit 113, and an under-voltage analog lockout circuit
25 114. The input to the high side bias circuit 112 is connected to pin V_B .

The output of lockout circuit 114 and dv/dt filter 113 is applied to latch circuit 115 and its output is connected to buffer 116 which contains gain stages and
30 drives pin H_0 . Note that pin V_{ss} is connected to circuits 113, 114, 115 and 116.

This Sheet Has Been Replaced



- 14 -

Although the present invention has been described in relation to particular embodiments thereof, many other variations and modifications and other uses will become apparent to those skilled in the art. It is preferred, therefore, that the present invention be
5 limited not by the specific disclosure herein, but only by the appended claims.



- 15 -

WHAT IS CLAIMED IS:

1. An integrated circuit formed in a silicon substrate for driving first and second MOS gated power devices which are connected in a half bridge circuit which has first and second d-c terminals and a
5 common terminal at the node between said first and second MOS gated power devices; said integrated circuit including timer circuit means having an input control terminal C_T which is connectable to a low logic level signal referenced to the potential of said
10 substrate; latch circuit means coupled to said timer circuit means for controlling the frequency at which said first and second MOS devices are switched on and off and having an output which is switched in response to a predetermined signal applied to said input control
15 terminal; a high side dead time delay circuit and a low side dead time delay circuit each coupled to said latch circuit means for delaying the transmission of a latch output signal for a predetermined time delay following the switching of the output of said latch circuit means;
20 a high side level shifting means and a high side driver circuit means and a low side driver circuit means; said high side driver circuit means, and said low side driver means coupled to said high side dead time circuit and said low side dead time circuit respectively and
25 having high side and low side output pins respectively which produce outputs for turning on and off said first and second MOS gated power devices in response to control signals at said input control terminal C_T ; said dead time delay circuits preventing the simultaneous conduction of
30 said first and second MOS gated power devices.





- 16 -

2. The integrated circuit of claim 1 wherein said MOS gated power devices are MOS devices which are selected from the group consisting of power MOSFETs, IGBTs and MOS gated thyristors.

3. The integrated circuit of claim 1 wherein said predetermined time delay is about 1 microsecond.

4. The circuit of claim 1 which further includes a source of operating voltage V_{cc} coupled to said first and second d-c terminals for providing operating power for each of said circuit means in said integrated circuit; said integrated circuit having a V_{cc} pin extending therefrom for connection to at least one of said first or second d-c terminals.

5. The circuit of claim 4 which further includes resistor means for coupling said V_{cc} pin to said first d-c terminal.

6. The integrated circuit of claim 4 wherein said predetermined time delay is about 1 microsecond.

7. The integrated circuit of claim 6 wherein said predetermined time delay is about 1 microsecond.

8. The device of claim 4 which further includes undervoltage trip circuit means coupled to and monitoring the voltage at said V_{cc} pin and having an output coupled to said latch circuit means and to said high side and low side dead time circuits for disabling



* C L M S *



said latch circuit means and delay circuits when the voltage at said V_{cc} pin falls below a given value.

9. The integrated circuit of claim 8 wherein said predetermined time delay is about 1 microsecond.

10. The circuit of claim 9 which further includes a source of operating voltage V_{cc} coupled to said first and second d-c terminals for providing operating power for each of said circuit means in said integrated circuit, said integrated circuit having a V_{cc} pin extending therefrom for connection to at least one of said first or second d-c terminals.

11. The circuit of claim 7 which further includes resistor means for coupling said V_{cc} pin to said first d-c terminal.

12. The circuit of claim 8 which further includes resistor means for coupling said V_{cc} pin to said positive terminal.

13. The device of claim 1 wherein said timer circuit has a second input control terminal R_T for controlling the frequency at which said MOS gated devices are turned on and off; said terminals C_T and R_T being connected to an external timing capacitor of value C_T and timing resistor of value R_T respectively for setting the oscillation frequency f_o of said timing circuit to be:





- 18 -

$$f_o = \frac{1}{1.4 R_T \times C_T}$$

14. The integrated circuit of claim 13 wherein said predetermined time delay is about 1 microsecond.

15. The circuit of claim 13 which further includes a source of operating voltage V_{cc} coupled to said first and second d-c terminals for providing operating power for each of said circuit means in said
5 integrated circuit; said integrated circuit having a V_{cc} pin extending therefrom for connection to at least one of said first or second d-c terminals.

16. The circuit of claim 13 which further includes resistor means for coupling said V_{cc} pin to said first d-c terminal.

17. The device of claim 13 which further includes undervoltage trip circuit means coupled to and monitoring the voltage of said V_{cc} pin and having an output coupled to said latch circuit means and to said
5 high side and low side dead time circuits for disabling said latch circuit means and delay circuits when the voltage at said V_{cc} pin falls below a given value.

18. An electronic ballast circuit including, in combination, at least one gas discharge lamp, at least one L-C circuit in series with said gas discharge lamp, first and second series connected MOS gate controlled
5 power switching devices having respective gate terminals and connected in a half bridge circuit arrangement, a





pair of d-c power terminals connected in series with said first and second series connected switching devices; said lamp and L-C series circuit connected across said second
10 power switching device, and a gate drive circuit having an input terminal for receiving input logic level signals for alternately switching on and off both of said first and second MOS gated devices at a given frequency of oscillation; said gate drive circuit
15 having output terminals H_0 and L_0 coupled to the respective gates of said discrete devices; said gate drive circuit having a terminal V_{cc} which provides the operating power for its internal circuitry; and an external resistor for connecting said terminal V_{cc} to one
20 of said pair of terminals.

19. An electronic ballast circuit including, in combination, at least one gas discharge lamp, at least one L-C circuit in series with said gas discharge lamp, first and second series connected MOS gate controlled
5 power switching devices having respective gate terminals and connected in a half bridge circuit arrangement, a pair of d-c power terminals connected in series with said first and second series connected switching devices, said lamp and L-C series circuit connected across said second
10 power switching device, and a gate drive circuit having an input terminal for receiving input logic level signals for alternately switching on and off both of said first and second MOS gated devices at a given frequency of oscillation; said gate drive circuit
15 having output terminals H_0 and L_0 coupled to the respective gates of said power switching devices; said gate drive circuit having an oscillation timer circuit





having first and second input pins R_T and C_T respectively, and a discrete resistor and a discrete capacitor connected to pins R_T and C_T respectively to set said given frequency of oscillation at a given frequency and at the frequency of oscillation of said L-C circuit.

20. An electronic ballast circuit including, in combination, at least one gas discharge lamp, at least one L-C circuit in series with said gas discharge lamp, first and second series connected MOS gate controlled power switching devices having respective gate terminals and connected in a half bridge circuit arrangement, a pair of d-c power terminals connected in series with said first and second series connected switching devices; said lamp and L-C series circuit connected across said second power switching device, and a gate drive circuit having an input terminal for receiving input logic level signals for alternately switching on and off both of said first and second MOS gated devices at a given frequency of oscillation; said gate drive circuit having output terminals H_0 and L_0 coupled to the respective gates of said power switching devices; said gate drive circuit having a terminal V_{CC} which provides the operating power for its internal circuitry; and an external resistor for connecting said terminal V_{CC} to one of said pair of terminals; said gate drive circuit having an oscillation timer circuit having first and second input pins R_T and C_T respectively, and a discrete resistor and a discrete capacitor connected to pins R_T and C_T respectively to set said given frequency of oscillation at a given frequency and at the frequency of oscillation of said L-C circuit.






- 21 -

21. An electronic ballast circuit including, in combination, at least one gas discharge lamp, at least one L-C circuit in series with said gas discharge lamp, first and second series connected MOS gate controlled power switching devices having respective gate terminals and connected in a half bridge circuit arrangement, a pair of d-c power terminals connected in series with said first and second series connected switching devices; said lamp and L-C series circuit connected across said second power switching device, and a monolithic gate drive circuit having an input terminal for receiving input logic level signals for alternately switching on and off both of said first and second MOS gated devices at a given frequency of oscillation; said gate drive circuit having output terminals H_0 and L_0 coupled to the respective gates of said discrete devices; said gate drive circuit having a terminal V_{cc} which provides the operating power for its internal circuitry; and an external resistor for connecting said terminal V_{cc} to one of said pair of terminals; said integrated circuit including timer means having an input control terminal C_1 which is connectable to a low logic level signal referenced to the potential of said substrate; latch circuit means coupled to said timer circuit means for controlling the frequency at which said first and second power switching devices are switched on and off and having an output which is switched in response to a predetermined signal affixed to said input control terminal; a high side dead time delay circuit and a low side dead time circuit each coupled to said latch circuit means for delaying the transmission of a latch output





35 signal for a predetermined time delay following the
switching of the output of said latch circuit means; a
high side level shifting means and a high side driver
circuit means and a low side driver circuit means; said
high side driver circuit means and said low side driver
circuit means coupled to said high side dead time circuit
and said low side dead time circuit means respectively
and having high side and low side output pins
40 respectively which produce outputs for turning on and off
said first and second MOS gated power devices in response
to control signals at said input control terminal C_T ;
said dead time delay circuits preventing the simultaneous
conduction of said first and second MOS gated power
45 devices.

22. An electronic ballast circuit including,
in combination, at least one gas discharge lamp, at least
one L-C circuit in series with said gas discharge lamp,
first and second series connected MOS gate controlled
5 power switching devices having respective gate terminals
and connected in a half bridge circuit arrangement, a
pair of d-c power terminals connected in series with said
first and second series connected switching devices; said
lamp and L-C series circuit connected across said second
10 power switching device, and a gate drive
circuit having an input terminal for receiving input
logic level signals for alternately switching on and off
both of said first and second MOS gated devices at a
given frequency of oscillation; said gate drive circuit
15 having output terminals H_0 and L_0 coupled to the
respective gates of said MOS power switching devices;
said gate drive circuit having an oscillation timer
circuit having first and second input pins R_T and C_T ,



respectively, and a discrete resistor and a discrete
20 capacitor connected to pins R_T and C_T , respectively, to
set said frequency of oscillation at a given frequency
and at the frequency of oscillation at a given frequency
and at the frequency of oscillation of said L-C circuit;
said integrated circuit including timer means
25 having an input control terminal C_T which is connectable
to a low logic level signal referenced to the potential
of said substrate; latch circuit means coupled to said
timer circuit means for controlling the frequency at
which said first and second discrete devices are switched
30 on and off and having an output which is switched in
response to a predetermined signal affixed to said input
control terminal; a high side dead time delay circuit and
a low side dead time circuit each coupled to said RS
latch circuit for delaying the transmission of a latch
35 output signal for a predetermined time delay following
the switching of the output of said latch circuit means;
a high side level shifting means and a high side driver
circuit means and a low side driver circuit means; said
high side driver circuit means and said low side driver
40 circuit means coupled to said high side dead time circuit
means and said low side dead time circuit means
respectively and having high side and low side output
pins respectively which produce outputs for turning on
and off said first and second MOS gated power devices in
45 response to control signals at said input control
terminals C_T ; said dead time delay circuits preventing
the simultaneous conduction of said first and second MOS
gated power devices.





This Sheet Has Been Replaced




MOSGATE DRIVER FOR BALLAST CIRCUITS


ABSTRACT OF THE DISCLOSURE


A monolithic MOS gate driver chip is described for driving high side and low side power MOSFETs in a gas discharge lamp ballast circuit. The chip includes a timer circuit for generating a square output at the natural frequency of resonance of the lamp ballast. Dead time circuits are provided in the chip to prevent the simultaneous conduction of both high side and low side MOSFETs. The chip may be housed in a right pin DIP package.

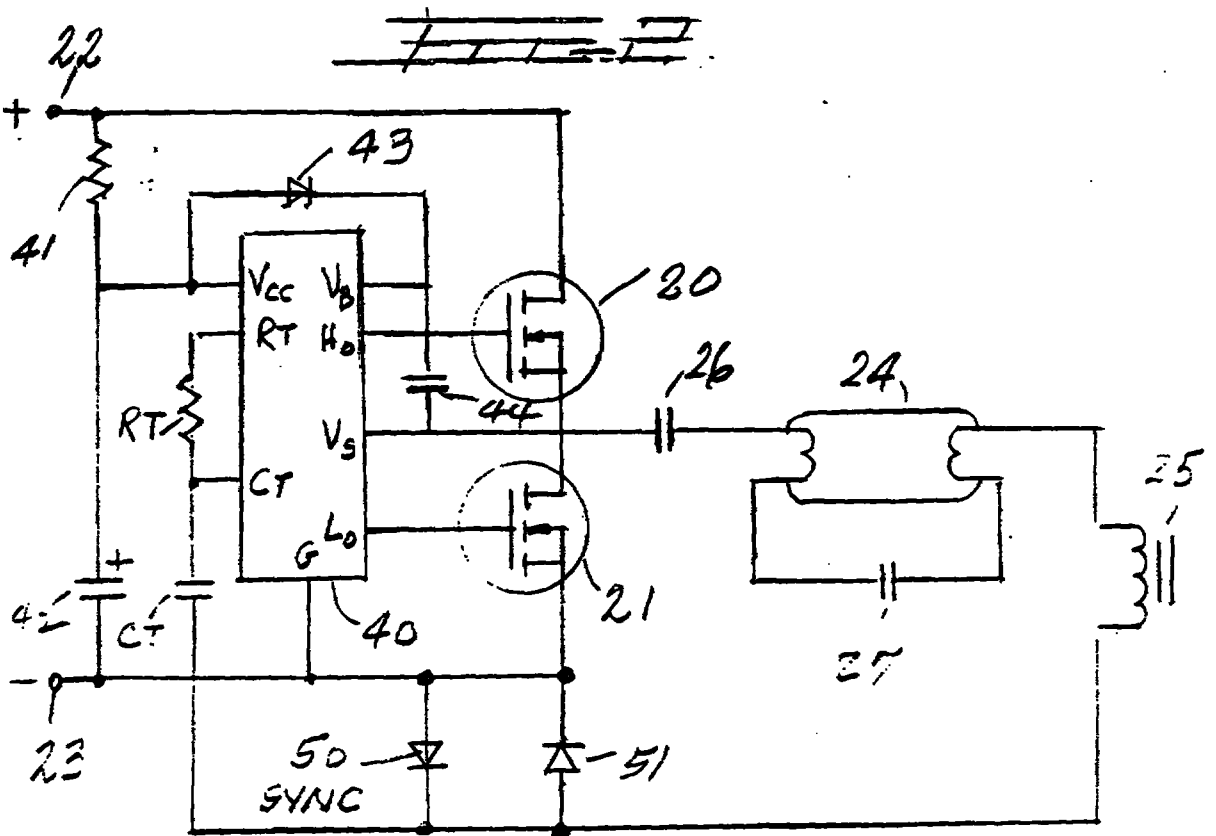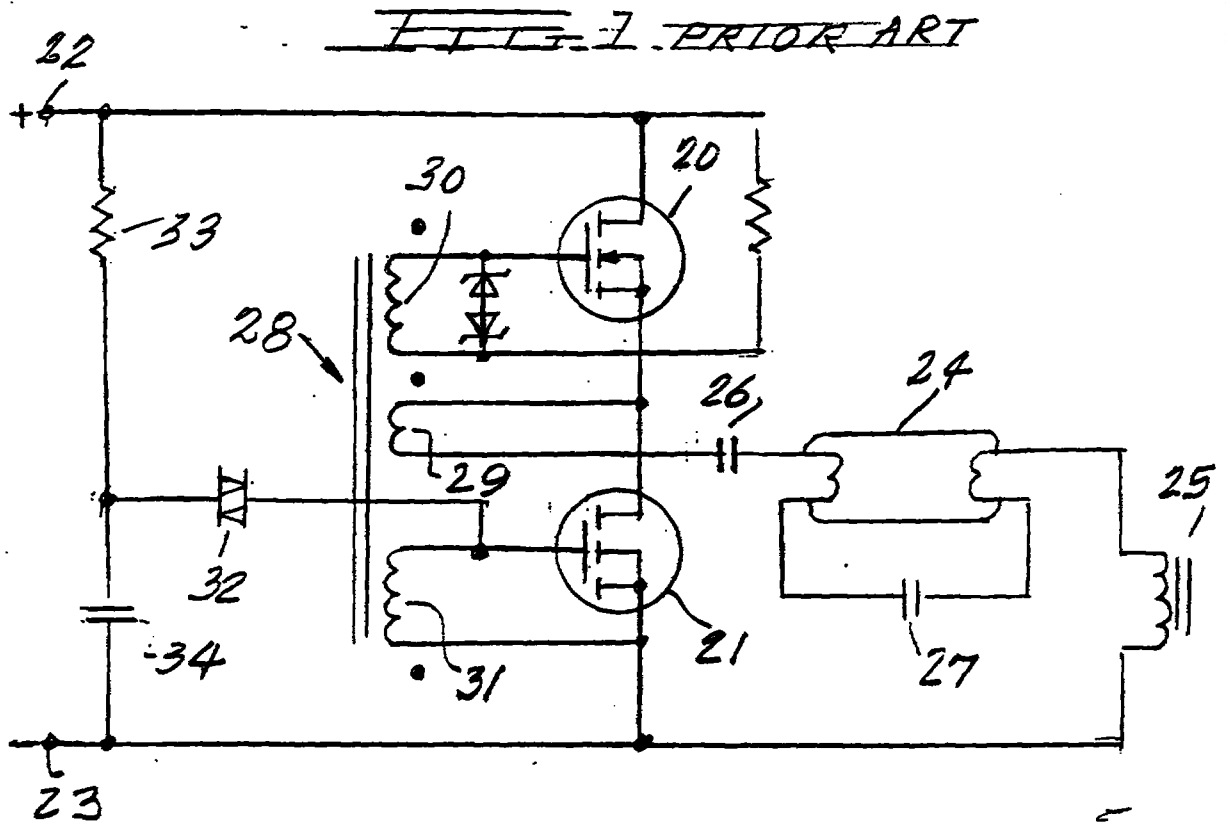

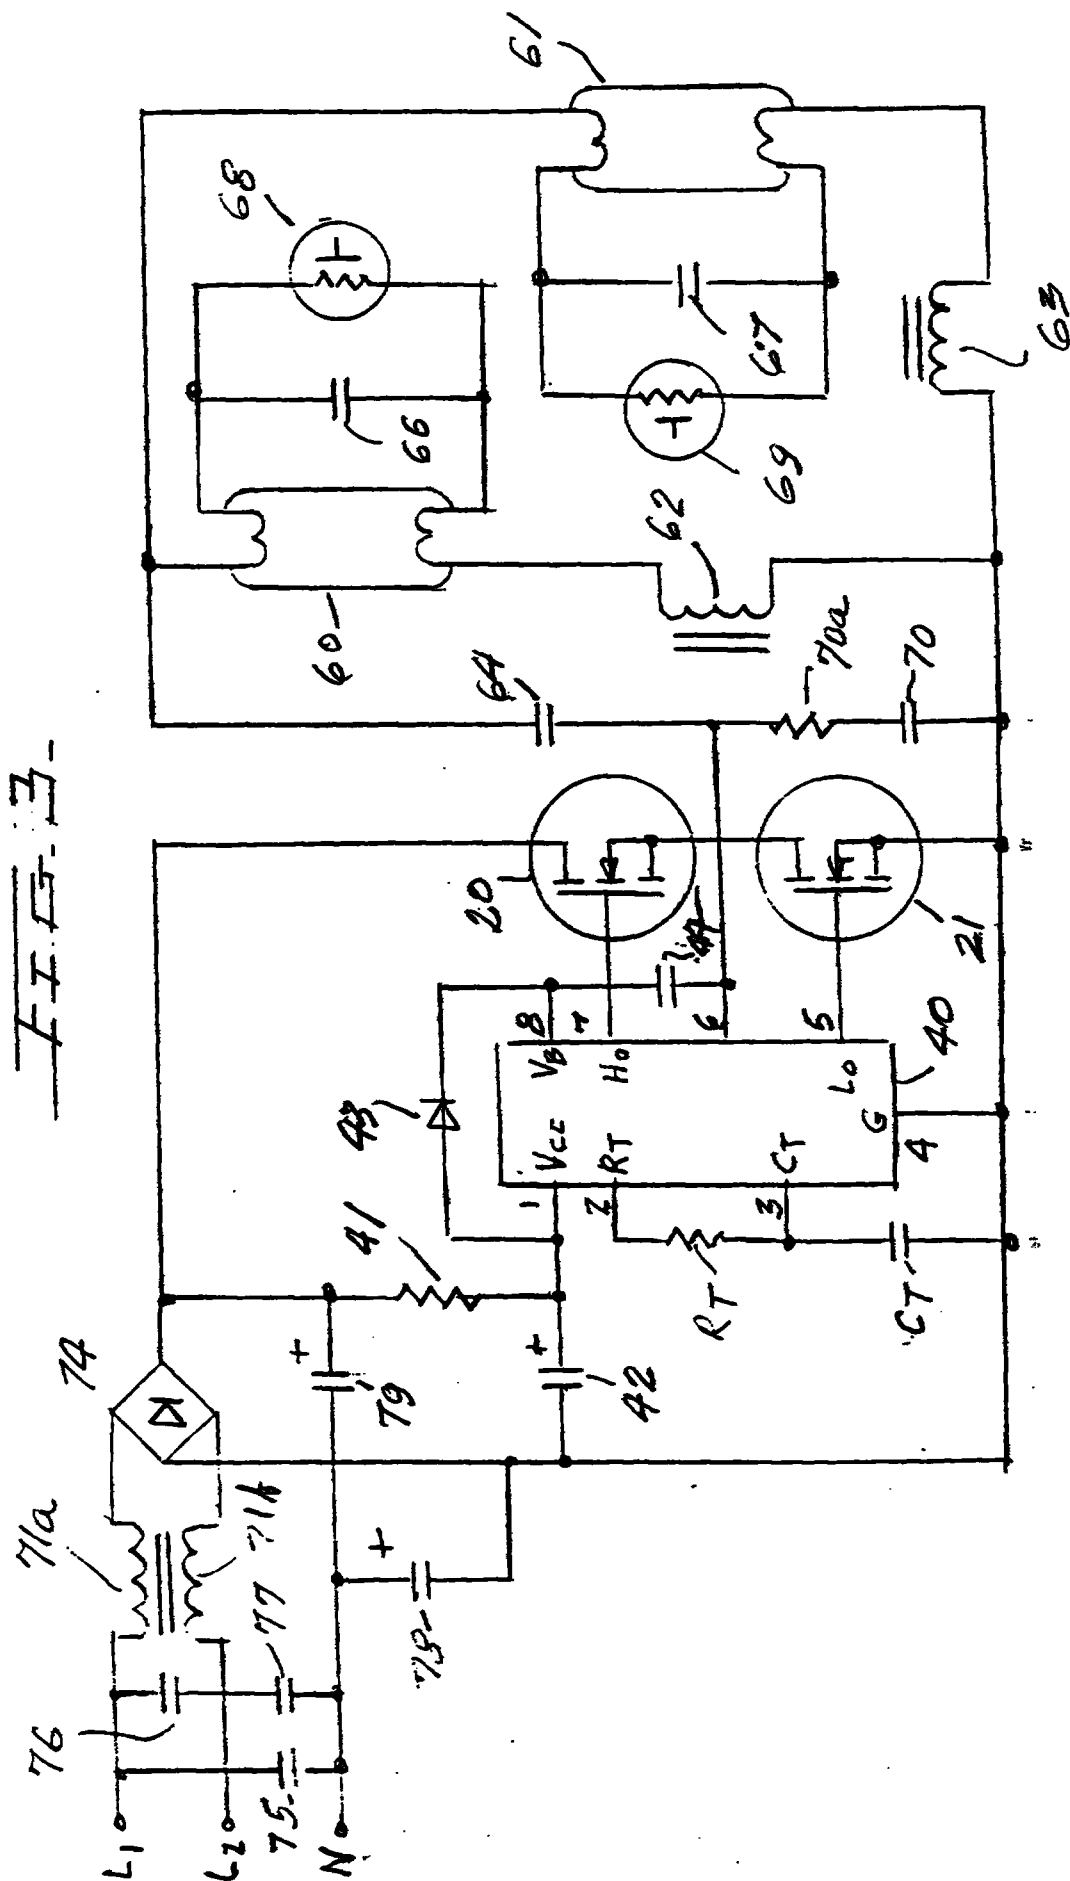


775-4

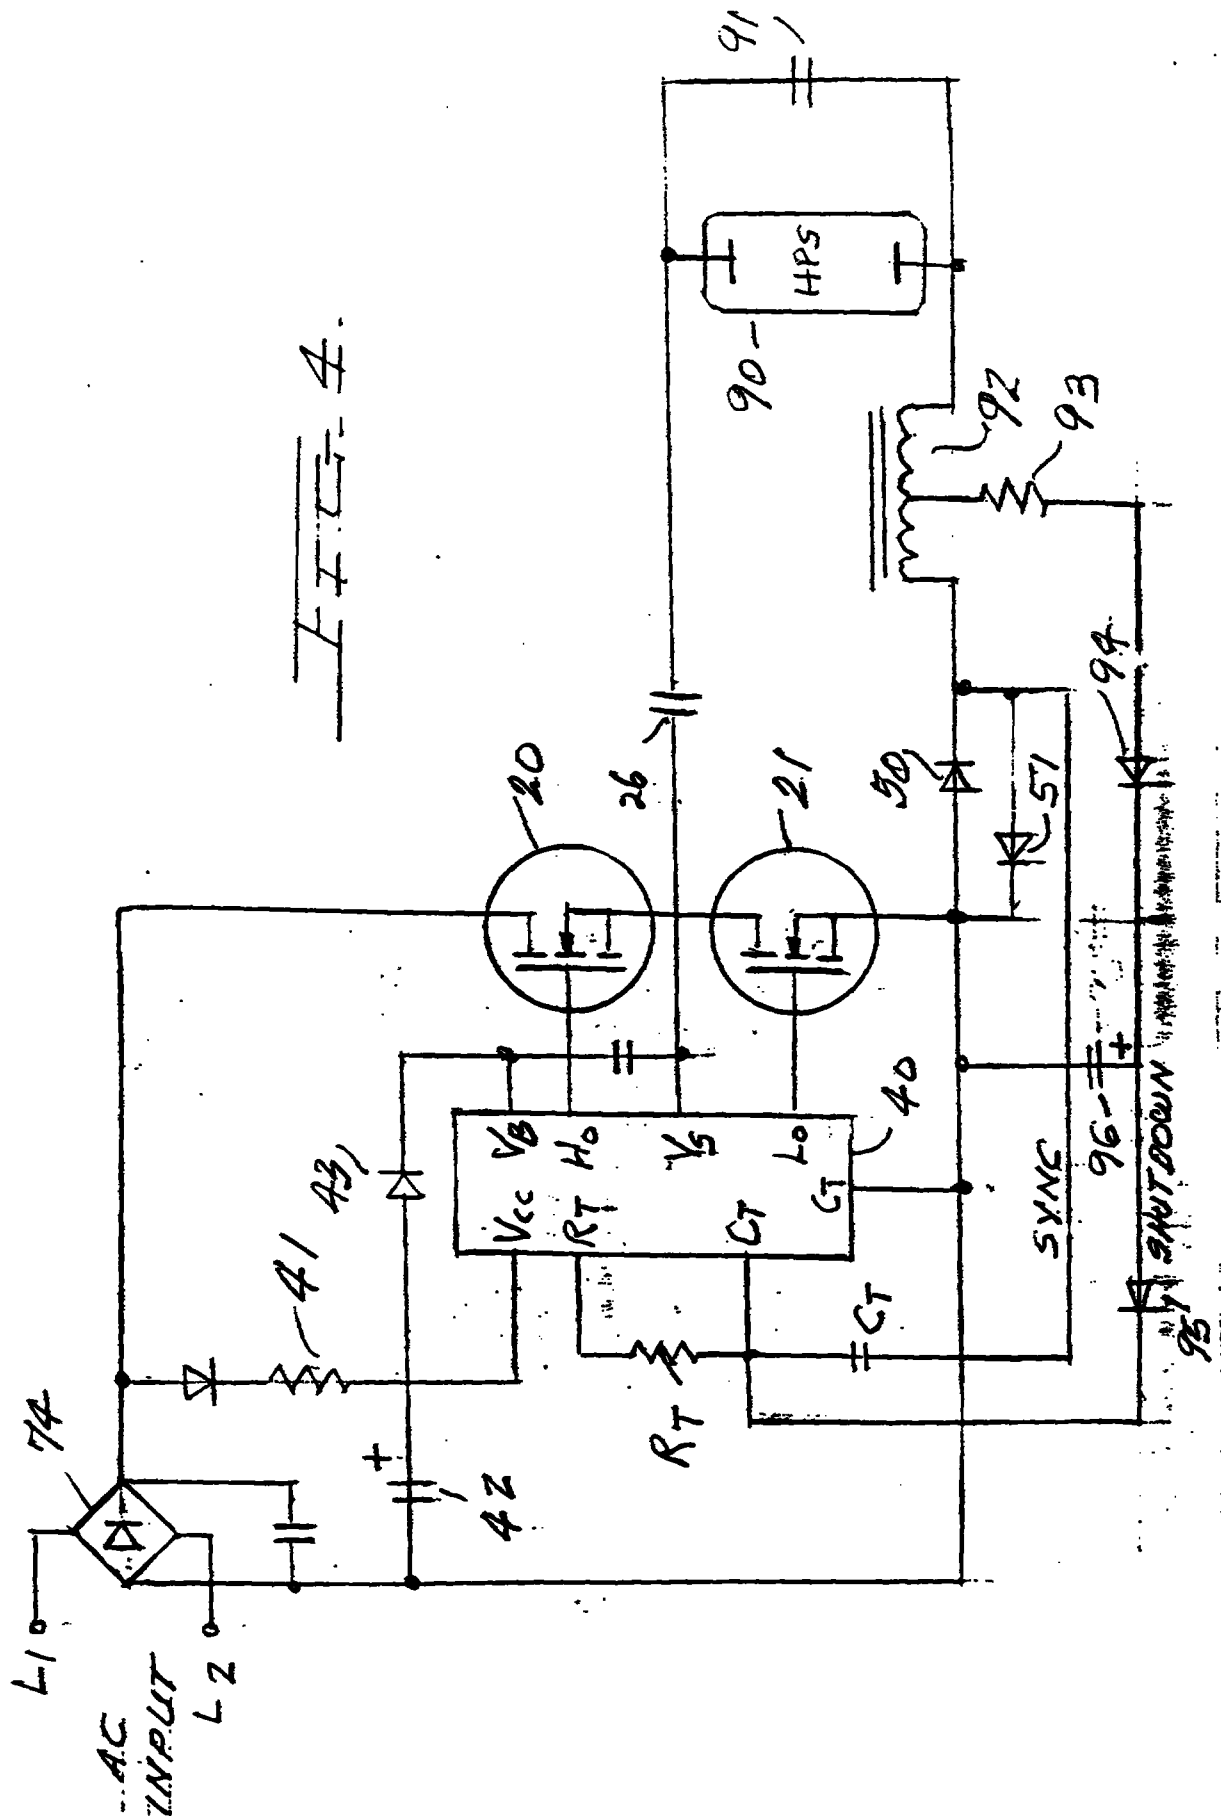



Informal 4/4

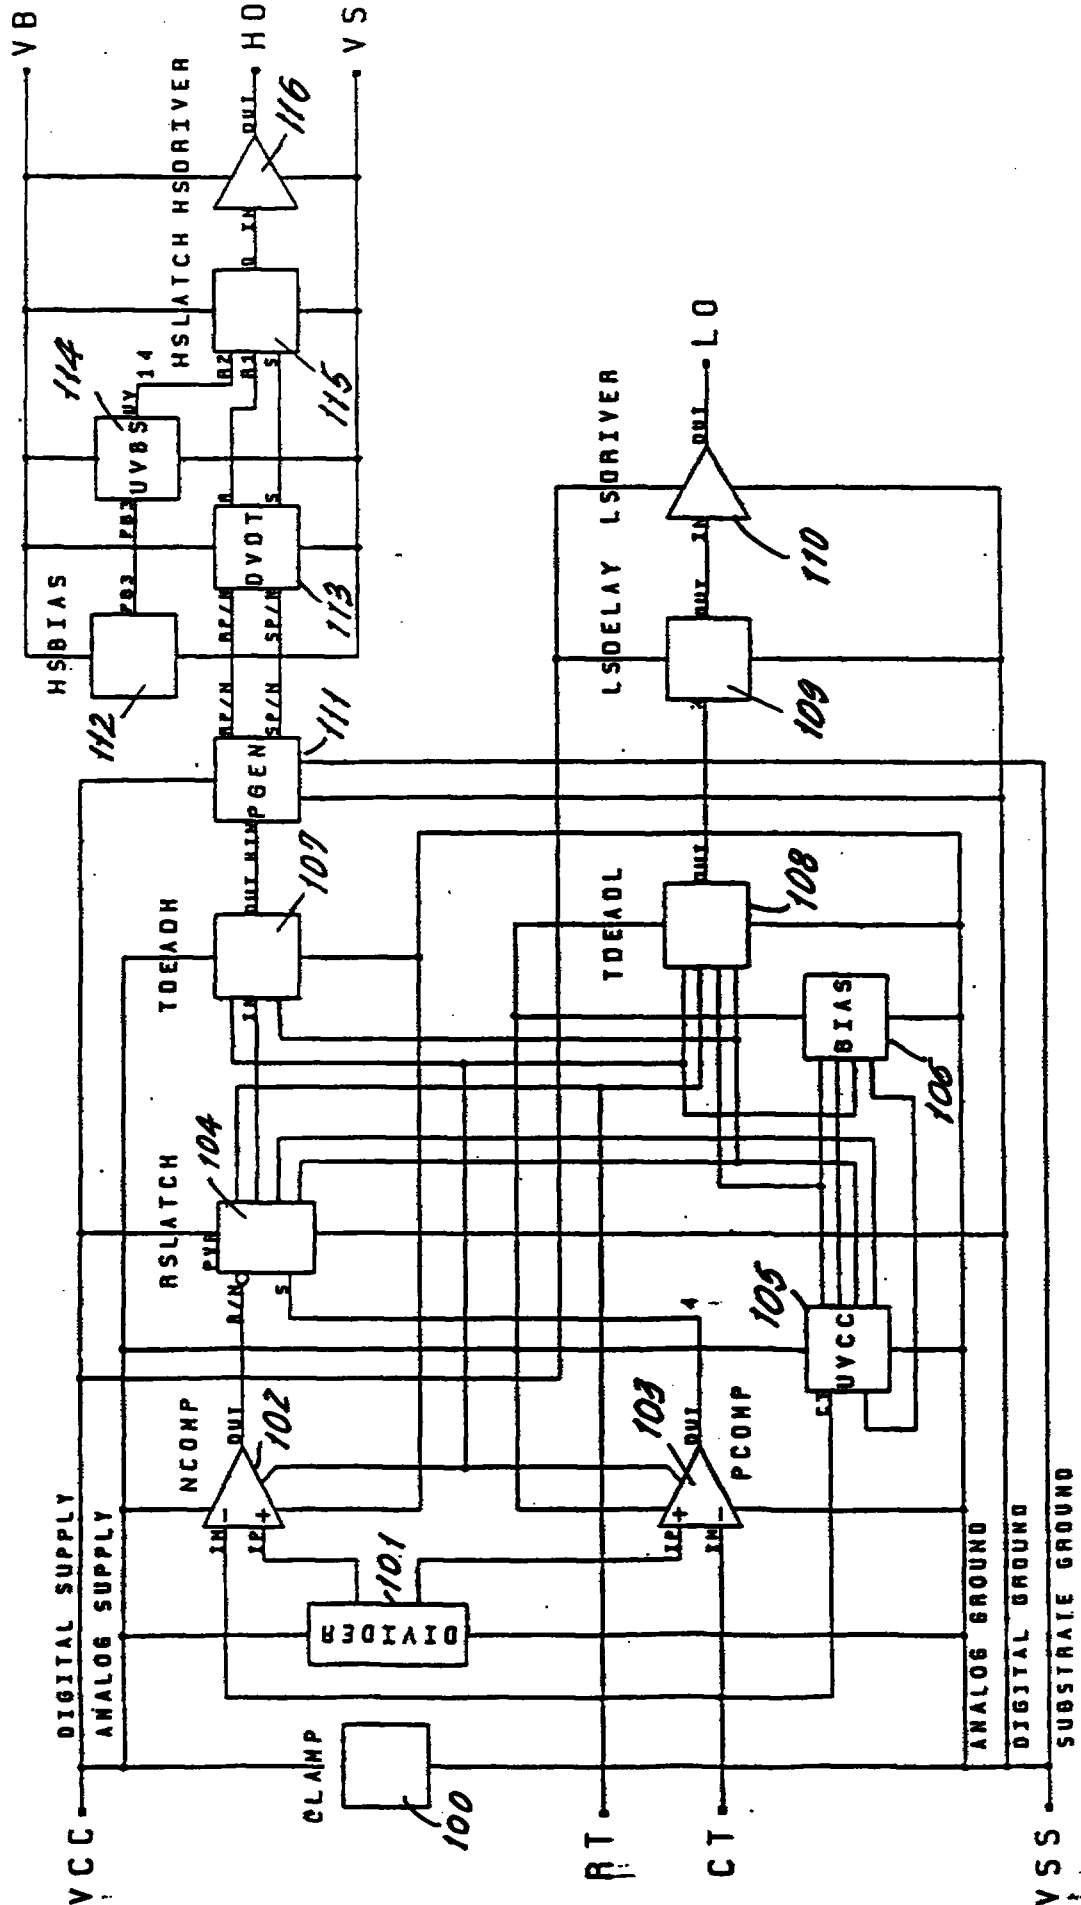

FILE-5-

REPLACED SHEETS	SG
☒ Description : paged to paged	
☒ Claim(s) : paged to paged	
☐ Drawing(s) : paged to paged	
☒ Abstract : paged to paged	
DATE OF RECEIPT	

- 1 -

REPLACEMENT SHEETS	SG
☒ Description : paged to paged	
☒ Claim(s) : paged to paged	
☒ Drawing(s) : paged to paged	
☒ Abstract : paged to paged	
DATE OF RECEIPT/...../.....	

MOSGATE DRIVER FOR BALLAST CIRCUITS

BACKGROUND OF THE INVENTION


This invention relates to a gate driver circuit for MOS gated devices, and more specifically relates to a monolithic gate driver circuit for MOS gated circuit devices, particularly those used in lamp ballast circuits.

Electronic ballasts for gas discharge circuits are coming into widespread use because of the availability of power MOSFET switching devices to replace previously used power bipolar transistor devices. Most electronic ballasts use two power MOSFET switches in a totem pole (half bridge) topology, with the gas discharge tube circuits consisting of L-C series resonant circuits in which the lamp or lamps are connected across one of the reactances of the L-C circuit. The power MOSFET switches are then driven to conduct alternately by inputs from secondary windings on a current transformer, the primary winding of which conducts the current of the lamp circuits. The primary winding current alternates at the resonant frequency of the resonant circuit.

Such prior art circuits have numerous drawbacks. For example, such circuits:

1. Are not self-starting and require a DIAC type device to initially pulse the circuit into operation.
2. They have poor switch times.
3. They are labor intensive due particularly to the need for a toroidal current transformer.
4. The circuits are not amenable to dimming.

This Sheet Has Been Replaced

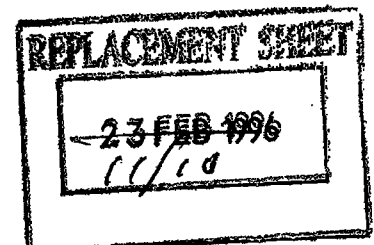5. The circuits are not amenable to mass production manufacture.

BRIEF SUMMARY OF THE INVENTION

The present invention provides a novel monolithic MOS gate driver which permits the driving of low side and high side power MOSFETS or IGBTs (or any other MOS gated type device) from logic level, ground referenced inputs. Such circuits are particularly well adapted for the driving of gas discharge lamp ballast circuits.



More specifically, the MOS gate driver of the invention can be used for the drive of lamp ballast circuits or, more generally, any desired MOS gated circuit, and provides the following features:

1. It provides gate drive voltage signals for two MOS gated power semiconductors such as power MOSFETS or IGBTs, one designated as a "Low-side switch" and the other as a "High-side switch". The two power switches are commonly connected in a totem pole or half-bridge circuit.

2. It provides level shifting circuits with a voltage offset capability up to about 600 volts to translate ground (substrate) referenced signals via an isolated portion of the silicon die to facilitate the drive function of the high side switch.

3. A logic circuit referenced to ground (substrate) that consists of comparators, a voltage regulator to control the magnitude of the output signals when the driver is supplied from non-regulated d-c supplies, undervoltage lockout circuits to prevent marginal operation of the MOS power switches, both low side and high side, a dead band delay circuit that

This Sheet Has Been Replaced

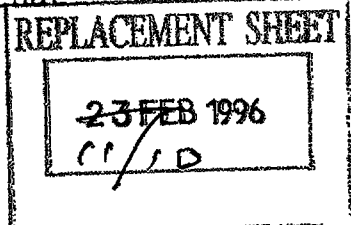

prevents "shoot through" currents from flowing in the MOS power switches, and a logic function that allows the high side and low side drive outputs to alternate on a 50% time basis.

4. An additional logic output is provided so that the driver can self-oscillate at a frequency determined by external resistors and capacitors R_T and C_T , respectively, where the frequency of oscillation f_o is set by the relationship:

$$f_o = \frac{1}{1.4 R_T \times C_T}$$

5. The monolithic die can be packaged in a conventional 8-pin DIP or SMD package.

DETAILED DESCRIPTION OF THE DRAWINGS


Figure 1 shows a prior art electronic ballast using a current transformer drive.

Figure 2 shows a generalized electronic ballast for gas discharge lamps, which uses the monolithic circuit of the present invention.

Figure 3 shows a circuit diagram of a "double 40" fluorescent ballast, which uses the monolithic MOS gate driver of the invention.

Figure 4 shows a circuit diagram of a high pressure sodium ballast, using the novel MOS gate driver of the present invention.

Figure 5 is a block diagram of the novel monolithic gate driver shown in Figures 2, 3 and 4.



DETAILED DESCRIPTION OF THE DRAWINGS

Referring first to Figure 1, there is shown a prior art ballast using a current transformer drive. The circuit employs power MOSFETs 20 and 21 connected in a "totem pole", a half-bridge circuit, and driven from a d-c power source at terminals 22 and 23. The output circuit includes a gas discharge tube 24 of any desired type which is connected to a series L-C circuit consisting of inductor 25 and capacitors 26-27. A current transformer 28 has a primary winding 29 in series with tube 24 and secondary windings 30 and 31 connected to the gates of MOSFETs 20 and 21, respectively. A diac 32 is connected from the node between resistor 33 and capacitor 34 and the gate of MOSFET 21 to provide a starting pulse to start the circuit into oscillation. Once started, the circuit will operate at the resonant frequency of inductor 25 and capacitor 26.

More specifically, after MOSFET 21 turns on, oscillation is sustained, and a high frequency (30 to 80 KHZ) excites the L-C circuit. The sinusoidal voltage across capacitor 27 is magnified by the circuit Q at resonance, and develops a sufficient magnitude to strike the lamp 24.

The circuit of Figure 1 is a holdover from known ballast designs using bipolar transistors and is not well suited to power MOSFETs because of poor waveforms.

The novel monolithic chip of the invention permits the drive of a ballast circuit which is self-starting, has improved switching time, is amenable to dimming, and avoids labor intensive inductor components such as the current transformer 28 of Figure 1.

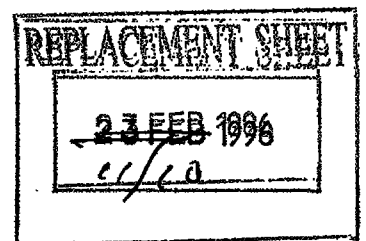


Figure 2 shows the novel monolithic MOS gate driver 40 of the invention in the ballast circuit of a gas discharge lamp. More specifically, the circuit of Figure 2 has a gas discharge lamp 24 associated with the series L-C circuits 25, 26, 27 as in Figure 1. Two power MOSFETs 20 and 21 are also connected to d-c source terminals 22 and 23 as in Figure 1. Power MOSFETs 20 and 21 may be any power device which has a MOS gate, for example, an IGBT or a MOS gated thyristor. The chip 40 of Figure 2 provides drive signals to the MOSFETs 20 and 21 which avoids the drawbacks of the prior art circuit of Figure 1.

More specifically, chip 40 may be housed in an 8-pin DIP or surface mount package, and has the following pinouts:

H_0 - an output pin to the gate of the high side MOSFET 20;


V_s - a pin to the center tap of the totem-pole or half bridge connected MOSFETs 20 and 21.

L_0 - an output pin to the gate of the low side MOSFET 21.

G - a pin connected to the negative terminal 23 of the d-c source.

C_T - a single input control pin which is connected to the node between timing capacitor C_T and timing resistor R_T . The other side of capacitor C_T is connected to inductor 25. Control signals to single pin C_T controls both outputs H_0 and L_0 .

R_T - a pin which is connected to the other terminal of timing resistor R_T .

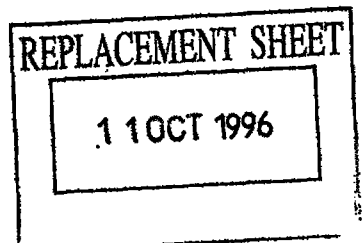

V_{cc} - a pin which receives a chip operating voltage from the node between resistor 41 and capacitor 42.


V_B - a pin connected to the node of diode 43 and capacitor 44, which acts as a "bootstrap" circuit to provide power for the operation of the high side switch.

Also provided in Figure 2 are two back-to-back diodes 50 and 51 in series with the lamp circuit. These diodes 50 and 51 form a zero-crossing detector for lamp 24.

In operation, and before tube 24 strikes, the resonant circuit consists of inductor 24 and both capacitors 26 and 27. The capacitance of capacitor 27 is lower than that of capacitor 26 so that it operates at a higher a-c voltage than that of capacitor 26. This voltage on capacitor 27 strikes the lamp 24. After lamp 24 strikes, capacitor 27 is effectively short circuited by the lamp voltage drop and the frequency of the resonant lamp circuit now depends on inductor 25 and capacitor 26.

This causes a shift to a lower resonant frequency during normal operation, synchronized by the zero crossing of the a-c current at diodes 50 and 51, and using the resultant voltage to control the oscillator within chip 40. As will be shown, the oscillation frequency of the circuit is synchronized by the addition of resistor R_T and capacitor C_T .

The chip 40 provides offset voltage capability up to or higher than 600 volts d-c and has a "front end" capability similar in function to that of the well known CMOS 555 timer i.c.

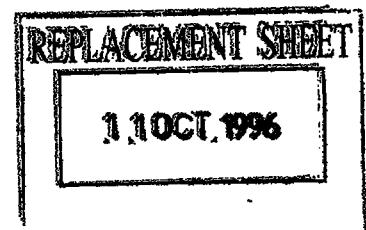

Chip 40 also has interior circuitry to provide a nominal 1 microsecond dead time between outputs of the alternating high side and low side outputs for driving switches 20 and 21.

As will also be later shown, the chip 40 will be supplied at terminal 22 by a rectified a-c voltage and, therefore, is designed for a minimum quiescent current, and has a 15 volt interval shunt regulator. Thus, a single one-half watt dropping resistor 41 can be used.

In addition to the quiescent current there are two other components of d-c supply current that are a function of the actual application circuit.


- 1) Current due to charging the input capacitance of the power switches.
- 2) Current due to charging and discharging the junction isolation capacitance of the gate driver chip.

Both components of current are charge related and therefore follow the rules:

$$Q = CV$$

It can readily be seen, therefore, that to charge and discharge the power switch input capacitances, the required charge is a product of the gate drive voltage and the actual input capacitances and the input power required is directly proportional to the product of charge and frequency and voltage squared:

$$Power = \frac{C V^2}{2} \times f$$

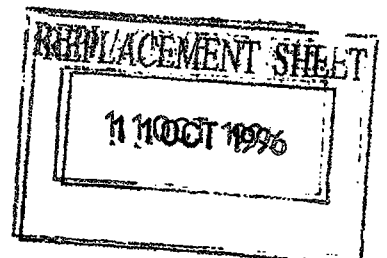


When designing an actual ballast circuit and because of the above relationships, the following should be observed:

- 1) Select the lowest operating frequency consistent with minimizing inductor size.
- 2) Select the smallest die size for the power switches consistent with low conduction losses. (This reduces the charge requirements.)
- 3) Use the lowest possible d-c voltage.

In summary, the circuit of Figure 2, when driven by chip 40, provides a self-oscillating square wave generator with dead time control and level shifting for the MOS gated devices in the circuit. Unlike the prior art current transformer driver, the novel system provides clean "text book" waveforms to minimize switch losses. In many cases, smaller size MOSFETs can be selected or, alternatively, heat sinks may be reduced or eliminated.

Figure 3 shows an exemplary ballast circuit which could employ the chip 40 of the Figure 2 for a "double 40" fluorescent lamp ballast. In Figure 3, components similar to those of Figure 2 have the same identifying numerals. The lamp circuit in Figure 3 employs two 40 watt fluorescent lamps 60 and 61 in a common reflector which have respective series inductors 62 and 63 and series capacitor 64. Each of tubes 60 and 61 have parallel capacitors 66 and 67, respectively, and parallel positive temperature coefficient thermistors 68 and 69, respectively. A snubber consisting of capacitor 70 and resistor 70a is connected from the node between MOSFETs 20 and 21 to the neutral line.

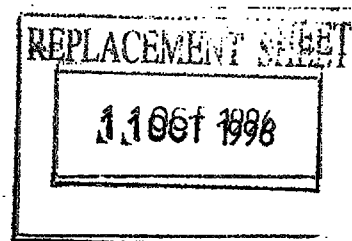

The input a-c circuit includes an a-c source having two a-c terminals L_1 and L_2 and a neutral terminal N. A conventional filter circuit including 30 microhenry inductors 71a and 71b is connected to a single phase full wave rectifier 74 having a positive output connected to resistor 41 and a negative terminal connected to capacitor 42, providing a 320 volt d-c output from a 220 volt a-c input. The input filter further includes capacitors 75, 76 and 77 as well as d-c capacitors 78 and 79.

Note that chip 40 of Figure 3 operates directly off the d-c bus through dropping resistor 41 and oscillates at around 45kHz in compliance with the following relationship:

$$f_{osc} = \frac{1}{1.4 R_T C_T}$$

Power for the high side switch gate drive comes from bootstrap capacitor 44 ($0.1\mu\text{F}$) which is charged to approximately 14 volts whenever pin V_s is pulled low during the low side power switch conduction. The bootstrap diode 43 (11DF4) blocks the d-c bus voltage when the high side switch conducts. Diode 43 is a fast recovery diode ($<100\text{nSec}$) to ensure that the bootstrap capacitor 44 is not partially discharged as the diode 43 recovers and blocks the high voltage bus.

The high frequency output from the half bridge 20-21 is a square wave with very fast transition times (approximately 50nSec). In order to avoid excessive radiated noise from the fast wave fronts, a 0.5 watt snubber 70-70a (10Ω and $0.001\mu\text{F}$, respectively), is used to slow down the switch times to approximately $0.5\mu\text{Sec}$.

REPLACEMENT SHEET

11OCT 1996

Note that there is a built-in dead time of $1\mu\text{Sec}$ to prevent shoot-through currents in the half bridge.

The fluorescent lamps 60 and 61 are operated in parallel, each with its own L-C resonant circuit. Any number of tube circuits can be driven from the single pair of MOSFETs 20 and 21 sized to suit the power level.

The reactance values for the lamp circuit are selected from L-C reactance tables or from the equation for series resonance:

$$f = \frac{1}{2\pi\sqrt{LC}}$$


The Q of the lamp circuits is fairly low because of the need for operation from a fixed frequency which, of course, can vary because of R_f and C_f tolerances. Fluorescent lamps do not normally require very high striking voltages so a Q of two or three is sufficient. "Flat" Q curves tend to result from larger inductors and small capacitor ratios where:

$$Q = \frac{2\pi fL}{R}$$

and R tends to be larger as more turns are used.

Soft-starting with tube filament pre-heating is accomplished by P.T.C. thermistors 68 and 69 across each lamp. In this way the voltage across the lamp gradually increases as the P.T.C. thermistor self-heats until finally the striking voltage with hot filaments is reached and the lamp strikes.


The following table gives the values of components used for a preferred embodiment of Figure 3:

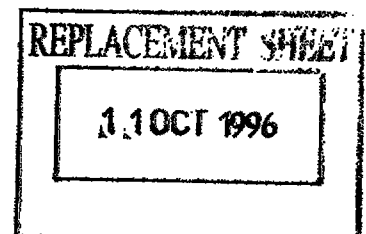

MOSFETs 20, 21	Type IRF 720 (International Rectifier)
PTC 68,69	TDK 911P97ES014U10
Bridge 74	4 x IN 4007
Diode 43	11DF4
Resistor 41	91 KOHMS, 1/2 watt
Resistor 70a	10 OHMS, 1/2 watt
Resistor R_T	15 KOHMS
Capacitor 42	47 μ f, 20v
Capacitor 64	1 μ f, 400v
Capacitor 66, 67	0.01 μ f, 600v
70	0.001 μ f, 600v
75,76,77	0.22 μ f, 250 v a-c
78, 79	100 μ f, 200v
C_T	0.001 μ f
Inductors 62, 63	1.35 millihenry

Figure 4 shows another embodiment of the invention for the drive of a high pressure sodium lamp ballast. The circuit of Figure 4 has the synchronization circuit of Figure 2 and also has an automatic shut-down circuit. In Figure 4, components similar to those of Figures 2 and 3 have similar identifying numerals. In Figure 4, the lamp is a high pressure sodium lamp 90 having a parallel capacitor 91 and an inductor 92. Inductor 92 has a tap which is part of a shut-down circuit, and includes resistor 93, diodes 94 and 95 and capacitor 96.

In Figure 4, the synchronizing circuit consists of the zero crossing detector diodes 50 and 51 which synchronize the self-oscillation frequency to the true resonance of the LC circuit 91, 92. The Q of the series resonant circuit is made to be about 20 and provides

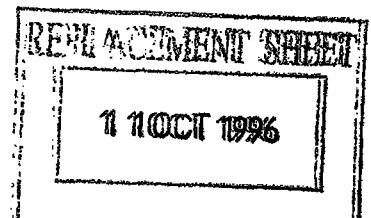


sufficient voltage to strike lamp 90. The synchronizing capability of the chip 40 allows the series tuned circuit of Figure 4 to resonate at high Q to provide the 3kv starting voltage for lamp 90 without the use of a separate igniter.

In a hot restrike situation, where Q is insufficient to provide the necessary restrike voltage, the shutdown circuit including diodes 95 and 96 provides a d-c bias voltage which prevents the voltage at pin C_T from reaching the $1/3 V_{CC}$ valley switching point. Thus, the circuit provides "burps" of oscillation until restrike is accomplished (approximately 90 seconds) and sustained, and destructive high MOSFET currents avoided.

Figure 5 is a block diagram of the circuit of chip 40 of the preceding Figures 2, 3 and 4. The eight pinouts of chip 40 are repeated in Figure 5. All circuit blocks to be described in Figure 5 are integrated into a common silicon chip. The first circuit block is the clamp circuit 100, consisting of a plurality of zener diodes. These are connected from pin V_{CC} and pin V_{SS} which is connected to the silicon substrate which acts as the chip ground. A digital supply line and analog supply line both extend from pin V_{CC} . An analog ground line and a digital ground line are also connected to pin V_{SS} .

The next group of circuit blocks form a timer circuit. These include divider circuit 101 connected to the analog supply line to the analog ground, N comparator 102, P comparator 103 and an RS latch 104. Two taps from divider 101 are connected to the positive inputs of comparators 102 and 103. Input pin C_T is connected to the negative input of comparator 103. The output of

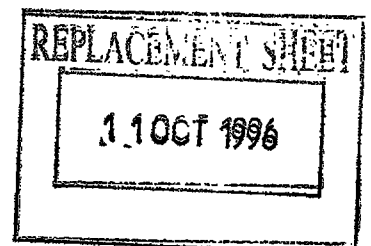

comparators 102 and 103 are connected to the RS latch 104 as shown.


The RS latch 104 is also connected to under-voltage lock-out circuit 105 which is integrated into the chip circuit. Thus if V_{cc} reduces too low, the RS latch 104 is locked out.

A bias circuit 106 provides bias outputs to the RS latch 104, the lockout circuit 105, and to dead time delay circuits 107 and 108 in the high side and low side circuit lines. Time delay circuits 107 and 108 provide a dead time or delay of about 1 microsecond between the turn on of the high side or low side switch after the turn off of the other. This dead time ensures that a "shoot through" circuit cannot be formed in which both power MOSFETs 20 and 21 are simultaneously on.


The output of dead time circuit 108 is applied to low side delay circuit 109 and low side driver 110 which is connected to pin L_0 .

The output of dead time circuit 107 is applied to level shift pulse generator 111 in the high side output line. The high side line also includes a high side bias supply circuit 112 which drives a dv/dt filter circuit 113 which filters noise from the pulse passed by circuit 113, and an under-voltage analog lockout circuit 114. The input to the high side bias circuit 112 is connected to pin V_B .

The output of lockout circuit 114 and dv/dt filter 113 is applied to latch circuit 115 and its output is connected to buffer 116 which contains gain stages and drives pin H_0 . Note that pin V_{ss} is connected to circuits 113, 114, 115 and 116.

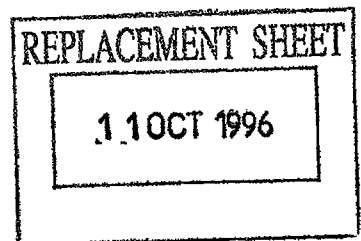

Although the present invention has been described in relation to particular embodiments thereof, many other variations and modifications and other uses will become apparent to those skilled in the art. It is preferred, therefore, that the present invention be limited not by the specific disclosure herein, but only by the appended claims.

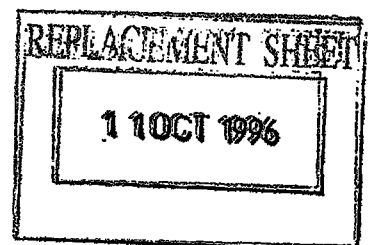




- 15 -

WHAT IS CLAIMED IS:

1. An integrated circuit formed in a silicon substrate for driving first and second MOS gated power devices which are connected in a half bridge circuit which has first and second d-c terminals and a common terminal at the node between said first and second MOS gated power devices; said integrated circuit including timer circuit means having an input control terminal C_T which is connectable to a low logic level signal referenced to the potential of said substrate; latch circuit means coupled to said timer circuit means for controlling the frequency at which said first and second MOS devices are switched on and off and having an output which is switched in response to a predetermined signal applied to said input control terminal; a high side dead time delay circuit and a low side dead time delay circuit each coupled to said latch circuit means for delaying the transmission of a latch output signal for a predetermined time delay following the switching of the output of said latch circuit means; a high side level shifting means and a high side driver circuit means and a low side driver circuit means; said high side driver circuit means, and said low side driver means coupled to said high side dead time circuit and said low side dead time circuit respectively and having high side and low side output pins respectively which produce outputs for turning on and off said first and second MOS gated power devices in response to control signals at said input control terminal C_T ; said dead time delay circuits preventing the simultaneous conduction of said first and second MOS gated power devices.

This Sheet Has Been Replaced

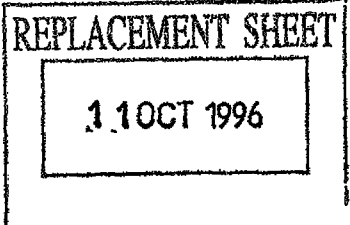



2. The integrated circuit of claim 1 wherein said MOS gated power devices are MOS devices which are selected from the group consisting of power MOSFETs, IGBTs and MOS gated thyristors.

3. The integrated circuit of claim 1 wherein said predetermined time delay is about 1 microsecond.

4. The circuit of claim 1 which further includes a source of operating voltage V_{cc} coupled to said first and second d-c terminals for providing operating power for each of said circuit means in said integrated circuit; said integrated circuit having a V_{cc} pin extending therefrom for connection to at least one of said first or second d-c terminals.


5. The circuit of claim 4 which further includes resistor means for coupling said V_{cc} pin to said first d-c terminal.

6. The integrated circuit of claim 4 wherein said predetermined time delay is about 1 microsecond.

7. The integrated circuit of claim 6 wherein said predetermined time delay is about 1 microsecond.

8. The device of claim 4 which further includes undervoltage trip circuit means coupled to and monitoring the voltage at said V_{cc} pin and having an output coupled to said latch circuit means and to said high side and low side dead time circuits for disabling

This Sheet Has Been Replaced





said latch circuit means and delay circuits when the voltage at said V_{cc} pin falls below a given value.

9. The integrated circuit of claim 8 wherein said predetermined time delay is about 1 microsecond.


10. The circuit of claim 9 which further includes a source of operating voltage V_{cc} coupled to said first and second d-c terminals for providing operating power for each of said circuit means in said integrated circuit, said integrated circuit having a V_{cc} pin extending therefrom for connection to at least one of said first or second d-c terminals.

11. The circuit of claim 7 which further includes resistor means for coupling said V_{cc} pin to said first d-c terminal.

12. The circuit of claim 8 which further includes resistor means for coupling said V_{cc} pin to said positive terminal.

13. The device of claim 1 wherein said timer circuit has a second input control terminal R_T for controlling the frequency at which said MOS gated devices are turned on and off; said terminals C_T and R_T being connected to an external timing capacitor of value C_T and timing resistor of value R_T respectively for setting the oscillation frequency f_o of said timing circuit to be:

This Sheet Has Been Replaced

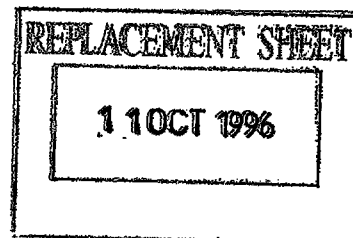



$$f_o = \frac{1}{1.4 R_T \times C_T}$$

14. The integrated circuit of claim 13 wherein said predetermined time delay is about 1 microsecond.


15. The circuit of claim 13 which further includes a source of operating voltage V_{cc} coupled to said first and second d-c terminals for providing operating power for each of said circuit means in said integrated circuit; said integrated circuit having a V_{cc} pin extending therefrom for connection to at least one of said first or second d-c terminals.

16. The circuit of claim 13 which further includes resistor means for coupling said V_{cc} pin to said first d-c terminal.

17. The device of claim 13 which further includes undervoltage trip circuit means coupled to and monitoring the voltage of said V_{cc} pin and having an output coupled to said latch circuit means and to said high side and low side dead time circuits for disabling said latch circuit means and delay circuits when the voltage at said V_{cc} pin falls below a given value.

18. An electronic ballast circuit including, in combination, at least one gas discharge lamp, at least one L-C circuit in series with said gas discharge lamp, first and second series connected MOS gate controlled power switching devices having respective gate terminals and connected in a half bridge circuit arrangement, a

This Sheet Has Been Replaced

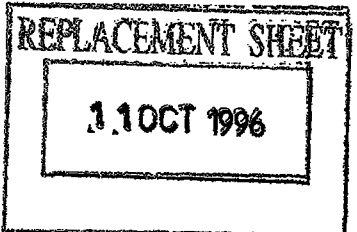



pair of d-c power terminals connected in series with said first and second series connected switching devices; said lamp and L-C series circuit connected across said second power switching device, and a gate drive circuit having an input terminal for receiving input logic level signals for alternately switching on and off both of said first and second MOS gated devices at a given frequency of oscillation; said gate drive circuit having output terminals H_0 and L_0 coupled to the respective gates of said discrete devices; said gate drive circuit having a terminal V_{cc} which provides the operating power for its internal circuitry; and an external resistor for connecting said terminal V_{cc} to one of said pair of terminals.

19. An electronic ballast circuit including, in combination, at least one gas discharge lamp, at least one L-C circuit in series with said gas discharge lamp, first and second series connected MOS gate controlled power switching devices having respective gate terminals and connected in a half bridge circuit arrangement, a pair of d-c power terminals connected in series with said first and second series connected switching devices, said lamp and L-C series circuit connected across said second power switching device, and a gate drive circuit having an input terminal for receiving input logic level signals for alternately switching on and off both of said first and second MOS gated devices at a given frequency of oscillation; said gate drive circuit having output terminals H_0 and L_0 coupled to the respective gates of said power switching devices; said gate drive circuit having an oscillation timer circuit

This Sheet Has Been Replaced



REPLACEMENT SHEET


11 OCT 1996



having first and second input pins R_T and C_T respectively, and a discrete resistor and a discrete capacitor connected to pins R_T and C_T respectively to set said given frequency of oscillation at a given frequency and at the frequency of oscillation of said L-C circuit.

20. An electronic ballast circuit including, in combination, at least one gas discharge lamp, at least one L-C circuit in series with said gas discharge lamp, first and second series connected MOS gate controlled power switching devices having respective gate terminals and connected in a half bridge circuit arrangement, a pair of d-c power terminals connected in series with said first and second series connected switching devices; said lamp and L-C series circuit connected across said second power switching device, and a gate drive circuit having an input terminal for receiving input logic level signals for alternately switching on and off both of said first and second MOS gated devices at a given frequency of oscillation; said gate drive circuit having output terminals H_0 and L_0 coupled to the respective gates of said power switching devices; said gate drive circuit having a terminal V_{cc} which provides the operating power for its internal circuitry; and an external resistor for connecting said terminal V_{cc} to one of said pair of terminals; said gate drive circuit having an oscillation timer circuit having first and second input pins R_T and C_T respectively, and a discrete resistor and a discrete capacitor connected to pins R_T and C_T respectively to set said given frequency of oscillation at a given frequency and at the frequency of oscillation of said L-C circuit.



This Sheet Has Been Replaced

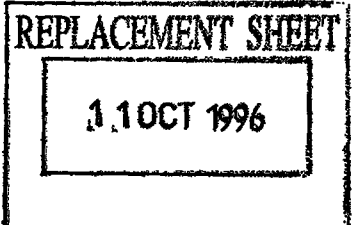



21. An electronic ballast circuit including, in combination, at least one gas discharge lamp, at least one L-C circuit in series with said gas discharge lamp, first and second series connected MOS gate controlled power switching devices having respective gate terminals and connected in a half bridge circuit arrangement, a pair of d-c power terminals connected in series with said first and second series connected switching devices; said lamp and L-C series circuit connected across said second power switching device, and a monolithic gate drive circuit having an input terminal for receiving input logic level signals for alternately switching on and off both of said first and second MOS gated devices at a given frequency of oscillation; said gate drive circuit having output terminals H_0 and L_0 coupled to the respective gates of said discrete devices; said gate drive circuit having a terminal V_{cc} which provides the operating power for its internal circuitry; and an external resistor for connecting said terminal V_{cc} to one of said pair of terminals; said integrated circuit including timer means having an input control terminal C_T which is connectable to a low logic level signal referenced to the potential of said substrate; latch circuit means coupled to said timer circuit means for controlling the frequency at which said first and second power switching devices are switched on and off and having an output which is switched in response to a predetermined signal affixed to said input control terminal; a high side dead time delay circuit and a low side dead time circuit each coupled to said latch circuit means for delaying the transmission of a latch output

This Sheet Has Been Replaced

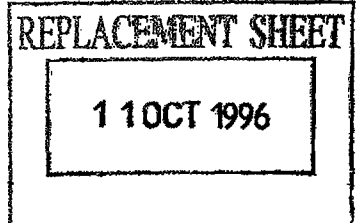



- 22 -

signal for a predetermined time delay following the switching of the output of said latch circuit means; a high side level shifting means and a high side driver circuit means and a low side driver circuit means; said high side driver circuit means and said low side driver circuit means coupled to said high side dead time circuit and said low side dead time circuit means respectively and having high side and low side output pins respectively which produce outputs for turning on and off said first and second MOS gated power devices in response to control signals at said input control terminal C_T ; said dead time delay circuits preventing the simultaneous conduction of said first and second MOS gated power devices.

22. An electronic ballast circuit including, in combination, at least one gas discharge lamp, at least one L-C circuit in series with said gas discharge lamp, first and second series connected MOS gate controlled power switching devices having respective gate terminals and connected in a half bridge circuit arrangement, a pair of d-c power terminals connected in series with said first and second series connected switching devices; said lamp and L-C series circuit connected across said second power switching device, and a gate drive circuit having an input terminal for receiving input logic level signals for alternately switching on and off both of said first and second MOS gated devices at a given frequency of oscillation; said gate drive circuit having output terminals H_0 and L_0 coupled to the respective gates of said MOS power switching devices; said gate drive circuit having an oscillation timer circuit having first and second input pins R_T and C_T .

This Sheet Has Been Replaced



REPLACEMENT SHEET

11 OCT 1996



- 23 -

respectively, and a discrete resistor and a discrete capacitor connected to pins R_T and C_T , respectively, to set said frequency of oscillation at a given frequency and at the frequency of oscillation at a given frequency and at the frequency of oscillation of said L-C circuit; said integrated circuit including timer means having an input control terminal C_T which is connectable to a low logic level signal referenced to the potential of said substrate; latch circuit means coupled to said timer circuit means for controlling the frequency at which said first and second discrete devices are switched on and off and having an output which is switched in response to a predetermined signal affixed to said input control terminal; a high side dead time delay circuit and a low side dead time circuit each coupled to said RS latch circuit for delaying the transmission of a latch output signal for a predetermined time delay following the switching of the output of said latch circuit means; a high side level shifting means and a high side driver circuit means and a low side driver circuit means; said high side driver circuit means and said low side driver circuit means coupled to said high side dead time circuit means and said low side dead time circuit means respectively and having high side and low side output pins respectively which produce outputs for turning on and off said first and second MOS gated power devices in response to control signals at said input control terminals C_T ; said dead time delay circuits preventing the simultaneous conduction of said first and second MOS gated power devices.

This Sheet Has Been Replaced



REPLACEMENT SHEET

11 OCT 1996

MOSGATE DRIVER FOR BALLAST CIRCUITS

ABSTRACT OF THE DISCLOSURE

A monolithic MOS gate driver chip is described for driving high side and low side power MOSFETs in a gas discharge lamp ballast circuit. The chip includes a timer circuit for generating a square output at the natural frequency of resonance of the lamp ballast. Dead time circuits are provided in the chip to prevent the simultaneous conduction of both high side and low side MOSFETs. The chip may be housed in a right pin DIP package.

FIGURE 2

This Sheet Has Been Replaced

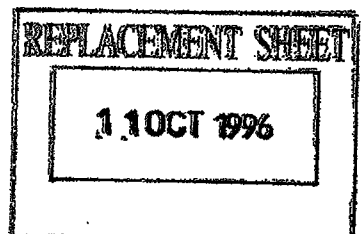


FIG. 1 PRIOR ART



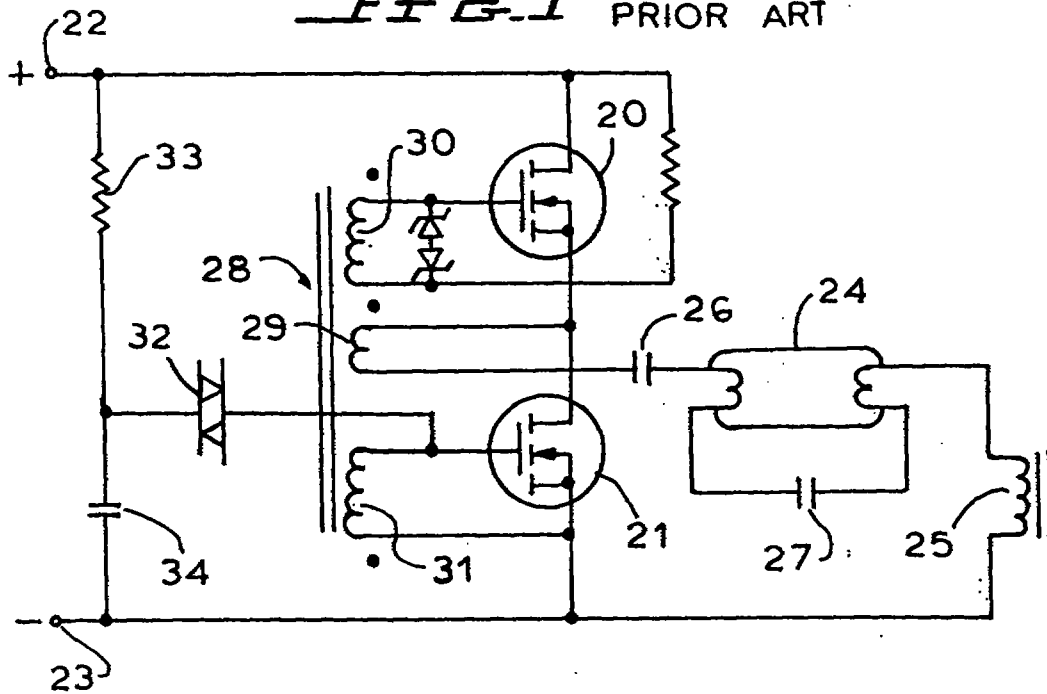



FIG. 2

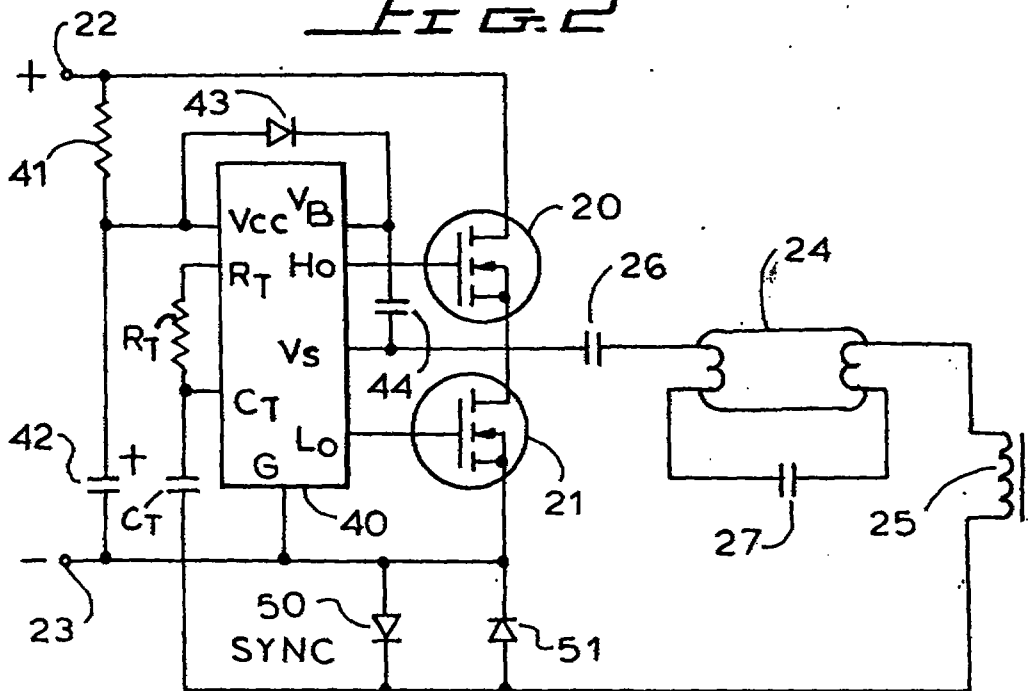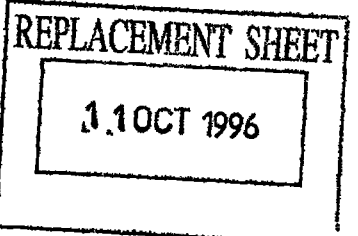

REPLACEMENT SHEET

11 OCT 1996



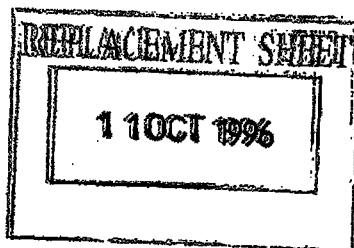

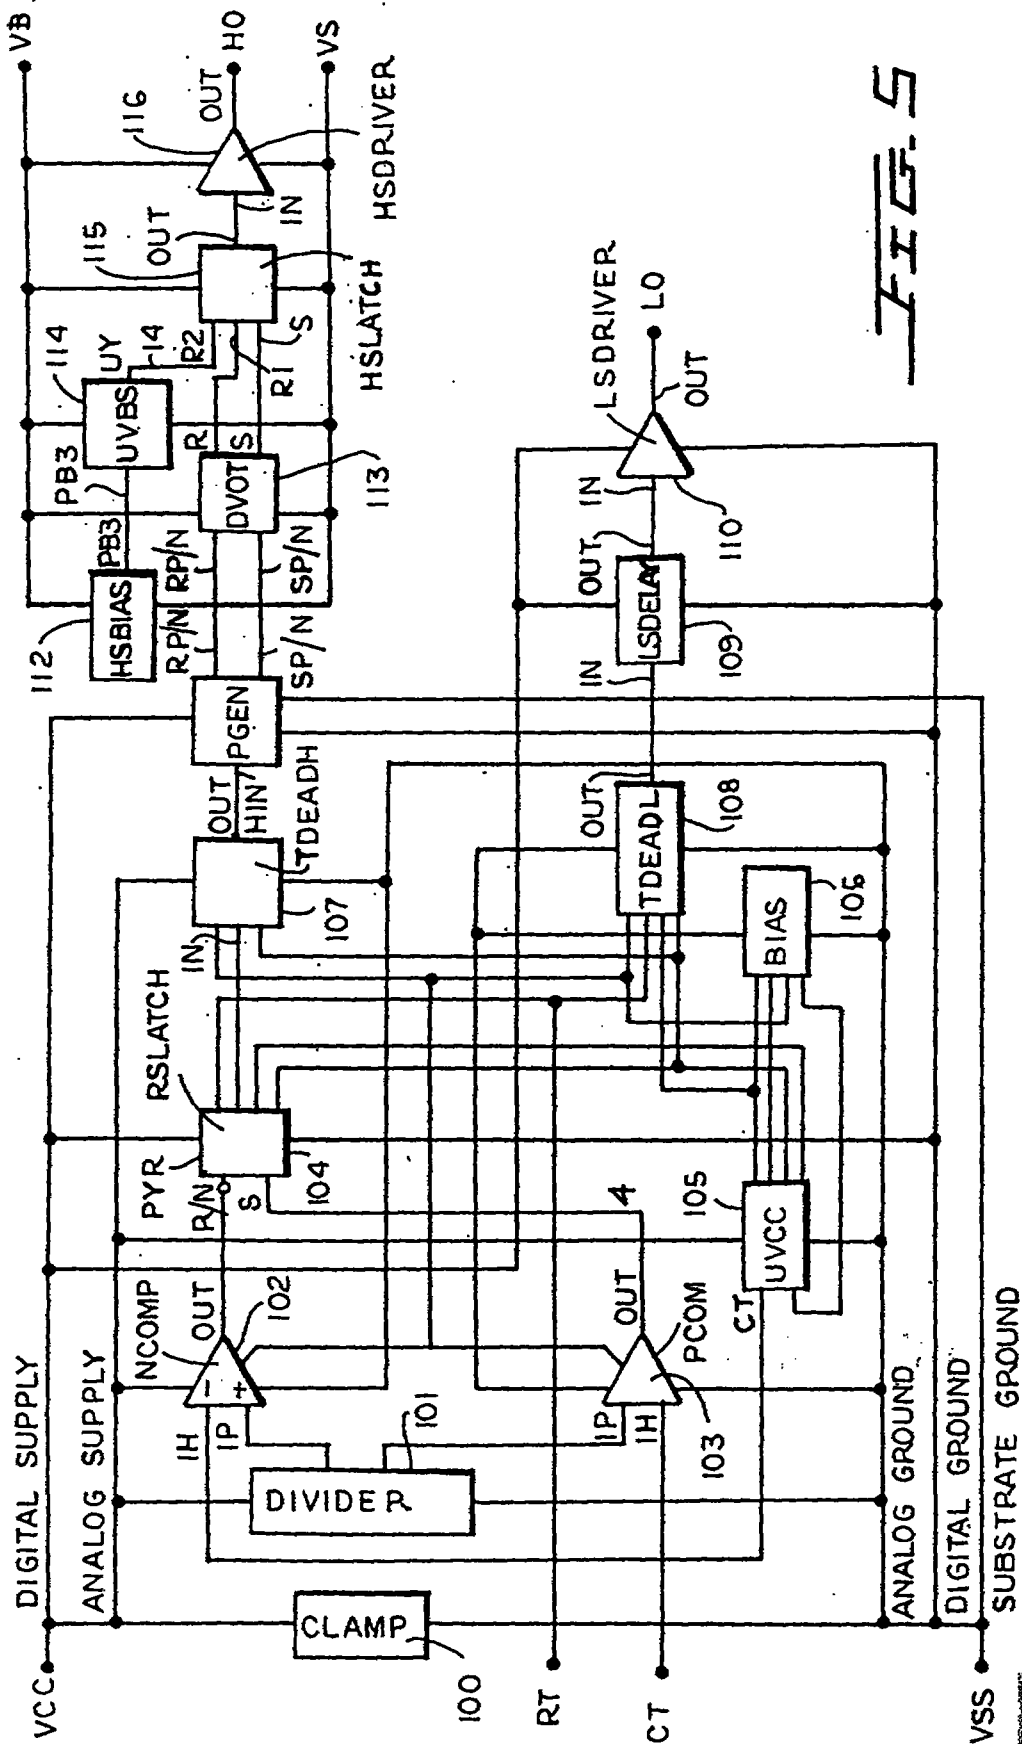


FIG. 5

REPLACEMENT SHEETS		SG
☒	Description	: paged .1. to paged .2..
☒	Claim(s)	: paged .12. to paged .13..
☐	Drawing(s)	: paged to paged
☒	Abstract	: paged .30. to paged
DATE OF RECEIPT 17/8/99		

MOSGATE DRIVER FOR BALLAST CIRCUITS

This invention relates to a gate driver circuit for MOS gated devices, and more specifically relates to a monolithic gate driver circuit for MOS gated circuit devices, particularly those used in lamp ballast circuits. The invention further relates to an electronic ballast circuit for gas discharge lamps.

Electronic ballasts for gas discharge circuits are coming into widespread use because of the availability of power MOSFET switching devices to replace previously used power bipolar transistor devices. Most electronic ballasts use two power MOSFET switches in a totem pole (half bridge) topology, with the gas discharge tube circuits consisting of L-C series resonant circuits in which the lamp or lamps are connected across one of the reactances of the L-C circuit. The power MOSFET switches are then driven to conduct alternately by inputs from secondary windings on a current transformer, the primary winding of which conducts the current of the lamp circuits. The primary winding current alternates at the resonant frequency of the resonant circuit.

Such prior art circuits have numerous drawbacks. For example, such circuits:

1. Are not self-starting and require a DIAC type device to initially pulse the circuit into operation.
2. They have poor switch times.
3. They are labour intensive due particularly to the need for a toroidal current transformer.
4. The circuits are not amenable to dimming.
5. The circuits are not amenable to mass production manufacture.


REPLACEMENT SHEET
17 AUG 1999

The present invention provides an integrated circuit as claimed in Claim 1 and preferred features of this aspect of the invention are set out in Claims 2 to 7. The invention further provides an electronic ballast circuit as claimed in Claim 8 or Claim 9. Preferred features of this aspect of the invention are set out in Claims 10 to 13.

The MOS gate driver of this invention permits the driving of low side and high side power MOSFETs or IGBTs (or any other MOS gated type device) from logic level, ground referenced inputs. Such circuits are particularly well adapted for the driving of gas discharge lamp ballast circuits.

More specifically, the MOS gate driver of the invention can be used for the drive of lamp ballast circuits or, more generally, any desired MOS gated circuit, and provides the following features:

1. It provides gate drive voltage signals for two MOS gated power semiconductors such as power MOSFETs or IGBTs, one designated as a "Low-side switch" and the other as a "High-side switch". The two power switches are commonly connected in a totem pole or half-bridge circuit.
2. It provides level shifting circuits with a voltage offset capability up to about 600 volts to translate ground (substrate) referenced signals via an isolated portion of the silicon die to facilitate the drive function of the high side switch.
3. A logic circuit referenced to ground (substrate) that consists of comparators, a voltage regulator to control the magnitude of the output signals when the driver is supplied from non-regulated d-c supplies, undervoltage lockout circuits to prevent marginal operation of the MOS power switches, both low side and high side, a dead band delay circuit that _____

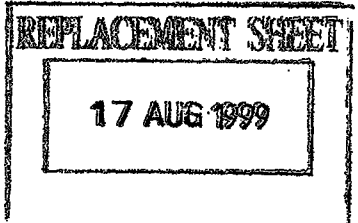



**CLAIMS:**

1. An integrated circuit formed in a silicon substrate for driving first and second MOS gated power semiconductor devices which are connected in a half bridge circuit which has first and second d-c terminals and a common terminal at the node between said first and second MOS gated power semiconductor devices; said integrated circuit including timer circuit means having an input control terminal C_T which is connectable to a low logic level signal referenced to the potential of said substrate; latch circuit means coupled to said timer circuit means for controlling the frequency at which said first and second MOS gated power semiconductor devices are switched on and off and having an output which is switched in response to a predetermined signal applied to said input control terminal; a high side dead time delay circuit and a low side dead time delay circuit each coupled to said latch circuit means for delaying the transmission of a latch output signal for a predetermined time delay following the switching of the output of said latch circuit means; a high side level shifting means and a high side driver circuit means and a low side driver circuit means; said high side driver circuit means and said low side driver means being coupled to said high side dead time circuit and said low side dead time circuit respectively and having high side and low side output pins respectively which produce outputs for turning on and off said first and second MOS gated power semiconductor devices in response to control signals at said input control terminal C_T ; said dead time delay circuits preventing the simultaneous conduction of said first and second MOS gated power semiconductor devices.

2. An integrated circuit as claimed in claim 1 wherein said high side and low side output pins produce outputs which turn on and off MOS gated power semiconductor devices which are selected from the group consisting of power MOSFETs, IGBTs and MOS gated thyristors.

3. An integrated circuit as claimed in claim 1 or 2 wherein said integrated circuit includes a V_{cc} pin coupled to a source of operating voltage V_{cc} for providing operating

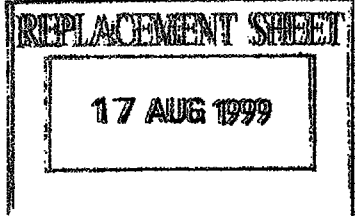

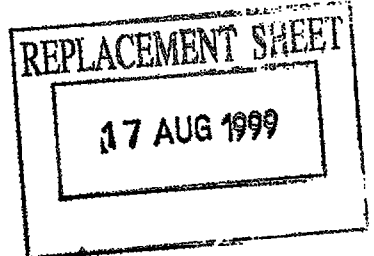

power to each of said circuit means in said integrated circuit and for connection to one of said first or second d-c terminals.

4. An integrated circuit as claimed in claim 3 which further includes undervoltage trip circuit means coupled to and monitoring the voltage at said V_{cc} pin and having an output coupled to said latch circuit means and to said high side and low side dead time circuits for disabling said latch circuit means and said delay circuits when the voltage at said V_{cc} pin falls below a given value.

5. An integrated circuit as claimed in any of claims 3 or 4 and which further includes means for coupling said V_{cc} pin to a resistor which is coupled to said first d-c terminal.

6. An integrated circuit as claimed in claim 1 wherein said timer circuit has a second input control terminal R_T for controlling the frequency at which said MOS gated power semiconductor devices are turned on and off; said terminals C_T and R_T being connected to an external timing capacitor of value C_T and timing resistor of value R_T respectively for setting the oscillation frequency f_o of said timing circuit to be:

$$f_o = \frac{1}{1.4 R_T \times C_T}$$

7. An integrated circuit as claimed in any of claims 1 to 6 wherein said predetermined time delay is about 1 microsecond.

8. An electronic ballast circuit for a gas discharge lamp, the circuit comprising: at least one L-C circuit for coupling in series with said gas discharge lamp; first and second series connected MOS gate controlled power switching devices having respective gate terminals and connected in a half bridge circuit arrangement; a pair of d-c power terminals connected in series with said first and second series connected switching devices, said lamp and said L-C circuit being connected, in use, across said




second power switching device; and a gate drive circuit having an input terminal for receiving input logic level signals for alternately switching on and off both of said first and second MOS gated devices at a given frequency of oscillation; said gate drive circuit having output terminals H_0 and L_0 coupled to the respective gate terminals of said power switching devices; said gate drive circuit having a terminal V_{cc} which provides the operating power for its internal circuitry; and an external resistor for connecting said terminal V_{cc} to one of said pair of terminals;

wherein said gate drive circuit includes: timer means having an input control terminal C_T which is connectable to a low logic level signal referenced to the potential of a substrate; latch circuit means coupled to said timer circuit means for controlling the frequency at which said first and second power switching devices are switched on and off and having an output which is switched in response to a predetermined signal supplied to said input control terminal; a high side dead time delay circuit and a low side dead time circuit each coupled to said latch circuit means for delaying the transmission of a latch output signal for a predetermined time delay following the switching of the output of said latch circuit means; and a high side level shifting means and a high side driver circuit means and a low side driver circuit means; said high side driver circuit means and said low side driver circuit means being coupled to said high side dead time circuit and said low side dead time circuit means respectively and having high side and low side output pins respectively which produce outputs for turning on and off said first and second MOS gated power devices in response to control signals at said input control terminal C_T ; said dead time delay circuits preventing the simultaneous conduction of said first and second MOS gated power devices;

wherein said timer circuit has a second control terminal R_T for controlling the frequency at which said MOS gated power semiconductor devices are turned on and off; said terminals C_T and R_T being connected to an external timing capacitor of value C_T and timing resistor of value R_T respectively for setting the oscillation frequency f_0 of said timing circuit to be:

$$f_0 = \frac{1}{1.4 R_T \times C_T}$$

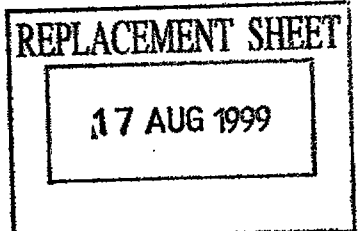



17 AUG 1999

9. An electronic ballast circuit for a gas discharge lamp, the circuit comprising: at least one L-C circuit for coupling in series with said gas discharge lamp; first and second series connected MOS gate controlled power switching devices having respective gate terminals and connected in a half bridge circuit arrangement; a pair of d-c power terminals connected in series with said first and second series connected switching devices, said lamp and said L-C circuit being connected, in use, across said second power switching device; and a gate drive circuit having an input terminal for receiving input logic level signals for alternately switching on and off both of said first and second MOS gated devices at a given frequency of oscillation; said gate drive circuit having output terminals H_0 and L_0 coupled to the respective gate terminals of said MOS power switching devices;

said gate drive circuit having an oscillation timer circuit having first and second control terminals R_T and C_T , respectively, and a discrete resistor and a discrete capacitor connected to control terminals R_T and C_T , respectively, to set said frequency of oscillation at a given frequency and at the frequency of oscillation of said L-C circuit; said control terminal C_T being connectable to a low logic level signal referenced to the potential of a substrate; said gate drive circuit further comprising: latch circuit means coupled to said timer circuit means for controlling the frequency at which said first and second MOS power switching devices are switched on and off and having an output which is switched in response to a predetermined signal affixed to a control terminal; a high side dead time delay circuit and a low side dead time circuit each coupled to said latch circuit means for delaying the transmission of a latch output signal for a predetermined time delay following the switching of the output of said latch circuit means; and a high side level shifting means and a high side driver circuit means and a low side driver circuit means;

said high side driver circuit means and said low side driver circuit means being coupled to said high side dead time circuit means and said low side dead time circuit means respectively and having high side and low side output pins respectively which produce outputs for turning on and off said first and second MOS gated power devices in response to control signals at said control terminal C_T ; said dead time delay circuits




preventing the simultaneous conduction of said first and second MOS gated power devices;

wherein said terminals C_T and R_T are connected to an external timing capacitor of value C_T and timing resistor of value R_T respectively for setting the oscillation frequency f_0 of said timing circuit to be:

$$f_0 = \frac{1}{1.4 R_T \times C_T}$$

10. An electronic ballast circuit as claimed in claim 9, wherein said gate drive circuit includes a V_{cc} pin coupled, in use, to a source of operating voltage V_{cc} for providing operating power for its internal circuitry.
11. An electronic ballast circuit as claimed in claim 9 and further comprising a resistor for coupling said V_{cc} pin to one of the d-c terminals.
12. An electronic ballast circuit according to either claim 8 or 9 wherein the MOS gated power semiconductor devices are selected from the group consisting of power MOSFETs, IGBTs and MOS gated thyristors.
13. An electronic ballast circuit as claimed in claim 9 and further comprising a terminal V_{cc} for providing the operating power for the internal circuitry for the gate drive circuit; and an undervoltage trip circuit coupled to and monitoring the voltage at the V_{cc} pin and having an output coupled to said latch circuit means and to said high side and low side dead time circuits for disabling the latch circuit and the delay circuits when the voltage at said V_{cc} pin falls below a given value.
14. An electronic ballast circuit substantially as hereinbefore described and with reference to the accompanying drawings 2 - 5.

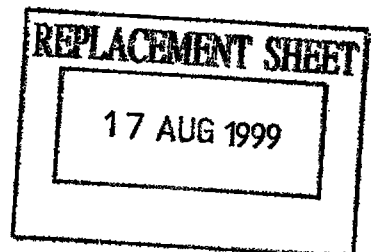

MOSGATE DRIVER FOR BALLAST CIRCUITSABSTRACT OF THE DISCLOSURE

A monolithic MOS gate driver chip is described for driving high side and low side power MOSFETs in a gas discharge lamp ballast circuit. The chip includes a timer circuit for generating a square output at the natural frequency of resonance of the lamp ballast. Dead time circuits are provided in the chip to prevent the simultaneous conduction of both high side and low side MOSFETs. The chip may be housed in a right pin DIP package.

FIGURE 2

