




- (51) **International Patent Classification:**
B65G 47/84 (2006.01) *A61F 13/15* (2006.01)
- (21) **International Application Number:**
PCT/US2013/036718
- (22) **International Filing Date:**
16 April 2013 (16.04.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/447,585 16 April 2012 (16.04.2012) US
- (71) **Applicant:** THE PROCTER & GAMBLE COMPANY
[US/US]; One Procter & Gamble Plaza, Cincinnati, Ohio
45202 (US).
- (72) **Inventors:** PAPSDORF, Clifford, Theodore; 439 Branch
Hill Loveland Road, Loveland, Ohio 45140 (US).
SCHNEIDER, Uwe; 520 Chisholm Trail, Cincinnati,
Ohio 45215 (US).
- (74) **Agent:** GUFFEY, Timothy B.; c/o THE PROCTER &
GAMBLE COMPANY, Global Patent Services, 299 East
6th Street, Sycamore Building, 4th Floor, Cincinnati, Ohio
45202 (US).

- (81) **Designated States** (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** APPARATUSES FOR TRANSFERRING DISCRETE ARTICLES

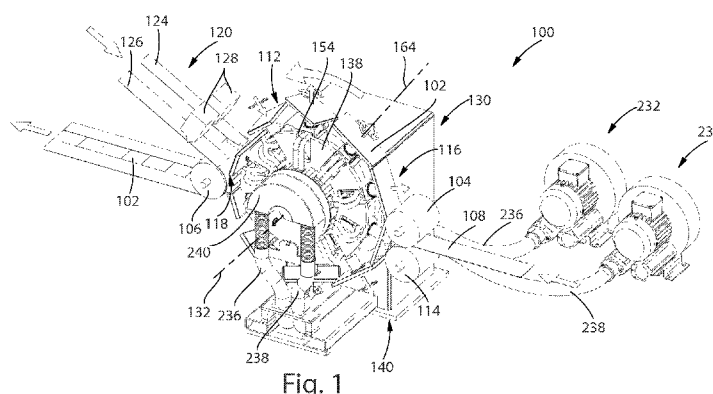

(57) **Abstract:** The present disclosure is directed to a transfer assembly (100) for transferring discrete articles (102) from or to a moving carrier member (104, 106). The transfer assembly comprises a frame (130) defining a rotation axis (132). The frame comprises a track (134) having a circumferential shape surrounding the rotation axis. The transfer assembly comprises transfer members (112) movably engaged with the track, each having a transfer surface (136). The transfer assembly comprises a wheel (138) engaged with the frame and configured to rotate about the rotation axis. The wheel is engaged with the transfer members. As the wheel rotates about the rotation axis, the transfer members circumnavigate about a path about the rotation axis in correspondence with the track. The shape of the track causes the transfer surfaces to move radially relative to the rotation axis while the transfer surfaces are maintained a substantially constant distance away from the moving carrier member at the point of discrete article transfer.