




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H05B		A2	(11) International Publication Number: WO 96/07297
			(43) International Publication Date: 7 March 1996 (07.03.96)
(21) International Application Number: PCT/IB95/00651		(81) Designated States: CN, JP, (SG), European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 16 August 1995 (16.08.95)		Published Without international search report and to be republished upon receipt of that report.	
(30) Priority Data: 94202395.3 22 August 1994 (22.08.94) EP			
(34) Countries for which the regional or international application was filed: NL et al.			
(71) Applicant: PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).			
(71) Applicant (for SE only): PHILIPS NORDEN AB [SE/SE]; Kottbygatan 5, Kista, S-164 85 Stockholm (SE).		SG 9700733-0 RTMP copy	
(72) Inventor: WESSELS, Johannes, Hendrik; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).			
(74) Agent: EVERS, Johannes, Hubertus, Maria; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).			

① A2+A3
② IPER

(54) Title: CIRCUIT ARRANGEMENT

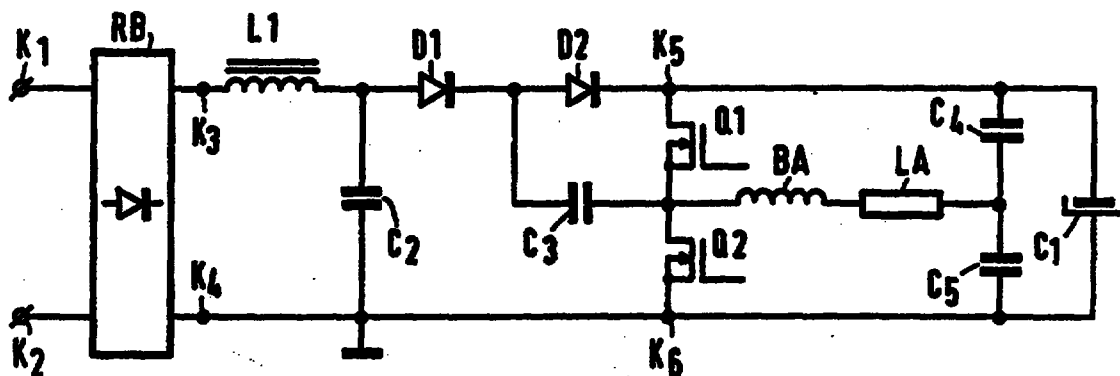

(57) Abstract

The invention relates to a circuit arrangement comprising a DC-AC converter for operating a lamp (La). According to the invention, the circuit arrangement also comprises diodes (D1, D2), a coil (L1) and two capacitors (C2, C3) which are so dimensioned that the resonance frequency of a series circuit of the coil and the two capacitors connected in parallel is approximately equal to the operating frequency of the DC-AC converter. It is achieved thereby that the circuit arrangement has a high power factor.

Circuit arrangement.

The invention relates to a circuit arrangement for operating a lamp, provided with

- terminals for connection to a supply voltage source,
- rectifying means provided with a first output and a second output and coupled to the terminals, for rectifying an AC voltage supplied by the supply voltage source,
- a DC-AC converter provided with a first input and a second input, coupled to the respective outputs,
- a first branch comprising first capacitive means and interconnecting the inputs,
- 10 - a second branch comprising a series circuit of first inductive means and second capacitive means and connecting the first output to the second output,
- a third branch comprising a series circuit of two unidirectional elements and connecting a common junction point of the first inductive means and the second capacitive means to the first input, and
- 15 - a fourth branch, comprising third capacitive means and connecting a common junction point of the unidirectional elements to a point of the DC-AC converter at which a high-frequency voltage is present during lamp operation.

20 Such a circuit arrangement is known from European Patent Application 0 244 644. In the known circuit arrangement, the first branch acts as a filter whose function is *inter alia* to improve the power factor of the circuit arrangement. To fulfil this function satisfactorily, the self-inductance of the first inductive means is chosen to be comparatively great, so that the first inductive means form a voluminous and expensive component of the
25 circuit arrangement.

The invention has for its object to provide a circuit arrangement whose power factor is comparatively high and whose first inductive means in the first branch have a

comparatively low self-inductance.

According to the invention, a circuit arrangement as described in the opening paragraph is for this purpose characterized in that the resonance frequency of a series circuit formed by the first inductive means and by a parallel arrangement of the second
5 capacitive means and the third capacitive means is chosen to lie within a range limited by $0.1 F_b$ and $2.0 F_b$, where F_b is the operating frequency of the DC-AC converter.

It was found that a circuit arrangement according to the invention has a comparatively high power factor. Since the operating frequency of the DC-AC converter usually is of the order of 10 kHz or even higher, it is possible to choose the self-inductance
10 of the first inductive means and the capacitance values of the second and third capacitive means to be comparatively low, so that the circuit arrangement does not comprise any voluminous or comparatively expensive components.

It was also found that particularly high power factor values can be realised in that the resonance frequency of a series circuit formed by the first inductive means and by
15 a parallel arrangement of the second capacitive means and the third capacitive means is chosen to lie within a range limited by $0.5 F_b$ and $1.5 F_b$.

It was found to be advantageous to construct the DC-AC converter such that it comprises a series circuit of two switching elements coupled to the inputs, and that the fourth branch connects a common junction point of the unidirectional elements to a common
20 junction point of the switching elements. A very high power factor is realised because a high-frequency voltage of comparatively great amplitude is applied to the common junction point of the two switching elements during lamp operation.

It was also found to be advantageous when the ratio between the capacitance of the second capacitive means and the capacitance of the third capacitive means
25 is chosen to lie within a range limited by 1 and 4.

The measure according to the invention yielded particularly good results in circuit arrangements wherein the operating frequency of the DC-AC converter is of the order of 1 MHz. Such circuit arrangements are used, for example, for operating electrodeless
30 lamps. Owing to the very high operating frequency, a substantial portion of the second and third capacitive means is formed by parasitic capacitances of components and conductive connections in the circuit arrangement.

To enhance the effect achieved by the measure according to the invention, it is possible to implement the measure according to the invention twice in the circuit arrangement. Such a circuit arrangement comprises, besides the first inductive means, second

inductive means, the second branch comprises a series circuit of the first inductive means, the second capacitive means, and the second inductive means, and the circuit arrangement is further provided with

- a fifth branch which comprises a series circuit of two further unidirectional elements and which connects the second input to a common junction point of the second capacitive means and the second inductive means, and
- a sixth branch which comprises fourth capacitive means and which connects a common junction point of the further unidirectional elements to a point of the DC-AC converter at which a high-frequency voltage is present during lamp operation.

Very favourable results were achieved with a circuit arrangement in which the DC-AC converter comprises a series arrangement of two switching elements coupled to the inputs, and the sixth branch connects a common junction point of the further unidirectional elements to a common junction point of the switching elements.

Embodiments of the invention will be explained in more detail with reference to a drawing, in which

Fig. 1 shows an embodiment of a circuit arrangement according to the invention;

Fig. 2 shows a further embodiment of a circuit arrangement according to the invention; and

Fig. 3 shows the currents taken up from the supply voltage source for various dimensionings of the embodiment shown in Fig. 1.

In Fig. 1, K1 and K2 form terminals for connection to a supply voltage source. RB are rectifying means coupled to the terminals for rectifying an AC-voltage supplied by the supply voltage source. K3 and K4 are a first and a second output, respectively. K3 and K4 are coupled to a first input K5 and a second input K6, respectively, of a DC-AC converter formed by inputs K5 and K6, switching elements Q1 and Q2, capacitors C4 and C5, and coil Ba. In addition, the DC-AC converter of Fig. 1 comprises means (not shown) for rendering switching elements Q1 and Q2 alternately conducting and non-conducting. A discharge lamp La is connected to the DC-AC converter. The construction

of the DC-AC converter is as follows. The first input K5 and the second input K6 are interconnected by a series arrangement of the switching elements Q1 and Q2. The inputs are also interconnected by a series arrangement of capacitor C4 and capacitor C5. A common junction point of the switching elements Q1 and Q2 is connected to a common junction point of the capacitors C4 and C5 by way of a series circuit of coil Ba and lamp La.

A first branch comprising first capacitive means is formed by capacitor C1, while also interconnecting the inputs. A second branch formed by coil L1 and capacitor C2 interconnects the outputs K3 and K4. Coil L1 and capacitor C2 in this embodiment form first inductive means and second capacitive means, respectively. A third branch comprising a series arrangement of two unidirectional elements connects a common junction point of coil L1 and capacitor C2 to input K5. The two unidirectional elements in this embodiment are formed by diode D1 and diode D2. Capacitor C3 forms third capacitive means and at the same time a fourth branch which connects a common junction point of the two diodes D1 and D2 to a common junction point of the two switching elements Q1 and Q2. Output K4 is connected to input K6. The dimensioning of the circuit arrangement is such that the resonance frequency of a series circuit formed by coil L1 and a parallel arrangement of capacitor C2 and capacitor C3 is approximately equal to the operating frequency of the DC-AC converter.

The operation of the circuit arrangement shown in Fig. 1 is as follows.

When the terminals K1 and K2 are connected to a supply voltage source, the rectifying means RB rectify the AC-voltage supplied by the supply voltage source to a DC-voltage which is present between the outputs K3 and K4. At the same time, the switching elements Q1 and Q2 are rendered conducting and non-conducting alternately with a frequency f . Since a DC-voltage is present across capacitor C1 during stationary lamp operation, a resulting high-frequency alternating current of frequency f flows through the lamp La. The capacitor C3 is charged from the supply voltage source through diode D1 and subsequently discharged through diode D2 and capacitor C1, also with frequency f . As a result, a DC-voltage is present across capacitor C1 during stationary lamp operation with an amplitude higher than the maximum amplitude of the AC-voltage supplied by the supply voltage source. It is prevented thereby that a peak current is taken up from the supply voltage source when the amplitude of the AC-voltage reaches its maximum value. Since the frequency f is approximately equal to the resonance frequency of the series circuit formed by coil L1 and a parallel arrangement of capacitor C2 and capacitor C3, the amplitude of the high-frequency voltage across C3 is comparatively great. As a result, the charging current

which charges capacitor C1 from capacitor C3 during a portion of each high-frequency cycle is comparatively high. When the instantaneous amplitude of the AC-voltage exceeds a certain threshold value, the maximum amplitude of the high-frequency voltage across capacitor C3 reaches a value which is equal to the amplitude of the DC-voltage present across capacitor C1. The amplitude of the high-frequency voltage across capacitor C3 does not increase any further with a further increase in the instantaneous amplitude of the AC-voltage. This means that also the charging current of capacitor C1 from capacitor C3 does not increase any further. The limitation of the maximum amplitude of the high-frequency voltage across capacitor C3 also limits the maximum amplitude of the high-frequency voltage across capacitor C2. As a result, the current through the coil L1 charges the capacitor C1 directly during a portion of each high-frequency cycle. This direct charging current compensates for the fact that the charging current from capacitor C3 does not rise any further when the instantaneous amplitude of the AC-voltage exceeds the threshold value. It is achieved thereby that the total charging current (formed by the charging current through capacitor C3 and the direct charging current through coil L1) taken up from the supply voltage source is approximately proportional to the instantaneous amplitude of the AC-voltage, *i.e.* the power factor of the circuit arrangement is comparatively high.

In the circuit arrangement shown in Fig. 2, all components corresponding to components of the circuit arrangement shown in Fig. 1 have been given the same reference symbols. The circuit arrangement shown in Fig. 2 comprises besides first inductive means formed by coil L1 second inductive means formed by coil L2. The second branch in this embodiment is formed by the series circuit of coil L1, capacitor C2, and coil L2. The diodes D3 and D4 form further unidirectional elements. The series arrangement of diode D3 and diode D4 forms a fifth branch, connecting the second input K6 to a common junction point of capacitor C2 and coil L2. Capacitor C6 in this embodiment forms fourth capacitive means and at the same time a sixth branch which connects a common junction point of diode D3 and diode D4 to a common junction point of switching elements Q1 and Q2. The dimensioning is so chosen that the resonance frequency of a series circuit of coil L2 and a parallel arrangement of capacitor C6 and capacitor C2 is approximately equal to the operating frequency of the DC-AC converter. The dimensioning is also so chosen that the resonance frequency of a series circuit of coil L1 and a parallel arrangement of capacitor C2 and capacitor C3 is approximately equal to the operating frequency of the DC-AC converter.

The operation of the circuit arrangement shown in Fig. 2 is as follows.

As in the circuit arrangement shown in Fig. 1, capacitor C3 is alternately

charged from the supply voltage through diode D1 and discharged through diode D2 and capacitor C1 during each high-frequency cycle. In the circuit arrangement shown in Fig. 2, in addition, capacitor C6 is also charged from the supply voltage through diode D4 and discharged through diode D3 and capacitor C1 in each high-frequency cycle. The result of this is that capacitor C1 is charged consecutively from capacitor C3 and from capacitor C6 during each high-frequency cycle. The amplitude of the DC-voltage across capacitor C1 is thus comparatively high, which favourably affects the power factor of the circuit arrangement. When the instantaneous amplitude of the AC-voltage exceeds a threshold value, where the maximum amplitude of the high-frequency voltage across capacitor C6 is equal to the amplitude of the DC-voltage across capacitor C1, the capacitor C1 is directly charged by the current through coil L2 during a portion of each high-frequency cycle. When the instantaneous amplitude of the AC-voltage has also exceeded a further threshold value, where the maximum amplitude of the high-frequency voltage across capacitor C3 is equal to the amplitude of the DC-voltage across capacitor C1, the capacitor C1 is similarly directly charged by the current through coil L1 during a portion of each high-frequency cycle. Given such values of the instantaneous amplitude of the AC-voltage, both the direct charging current of coil L1 and the direct charging current of coil L2 compensate for the fact that the charging currents from capacitor C3 and capacitor C6 do not rise any further.

Fig. 3 shows the currents derived from the supply voltage source for various dimensionings of the embodiment shown in Fig. 1 for the case in which the supply voltage is a sinusoidal AC voltage with a frequency of 50 Hz and an effective value of 220 V. The current is plotted in amps on the vertical axis. Time is plotted in seconds on the horizontal axis. The current waveform is shown over a time interval of 0.005 second, *i.e.* a quarter of a supply voltage cycle. The capacitance of capacitor C2 was 11 nF, as was the capacitance of capacitor C3. The operating frequency F_b of the DC-AC converter is 30 kHz. The self-inductances of coil L1 were so chosen consecutively that the resonance frequencies of the parallel circuit of capacitor C2 and capacitor C3 and the coil L1 were approximately 0.5 F_b , F_b and 1.5 F_b , respectively. It is evident from Fig. 3 that, at a resonance frequency approximately equal to F_b , a current drawn from the supply voltage source exhibits the smallest deviation from a sine shape. The power factors in these three cases were 0.93; 0.99; and 0.93, respectively. It is also visible in Fig. 3 that the current drawn from the supply voltage source is lower when the resonance frequency of L1, C2 and C3 is approximately equal to 0.5 F_b or 1.5 F_b than when the resonance frequency is approximately equal to F_b , so that in the former two cases less power is drawn from the supply voltage source than in

the case with the resonance frequency equal to F_b . A further modification in the dimensioning of the circuit arrangement is necessary, which leads to an increase in the consumed power as well as to a decrease in the power factor, if the power drawn from the supply voltage source with the resonance frequency equal to $0.5 F_b$ or $1.5 F_b$ is to be rendered equal to the power drawn with the resonance frequency approximately equal to F_b .

In a concrete realisation of a circuit arrangement according to the invention as shown in Fig. 1, the self-inductance of coil L_1 was $31 \mu\text{H}$, the capacitance of capacitor C_2 was 58 pF , and the capacitance of capacitor C_3 was 71 pF . The operating frequency of the DC-AC converter was 2.65 MHz . In view of the high operating frequency, the capacitance of both capacitor C_2 and of capacitor C_3 is supplemented with parasitic capacitances. The circuit arrangement was supplied with a sinusoidal AC-voltage with a frequency of approximately 50 Hz and an effective value of 220 V . The power factor was 0.96 . The power factor was no more than 0.53 when capacitor C_3 was removed from the circuit arrangement.

CLAIMS:

1. A circuit arrangement for operating a lamp, provided with
- terminals for connection to a supply voltage source,
- rectifying means provided with a first output and a second output and coupled
5 to the terminals, for rectifying an AC voltage supplied by the supply voltage
source,
- a DC-AC converter provided with a first input and a second input, coupled to
the respective outputs,
- a first branch comprising first capacitive means and interconnecting the inputs,
- a second branch comprising a series circuit of first inductive means and second
10 capacitive means and connecting the first output to the second output,
- a third branch comprising a series circuit of two unidirectional elements and
connecting a common junction point of the first inductive means and the second
capacitive means to the first input, and
- a fourth branch, comprising third capacitive means and connecting a common
15 junction point of the unidirectional elements to a point of the DC-AC converter
at which a high-frequency voltage is present during lamp operation,
characterized in that the resonance frequency of a series circuit formed by
the first inductive means and by a parallel arrangement of the second capacitive means and
the third capacitive means is chosen to lie within a range limited by $0.1 F_b$ and $2.0 F_b$,
20 where F_b is the operating frequency of the DC-AC converter.
2. A circuit arrangement as claimed in Claim 1, wherein the resonance
frequency of a series circuit formed by the first inductive means and a parallel arrangement
of the second capacitive means and the third capacitive means is chosen to lie within a range
limited by $0.5 F_b$ and $1.5 F_b$.
- 25 3. A circuit arrangement as claimed in Claim 1 or 2, wherein the DC-AC
converter comprises a series circuit of two switching elements coupled to the inputs, and the
fourth branch connects a common junction point of the unidirectional elements to a common
junction point of the switching elements.
4. A circuit arrangement as claimed in Claim 1, 2 or 3, wherein the ratio



between the capacitance of the second capacitive means and the capacitance of the third capacitive means is chosen to lie within a range limited by 1 and 4.

5. A circuit arrangement as claimed in any one or several of the preceding Claims, wherein the operating frequency of the DC-AC converter is higher than 1 MHz.

5 6. A circuit arrangement as claimed in any one or several of the preceding Claims, wherein the circuit arrangement comprises second inductive means, the second branch comprises a series circuit of the first inductive means, the second capacitive means, and the second inductive means, and the circuit arrangement is further provided with

- 10 - a fifth branch which comprises a series circuit of two further unidirectional elements and which connects the second input to a common junction point of the second capacitive means and the second inductive means, and
- a sixth branch which comprises fourth capacitive means and which connects a common junction point of the further unidirectional elements to a point of the DC-AC converter at which a high frequency voltage is present during lamp
- 15 operation.

7. A circuit arrangement as claimed in Claim 6, wherein the DC-AC converter comprises a series arrangement of two switching elements coupled to the inputs, and the sixth branch connects a common junction point of the further unidirectional elements to a common junction point of the switching elements.



1/1

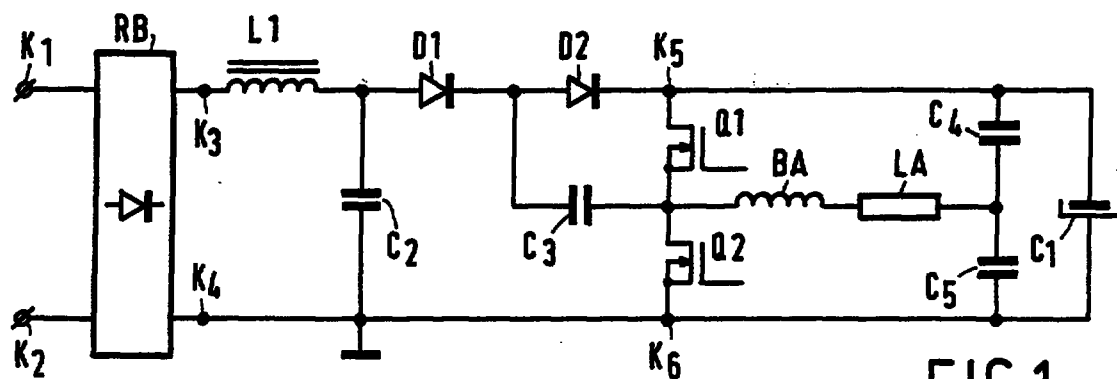


FIG. 1

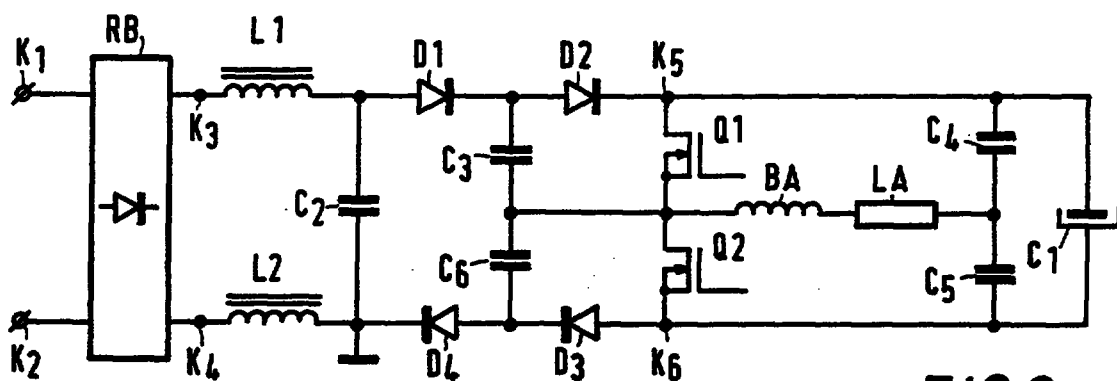


FIG. 2

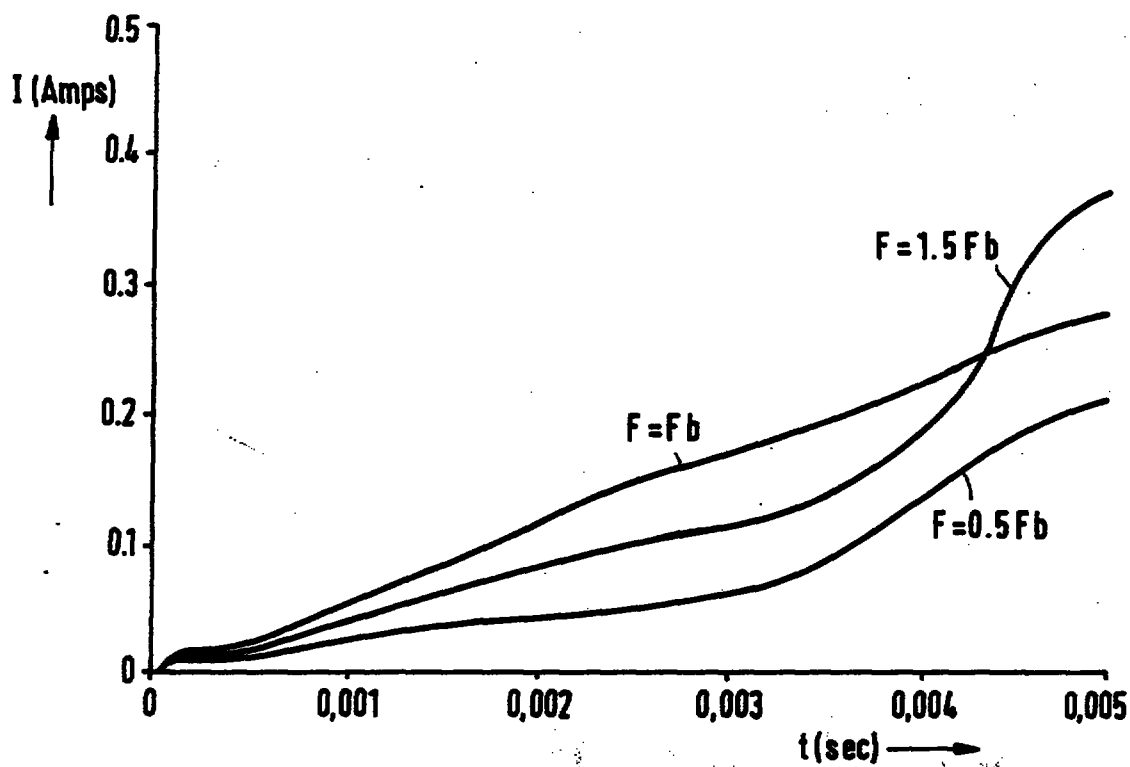


FIG. 3