



(51) International Patent Classification:

E04G 11/48 (2006.01) *E04G 19/00* (2006.01)
E04G 11/54 (2006.01)

(21) International Application Number:

PCT/AU2008/001792

(22) International Filing Date:

4 December 2008 (04.12.2008)

(25) Filing Language:

English

(26) Publication Language:

English

(72) Inventor; and

(71) Applicant : ROSATI, Wasyl [AU/AU]; 12 Chorley Avenue, Cheltenham, NSW 2119 (AU).

(74) Agent: MADDERN; First Floor, 64 Hindmarsh Square, Adelaide, South Australia 5000 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ,

EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A MEANS OF STRIPPING CONCRETE FORMWORK FROM A CONCRETE SURFACE

Fig 3

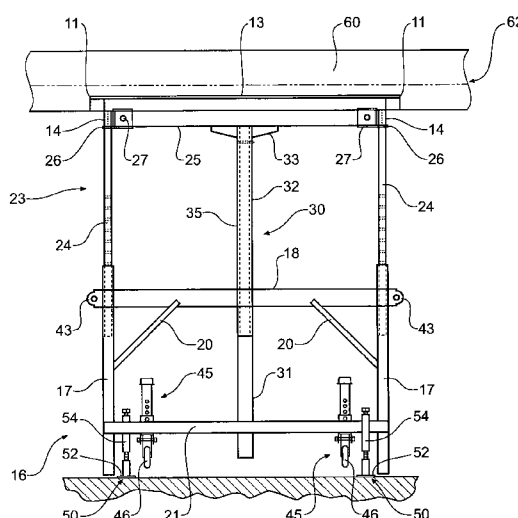

(57) Abstract: This disclosure relates to a frame for use with formwork to support the formwork for concrete casting and for stripping formwork from a concrete surface. The formwork is secured to the frame assembly such that the level at which the formwork is supported by the framework is adjustable so as to be movable between at least a first level above a floor surface selected for concrete casting, and a second level where the formwork is either away from the cured concrete (i.e. stripped) or unsupported by the frame assembly. The disclosure provides a means of both supporting formwork during concrete casting as well as a means of stripping the formwork after the concrete is cast. An associated method is also disclosed.