


FIG.1

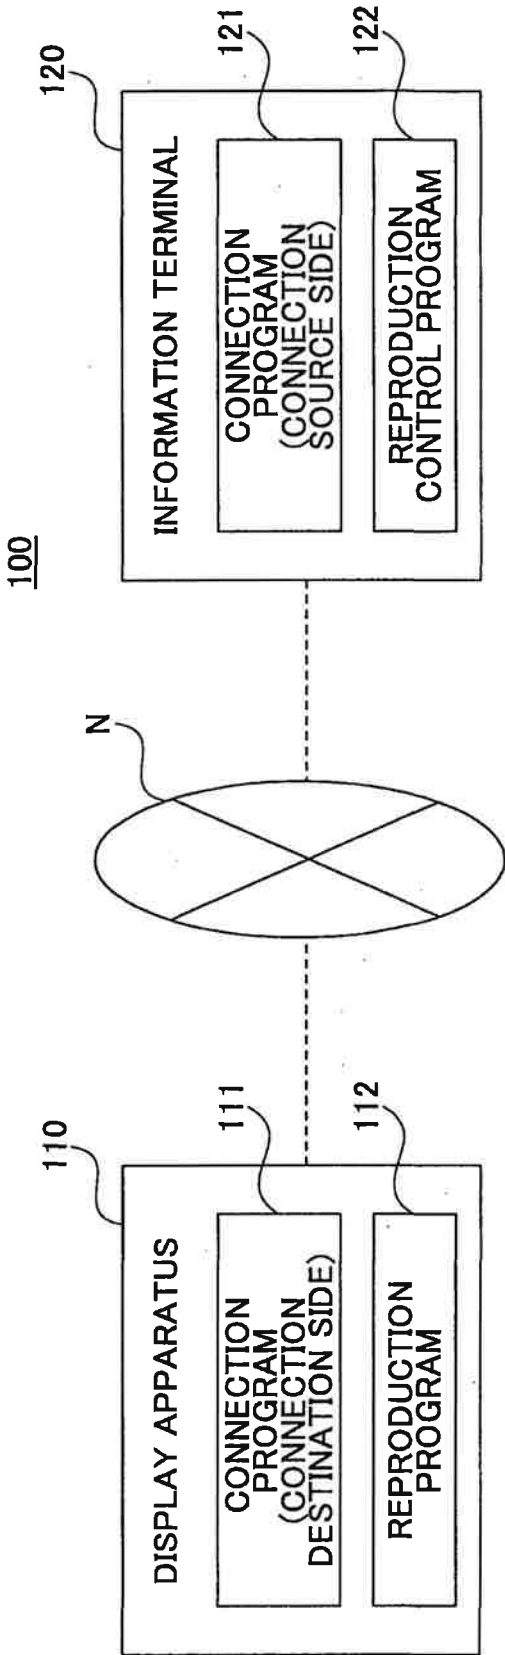

100

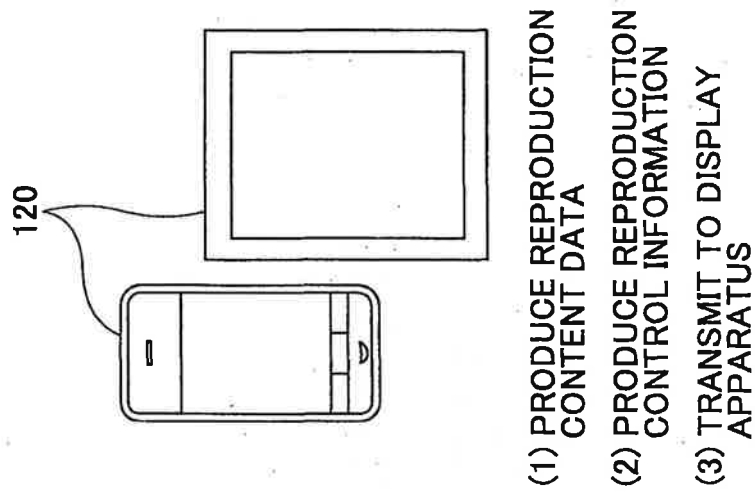
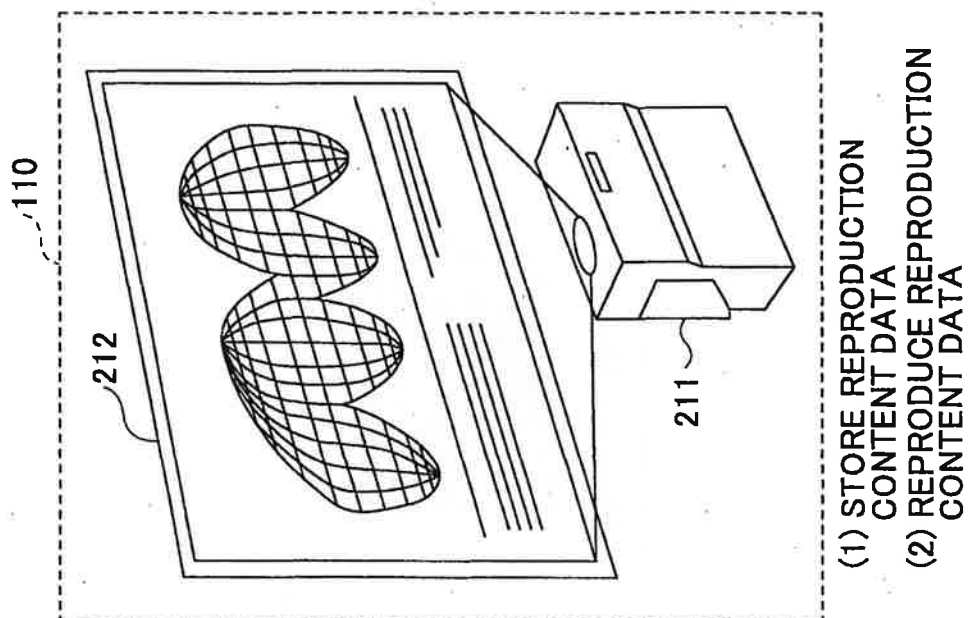


FIG.2

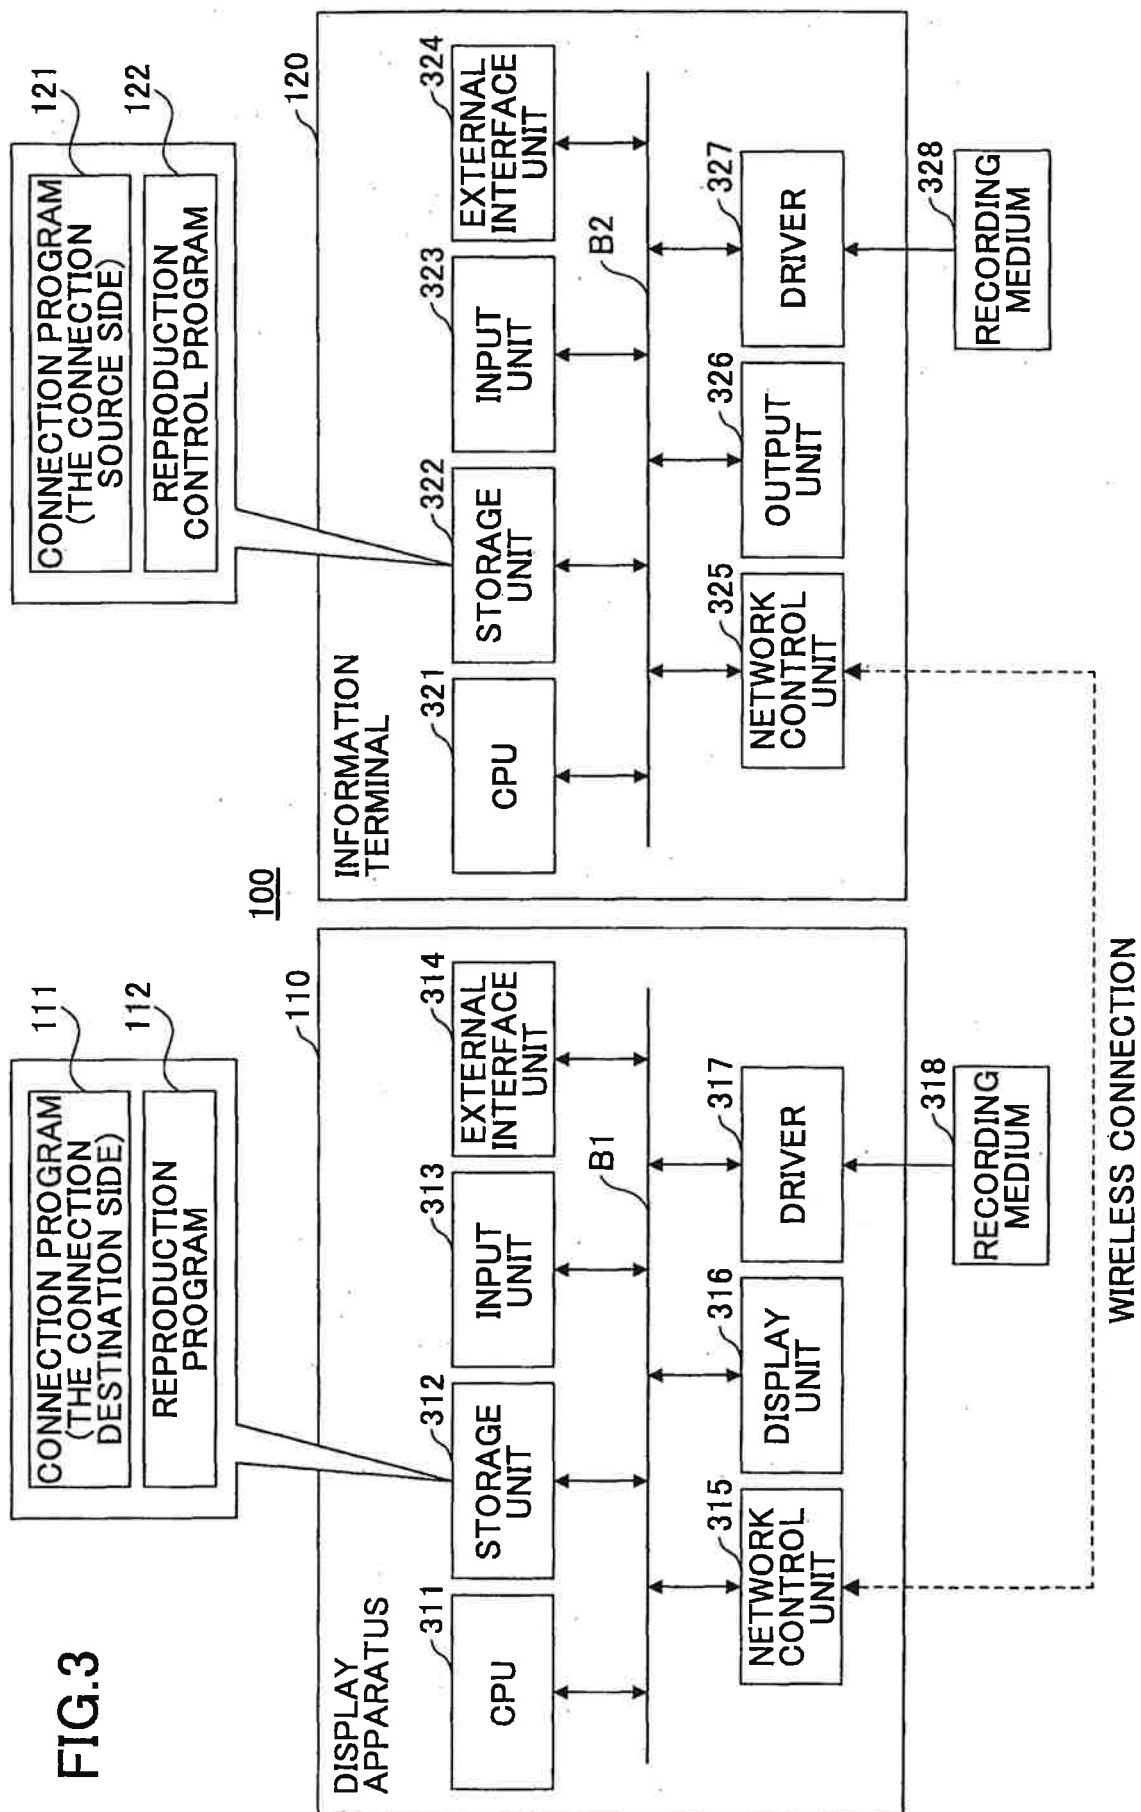


FIG.4A

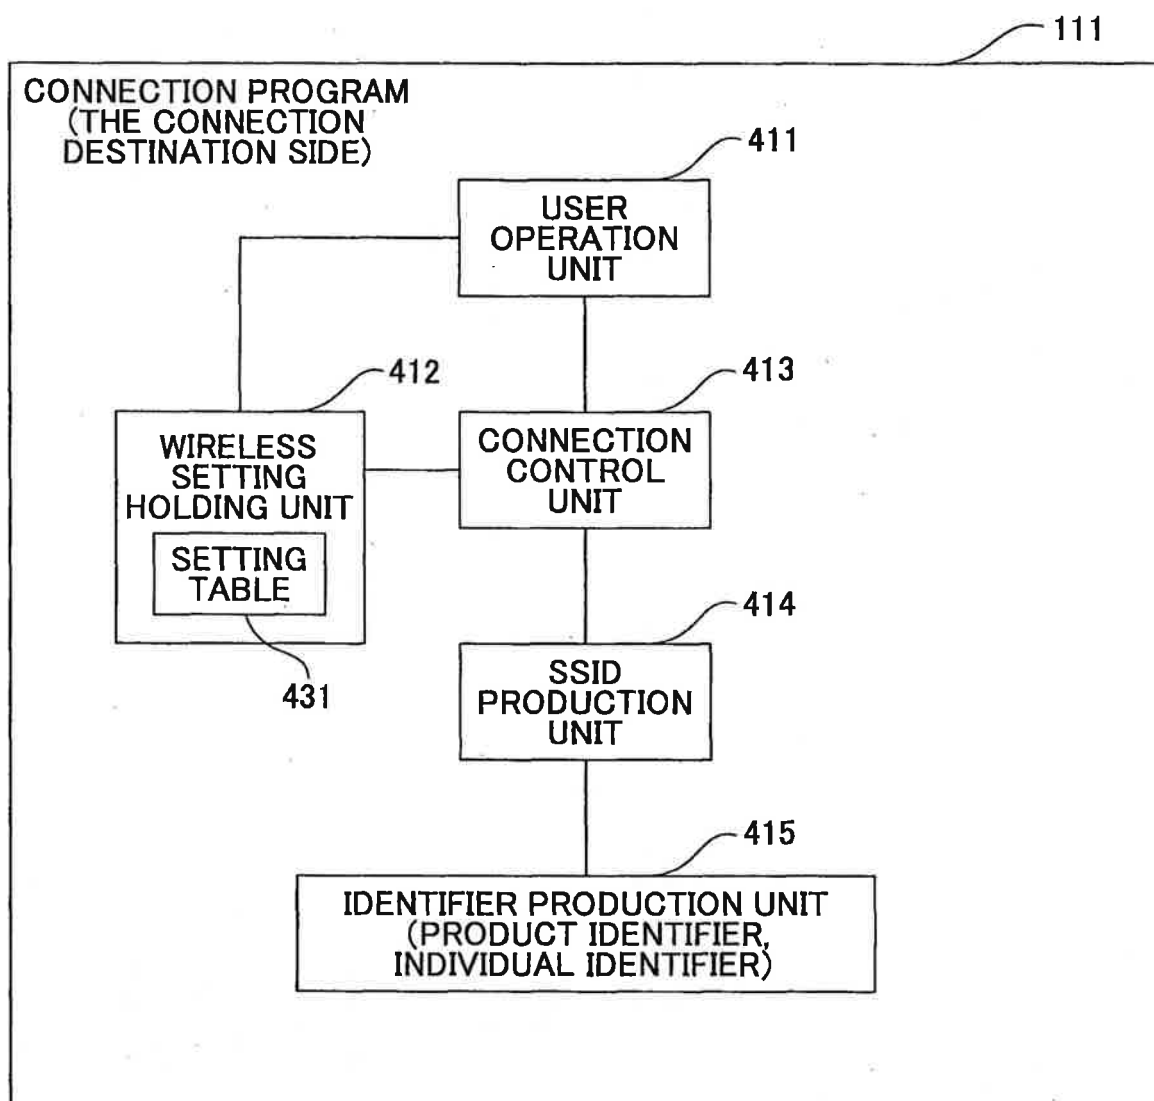


FIG.4B

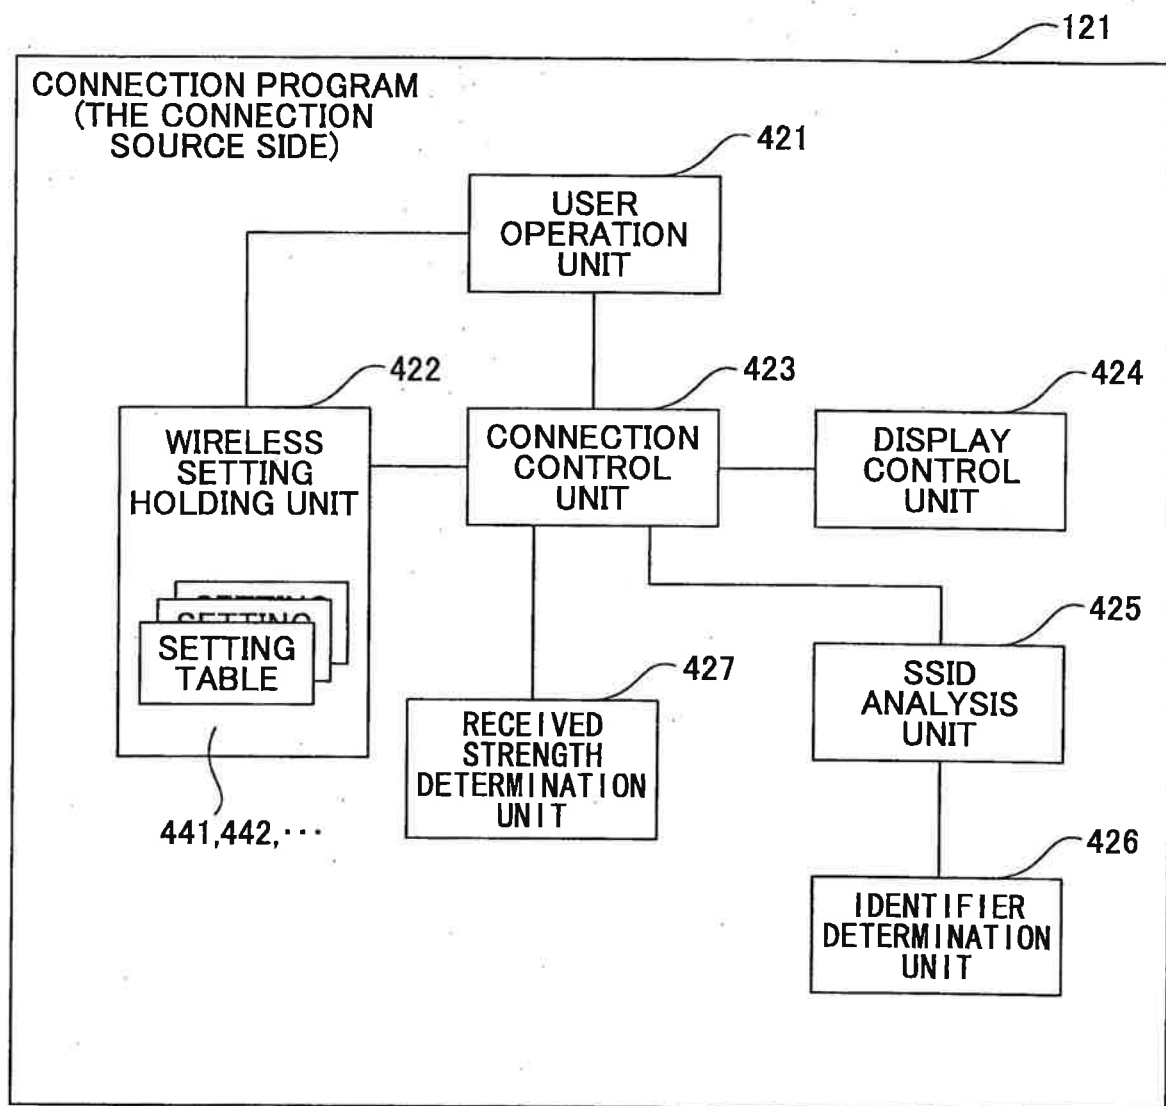


FIG.5

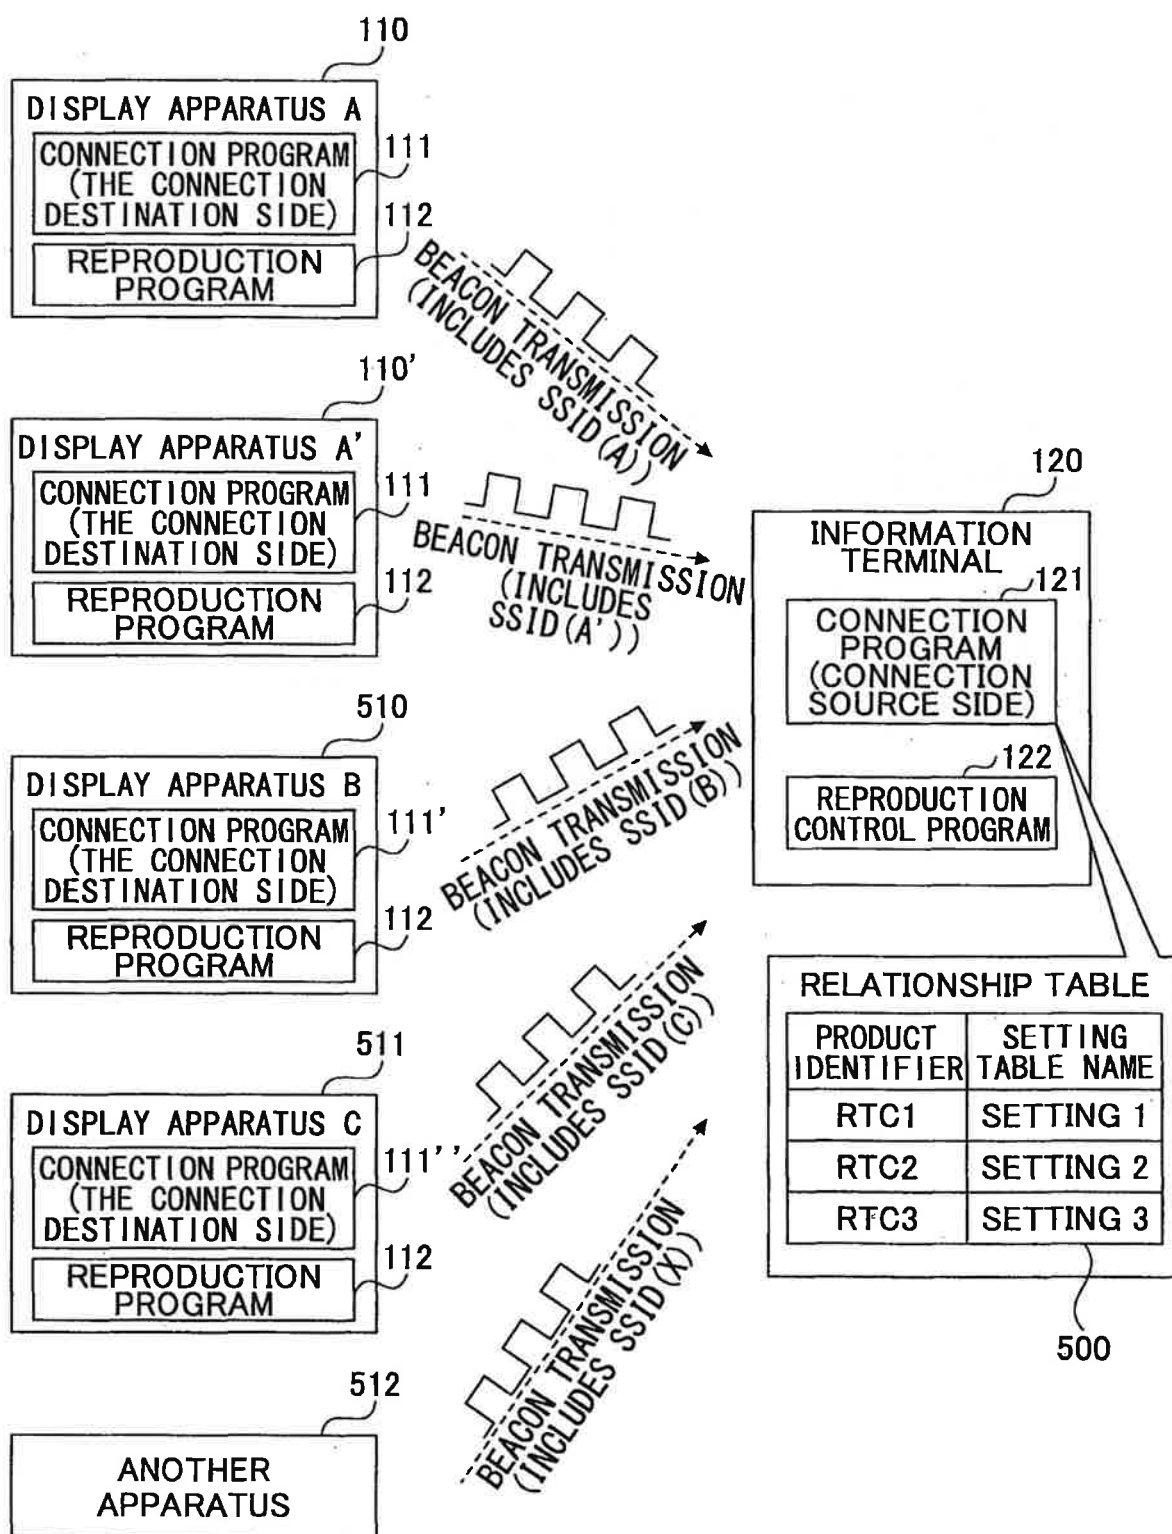


FIG.6

BYTE NUMBER	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
	SSID	R	T	C	1	A	0	0	1	1	1	1	0	W	i	r	e	l	e	s	s	D	e	v	i	c	e	A				
(a)																																
BYTE NUMBER	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
	SSID	R	T	C	1	A	0	0	1	1	1	1	1	W	i	r	e	l	e	s	s	D	e	v	i	c	e	A				
(b)																																
BYTE NUMBER	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
	SSID	R	T	C	2	A	0	0	1	1	1	1	1	W	i	r	e	l	e	s	s	D	e	v	i	c	e	B				
(c)																																
BYTE NUMBER	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
	SSID	R	T	C	3	A	0	1	1	1	1	1	1	W	i	r	e	l	e	s	s	D	e	v	i	c	e	C				
(d)																																
BYTE NUMBER	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
	SSID	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X				
(e)																																

PRODUCT IDENTIFIER

INDIVIDUAL IDENTIFIER

APPARATUS NAME FOR DISPLAY

FIG.7A

	SETTING 1
COMMUNICATION MODE	AD-HOC
AUTHENTICATION SCHEME	OPEN SYSTEM
ENCRYPTION SCHEME	WEP(Pass:XXX)
FREQUENCY CHANNEL	11
TRANSMISSION STANDARD	IEEE802.11n
COMMUNICATION PROTOCOL	IPv4
IPv4 ADDRESS OF WIRELESS APPARATUS TO BE CONNECTED	169.254.1.1
IPv4 SUBNET MASK ADDRESS	255.255.0.0

FIG.7B

	SETTING 2
COMMUNICATION MODE	SOFT AP MODE
AUTHENTICATION SCHEME	OPEN SYSTEM
ENCRYPTION SCHEME	WPA(Pass:XXX)
FREQUENCY CHANNEL	13
TRANSMISSION STANDARD	IEEE802.11n
COMMUNICATION PROTOCOL	IPv4
IPv4 ADDRESS OF WIRELESS APPARATUS TO BE CONNECTED	169.254.1.1
IPv4 SUBNET MASK ADDRESS	255.255.0.0

FIG.7C

	SETTING 3
COMMUNICATION MODE	AD-HOC
AUTHENTICATION SCHEME	OPEN SYSTEM
ENCRYPTION SCHEME	WPA(Pass:XXX)
FREQUENCY CHANNEL	11
TRANSMISSION STANDARD	IEEE802.11n
COMMUNICATION PROTOCOL	IPv6
IPv6 ADDRESS OF WIRELESS APPARATUS TO BE CONNECTED	2001:0db8:bd05:01d2:288a:1fc0:0001:10ee
IPv6 PREFIX	2001:0db8:bd05:01d2

FIG.8

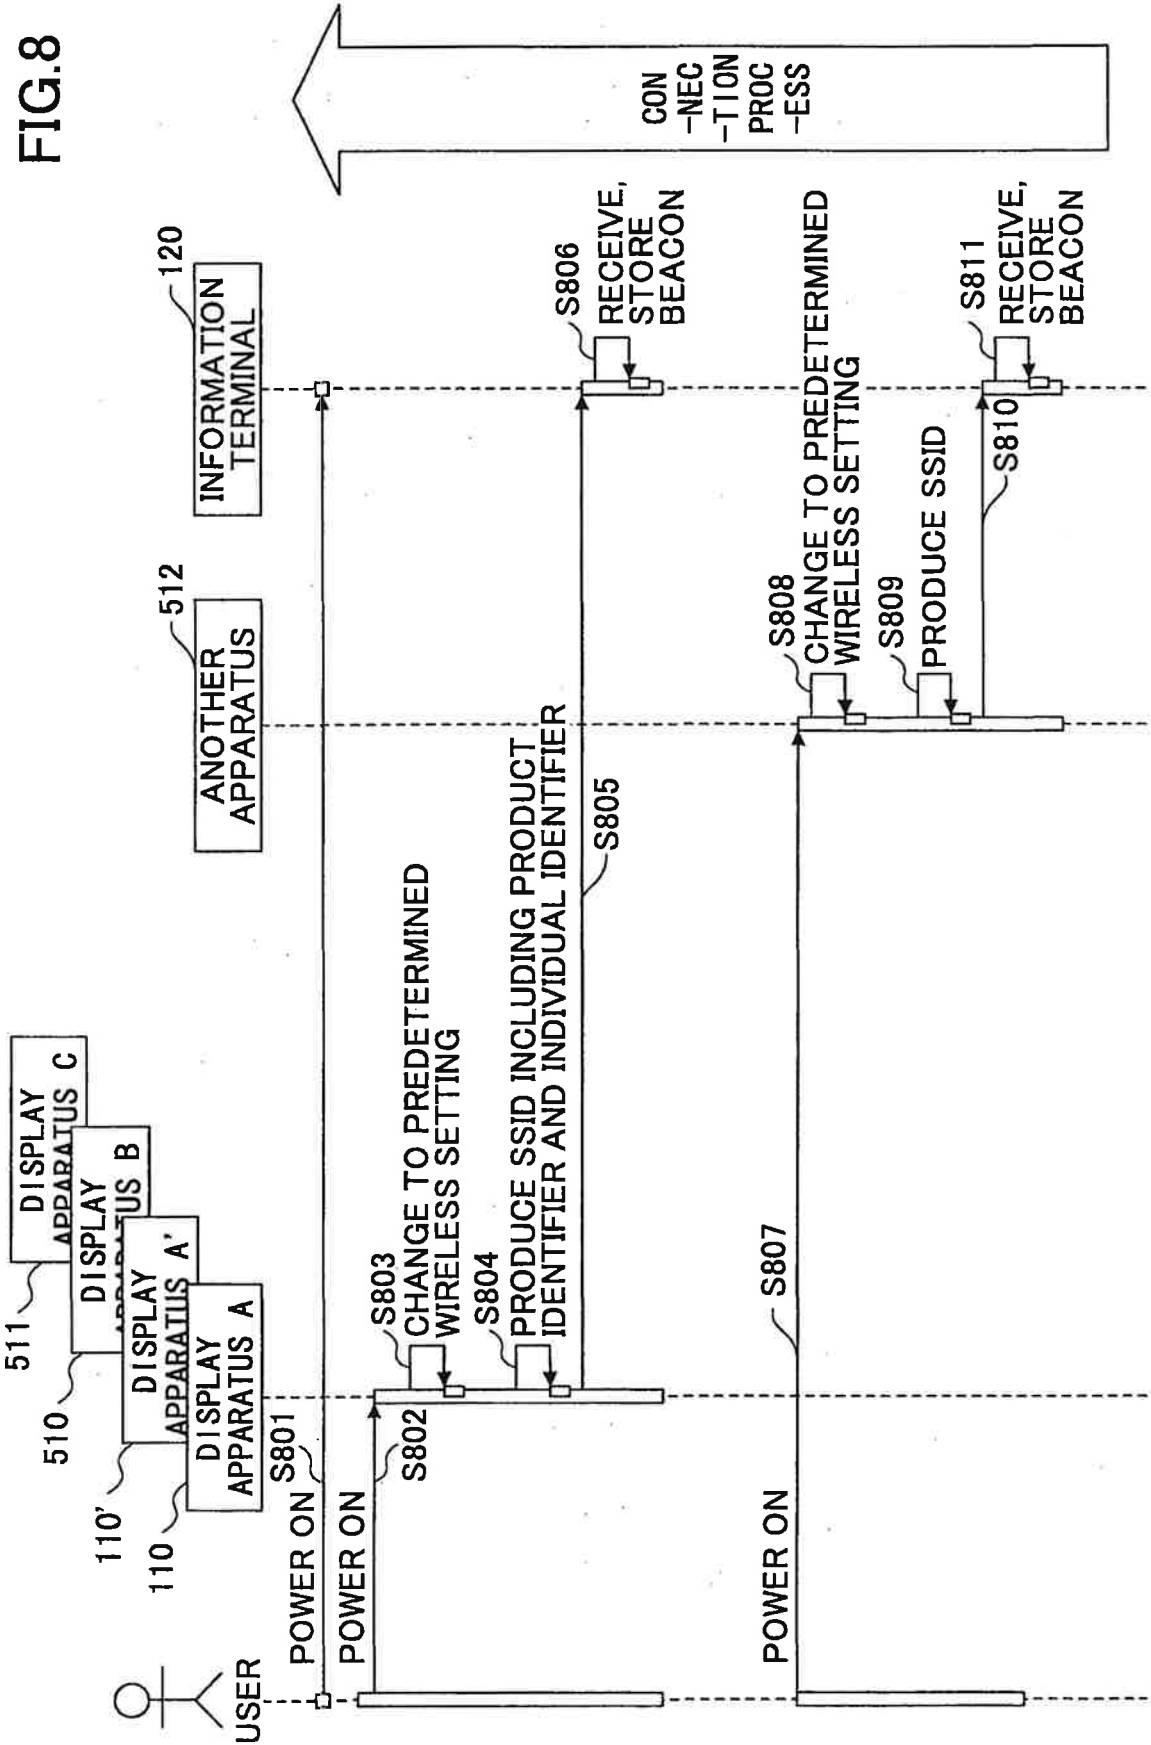


FIG.9

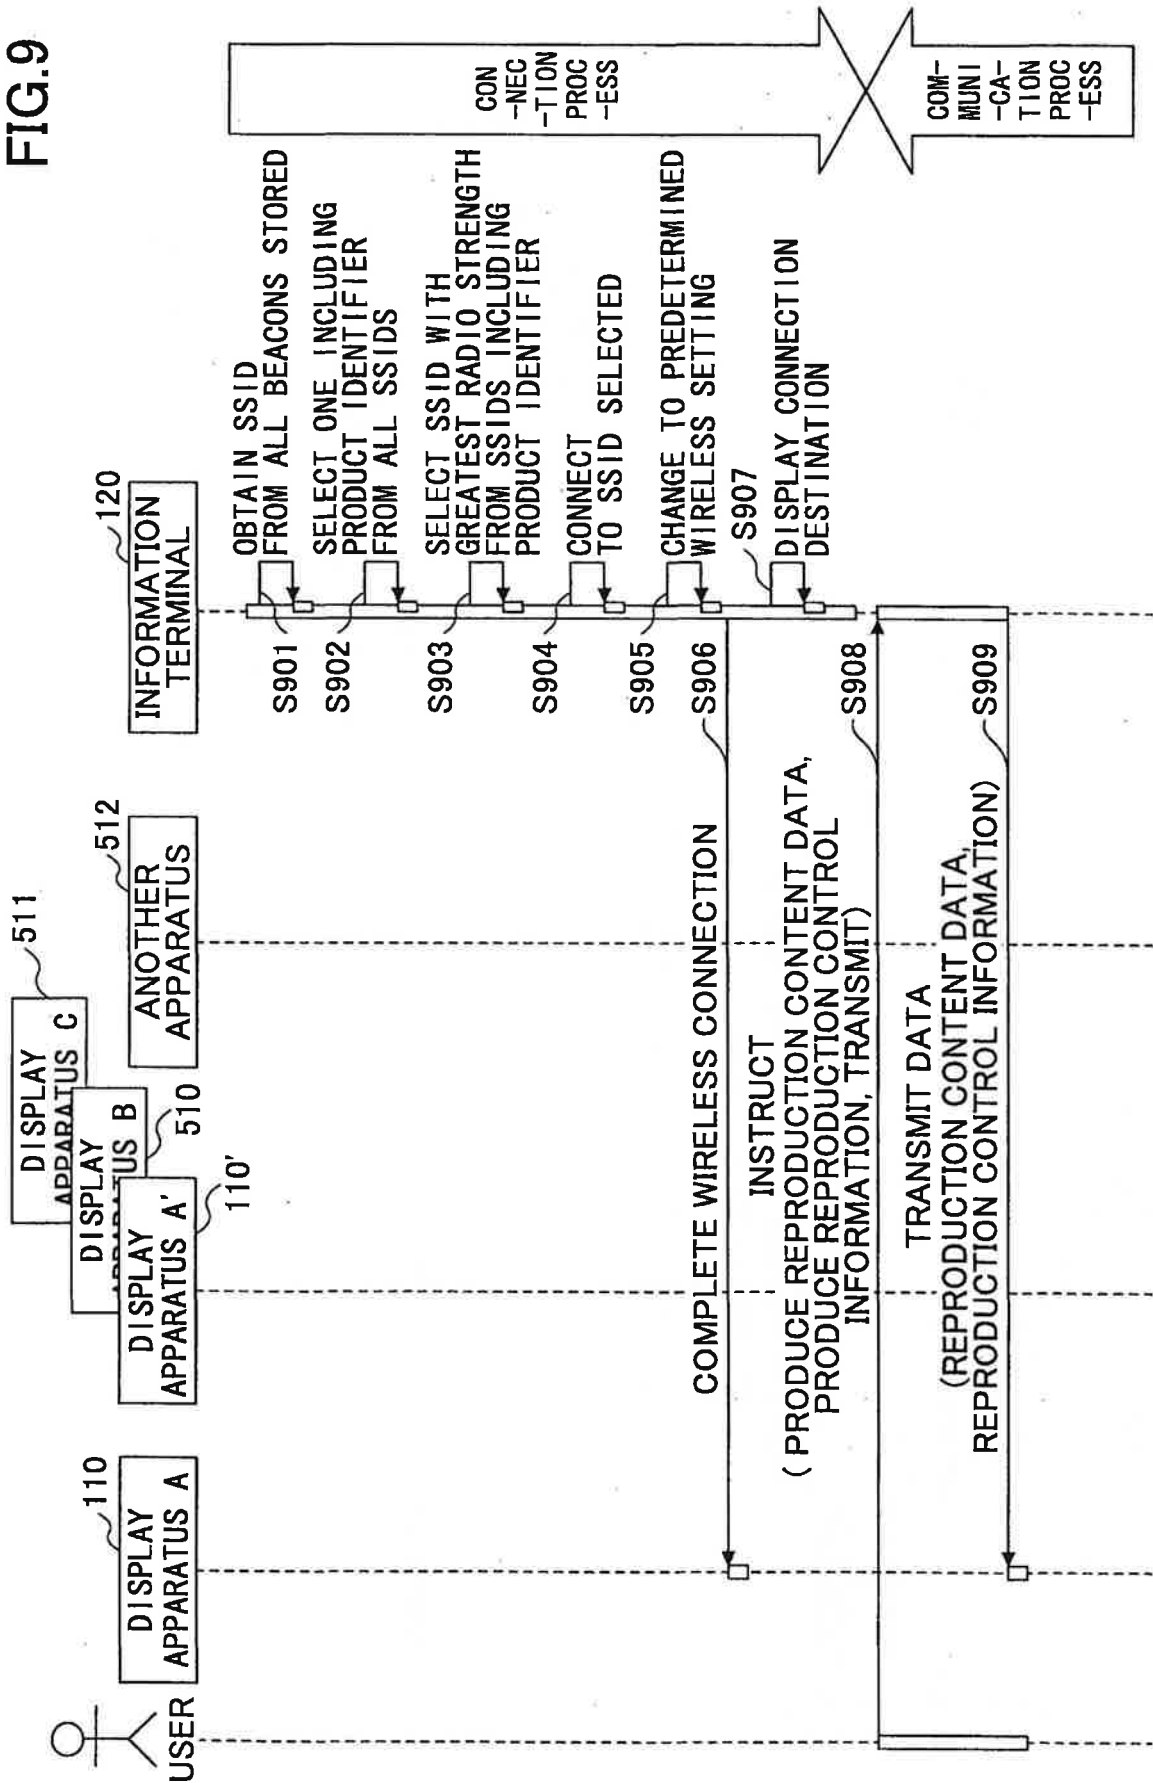


FIG.10

NETWORK NAME	SETTING TABLE	RECEIVED STRENGTH
SSID(A)	SETTING 1	○○dB
SSID(A')	SETTING 1	△△dB
SSID(B)	SETTING 2	□□dB
SSID(C)	SETTING 3	× × dB

12/17

FIG.11

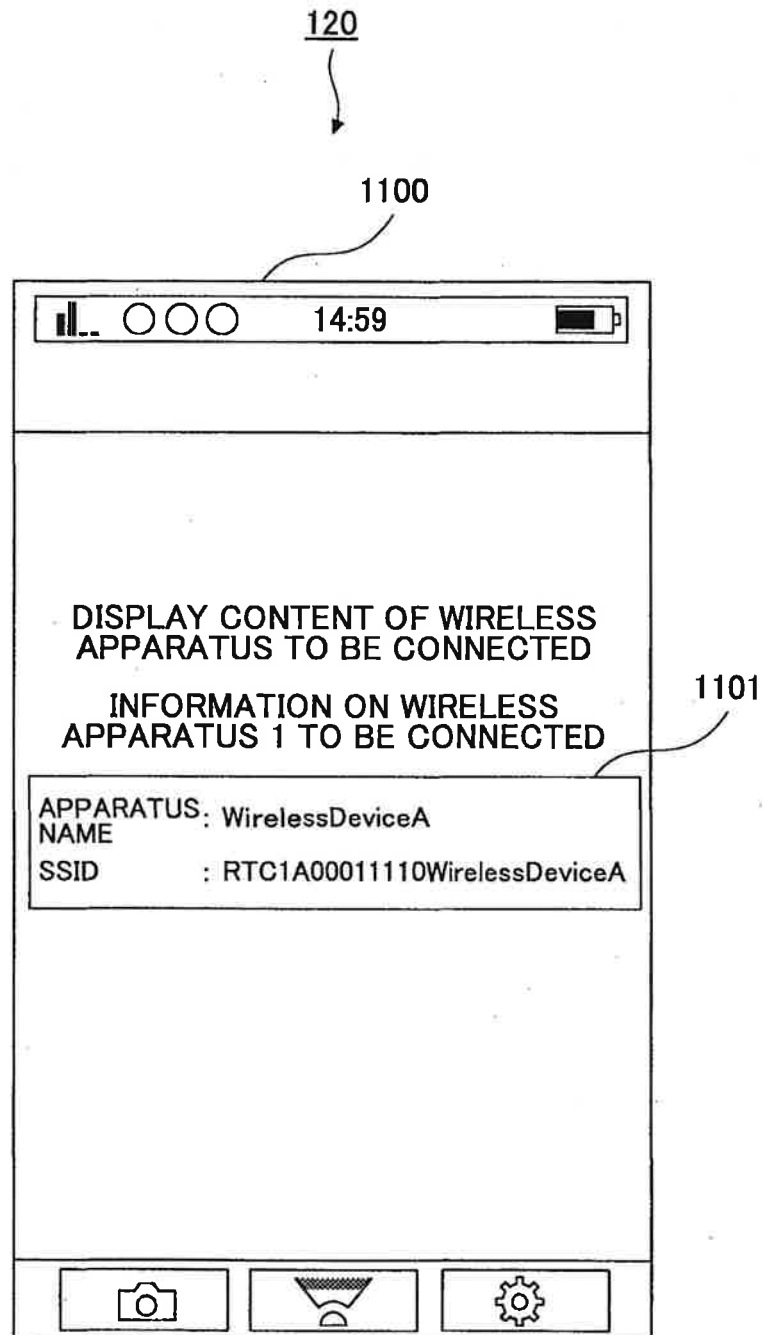


FIG.12

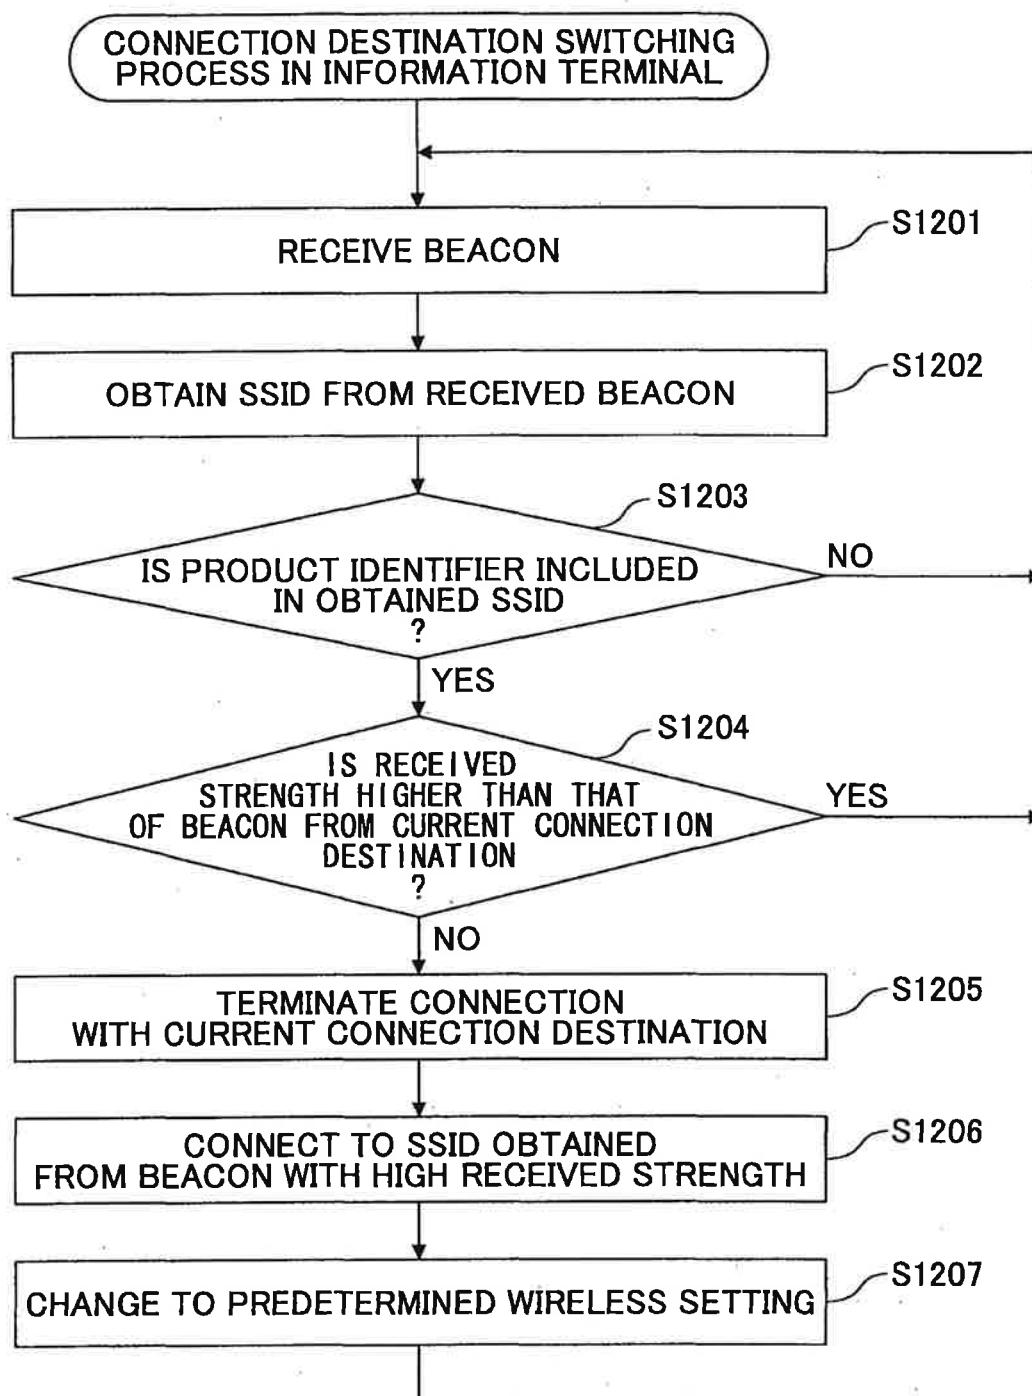


FIG.13

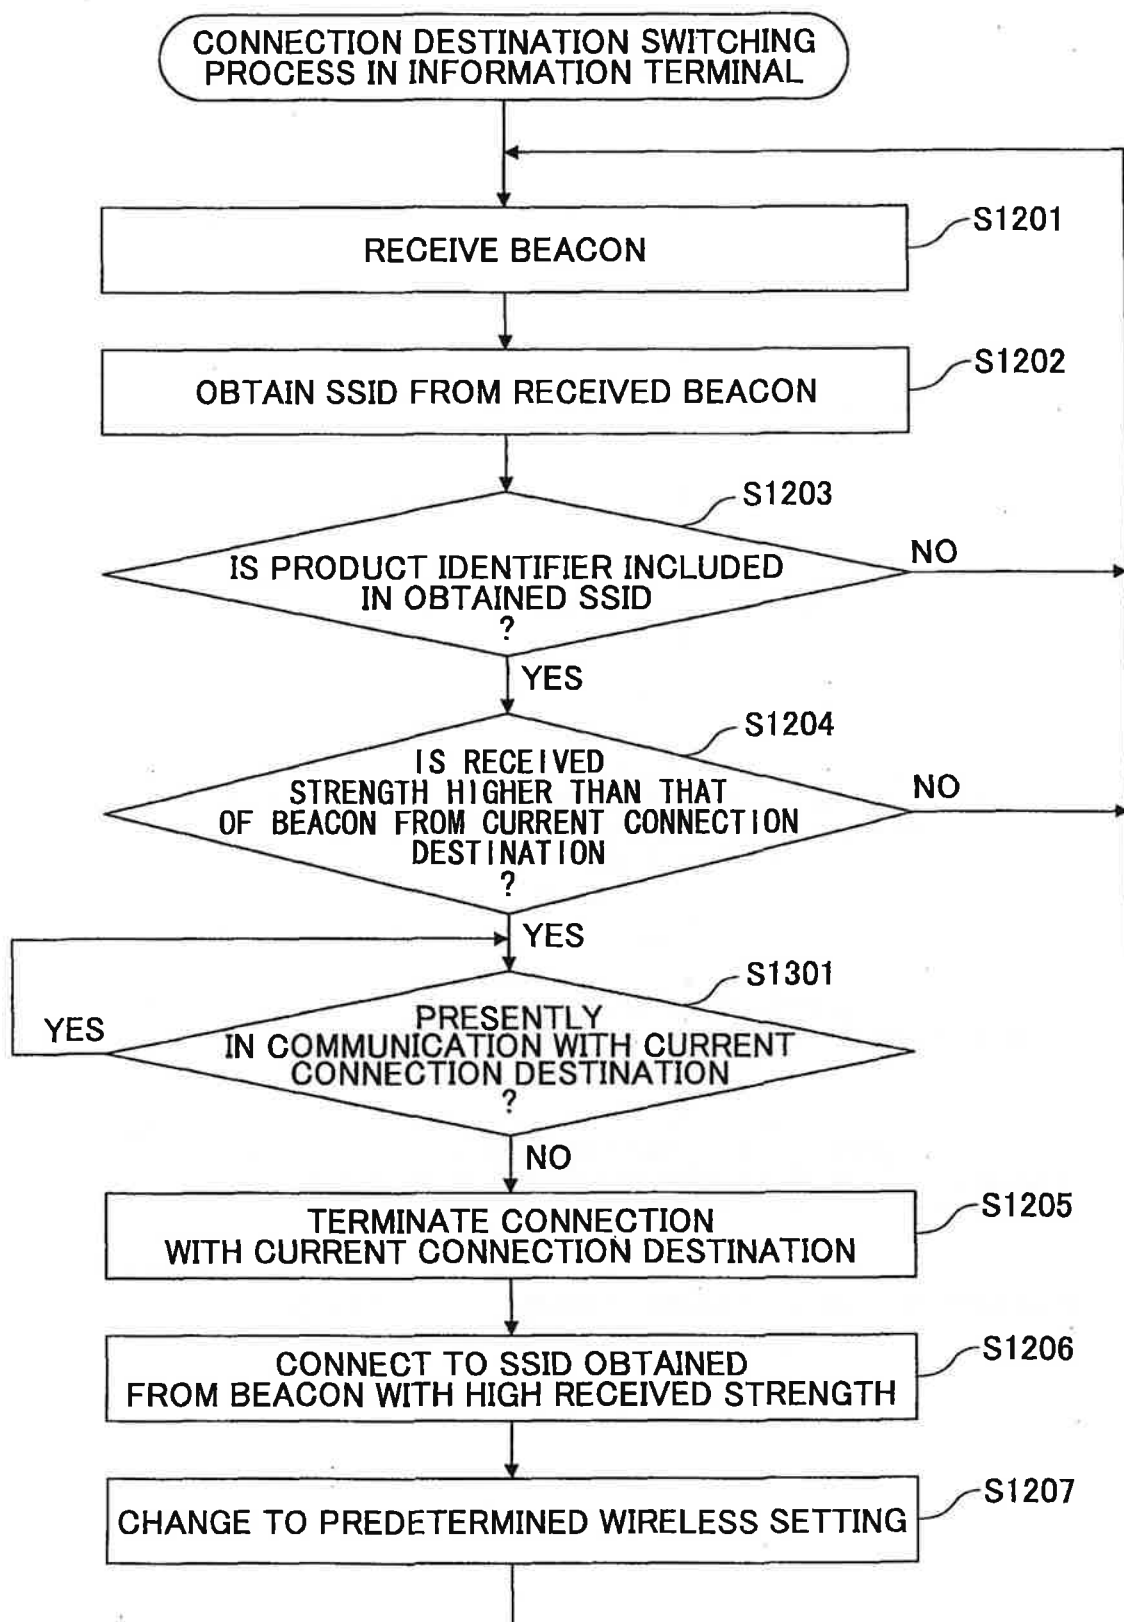


FIG.14

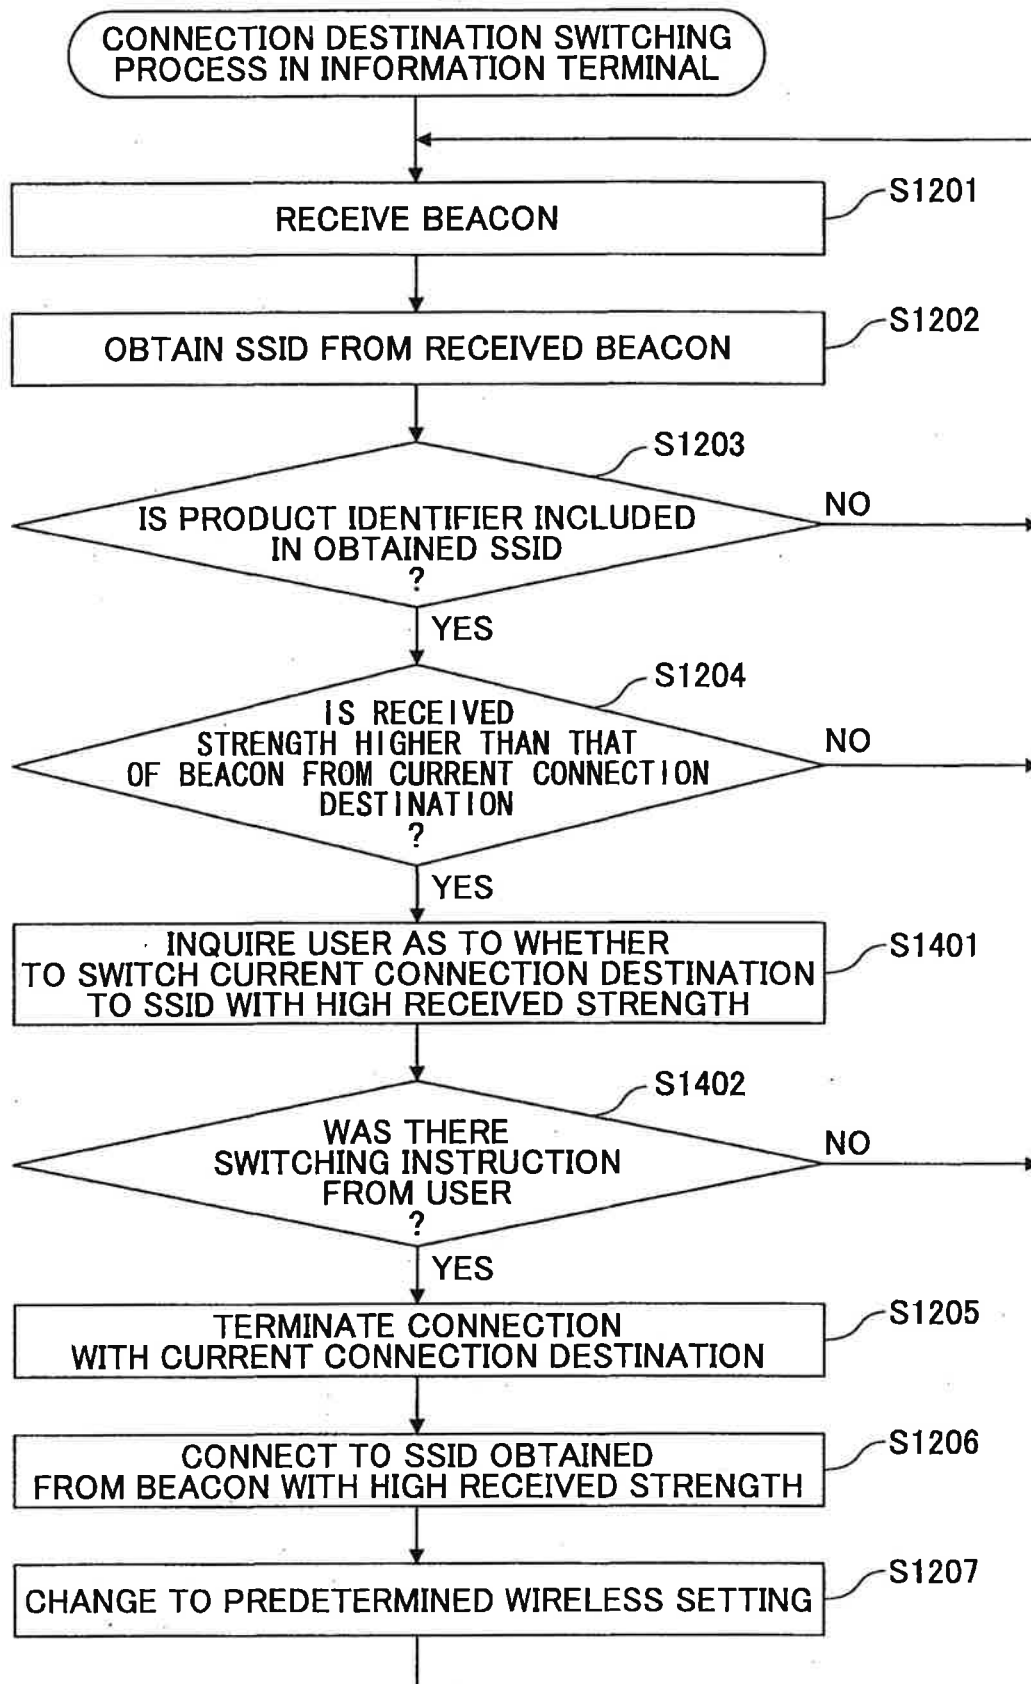


FIG.15

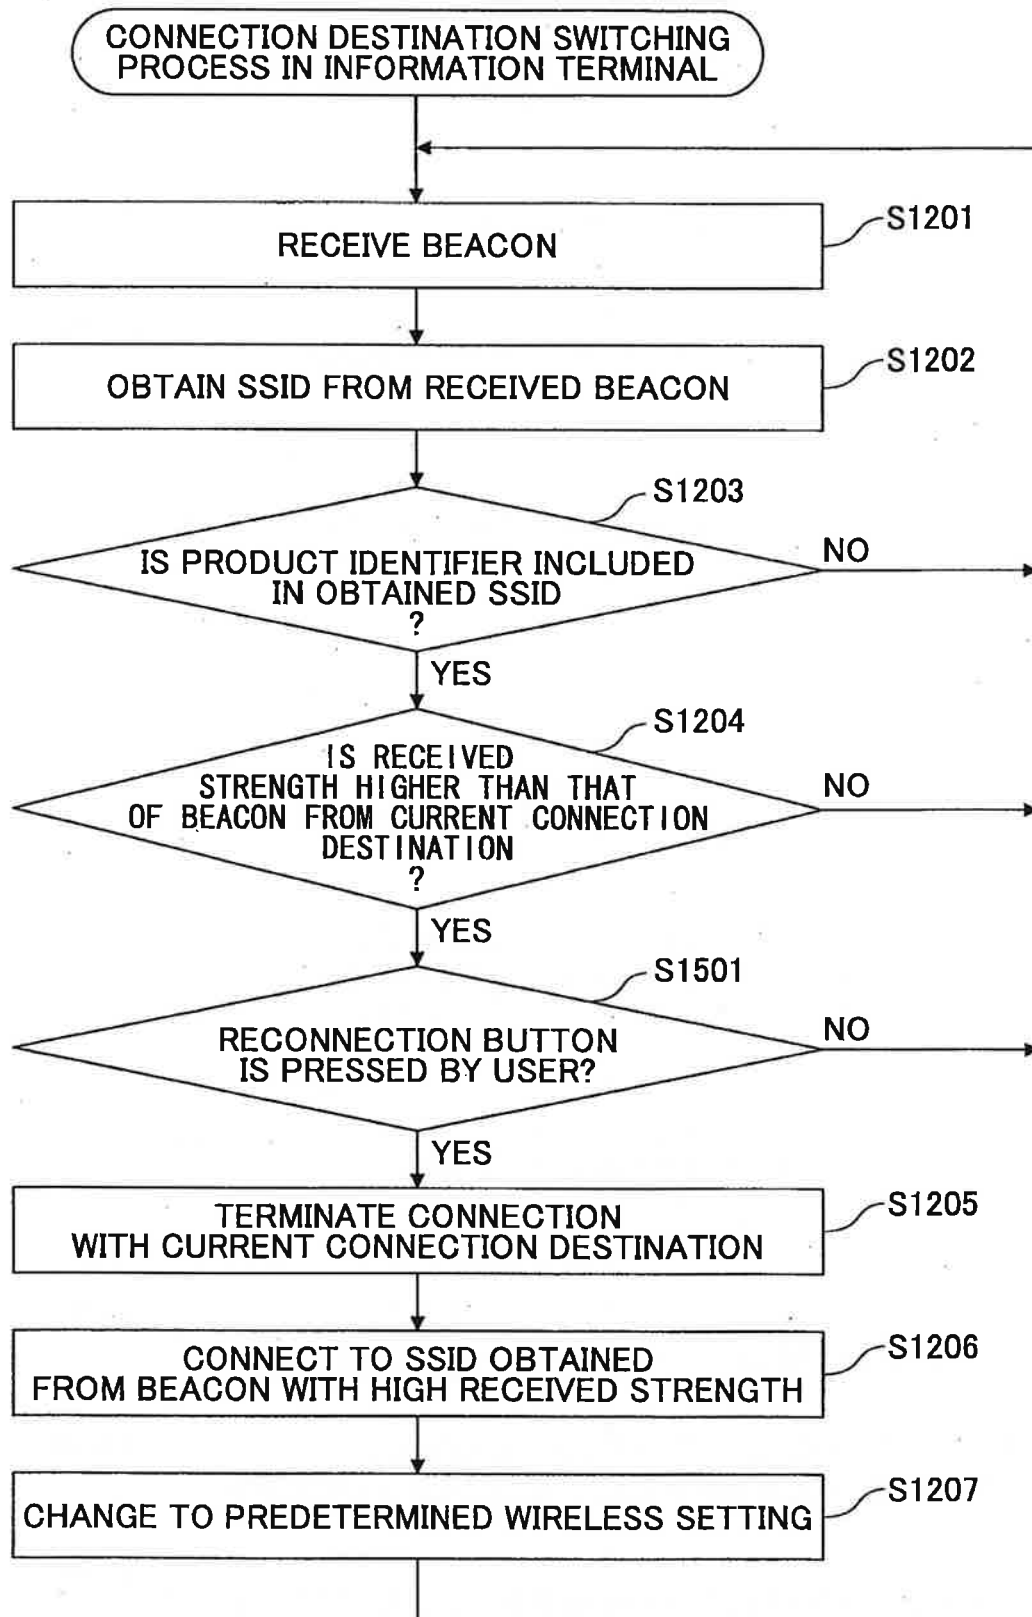


FIG.16A

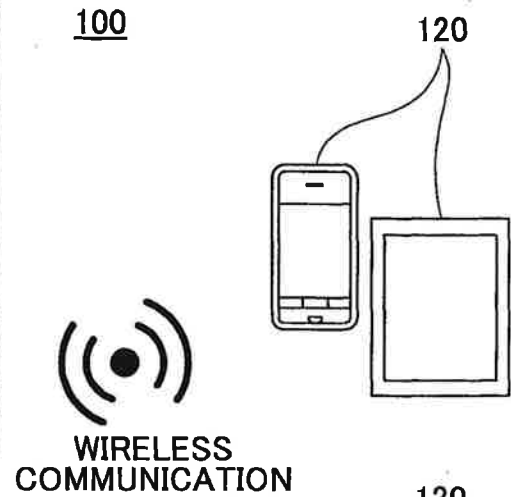
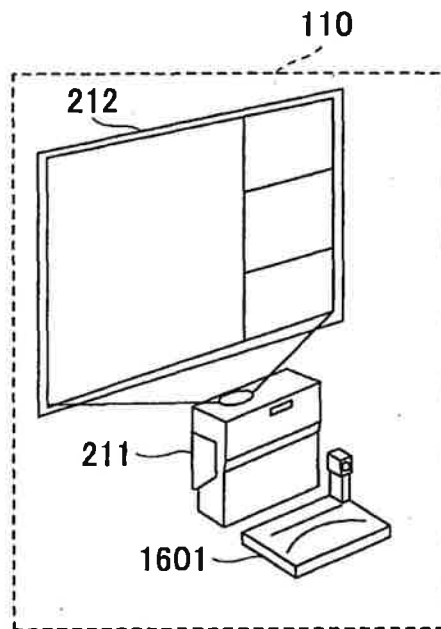


FIG.16B


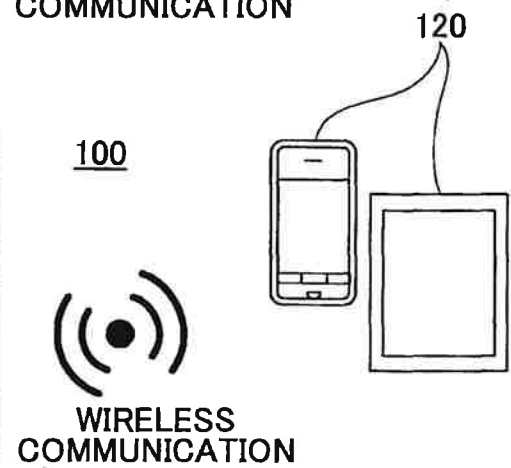


FIG.16C

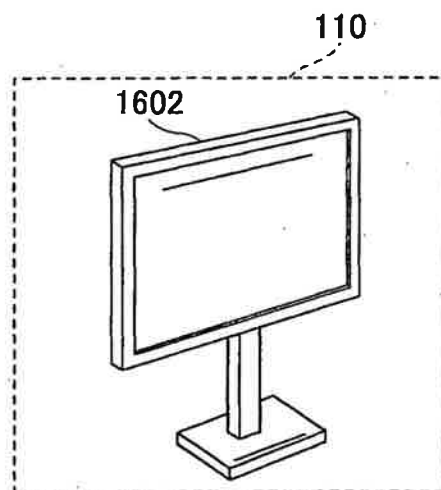