



(51) International Patent Classification:

C01B 3/04 (2006.01) C01B 3/56 (2006.01)
B01D 53/047 (2006.01) F25B 1/10 (2006.01)
B01D 53/22 (2006.01)

(21) International Application Number:

PCT/US2021/038000

(22) International Filing Date:

18 June 2021 (18.06.2021)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: AIR PRODUCTS AND CHEMICALS, INC.
[US/US]; 1940 Air Products Blvd., Allentown, PA 18106
(US).

(72) Inventors: SHAW, Andrew; 7201 Hamilton Boulevard,
Allentown, PA 18195 (US). SALOWAY, Simon, Craig;
7201 Hamilton Boulevard, Allentown, PA 18195 (US).
WHITE, Vincent; 7201 Hamilton Boulevard, Allentown,
PA 18195 (US).

(74) Agent: NEAGLE, Damon, A.; Design IP, P.C., 1575 Pond
Road, Suite 201, Allentown, PA 18104 (US).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,
SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every


kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

(54) Title: AMMONIA CRACKING PROCESS

Figure 6

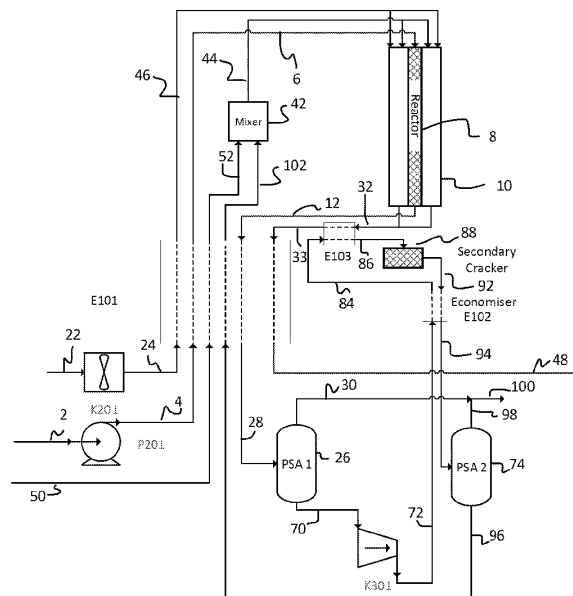

(57) Abstract: Ammonia cracking process in which cracked gas is purified in a PSA system are improved by converting residual ammonia in the first cracked gas into further hydrogen and nitrogen by feeding PSA tail gas, or a gas derived therefrom, to a secondary cracking reactor and further processing the second cracked gas.

[Continued on next page]

Published:

— with international search report (Art. 21(3))