Method and apparatus for recording a binary signal onto a record carrier.

The invention relates to a method of recording a binary signal onto a magnetic record carrier, the method comprises the steps of:

(a) receiving the binary signal, the binary signal comprising bits of a first polarity and bits of a second polarity, the second polarity being opposite to the first polarity,

(b) writing bits of the first and the second polarity onto the record carrier, and relates to an apparatus for recording the binary signal onto the record carrier. A method and apparatus as defined above is known from JP Kokai 57-181,420.

In the known method, a binary signal is recorded by generating write pulses at the location of leading and trailing edges of the binary signal, in order to decrease recording current and to avoid a too large current consumption and thus an overheating of the write head.

The invention aims at improving the writing of a binary signal. The method in accordance with the invention is characterized in that the writing step comprises the step of generating at least two write pulses for each bit to be written, and that, when writing a first sequence of at least two bits of the first polarity followed by a second sequence of at least two bits of the second polarity, the writing step comprising the substeps of

(i) generating at least two write pulses of a third polarity for the first bit of the first polarity in the first sequence,

(ii) generating a write pulse of the third polarity and a write pulse of a fourth polarity for the at least second bit of the first polarity occurring in the first sequence, the third polarity being opposite to the fourth polarity,

(iii) generating at least two write pulses of the fourth polarity for the first bit of the second polarity in the second sequence,

(iv) generating a write pulse of the third polarity and a write pulse of the fourth polarity for the at least second bit of the second polarity occurring in the second sequence.

The invention is based on the following recognition.

First, a write equalization is carried out during recording of a binary signal. More specifi-

cally, when writing a second or further bit of the first polarity (a '1' bit) in a sequence of bits of the first polarity to be written on the record carrier, a first write pulse of the second polarity (a negative write pulse) is generated, followed by a write pulse of the first polarity (a positive write pulse). In an identical way, when writing a second or further bit of the second polarity (a '0' bit) in a sequence of bits of the second polarity to be written on the record carrier, a first write pulse of the first polarity (a positive write pulse) is generated, followed by a write pulse of the second polarity (a negative write pulse). This results in a lower low frequency content of the signal written in the record carrier. Further, equalization during reproduction becomes easier.

As a second measure, when writing the first bit of the first polarity (a '1' bit) in the sequence of bits of the first polarity to be written on the record carrier, two write pulses of the first polarity (two positive write pulses) are generated. In an identical way, when writing the first bit of the second polarity (a '0' bit) in the sequence of bits of the second polarity to be written on the record carrier, two write pulses of the second polarity (two negative write pulses) are generated. Further, when single bits of the first polarity directly surrounded by bits of the second polarity should be written, normally, only one write pulse of the first polarity is generated for each bit of the first polarity. In accordance with the present invention, however, two write pulses of the first polarity (two positive write pulses) are generated. Moreover, when single bits of the second polarity directly surrounded by bits of the first polarity should be written, normally, only one write pulse of the second polarity is generated for each bit of the second polarity. In accordance with the invention, however, two write pulses of the second polarity (two negative write pulses) are generated. The reason for this is the following.

Suppose a long sequence of bits of the first polarity. As has been explained above, for the second and further bits in the sequence to be written, two pulses of opposite polarity are generated for each bit. In a long sequence of subsequent bits of opposite polarity (...0101010...), in accordance with the prior art, only one write pulse need to be generated for each bit. As a result, there is a large difference in dissipation, as for the long sequence of bits of the first polarity a writing power of a factor of 2 higher is needed than for the long sequence of subsequent bits of opposite polarity. Those variations in dissipation, in dependence of the signal to be written, results in a thermical crosstalk between the write head and a read head in a combined read-write head construction. Such read-write head construction can be used to realize a read-while-write or a read-after-write function, or to realize a tracking function. The variations in dissipation result in a distortion component in the signal read out

by the read head, so that read-after-write, read-while-write or tracking functions less properly.

By generating two write pulses of the same polarity for the first bit of the first polarity in the sequence of bits of the first polarity and for each bit in a sequence of bits of subsequently opposite polarity, the power dissipation remains substantially the same, resulting in practically no distortion in the signal read out.

These and other aspects of the invention will be apparent from and elucidated with reference to embodiments described hereafter. In the following figure description shows

figure 1 an embodiment of the method of recording a binary signal,

figure 2 the method of recording another binary signal,

figure 3 an embodiment of the recording apparatus

The signal (a) in figure 1 is a clock signal applied to a writing apparatus in accordance with the invention and to be described hereafter. (b) in figure 1 is an example of a binary signal that should be written on a record carrier. (c) in figure 1 is the write current with which the binary signal will be written on the record carrier. (d) of figure 1 is the mangetic pattern in a track on a record carrier in which the binary signal as given in (b) of figure 1 has been written. The binary signal in (b) of figure 1 has a sequence of bits .... 1 1 1 0 1 .... The bit directly preceding the first '1' bit in (b) of figure 1 was a '0' bit. This can be concluded from the fact that the magnetisation prior to the first pulse in the time interval (t_0,t_1) is given by minus-signs, see (d) in figure 1.

The first '1'-bit in the sequence of three consecutive '1'-bits shown in (b) of figure 1 results in the generation of two positive pulses P_1 and P_2 in the time interval (t_0,t_1). The subsequent '1'-pulse leads to a negative pulse P_3 followed by a positive pulse P_4 in the time interval (t_1,t_2). The last '1'-pulse in the sequence leads again to a negative pulse P_5 followed by a positive pulse P_6 in the time interval (t_2,t_3). The subsequent '0'-pulse leads to two negative pulses P_7 and P_8 in the time interval (t_3,t_4). Next, comes a '1'-pulse which again results in the generation of two positive pulses P_9 and P_{10} in the time interval (t_4,t_5).

Prior to the occurrence of the write pulse P_1, the magnetisation is in the negative direction, as is shown in (d) of figure 1. Upon the occurrence of the pulse P_1, the direction of magnetisation changes into the positive direction. The second pulse P_2 does not influence the magnetisation pattern on the record carrier but the power dissipation in the

write head now remains substantially constant, as has been explained above.

The magnetisation direction reverses upon the occurrence of the pulse P_3 and reverses again upon the occurrence of the pulse P_4. This is the result of the write equalization described above in order to lower the low frequency contents of the signal written in the record carrier.

The magnetisation direction further reverses upon the occurrence of the pulse P_5 and reverses again upon the occurrence of the pulse P_6.

Upon the occurrence of the pulse P_7, the direction of magnetisation changes into the negative direction. The second pulse P_8 again does not influence the magnetisation pattern on the record carrier, but results in a smaller variation in power dissipation. The magnetisation direction changes again upon the occurrence of the pulse P_9.

It should be noted that the moment of occurrence of the pulse pairs (P_1,P_2), (P_7,P_8) and (P_9,P_{10}) in their corresponding time intervals (t_0,t_1), (t_3,t_4) and (t_4,t_5) respectively, are delayed compared to the moment of occurrence of the pulse pairs $P_3,P_4)$ and (P_5,P_6) in their corresponding time intervals (t_2,t_3) and (t_3,t_4) respectively. As an example, the rising edge of the pulse P_1 in figure 1 concurs with the rising edge of the third clock pulse in the time interval (t_0,t_1), whereas the falling edge of the pulse P_3 concurs with the rising edge of the second clock pulse in the time interval (t_1,t_2).

More specifically, the rising edge of the pulse P_1 in the interval (t_0,t_1) occurs at a time instant in this time interval which lies exactly half way in between the moments of occurrence of the falling edge of the pulse P_3 and the rising edge of the pulse P_4 in the time interval (t_1,t_2). As a result, the short areas of negative magnetization A_1 and A_2 in (d) of figure 1, resulting from the negative pulses P_3 and P_5, lie symmetically between the large areas of negative magnetization A_3 and A_4.

The signal (b) in figure 2 is another example of a binary signal that could be written on a record carrier. (c) in figure 1 is the write current with which the binary signal will be written on the record carrier. (d) of figure 1 is the mangetic pattern in a track on a record carrier in which the binary signal as given in (b) of figure 1 has been written. The binary signal in (b) of figure 2 has a sequence of bits .... 0 0 0 1 0 .... The bit directly preceding the first '0' bit in (b) of figure 2 was a '1' bit. This can be concluded from the fact that the magnetisation prior to the first pulse in the time interval t_0,t_1 is given by plus-signs, see (d) in figure 2.

The first '0'-bit in the sequence of three consecutive '0'-bits shown in (b) of figure 2 results in the generation of two negative pulses P_1' and P_2' in the time interval t_0,t_1.

The subsequent '0'-pulse leads to a positive pulse P_3' followed by a negative pulse P_4' in the time interval t_1,t_2. The last '0'-pulse in the sequence leads again to a positive pulse P_5' followed by a negative pulse P_6' in the time interval t_2,t_3. The subsequent '1'-pulse leads to two positive pulses P_7' and P_8' in the time interval t_3,t_4. Next, comes a '0'-pulse which again results in the generation of two negative pulses P_9' and P_{10}' in the time interval t_4,t_5.

The magnetisation directions in the track on the record carrier behave as shown in (d) of figure 2 and need no further explanation.

It should again be noted that the moment of occurrence of the pulse pairs (P_1',P_2'), (P_7',P_8') and (P_9',P_{10}') in their corresponding time intervals (t_0,t_1), (t_3,t_4) and (t_4,t_5) respectively, are delayed compared to the moment of occurrence of the pulse pairs P_3',P_4') and (P_5',P_6') in their corresponding time intervals (t_2,t_3) and (t_3,t_4) respectively.

Figure 3 shows an embodiment of the recording apparatus. The apparatus has an input terminal 30 for receiving the binary signal. The binary signal could have been obtained by channel encoding an information signal. The binary signal thus can have the form of (b) of figure 1 or (b) of figure 2, where the binary signal is 'high' when being logic 'one', and 'low' when being logic 'zero'. The binary signal in (b) of figure 1 is thus 'high' during the time interval from $t=t_0$ to $t=t_3$, 'low' during the time interval (t_3,t_4) and again 'high' starting with the time instant t_4. The input terminal 30 is coupled to an input of a shift register 32 having two storage locations 32.1 and 32.2. A clock signal generator 34 is present having an output 36 for supplying the clock signal shown in (a) of the figures 1 and 2. This clock signal is supplied to a clock signal inputs of generators 38.1 to 38.4. Further, the output of the clock signal generator 34 is coupled, via a frequency divider 60, to a load input 62.1 of the storage location 32.1 and further via a delay 64 to the load input 62.2 of the storage location 32.2. The frequency division by the divider 60 is such that in each time interval (t_0,t_1), (t_1,t_2), (t_2,t_3), ... a load pulse is generated. Such load pulse could be generated at the time instants t_0, t_1, t_2, t_3, ... or eg. one clock pulse of the clock signal of (a) in the figures 1 and 2 later. Outputs 40.1 to 40.4 of the generators 38.1 to 38.4 respectively are coupled to respective inputs of a multiplexer 42. An output of the multiplexer 42 is coupled to an input of a write unit 44. The write unit 44 comprises at least one write head 43 for writing the binary signal on a magnetic record carrier 45. The magnetic record carrier can be in the form of a longitudinal record carrier on which tracks are written in the longitudinal direction of the record carrier, or in a slant direction on the record carrier.

Outputs of the storage locations 32.1 and 32.2 are coupled to inputs of an AND gate 46 and to inputs of a NOR gate 48. Further, the outputs of the storagr locations 32.1

and 32.2 are coupled to inputs of an AND gate 50 via an inverter 52 and to an AND gate 54 via an inverter 56. An output of the AND gate 46 is coupled to a trigger input 58.1 of the generator 38.1. An output of the NOR gate 48 is coupled to a trigger input 58.2 of the generator 38.2. An output of the AND gate 50 is coupled to a trigger input 58.3 of the generator 38.3. An output of the AND gate 54 is coupled to a trigger input 58.4 of the generator 38.4. Further, the outputs of the storage locations 32.1 and 32.2 are coupled to selection inputs of the multiplexer 42.

Assuming the time instant t_0 in figure 1, and that the '0'-bit preceding the '1'-bit of the time interval (t_0,t_1) is stored in the storage location 32.2. At the time instant t_0, a load pulse is supplied by the divider 60. Thus, the '0'-bit stored in the location 32.2 is stored in the location 32.1. A delayed load pulse is supplied to the storage location 32.2, so that the first '1'-bit is loaded in the storage location 32.2. As a result, a 'high' output signal is supplied by the AND gate 50 so that the generator 38.3 is triggered to generate the positive pulses P_1 and P_2 in response to the clock signal and further timing signals (not further shown), such as eg a delayed version of the output signal of the delay unit 64, so that only a pulse pair is generated after the contents of the storage locations have their correct bit values. The 2-bit word supplied to the selection inputs of the multiplexer 42 controls the multiplexer to select the output of the generator 38.3 so that two positive pulses are supplied to the write unit 44.

At the time instant t_1, another load pulse is supplied by the divider 60. Thus, the '1'-bit stored in the location 32.2 is shifted into the location 32.1. A delayed load pulse is supplied to the storage location 32.2, so that the second '1'-bit is loaded in the storage location 32.2. As a result, a 'high' output signal is supplied by the AND gate 46 so that the generator 38.1 is triggered to generate the pulse pair (P_3,P_4). The 2-bit word supplied to the selection inputs of the multiplexer 42 controls the multiplexer to select the output of the generator 38.1 so that the pulse pair (P_3,P_4) is supplied to the write unit 44. At the time instant t_2, another load pulse is supplied by the divider 60. Thus, the '1'-bit stored in the location 32.2 is shifted into the location 32.1. A delayed load pulse is supplied to the storage location 32.2, so that the third '1'-bit is loaded in the storage location 32.2. As a result, again 'high' output signal is supplied by the AND gate 46 so that the generator 38.1 is triggered again so as to generate the pulse pair (P_5,P_6). The 2-bit word supplied to the selection inputs of the multiplexer 42 controls the multiplexer to select the output of the generator 38.1 so that the pulse pair (P_5,P_6) is supplied to the write unit 44.

At the time instant t_3, another load pulse is supplied by the divider 60. Thus,

the '1'-bit stored in the location 32.2 is shifted into the location 32.1. A delayed load pulse is supplied to the storage location 32.2, so that the '0'-bit is loaded in the storage location 32.2. As a result, a 'high' output signal is supplied by the AND gate 54 so that the generator 38.4 is triggered so as to generate the pulse pair (P_7,P_8). The 2-bit word supplied to the selection inputs of the multiplexer 42 controls the multiplexer to select the output of the generator 38.4 so that the pulse pair (P_7,P_8) is supplied to the write unit 44. The load pulse at the time instant t_4, supplied by the divider 60, results in storing the '0'-bit into the location 32.1 and the corresponding delayed load pulse results in loading a '1'-bit into the storage location 32.2. As a result, a 'high' output signal is supplied by the AND gate 50 so that the generator 38.3 is triggered so as to generate the pulse pair (P_9,P_{10}). The 2-bit word supplied to the selection inputs of the multiplexer 42 controls the multiplexer to select the output of the generator 38.3 so that the pulse pair (P_9,P_{10}) is supplied to the write unit 44.

In an equivalent way, the write current as shown in (c) of figure 2 can be generated. We assuming that the '1'-bit preceding the '0'-bit of the time interval (t_0,t_1) is stored in the storage location 32.2. At the time instant t_0, a load pulse is supplied by the divider 60. Thus, the '1'-bit stored in the location 32.2 is shifted into the location 32.1. A delayed load pulse is supplied to the storage location 32.2, so that the first '0'-bit of the sequence of three '0'-bits is loaded in the storage location 32.2. As a result, a 'high' output signal is supplied by the AND gate 54 so that the generator 38.4 is triggered to generate the negative pulses P_1' and P_2' in response to the clock signal and further timing signals (not further shown), such as eg a delayed version of the output signal of the delay unit 64, so that only a pulse pair is generated after the contents of the storage locations have their correct bit values. The 2-bit word supplied to the selection inputs of the multiplexer 42 controls the multiplexer to select the output of the generator 38.4 so that two negative pulses are supplied to the write unit 44.

At the time instant t_1, another load pulse is supplied by the divider 60. Thus, the '0'-bit stored in the location 32.2 is shifted into the location 32.1. A delayed load pulse is supplied to the storage location 32.2, so that the second '0'-bit is loaded in the storage location 32.2. As a result, a 'high' output signal is supplied by the NOR gate 48 so that the generator 38.2 is triggered to generate the pulse pair (P_3',P_4'). The 2-bit word supplied to the selection inputs of the multiplexer 42 controls the multiplexer to select the output of the generator 38.2 so that the pulse pair (P_3',P_4') is supplied to the write unit 44. At the time instant t_2, another load pulse is supplied by the divider 60. Thus, the '0'-bit stored in the location 32.2 is shifted into the location 32.1. A delayed load pulse is supplied to the storage

location 32.2, so that the third '0'-bit is loaded in the storage location 32.2. As a result, again 'high' output signal is supplied by the NOR gate 48 so that the generator 38.2 is triggered again so as to generate the pulse pair (P_5',P_6'). The 2-bit word supplied to the selection inputs of the multiplexer 42 controls the multiplexer to select the output of the generator 38.2 so that the pulse pair (P_5',P_6') is supplied to the write unit 44.

At the time instant t_3, another load pulse is supplied by the divider 60. Thus, the '0'-bit stored in the location 32.2 is shifted into the location 32.1. A delayed load pulse is supplied to the storage location 32.2, so that the '1'-bit is loaded in the storage location 32.2. As a result, a 'high' output signal is supplied by the AND gate 50 so that the generator 38.3 is triggered so as to generate the pulse pair (P_7',P_8'). The 2-bit word supplied to the selection inputs of the multiplexer 42 controls the multiplexer to select the output of the generator 38.3 so that the pulse pair (P_7',P_8') is supplied to the write unit 44. The load pulse at the time instant t_4, supplied by the divider 60, results in storing the '1'-bit into the location 32.1 and the corresponding delayed load pulse results in loading a '0'-bit into the storage location 32.2. As a result, a 'high' output signal is supplied by the AND gate 54 so that the generator 38.4 is triggered so as to generate the pulse pair (P_9',P_{10}'). The 2-bit word supplied to the selection inputs of the multiplexer 42 controls the multiplexer to select the output of the generator 38.4 so that the pulse pair (P_9',P_{10}') is supplied to the write unit 44.

It will be clear that the skilled man will find possible embodiments of the generators 38.1 to 38.4 very easily without any inventive ingenuity. Whilst the present invention has been described with respect to preferred embodiments thereof, it is to be understood that these are not limitative examples. Thus, various modifications may become apparent to those skilled in the art, without departing from the scope of the invention, as defined in the appended claims. As an example, the embodiments described show the generation of two pulses for each bit of the binary signal to be written. One could have chosen to generate more than two pulses for each bit of the binary signal, eg. three. More specifically, in the embodiment of figure 1, the signal as per (c) of figure 1 could have resulted in three positive pulses in the interval (t_0,t_1), one negative pulse followed by two positive pulses in each of the time intervals (t_1,t_2), (t_2,t_3), three negative pulses in the interval (t_3,t_4) and three positive pulses in the time interval (t_4,t_5).

CLAIMS



1. Method of recording a binary signal onto a magnetic record carrier, the method comprises the steps of:

(a) receiving the binary signal, the binary signal comprising bits of a first polarity and bits of a second polarity, the second polarity being opposite to the first polarity,

(b) writing bits of the first and the second polarity onto the record carrier, characterized in that the writing step comprises the step of generating at least two write pulses for each bit to be written, and that, when writing a first sequence of at least two bits of the first polarity followed by a second sequence of at least two bits of the second polarity, the writing step comprising the substeps of

(i) generating at least two write pulses of a third polarity for the first bit of the first polarity in the first sequence,

(ii) generating a write pulse of the third polarity and a write pulse of a fourth polarity for the at least second bit of the first polarity occurring in the first sequence, the third polarity being opposite to the fourth polarity,

(iii) generating at least two write pulses of the fourth polarity for the first bit of the second polarity in the second sequence,

(iv) generating a write pulse of the third polarity and a write pulse of the fourth polarity for the at least second bit of the second polarity occurring in the second sequence.

2. The method as claimed in claim 1, characterized in that the substep (ii) comprises generating a write pulse of the fourth polarity and a write pulse of a third polarity thereafter, for the at least second bit of the first polarity occurring in the first sequence.

3. The method as claimed in claim 1 or 2, characterized in that the substep (iv) comprises generating a write pulse of the third polarity and a write pulse of the fourth polarity thereafter, for the at least second bit of the second polarity occurring in the second sequence.

4. The method as claimed in anyone of the preceding claims, characterized in that the substep (i) further comprises delaying the at least two write pulses of the third polarity generated for the first bit of the first polarity in the first sequence.

5. The method as claimed in anyone of the preceding claims, characterized in that

the substep (iii) further comprises delaying the at least two write pulses of the fourth polarity generated for the first bit of the second polarity in the second sequence.

6. Apparatus for recording a binary signal onto a magnetic record carrier, the apparatus comprises:

- input means for receiving the binary signal, the binary signal comprising bits of a first polarity and bits of a second polarity, the second polarity being opposite to the first polarity,
- writing means for writing bits of the first and the second polarity onto the record carrier, characterized in that the writing means are adapted to generate at least two write pulses for each bit to be written, and that, for writing a first sequence of at least two bits of the first polarity followed by a second sequence of at least two bits of the second polarity, the writing means comprising
- generator means for

(i) generating at least two write pulses of a third polarity for the first bit of the first polarity in the first sequence,

(ii) generating a write pulse of the third polarity and a write pulse of a fourth polarity for the at least second bit of the first polarity occurring in the first sequence, the third polarity being opposite to the fourth polarity,

(iii) generating at least two write pulses of the fourth polarity for the first bit of the second polarity in the second sequence,

(iv) generating a write pulse of the third polarity and a write pulse of the fourth polarity for the at least second bit of the second polarity occurring in the second sequence.

7. The apparatus as claimed in claim 6, characterized in that the generator means are further adapted to generate a write pulse of the fourth polarity and a write pulse of a third polarity thereafter, for the at least second bit of the first polarity occurring in the first sequence.

8. The apparatus as claimed in claim 6 or 7, characterized in that the generator means are further adapted to generate a write pulse of the third polarity and a write pulse of the fourth polarity thereafter, for the at least second bit of the second polarity occurring in the second sequence.

9. The apparatus as claimed in anyone of the claims 6 to 8, characterized in that the generator means further comprises delay means for delaying the at least two write pulses of the third polarity generated for the first bit of the first polarity in the first sequence.

10. The apparatus as claimed in claim 9, characterized in that the delay means are further adapted to delay the at least two write pulses of the fourth polarity generated for the first bit of the second polarity in the second sequence.

FIG. 1a

FIG. 1b

FIG. 1c

FIG. 1d


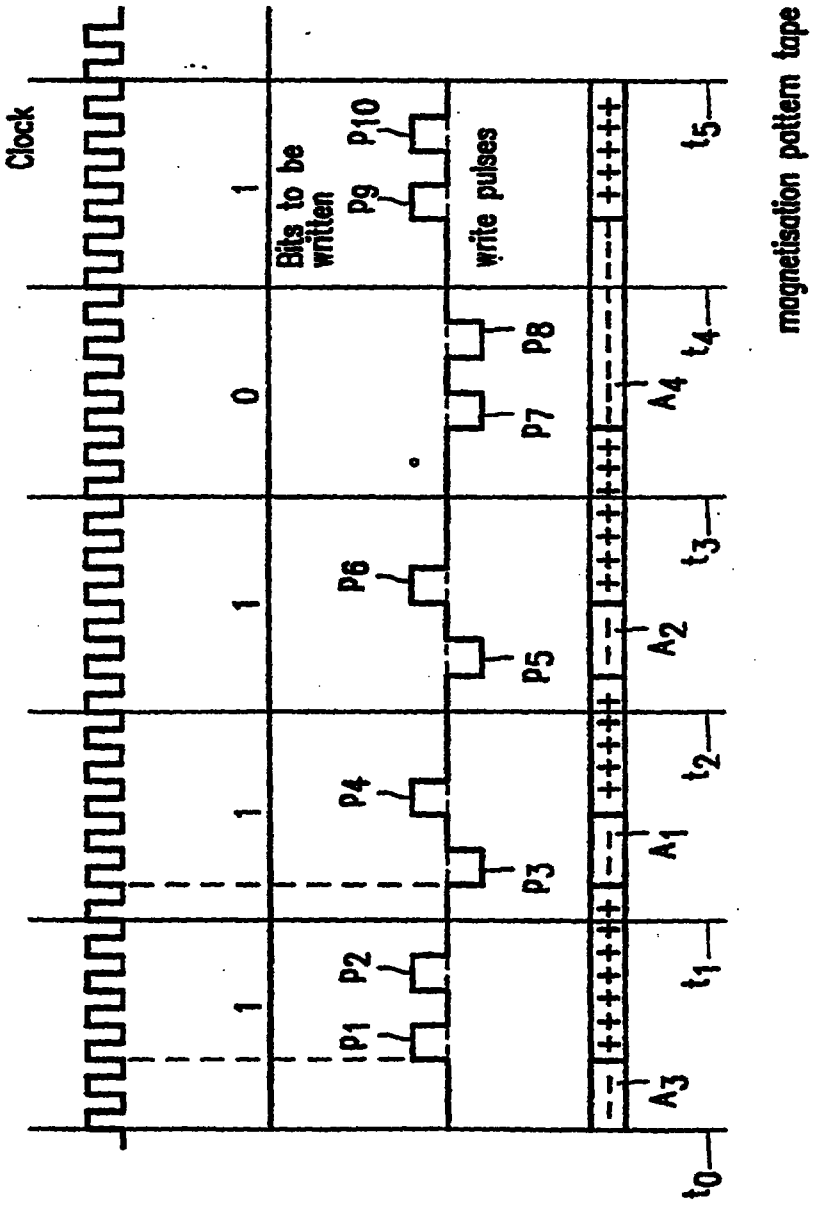


FIG. 2a

FIG. 2b

FIG. 2c

FIG. 2d

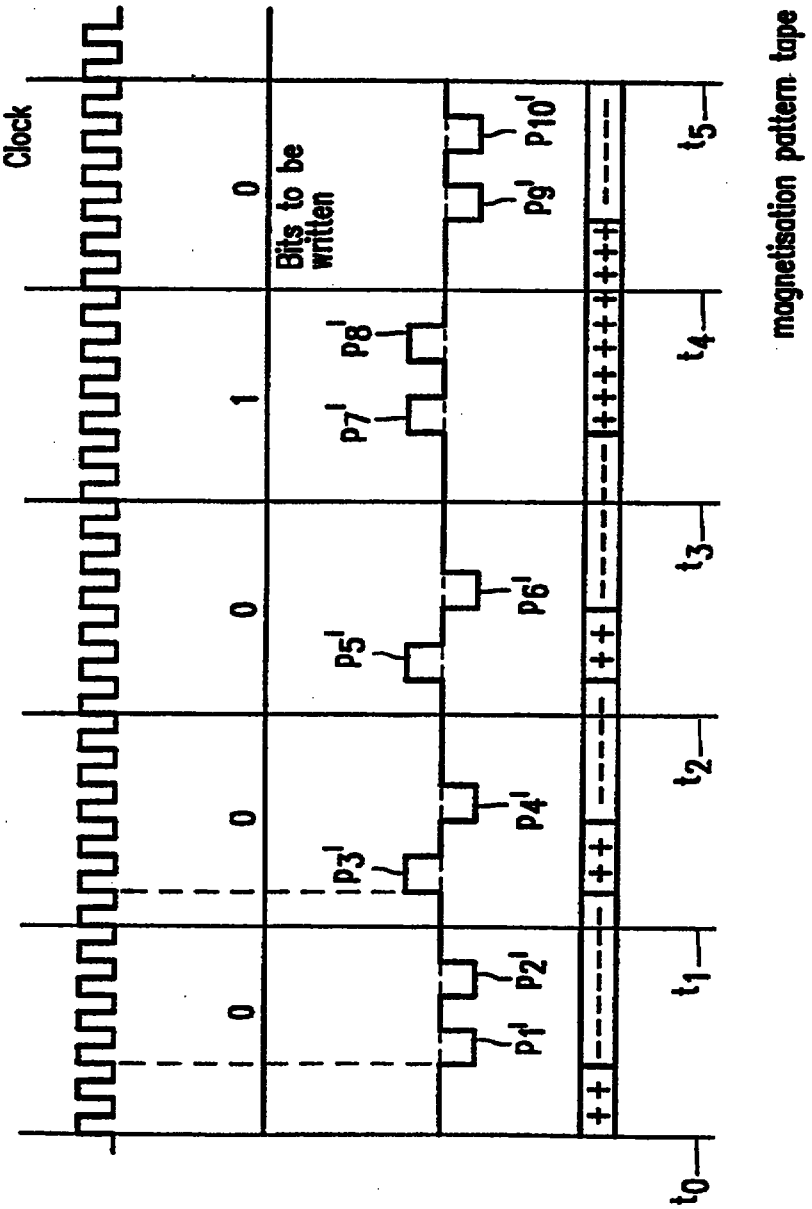

3/3

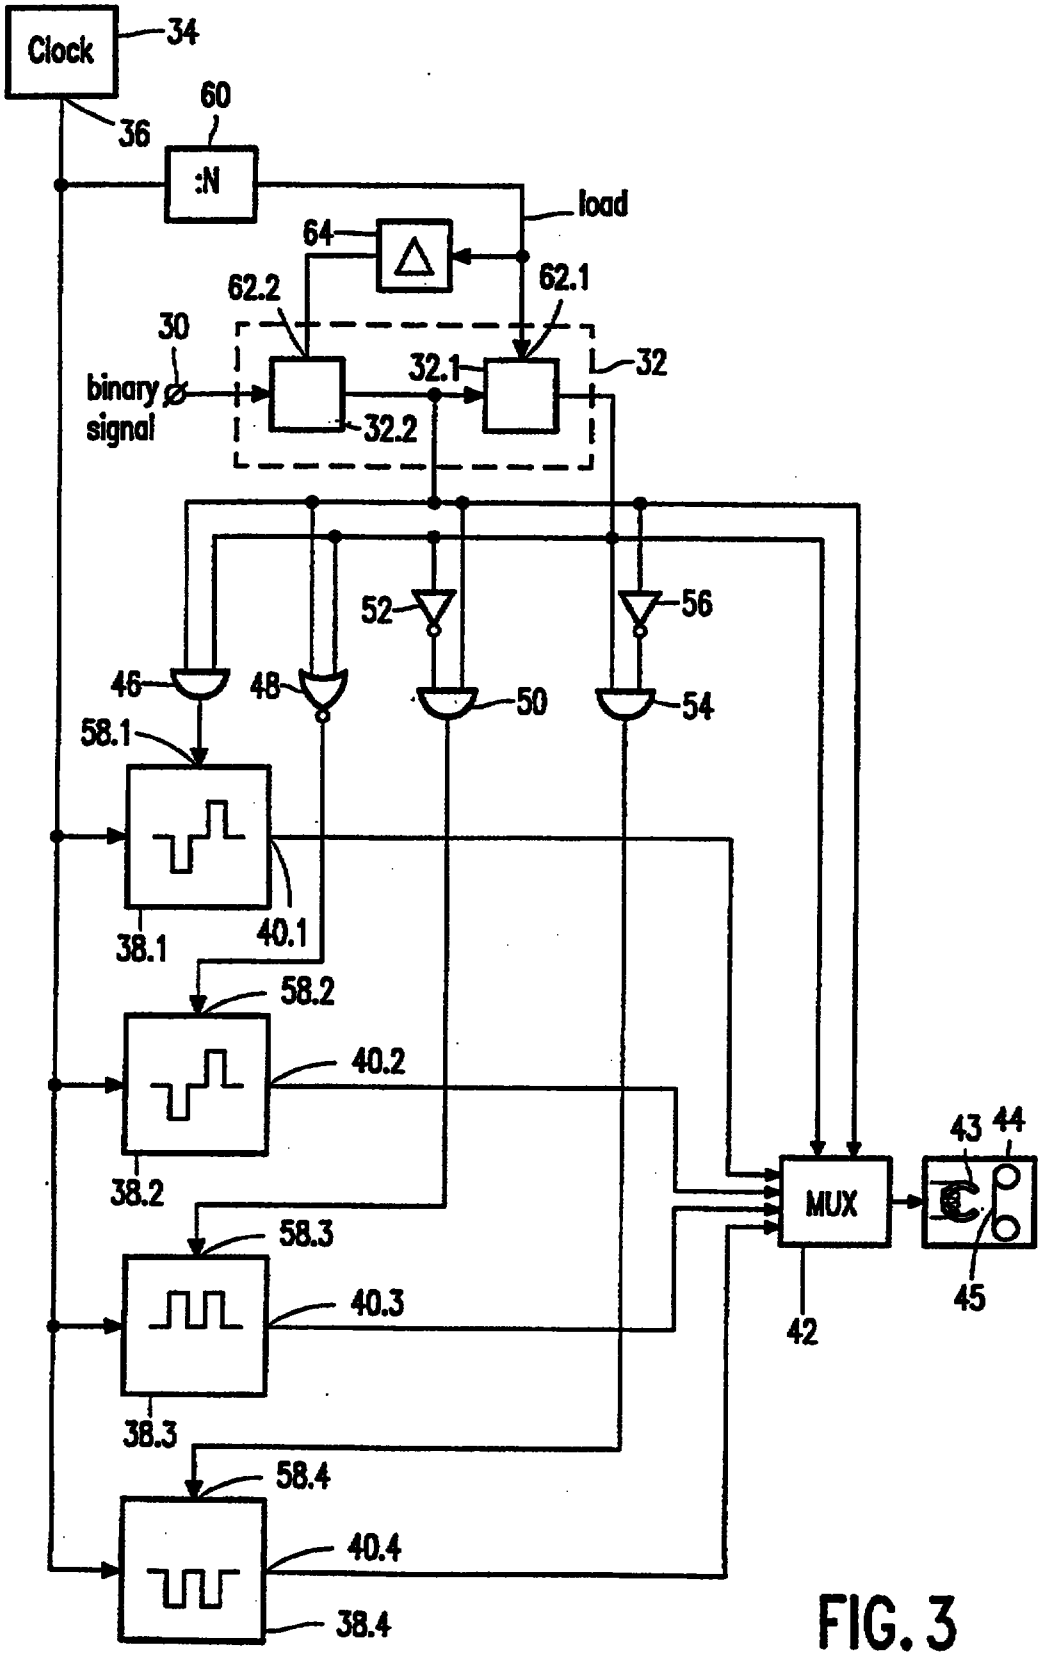

Clock
34
36
60
:N
load
64
62.2
62.1
30
32.1
32
binary signal
32.2
52
56
46
48
50
54
58.1
38.1
40.1
58.2
40.2
38.2
58.3
40.3
38.3
58.4
40.4
38.4
MUX
43
44
45
42

FIG. 3

9708128-D RTMP's copy.

PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : G11B 5/09, 20/14

A1

(11) International Publication Number: WO 97/17697

(43) International Publication Date: 15 May 1997 (15.05.97)

(21) International Application Number: PCT/IB96/01166

(22) International Filing Date: 30 October 1996 (30.10.96)

(30) Priority Data:
95203029.4 8 November 1995 (08.11.95) EP
(34) Countries for which the regional or international application was filed: AT et al.

(71) Applicant: PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(71) Applicant *(for SE only)*: PHILIPS NORDEN AB [SE/SE]; Kottbygatan 7, Kista, S-164 85 Stockholm (SE).


(72) Inventors: HOOGENDOORN, Abraham; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). ROOS, Willem, Arie; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). KALFS, Johannes, Jozef, Wilhelmus; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) Agent: VAN DER KRUK, Willem, L.; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).

(81) Designated States: BR, CN, JP, KR, MX, NO, SG, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: METHOD AND APPARATUS FOR RECORDING A BINARY SIGNAL ONTO A RECORD CARRIER

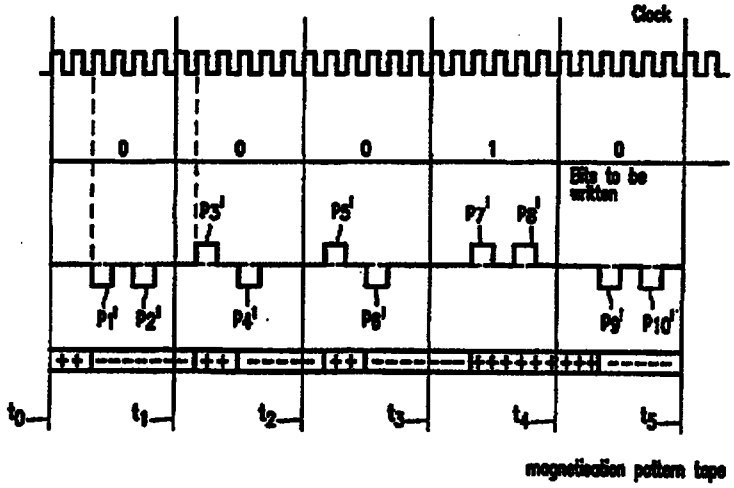

(57) Abstract

A method and an apparatus are disclosed for recording a binary signal onto a magnetic record carrier (45). The binary signal is supplied to an input terminal (30). The apparatus comprise generators (38.1 to 38.4) for generating at least two write pulses (P_1, P_2) for each bit of the binary signal to be written. More specifically, the generators are adapted to (i) generate at least two write pulses of a third polarity (P_1, P_2) for the first bit of the first polarity in the first sequence, (ii) generating a write pulse of the third polarity and a write pulse of a fourth polarity (P_3, P_4) for the at least second bit of the first polarity occurring in the first sequence, the third polarity being opposite to the fourth polarity, (iii) generating at least two write pulses of the fourth polarity (P_7, P_8) for the first bit of the second polarity in the second sequence, (iv) generating a write pulse of the third polarity and a write pulse of the fourth polarity (P_3', P_4') for the at least second bit of the second polarity occurring in the second sequence.