



(51) International Patent Classification:
H01Q 1/00 (2006.01) **G06K 7/00** (2006.01)

(21) International Application Number:
PCT/AU2011/001101

(22) International Filing Date:
20 July 2011 (20.07.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2010903263 21 July 2010 (21.07.2010) AU

(71) Applicant (for all designated States except US): **Magellan Technology Pty Ltd** [AU/AU]; 65 Johnston Street, Annandale NSW 2038 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LITTLECHILD, Stuart, Colin** [AU/AU]; 162 Hawthorne Road, Haberfield NSW 2045 (AU).

(74) Agent: **SMOORENBURG PINI PATENTS & TRADE MARK ATTORNEYS**; PO Box 515, Ringwood VIC 3134 (AU).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: ANTENNA CONFIGURATION METHOD AND APPARATUS

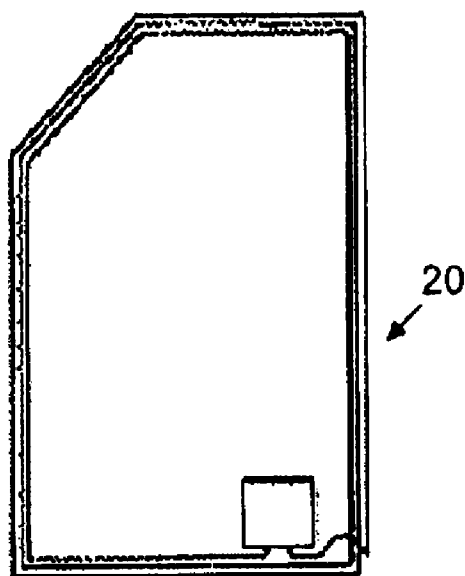


Figure 2

(57) Abstract: The present invention relates to the field of data transmission. In one form, the invention relates to the transmission and/or reception of data modulated signals between various devices, including loads and/or antennas. In another form, the invention relates to the field of transponders (tags), such as Radio Frequency Identification Devices (RFID), interrogator devices/systems and the transmission of data between a tag and an interrogator. The present invention utilises antenna design to alleviate tag coupling.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*