



(51) International Patent Classification:

A47B 21/04 (2006.01) A47B 19/00 (2006.01)
A47B 23/04 (2006.01)

(21) International Application Number:

PCT/SG2014/000376

(22) International Filing Date:

7 August 2014 (07.08.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **RACER TECHNOLOGY PTE. LTD.**
[SG/SG]; No. 28, Changi South Street 1, Singapore
486772 (SG).

(72) Inventor: **LAU, Choon Meng**; c/o Racer Technology
PTE. LTD., No. 28, Changi South Street 1, Singapore
486772 (SG).

(74) Agent: **ONG, Kheng Lu, Lucille Frances**; Marks & Clerk
Singapore LLP, Tanjong Pagar, P O Box 636, Singapore
910816 (SG).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: A STAND FOR ADJUSTABLE DISPLAY

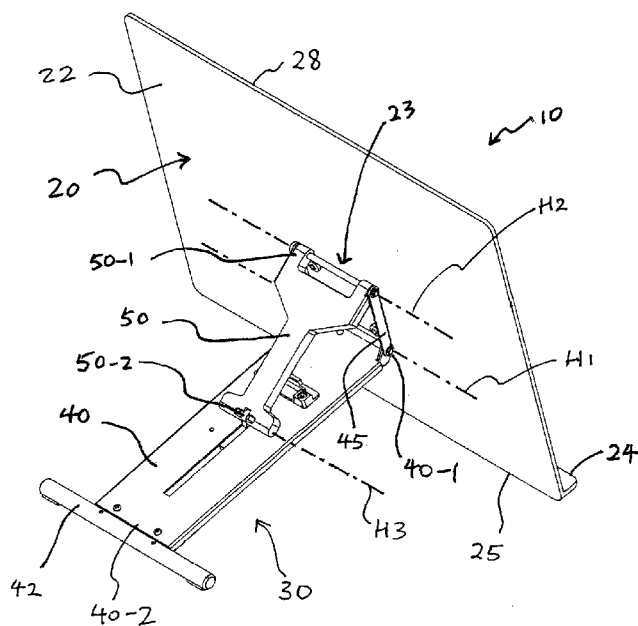


Fig. 2

(57) Abstract: A stand for adjustable display comprising: a holder configured to support an item to be displayed on the stand, a bottom edge of the holder configured to contact a surface on which the stand is placed; and an adjustable support configured to be attached to the holder, the adjustable support comprising a supporting leg having a first end configured to engage the holder pivotably about a first axis and a second end configured to contact the surface on which the stand is placed; and an adjusting bar having a first end configured to engage the holder pivotably about a second axis and a second end configured to slidably engage the supporting leg and to pivotably engage the supporting leg about a third axis; wherein the supporting leg comprises a locking mechanism configured to lock the stand in a stationary position between and including a minimum raised position and a maximum raised position such that the second end of the adjusting bar remains stationary on the supporting leg when raising of a top edge of the holder is stopped.