

**(19) World Intellectual Property Organization**  
International Bureau



\*G00002\*

**(43) International Publication Date**  
**16 May 2002 (16.05.2002)**

## PCT

**(10) International Publication Number**  
**WO 02/38011 A2**

**(51) International Patent Classification<sup>7</sup>:** **A47G**

**(81) Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

**(21) International Application Number:** PCT/US01/47650

**(22) International Filing Date:**  
13 November 2001 (13.11.2001)

**(25) Filing Language:** English

(26) **Publication Language:** English

**(30) Priority Data:**  
60/248,254 13 November 2000 (13.11.2000) US

**(71) Applicant and**


**(72) Inventor:** DANIELS, Thomas, E., Jr. [US/US]; 9163 Canyon Gate Road, Sandy, UT 84093 (US).

**(84) Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**(74) Agent: HOBSON, Garron, M.;** Thorpe, North & Western, LLP, P.O. Box 1219, Sandy, UT 84091-1219 (US).

[Continued on next page]

**(54) Title:** BEVERAGE MIXER

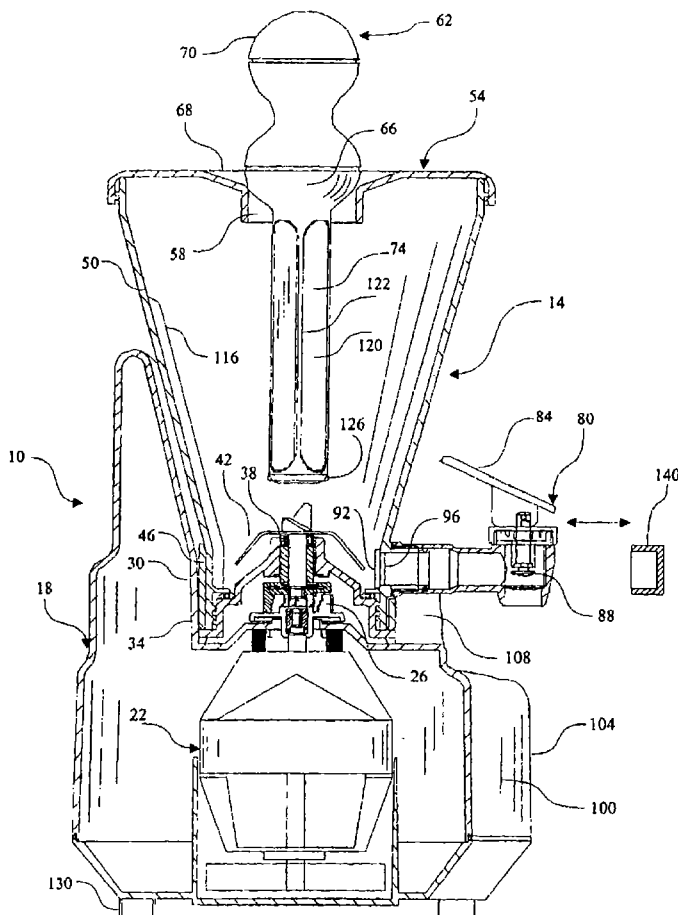

**(57) Abstract:** A beverage mixer, smoothie maker or the like includes a container with a mixing assembly disposable on a base with a rotor. A lid is disposable on the container and pivotally carries a stir stick that extends through an opening in the lid. The stir stick includes a ball portion to be pivotally disposable over the opening of the lid and to cooperate with the lid to cover the opening and to allow the ball portion to pivot in the opening. A spout can be coupled to the container to dispense contents, and can align with an alignment indentation in the base. A wall with an angled upper surface can be disposed adjacent the alignment indentation to abut and guide the spout to the alignment indentation. A cup indentation can be formed in the base under the alignment indentation to receive a cup under the spout.



\*162162\*

**WO 02/38011 A2**

WO 02/38011 A2



**Published:**

— without international search report and to be republished upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*