

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 December 2001 (27.12.2001)

PCT

(10) International Publication Number
WO 01/98154 A1

(51) International Patent Classification⁷: **B65D 6/26**

(21) International Application Number: PCT/SE01/01219

(22) International Filing Date: 31 May 2001 (31.05.2001)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
0002270-7 19 June 2000 (19.06.2000) SE

(71) Applicant (for all designated States except US): **NEFAB AB** [SE/SE]; Nordgrens väg 5, S-822 92 Alfta (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **PERSSON, Hans** [SE/SE]; Kilaforsvägen 128 A, S-821 41 Bollnäs (SE).

(74) Agents: **OLSSON, Jan** et al.; Bjerkéns Patentbyrå KB, P.O. Box 1274, S-801 37 Gävle (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EC, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A DEVICE FOR INTERLOCKING TWO PLATE-LIKE MEMBERS

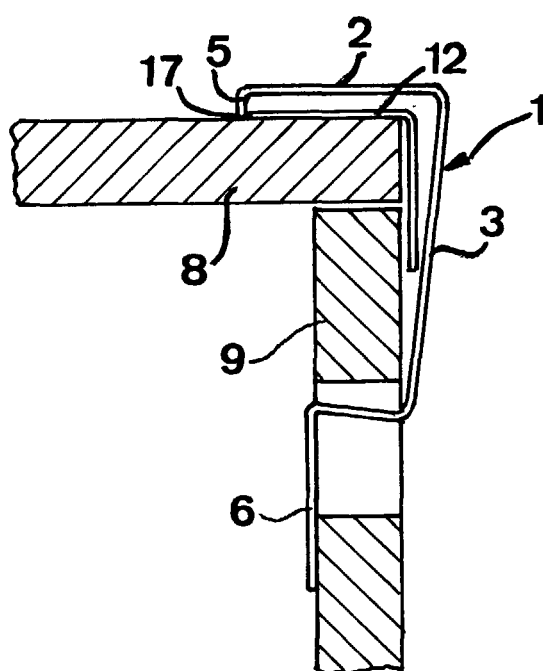

(57) Abstract: A device for interlocking two plate-like members (8, 9) comprises at least one clamp (1) having two legs (2, 3), which are resilient with respect to each other for being able to be moved from a rest position with respect to each other while storing potential energy. A second of the legs (3) has engagement members for co-operating with engagement members of a second (9) of the plate-like members, while a first leg (2) has hook-like portions (5) adapted to be moved over an edge frame (12) of the first member and grip behind this against the lateral edge (17) thereof through a movement of that leg away from the second leg creating storing of potential energy.