DIGITAL COMMUNICATION SYSTEM USING PACKET ASSEMBLING/DISASSEMBLING AND EIGHT-TO-FOURTEEN BIT ENCODING/DECODING

BACKGROUND OF THE INVENTION

The present invention relates to a digital communication system, which can perform a highly reliable digital communication at low cost by digital modulation after a packet process and an 8 bit-14 bit encoding (EFM) process for desired data at a transmission station.

Conventionally, a karaoke performing apparatus has means for transferring a song data read out from an optical disc such as a CD (compact disc), as shown in Fig. 2 (for example, see Unexamined Japanese Patent Publication No. 5-119788). Specifically, double phase shift keying (2 PSK) modulation is performed at an RF modulator 2 according to EFM data, such as, karaoke performance data, which is reproduced from a CD player 1, and the modulated output is transmitted to an RF demodulator 4 via a transmission cable 3. At the demodulator 4, the transmitted output is demodulated to pick up therefrom the EFM data, which is then supplied to an EFM decoder 5. At the decoder 5, the EFM data is decoded, and the decoded data is supplied

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

to a D/A converter 6. An analog signal from the converter 6 is supplied to a sound system 8 along with a singing voice signal from a microphone 7 so as to generate mixed sounds.

According to the foregoing data transfer system, since it is the digital transmission system and an error correction process is performed at the EFM decoder 5 and the like, the highly reliable data transmission is possible as compared with an analog transmission system. However, there is inconvenience that only recorded data can be transmitted only in one way. On the other hand, as a further highly reliable digital communication system than that shown in Fig. 2, a system of quadruplex PSK (4 PSK) modulation type is used in a satellite broadcast (BS), which, however, is inconvenient in that encoding for modulation is complicated, leading to high cost.

SUMMARY OF THE INVENTION

An object of the present invention is to provide a highly reliable digital communication system at low cost. According to the invention, a digital communication system comprises a transmitter station and a receiver station for communicating therebetween a data by means of a carrier wave. The transmitter station comprises packet means for assembling a data having an original format into a packet, encoding means

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

for encoding the data in the packet from an initial eight-bit form into a fourteen-bit form, and modulating means for modulating a carrier wave by the encoded data so as to transmit the packet of the encoded data in the fourteen-bit form. The receiver station comprises demodulating means receptive of the modulated carrier wave for demodulating the same to separate therefrom the packet of the encoded data, decoding means for decoding the encoded data in the packet from the fourteen-bit form into the initial eight-bit form, and unpacket means for disassembling the packet of the decoded data to restore the original format of the data having the initial eight-bit form.

In a preferred form, the packet means includes means for adding a self-checking code in the packet, and the unpacket means includes means for detecting an error contained in the data according to the self-checking code so as to correct the error. Further, the encoding means includes means for inserting a self-checking code into the fourteen-bit form of the data, and the decoding means includes means for detecting an error contained in the data according to the self-checking code so as to correct the error. In a specific form, the transmitting station includes database means for storing a song data in an original MIDI format for transmission of the song data in response to a request of a karaoke song from the

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

receiving station, and the receiving station includes performance means for performing the karaoke song according to the song data transmitted from the transmitting station.

According to another aspect of the invention, a digital data transmitter/receiver apparatus for transmitting an outgoing data and receiving an incoming data by means of a carrier wave in a two-way, comprises packet/unpacket means for assembling the outgoing data having an original format into a forward packet and for disassembling a backward packet of the incoming data to restore the original format, encoding/decoding means for encoding the outgoing data in the forward packet from an initial eight-bit form into a fourteen-bit form and for decoding the incoming data in the backward packet from the fourteen-bit form into the initial eight-bit form, and modulating/demodulating means for modulating a carrier wave by the encoded outgoing data so as to transmit the forward packet of the outgoing data in the fourteen-bit form and for demodulating another carrier wave to separate therefrom the backward packet of the incoming data received in the fourteen-bit form.

According to the construction of the present invention, at the transmitting station, the desired data is subjected to the packet process and the EFM process in sequence, and the self-checking code in the form of error check bits is added by

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

both of the packet and EFM processes. Further, at the receiving station, a data error is detected and corrected based on the error check bits in both of the decoding process and the unpacket process. Accordingly, the highly reliable data transmission is achieved. The packet means and the unpacket means are generally used in CD-ROM technique and can be obtained at low cost. On the other hand, the encoding means and the decoding means are generally used in CD technique and can be obtained at low cost.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing a digital communication system according to one embodiment of the present invention.

Fig. 2 is a block diagram showing a conventional digital communication system.

Figs. 3A, 3B and 3C are schematic diagrams showing packet process of a song data to be transmitted.

Fig. 4 shows a conversion table of eight-to-fourteen bit coding according to the invention.

Fig. 5 is a circuit diagram showing one example of a PSK modulator.

Fig. 6 is a circuit diagram showing one example of a PSK demodulator.

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

DETAILED DESCRIPTION OF THE INVENTION

Fig. 1 shows a digital communication system according to one embodiment of the present invention. In this embodiment, a song data associated to karaoke performance is communicable in a two-way fashion between a transmitting station and a receiving station. A communication line 10 is formed by, for example, a CATV (cable television) line, which interconnects the transmitting station in the form of a karaoke station 20 and the receiving station in the form of a karaoke terminal 30. Although a plurality of karaoke terminals can be connected to the communication line 10, one terminal 30 will be described for convenience.

In the karaoke station 20, when a request for a musical composition of a desired karaoke song is issued from one of the karaoke terminals, a host computer 22 delivers a karaoke performance data of that musical composition to the requesting karaoke terminal. In this example, the karaoke performance data is composed of a song data which is arranged in an original format according to MIDI (musical instrument digital interface) standard, and which is formatted such that a note-on event data (data for designating a tone pitch and a tone volume of a sound to be produced), a note-off event data (data for designating a sound to be attenuated) and other event data are arranged in

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

order of occurrences of events while an interval time data is interposed between preceding and succeeding events.

A packet assembler/disassembler 24 includes an assembler which performs a packet process of the data fed from the computer 22 and a disassembler which performs an unpacket process of the data fed from an EFM encoder/decoder 26. The packet process and the unpacket process are described in a yellow book of CD-ROM, and a bit rate is 1.5–6 Mbps. In the packet process, error check bits are added to the data. In the unpacket process, an error of the data is detected and corrected based on the error check bits.

The EFM encoder/decoder 26 includes an encoder which performs an EFM process for the packet of the data fed from the packet assembler/disassembler 24 and a decoder which performs a decoding process of the EFM data fed from an RF modulator/demodulator 28. The EFM encoding process and the decoding process are described in a red book of CD. In the EFM encoding process, error check bits are added to the data. In the decoding process, an error of the data is detected and corrected based on the error check bits.

The RF modulator/demodulator 28 includes a modulator which modulates an outgoing carrier wave by the EFM data fed from the EFM encoder/decoder 26 and sends the modulated carrier wave to the communication line 10,

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

and a demodulator which demodulates an incoming carrier wave received from the communication line 10. The modulator/demodulator 28, for example, are of 2PSK modulation type.

In the karaoke terminal 30, an RF modulator/demodulator 32, an EFM encoder/decoder 34 and a packet assembler/disassembler 36 have the same structures as the foregoing RF modulator/demodulator 28, EFM encoder/decoder 26 and packet assembler/disassembler 24, respectively, and operate in the same manner.

The RF modulator/demodulator 32 demodulates the modulated carrier wave received from the communication line 10 to pick up or separate therefrom the EFM data, and supplies it to the EFM encoder/decoder 34. The encoder/decoder 34 performs a decoding process of the supplied EFM data and supplies the decoded data to the packet assembler/disassembler 36. The assembler/disassembler 36 performs an unpacket process for the supplied backward packet of the decoded data and supplies the decoded data in a disassembled form to a bus 38. In the decoding process and the unpacket process, data errors are detected and corrected in the same manner as described above.

The packet assembler/disassembler 36 performs a packet

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

process of an outgoing data fed from a bus 38, and supplies an assembled forward packet of the data to the EFM encoder/decoder 34. The encoder/decoder 34 performs an EFM encoding process of the supplied data, and supplies the EFM data to the RF modulator/demodulator 32. In the packet process and the EFM process, error check bits are added to the data in the same manner as described above. The modulator/demodulator 32 modulates a carrier wave according to the supplied EFM data, and sends the modulated carrier wave to the communication line 10. The RF modulator/demodulator 32, for example, are of 2PSK modulation type. A communication channel determined by a frequency of the carrier wave used at the modulator of the karaoke terminal 30 differs from that used at the modulator of the karaoke station 20.

The bus 38 connects altogether a CPU (central processing unit) 40, a command input implement 42, a buffer memory 44, an MIDI performance unit 46 and the like. The CPU 40 executes various processes for communication control, musical tone generation and the like according to programs stored in a memory not shown in the drawings. The command input implement 42 is operated for inputting a request command of a desired musical composition of a karaoke song. The inputted request command is transmitted

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

to the host computer 22 via the packet assembler/disassembler 36, the EFM encoder/decoder 34, the RF modulator/demodulator 32, the communication line 10, the RF modulator/demodulator 28, the EFM encoder/decoder 26 and the packet assembler/disassembler 24. The host computer 22 sends a karaoke performance data of the requested musical composition in response to the request command. The karaoke performance data is transmitted to the karaoke terminal 30 and is loaded into the buffer memory 44 via the packet assembler/disassembler 24, the EFM encoder/decoder 26, the RF modulator/demodulator 28, the communication line 10, the RF modulator/demodulator 32, the EFM encoder/decoder 34 and the packet assembler/disassembler 36.

The CPU 40 reads out the event data, such as, the note-on event data and the note-off event data in sequence based on the event interval time data contained in the karaoke performance data stored in the memory 44, and supplies the read event data to the MIDI performance unit 46. The performance unit 46 includes a tone generator and produces a tone signal via a tone generating channel according to the note-on event data, and attenuates the tone signal being produced in response to the note-off event data. The tone signal TS is fed from the performance unit 46 to a

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

sound system 50 along with a singing voice signal SS detected from a microphone (M) 48. The sound system 50 includes an amplifier, a loudspeaker and the like, and converts the signals TS, SS into the karaoke sounds. A singer, after requesting a desired musical composition via the command input implement 42, can enjoy singing along with the accompaniment of the karaoke performance based on the karaoke performance data stored in the memory 44.

The foregoing embodiment is arranged to transfer the MIDI performance data to the karaoke terminal 30 from a database of the karaoke station 20. However, not limited to this, it may also be arranged to transfer PCM-recorded tone data. In this case, a D/A converter may be provided instead of the performance unit 46 to convert the PCM tone data into an analog tone signal which is supplied to the sound system 50. Further, it may also be arranged to transfer word data and background image data to the karaoke terminal 30 from the host computer 22 and to control an image display device (not shown in the drawings) of the karaoke terminal 30 to display the word images and the background images. The present invention is applicable to the transfer of various kinds of data, not limited to the karaoke song data, and not only applicable to the cable communication but also to a wireless communication.

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

Fig. 3A shows an original format of the song data stored in the database of the central karaoke station. The database contains a song data memory area for memorizing numerous files (several hundreds to several thousands) of the song data, and a directory file which memorizes identification codes (file names) of the song data files stored in the data memory area.

Fig. 3B schematically shows a format of one song data file which includes a header, an instrument track, a lyric track, a voice track, a digital sound field processing (DSP) control track and a voice data section. The header is written with various index data regarding the song such as a title, a genre, a release date, and a time length of performance. The instrument track is divided into subtracks corresponding to various parts of the instrumental accompaniment such as a piano part, a rhythm part and else. Each subtrack is written with a sequence of an event data and an event interval time data. The lyric track is written with a lyric word data for use in displaying of lyric characters on the monitor. The lyric track does not contain a pure MIDI data. However, in order to integrate an overall implementation and to facilitate data processing, the lyric data is prescribed in a specific form of "system-exclusive-message" likewise the MIDI data which is written in the instrument track. The voice track is utilized to generate a voice of a back chorus or else, which would be

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

hardly synthesized by a tone generator involved in the MIDI performance unit 46. The voice track is processed in combination with the voice data section so as to produce a back chorus sound or a harmony melody sound. The voice data section contains a plurality of ADPCM data sampled from a live chorus sound according to adaptive delta pulse code modulation. The voice track is written with a sequence of duration data and designation data. The duration data determines a timing when an ADPCM data is converted into an analog voice signal. The designation data is read out at that timing. The designation data designates one of the ADPCM data according to an assigned number 1, 2, ..., n. Further, the DSP control track is written with a control data effective to control a digital sound field processor contained in the karaoke terminal 30. The digital sound field processor is operated to impart a reverberation and other effects to the karaoke sound. The type and variation of the effect is progressively regulated according to the control data written in the DSP control track during the course of the karaoke performance.

Fig. 3C shows a forward packet of the song data to be transferred from the station to the terminal. One file of the song data is composed of about 100 Kbytes. For example, the song data is divided into blocks each containing 2048 bytes so

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

as to form a packet likewise CD-ROM format. Each block is added with a sync of 12 bytes and a header of 4 bytes at a top part, while the self-checking code or an error detection code (EDC) of 4 bytes, an identification space of 8 bytes, a P-parity of 172 bits and a Q-parity of 104 bits are added at an end part of the block, thereby forming one packet. A train of the packets are modulated by the EFM method for transmission. On the other hand, the packet is disassembled by the unpacket process so as to remove therefrom the header, the parity bit or else to restore the original format of the song data.

Fig. 4 shows a conversion table of the EFM. As mentioned before, the EFM encoder/decoder receives the packet and encodes the same according to Eight to Fourteen Modulation (EFM) method. In the EFM method, an eight-bit data is converted into a set of fourteen channel bits such that the maximum inversion interval is set narrowly and the minimum inversion interval is set widely while a DC component is reduced. Such a packet format and its encoding by EFM are commonly adopted in the CD system. Further, the EFM encoder/decoder decodes the EFM data into the data packet of a base band. In detail as indicated by the Fig. 4 table, the EFM method treats an input signal as an eight-bit data which represents 256 (2^8) number of symbols.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

All symbols of the eight-bit form are converted into a fourteen-bit form according to predetermined bit patterns. The fourteen-bit form contains 16384 (2^{14}) bit patterns, from which 256 number of suitable bit patterns are selected to correspond to the 256 number of the initial eight-bit data. Namely, the selected bit patterns meet a specific condition that adjacent bits "1" have therebetween bits "0" at least two and at most ten, thereby optimizing the maximum and minimum inversion intervals while reducing a DC component.

Lastly, as mentioned before, the RF modulator/demodulator modulates a carrier wave by the PSK (phase shift keying). The PSK method modulates a phase of the carrier wave by either of "0" and "π" corresponding to "1" and "0" status of an input pulse. For this, the PSK method preferably utilizes a ring modulator of a double balanced type as shown in Fig. 5. The RF modulator/demodulator further includes a demodulator composed of a phase detector, for example, as shown in Fig. 6. The phase detector detects a phase difference between a signal and a reference carrier wave.

As described above, according to the present invention, the packet process and the EFM process are performed at the transmitting station and the EFM decoding process and the unpacket process are performed at the receiving station.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

Therefore, the effect is obtained that the highly reliable digital communication is made possible at low cost, and further, the two-way communication can be easily realized.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

* C L M S *

WHAT IS CLAIMED IS:

1. A digital communication system comprising a transmitter station and a receiver station for communicating therebetween a data by means of a carrier wave: wherein

the transmitter station comprises packet means for assembling a data having an original format into a packet, encoding means for encoding the data in the packet from an initial eight-bit form into a fourteen-bit form, and modulating means for modulating a carrier wave by the encoded data so as to transmit the packet of the encoded data in the fourteen-bit form; and wherein

the receiver station comprises demodulating means receptive of the modulated carrier wave for demodulating the same to separate therefrom the packet of the encoded data, decoding means for decoding the encoded data in the packet from the fourteen-bit form into the initial eight-bit form, and unpacket means for disassembling the packet of the decoded data to restore the original format of the data having the initial eight-bit form.

2. A digital communication system according to claim 1, wherein the packet means includes means for adding a self-checking code in the packet, and wherein the unpacket means includes means for detecting an error contained in the data according to the self-checking code so as to correct the

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

* C L M S *

error.

3. A digital communication system according to claim 1, wherein the encoding means includes means for inserting a self-checking code into the fourteen-bit form of the data, and wherein the decoding means includes means for detecting an error contained in the data according to the self-checking code so as to correct the error.

4. A digital communication system according to claim 1, wherein the transmitting station includes database means for storing a karaoke data in an original MIDI format for transmission of the karaoke data in response to a request of a karaoke song from the receiving station, and wherein the receiving station includes performance means for performing the karaoke song according to the karaoke data transmitted from the transmitting station.

5. A digital data transmitter/receiver apparatus for transmitting an outgoing data and receiving an incoming data by means of a carrier wave in a two-way, comprising:

packet/unpacket means for assembling the outgoing data having an original format into a forward packet, and for disassembling a backward packet of the incoming data to restore the original format;

encoding/decoding means for encoding the outgoing data in the forward packet from an initial eight-bit form into a

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

* C. L M S *

fourteen-bit form, and for decoding the incoming data in the backward packet from the fourteen-bit form into the initial eight-bit form; and

modulating/demodulating means for modulating a carrier wave by the encoded outgoing data so as to transmit the forward packet of the outgoing data in the fourteen-bit form, and for demodulating another carrier wave to separate therefrom the backward packet of the incoming data received in the fourteen-bit form.

This Sheet Has Been Replaced

THIS SHEET HAS BEEN REPLACED

ABSTRACT


A digital communication system communicates a data between a transmitter station and a receiver station by means of a carrier wave. The transmitter station has a packet assembler for assembling a data having an original format into a packet, an encoder for encoding the data in the packet from an initial eight-bit form into a fourteen-bit form, and a modulator for modulating a carrier wave by the encoded data so as to transmit the packet of the encoded data in the fourteen-bit form. The receiver station has a demodulator receptive of the modulated carrier wave for demodulating the same to separate therefrom the packet of the encoded data, a decoder for decoding the encoded data in the packet from the fourteen-bit form into the initial eight-bit form, and a packet disassembler for disassembling the packet of the decoded data to restore the original format of the data having the initial eight-bit form.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

FIG. 1

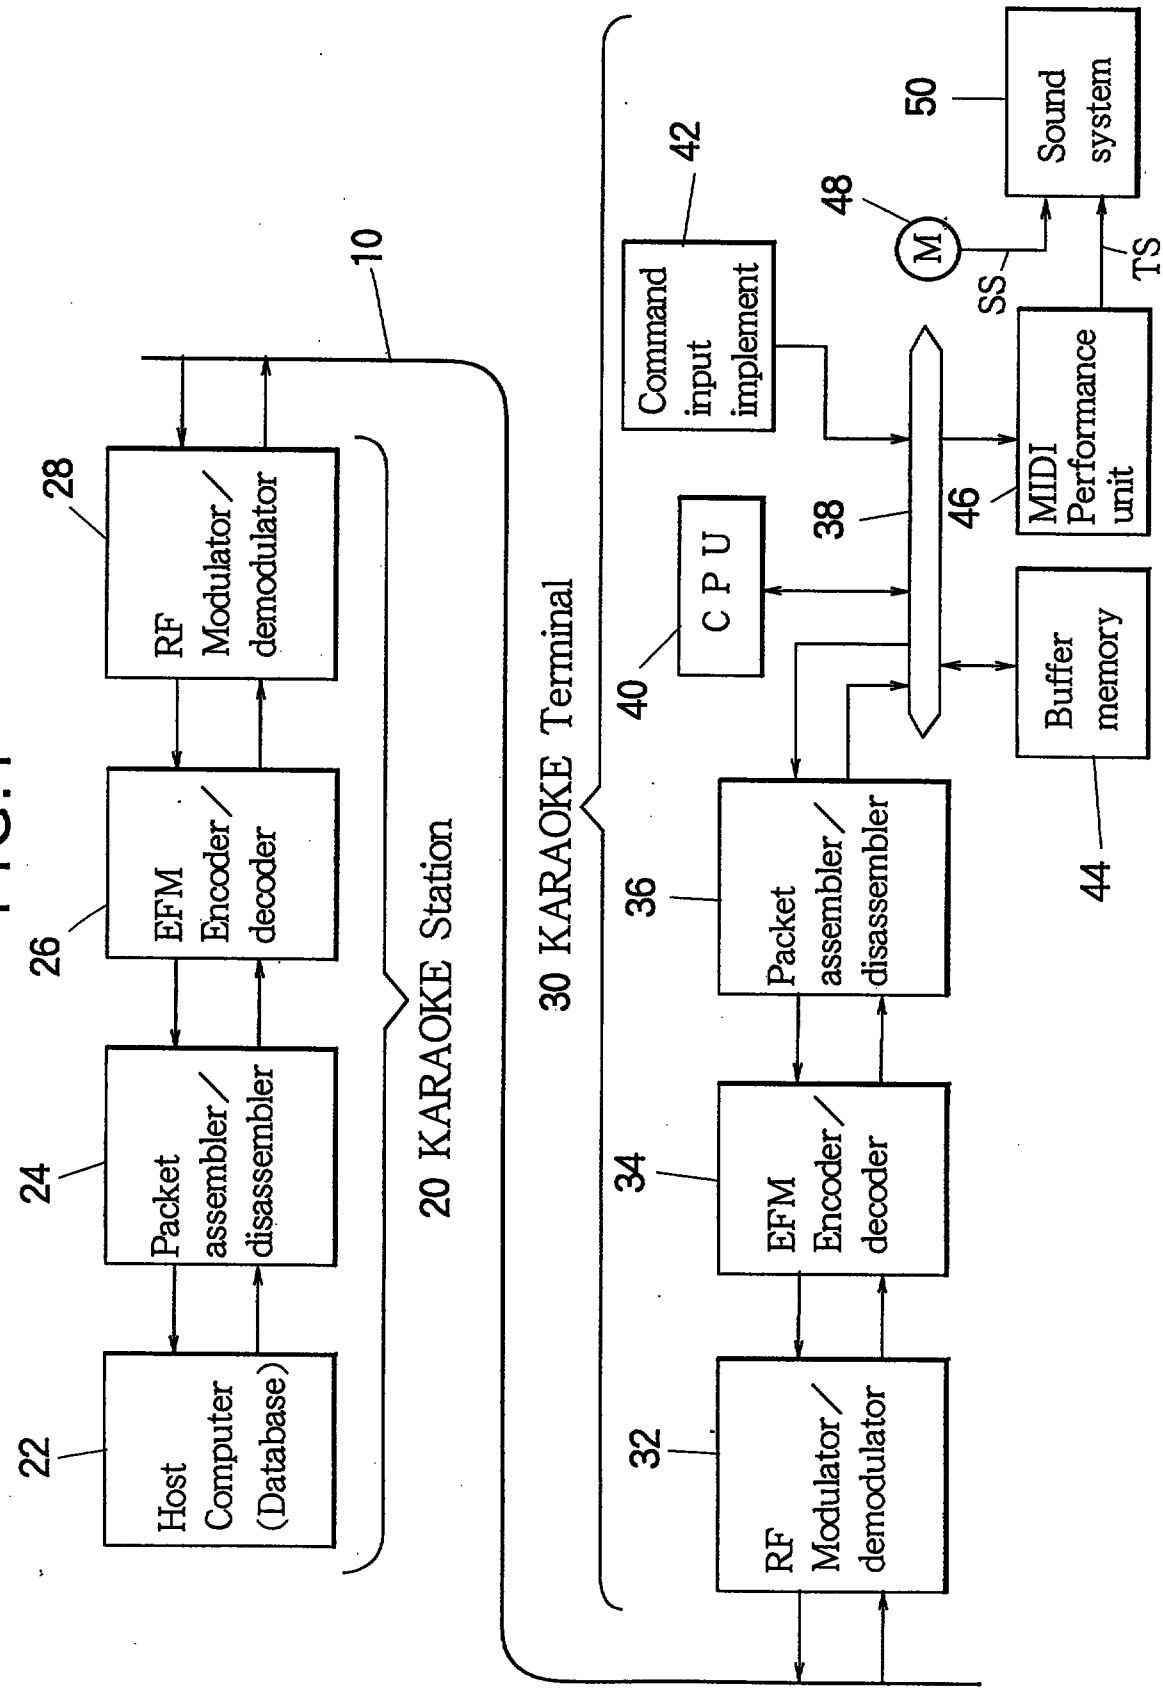

THIS SHEET HAS BEEN REPLACED

FIG. 2

PRIOR ART

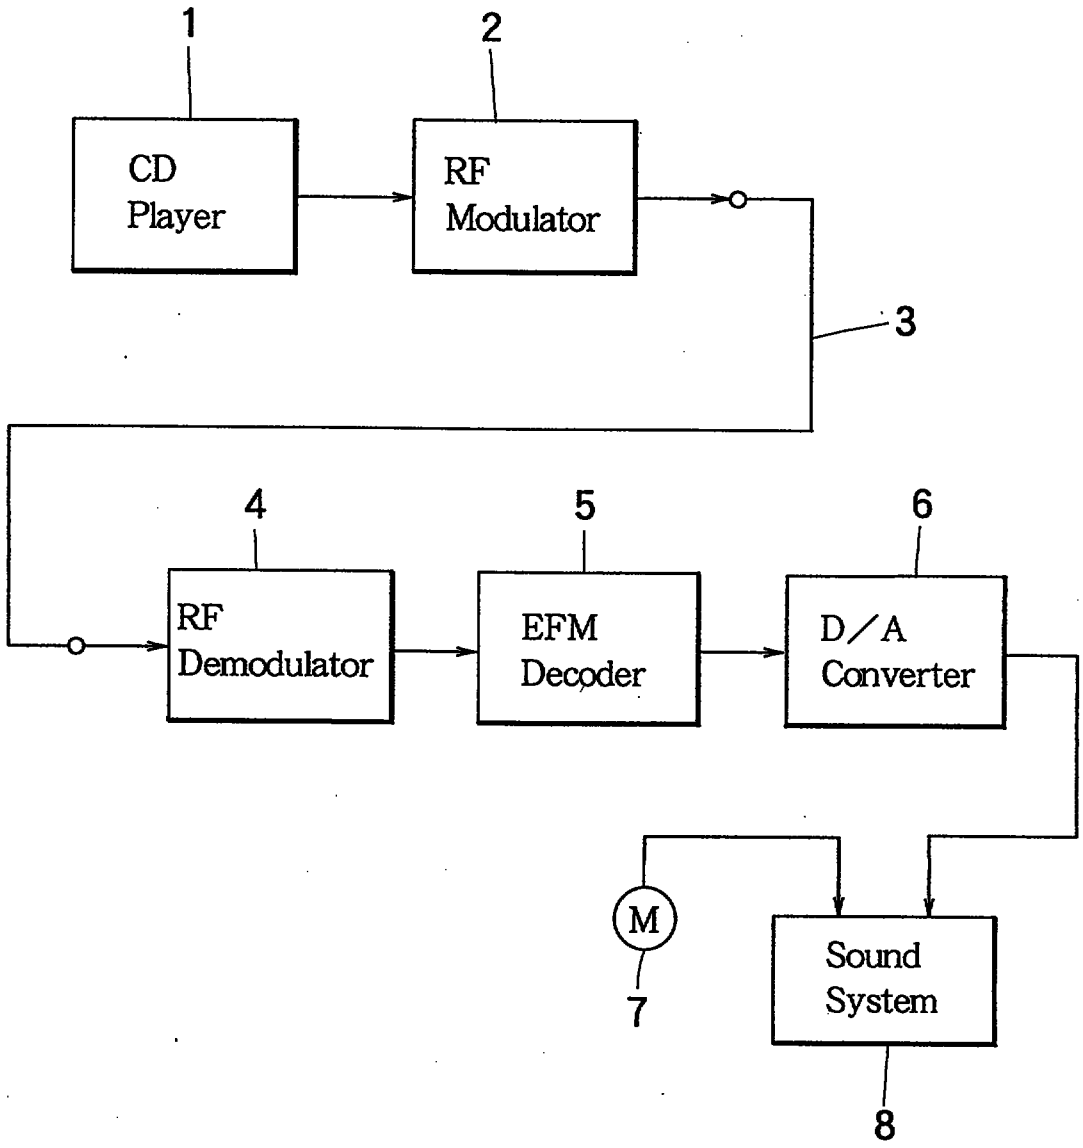


FIG.3A

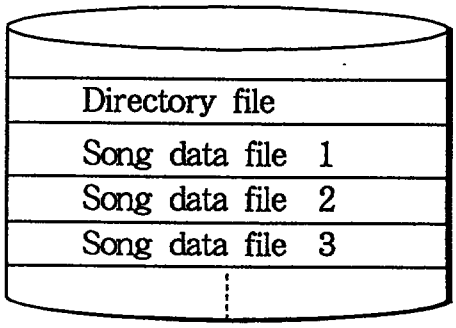


FIG.3B

Header Title Genre Release date Performance time length	Instrument track Lyric track Voice track DSP control track	ADPCM data 1 ADPCM data 2 ADPCM data n

FIG.3C

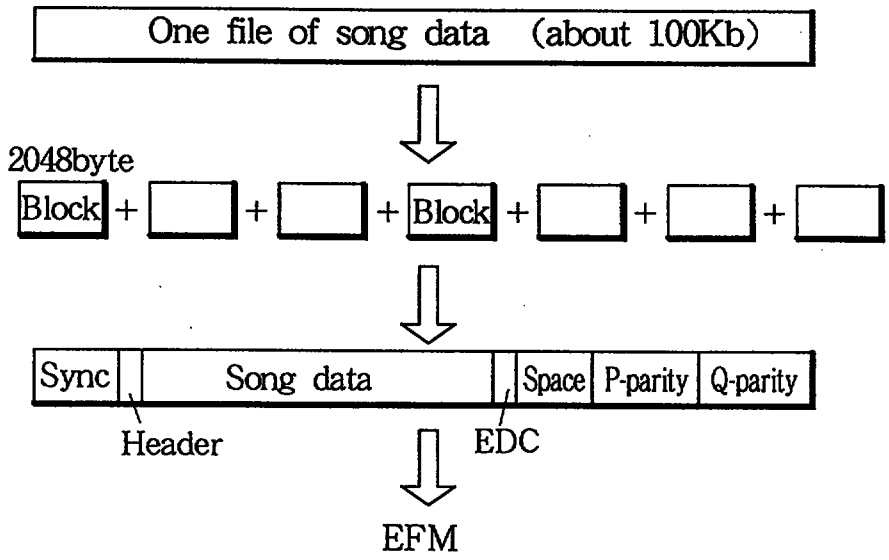


FIG.4

	Data bits	Channel bits
0	00000000	01001000100000
1	00000001	10000100000000
2	00000010	10010000100000
3	00000011	10001000100000
4	00000100	01000100000000
5	00000101	00000100010000
6	00000110	00010000100000
7	00000111	00100100000000
8	00001000	01001001000000
9	00001001	10000001000000
10	00001010	10010001000000
11	00001011	10001001000000
12	00001100	01000001000000
13	00001101	00000001000000
14	00001110	00010001000000
15	00001111	00100001000000
16	00010000	10000000100000
17	00010001	10000010000000
18	00010010	10010010000000
19	00010011	00100000100000
20	00010100	01000010000000
21	00010101	00000010000000
22	00010110	00010010000000
23	00010111	00100010000000
24	00011000	01001000010000
25	00011001	10000000010000
26	00011010	10010000010000
27	00011011	10001000010000
28	00011100	01000000010000
29	00011101	00001000010000
30	00011110	00010000010000
31	00011111	00100000010000
32	00100000	00000000100000
⋮	⋮	⋮

FIG.5

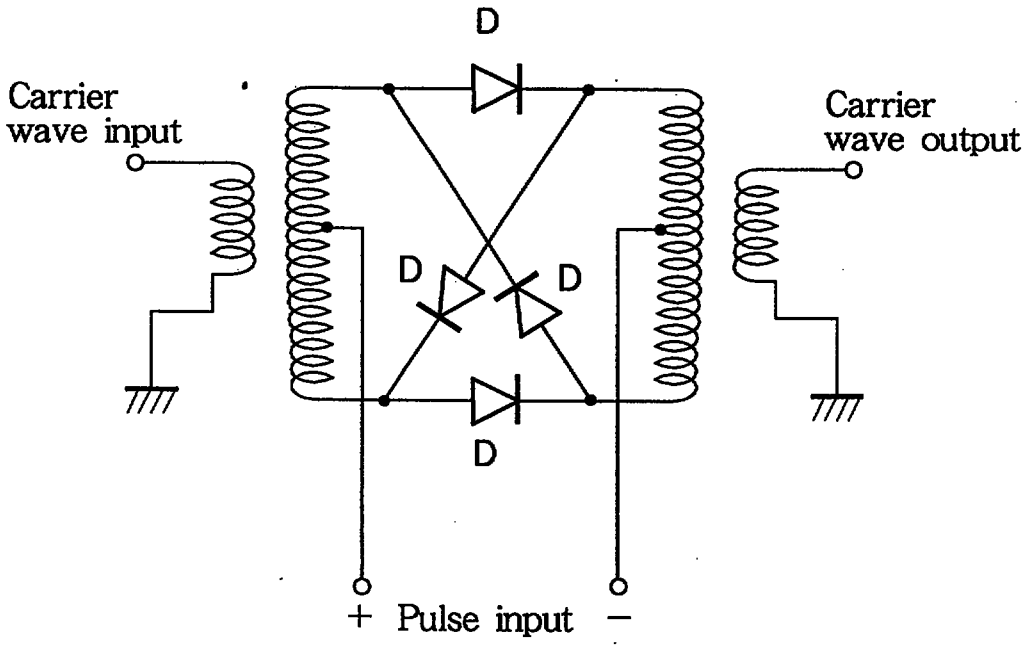
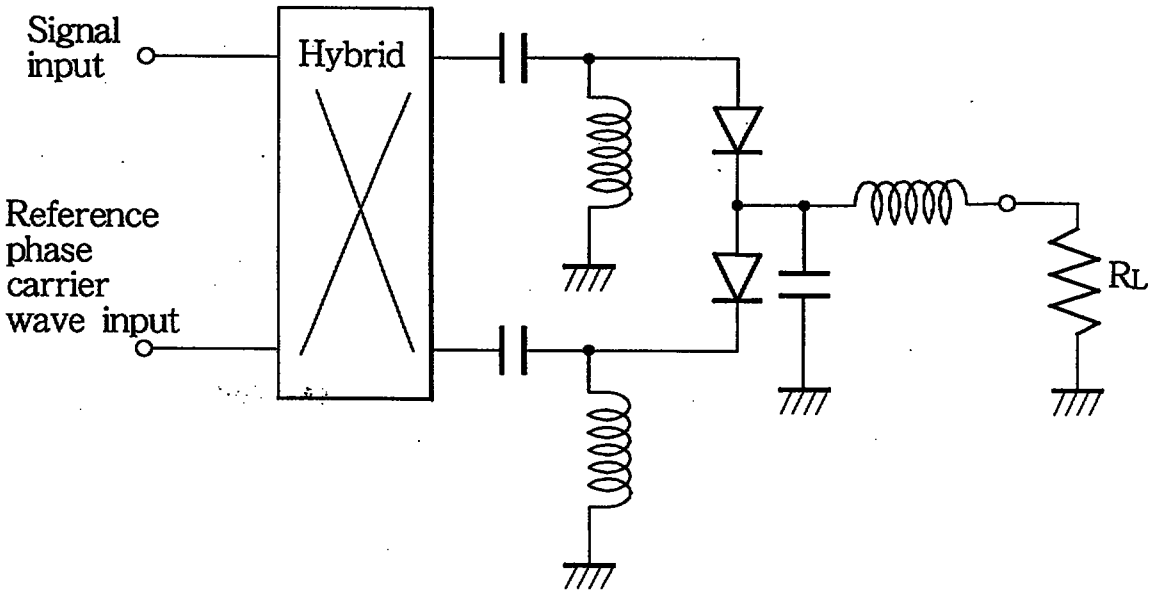

D
Carrier
wave input
Carrier
wave output
D
D
D
+ Pulse input −

FIG.6


Signal
input
Hybrid
Reference
phase
carrier
wave input
RL

DIGITAL COMMUNICATION SYSTEM USING PACKET ASSEMBLING/DISASSEMBLING AND EIGHT-TO-FOURTEEN BIT ENCODING/DECODING

BACKGROUND OF THE INVENTION

The present invention relates to a digital communication system, which can perform a highly reliable digital communication at low cost by digital modulation after a packet process and an 8 bit-14 bit encoding (EFM) process for desired data at a transmission station.

Conventionally, a karaoke performing apparatus has means for transferring a song data read out from an optical disc such as a CD (compact disc), as shown in Fig. 2 (for example, see Unexamined Japanese Patent Publication No. 5-119788). Specifically, double phase shift keying (2 PSK) modulation is performed at an RF modulator 2 according to EFM data, such as, karaoke performance data, which is reproduced from a CD player 1, and the modulated output is transmitted to an RF demodulator 4 via a transmission cable 3. At the demodulator 4, the transmitted output is demodulated to pick up therefrom the EFM data, which is then supplied to an EFM decoder 5. At the decoder 5, the EFM data is decoded, and the decoded data is supplied

REPLACEMENT SHEET
7 FEB 1996
Date :.....

to a D/A converter 6. An analog signal from the converter 6 is supplied to a sound system 8 along with a singing voice signal from a microphone 7 so as to generate mixed sounds.

According to the foregoing data transfer system, since it is the digital transmission system and an error correction process is performed at the EFM decoder 5 and the like, the highly reliable data transmission is possible as compared with an analog transmission system. However, there is inconvenience that only recorded data can be transmitted only in one way. On the other hand, as a further highly reliable digital communication system than that shown in Fig. 2, a system of quadruplex PSK (4 PSK) modulation type is used in a satellite broadcast (BS), which, however, is inconvenient in that encoding for modulation is complicated, leading to high cost.

SUMMARY OF THE INVENTION

An object of the present invention is to provide a highly reliable digital communication system at low cost. According to the invention, a digital communication system comprises a transmitter station and a receiver station for communicating therebetween a data by means of a carrier wave. The transmitter station comprises packet means for assembling a data having an original format into a packet, encoding means

REPLACEMENT SHEET
Date : 7 FEB 1996

for encoding the data in the packet from an initial eight-bit form into a fourteen-bit form, and modulating means for modulating a carrier wave by the encoded data so as to transmit the packet of the encoded data in the fourteen-bit form. The receiver station comprises demodulating means receptive of the modulated carrier wave for demodulating the same to separate therefrom the packet of the encoded data, decoding means for decoding the encoded data in the packet from the fourteen-bit form into the initial eight-bit form, and unpacket means for disassembling the packet of the decoded data to restore the original format of the data having the initial eight-bit form.

In a preferred form, the packet means includes means for adding a self-checking code in the packet, and the unpacket means includes means for detecting an error contained in the data according to the self-checking code so as to correct the error. Further, the encoding means includes means for inserting a self-checking code into the fourteen-bit form of the data, and the decoding means includes means for detecting an error contained in the data according to the self-checking code so as to correct the error. In a specific form, the transmitting station includes database means for storing a song data in an original MIDI format for transmission of the song data in response to a request of a karaoke song from the

REPLACEMENT SHEET
Date 7 FEB 1996

receiving station, and the receiving station includes performance means for performing the karaoke song according to the song data transmitted from the transmitting station.

According to another aspect of the invention, a digital data transmitter/receiver apparatus for transmitting an outgoing data and receiving an incoming data by means of a carrier wave in a two-way, comprises packet/unpacket means for assembling the outgoing data having an original format into a forward packet and for disassembling a backward packet of the incoming data to restore the original format, encoding/decoding means for encoding the outgoing data in the forward packet from an initial eight-bit form into a fourteen-bit form and for decoding the incoming data in the backward packet from the fourteen-bit form into the initial eight-bit form, and modulating/demodulating means for modulating a carrier wave by the encoded outgoing data so as to transmit the forward packet of the outgoing data in the fourteen-bit form and for demodulating another carrier wave to separate therefrom the backward packet of the incoming data received in the fourteen-bit form.

According to the construction of the present invention, at the transmitting station, the desired data is subjected to the packet process and the EFM process in sequence, and the self-checking code in the form of error check bits is added by

REPLACEMENT SHEET
Date : 7 FEB 1996

both of the packet and EFM processes. Further, at the receiving station, a data error is detected and corrected based on the error check bits in both of the decoding process and the unpacket process. Accordingly, the highly reliable data transmission is achieved. The packet means and the unpacket means are generally used in CD-ROM technique and can be obtained at low cost. On the other hand, the encoding means and the decoding means are generally used in CD technique and can be obtained at low cost.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing a digital communication system according to one embodiment of the present invention.

Fig. 2 is a block diagram showing a conventional digital communication system.

Figs. 3A, 3B and 3C are schematic diagrams showing packet process of a song data to be transmitted.

Fig. 4 shows a conversion table of eight-to-fourteen bit coding according to the invention.

Fig. 5 is a circuit diagram showing one example of a PSK modulator.

Fig. 6 is a circuit diagram showing one example of a PSK demodulator.

REPLACEMENT SHEET
Date : 7 FEB 1996

DETAILED DESCRIPTION OF THE INVENTION

Fig. 1 shows a digital communication system according to one embodiment of the present invention. In this embodiment, a song data associated to karaoke performance is communicable in a two-way fashion between a transmitting station and a receiving station. A communication line 10 is formed by, for example, a CATV (cable television) line, which interconnects the transmitting station in the form of a karaoke station 20 and the receiving station in the form of a karaoke terminal 30. Although a plurality of karaoke terminals can be connected to the communication line 10, one terminal 30 will be described for convenience.

In the karaoke station 20, when a request for a musical composition of a desired karaoke song is issued from one of the karaoke terminals, a host computer 22 delivers a karaoke performance data of that musical composition to the requesting karaoke terminal. In this example, the karaoke performance data is composed of a song data which is arranged in an original format according to MIDI (musical instrument digital interface) standard, and which is formatted such that a note-on event data (data for designating a tone pitch and a tone volume of a sound to be produced), a note-off event data (data for designating a sound to be attenuated) and other event data are arranged in

REPLACEMENT SHEET
Date : 7 FEB 1996

order of occurrences of events while an interval time data is interposed between preceding and succeeding events.

A packet assembler/disassembler 24 includes an assembler which performs a packet process of the data fed from the computer 22 and a disassembler which performs an unpacket process of the data fed from an EFM encoder/decoder 26. The packet process and the unpacket process are described in a yellow book of CD-ROM, and a bit rate is 1.5–6 Mbps. In the packet process, error check bits are added to the data. In the unpacket process, an error of the data is detected and corrected based on the error check bits.

The EFM encoder/decoder 26 includes an encoder which performs an EFM process for the packet of the data fed from the packet assembler/disassembler 24 and a decoder which performs a decoding process of the EFM data fed from an RF modulator/demodulator 28. The EFM encoding process and the decoding process are described in a red book of CD. In the EFM encoding process, error check bits are added to the data. In the decoding process, an error of the data is detected and corrected based on the error check bits.

The RF modulator/demodulator 28 includes a modulator which modulates an outgoing carrier wave by the EFM data fed from the EFM encoder/decoder 26 and sends the modulated carrier wave to the communication line 10,

REPLACEMENT SHEET
Date : 7 FEB 1996

and a demodulator which demodulates an incoming carrier wave received from the communication line 10. The modulator/demodulator 28, for example, are of 2PSK modulation type.

In the karaoke terminal 30, an RF modulator/demodulator 32, an EFM encoder/decoder 34 and a packet assembler/disassembler 36 have the same structures as the foregoing RF modulator/demodulator 28, EFM encoder/decoder 26 and packet assembler/disassembler 24, respectively, and operate in the same manner.

The RF modulator/demodulator 32 demodulates the modulated carrier wave received from the communication line 10 to pick up or separate therefrom the EFM data, and supplies it to the EFM encoder/decoder 34. The encoder/decoder 34 performs a decoding process of the supplied EFM data and supplies the decoded data to the packet assembler/disassembler 36. The assembler/disassembler 36 performs an unpacket process for the supplied backward packet of the decoded data and supplies the decoded data in a disassembled form to a bus 38. In the decoding process and the unpacket process, data errors are detected and corrected in the same manner as described above.

The packet assembler/disassembler 36 performs a packet

REPLACEMENT SHEET
Date : 7 FEB 1996

process of an outgoing data fed from a bus 38, and supplies an assembled forward packet of the data to the EFM encoder/decoder 34. The encoder/decoder 34 performs an EFM encoding process of the supplied data, and supplies the EFM data to the RF modulator/demodulator 32. In the packet process and the EFM process, error check bits are added to the data in the same manner as described above. The modulator/demodulator 32 modulates a carrier wave according to the supplied EFM data, and sends the modulated carrier wave to the communication line 10. The RF modulator/demodulator 32, for example, are of 2PSK modulation type. A communication channel determined by a frequency of the carrier wave used at the modulator of the karaoke terminal 30 differs from that used at the modulator of the karaoke station 20.

The bus 38 connects altogether a CPU (central processing unit) 40, a command input implement 42, a buffer memory 44, an MIDI performance unit 46 and the like. The CPU 40 executes various processes for communication control, musical tone generation and the like according to programs stored in a memory not shown in the drawings. The command input implement 42 is operated for inputting a request command of a desired musical composition of a karaoke song. The inputted request command is transmitted

REPLACEMENT SHEET
Date : 7 FEB 199

to the host computer 22 via the packet assembler/disassembler 36, the EFM encoder/decoder 34, the RF modulator/demodulator 32, the communication line 10, the RF modulator/demodulator 28, the EFM encoder/decoder 26 and the packet assembler/disassembler 24. The host computer 22 sends a karaoke performance data of the requested musical composition in response to the request command. The karaoke performance data is transmitted to the karaoke terminal 30 and is loaded into the buffer memory 44 via the packet assembler/disassembler 24, the EFM encoder/decoder 26, the RF modulator/demodulator 28, the communication line 10, the RF modulator/demodulator 32, the EFM encoder/decoder 34 and the packet assembler/disassembler 36.

The CPU 40 reads out the event data, such as, the note-on event data and the note-off event data in sequence based on the event interval time data contained in the karaoke performance data stored in the memory 44, and supplies the read event data to the MIDI performance unit 46. The performance unit 46 includes a tone generator and produces a tone signal via a tone generating channel according to the note-on event data, and attenuates the tone signal being produced in response to the note-off event data. The tone signal TS is fed from the performance unit 46 to a

REPLACEMENT SHEET
Date : 7 FEB 1996

sound system 50 along with a singing voice signal SS detected from a microphone (M) 48. The sound system 50 includes an amplifier, a loudspeaker and the like, and converts the signals TS, SS into the karaoke sounds. A singer, after requesting a desired musical composition via the command input implement 42, can enjoy singing along with the accompaniment of the karaoke performance based on the karaoke performance data stored in the memory 44.

The foregoing embodiment is arranged to transfer the MIDI performance data to the karaoke terminal 30 from a database of the karaoke station 20. However, not limited to this, it may also be arranged to transfer PCM-recorded tone data. In this case, a D/A converter may be provided instead of the performance unit 46 to convert the PCM tone data into an analog tone signal which is supplied to the sound system 50. Further, it may also be arranged to transfer word data and background image data to the karaoke terminal 30 from the host computer 22 and to control an image display device (not shown in the drawings) of the karaoke terminal 30 to display the word images and the background images. The present invention is applicable to the transfer of various kinds of data, not limited to the karaoke song data, and not only applicable to the cable communication but also to a wireless communication.

REPLACEMENT SHEET
Date : 7 FEB 1996

Fig. 3A shows an original format of the song data stored in the database of the central karaoke station. The database contains a song data memory area for memorizing numerous files (several hundreds to several thousands) of the song data, and a directory file which memorizes identification codes (file names) of the song data files stored in the data memory area.

Fig. 3B schematically shows a format of one song data file which includes a header, an instrument track, a lyric track, a voice track, a digital sound field processing (DSP) control track and a voice data section. The header is written with various index data regarding the song such as a title, a genre, a release date, and a time length of performance. The instrument track is divided into subtracks corresponding to various parts of the instrumental accompaniment such as a piano part, a rhythm part and else. Each subtrack is written with a sequence of an event data and an event interval time data. The lyric track is written with a lyric word data for use in displaying of lyric characters on the monitor. The lyric track does not contain a pure MIDI data. However, in order to integrate an overall implementation and to facilitate data processing, the lyric data is prescribed in a specific form of "system-exclusive-message" likewise the MIDI data which is written in the instrument track. The voice track is utilized to generate a voice of a back chorus or else, which would be

REPLACEMENT SHEET
Date : 7 FEB 1996

hardly synthesized by a tone generator involved in the MIDI performance unit 46. The voice track is processed in combination with the voice data section so as to produce a back chorus sound or a harmony melody sound. The voice data section contains a plurality of ADPCM data sampled from a live chorus sound according to adaptive delta pulse code modulation. The voice track is written with a sequence of duration data and designation data. The duration data determines a timing when an ADPCM data is converted into an analog voice signal. The designation data is read out at that timing. The designation data designates one of the ADPCM data according to an assigned number 1, 2, ..., n. Further, the DSP control track is written with a control data effective to control a digital sound field processor contained in the karaoke terminal 30. The digital sound field processor is operated to impart a reverberation and other effects to the karaoke sound. The type and variation of the effect is progressively regulated according to the control data written in the DSP control track during the course of the karaoke performance.

Fig. 3C shows a forward packet of the song data to be transferred from the station to the terminal. One file of the song data is composed of about 100 Kbytes. For example, the song data is divided into blocks each containing 2048 bytes so

REPLACEMENT SHEET
Date : 7 FEB 1996

as to form a packet likewise CD-ROM format. Each block is added with a sync of 12 bytes and a header of 4 bytes at a top part, while the self-checking code or an error detection code (EDC) of 4 bytes, an identification space of 8 bytes, a P-parity of 172 bits and a Q-parity of 104 bits are added at an end part of the block, thereby forming one packet. A train of the packets are modulated by the EFM method for transmission. On the other hand, the packet is disassembled by the unpacket process so as to remove therefrom the header, the parity bit or else to restore the original format of the song data.

Fig. 4 shows a conversion table of the EFM. As mentioned before, the EFM encoder/decoder receives the packet and encodes the same according to Eight to Fourteen Modulation (EFM) method. In the EFM method, an eight-bit data is converted into a set of fourteen channel bits such that the maximum inversion interval is set narrowly and the minimum inversion interval is set widely while a DC component is reduced. Such a packet format and its encoding by EFM are commonly adopted in the CD system. Further, the EFM encoder/decoder decodes the EFM data into the data packet of a base band. In detail as indicated by the Fig. 4 table, the EFM method treats an input signal as an eight-bit data which represents 256 (2^8) number of symbols.

REPLACEMENT SHEET
Date : 17 FEB 199

All symbols of the eight-bit form are converted into a fourteen-bit form according to predetermined bit patterns. The fourteen-bit form contains 16384 (2^{14}) bit patterns, from which 256 number of suitable bit patterns are selected to correspond to the 256 number of the initial eight-bit data. Namely, the selected bit patterns meet a specific condition that adjacent bits "1" have therebetween bits "0" at least two and at most ten, thereby optimizing the maximum and minimum inversion intervals while reducing a DC component.

Lastly, as mentioned before, the RF modulator/demodulator modulates a carrier wave by the PSK (phase shift keying). The PSK method modulates a phase of the carrier wave by either of "0" and "π" corresponding to "1" and "0" status of an input pulse. For this, the PSK method preferably utilizes a ring modulator of a double balanced type as shown in Fig. 5. The RF modulator/demodulator further includes a demodulator composed of a phase detector, for example, as shown in Fig. 6. The phase detector detects a phase difference between a signal and a reference carrier wave.

As described above, according to the present invention, the packet process and the EFM process are performed at the transmitting station and the EFM decoding process and the unpacket process are performed at the receiving station.

REPLACEMENT SHEET
Date : 7 FEB 1996

Therefore, the effect is obtained that the highly reliable digital communication is made possible at low cost, and further, the two-way communication can be easily realized.

REPLACEMENT SHEET
Date : 17 FEB 199

* C L M S *

WHAT IS CLAIMED IS:

1. A digital communication system comprising a transmitter station and a receiver station for communicating therebetween a data by means of a carrier wave: wherein

the transmitter station comprises packet means for assembling a data having an original format into a packet, encoding means for encoding the data in the packet from an initial eight-bit form into a fourteen-bit form, and modulating means for modulating a carrier wave by the encoded data so as to transmit the packet of the encoded data in the fourteen-bit form; and wherein

the receiver station comprises demodulating means receptive of the modulated carrier wave for demodulating the same to separate therefrom the packet of the encoded data, decoding means for decoding the encoded data in the packet from the fourteen-bit form into the initial eight-bit form, and unpacket means for disassembling the packet of the decoded data to restore the original format of the data having the initial eight-bit form.

2. A digital communication system according to claim 1, wherein the packet means includes means for adding a self-checking code in the packet, and wherein the unpacket means includes means for detecting an error contained in the data according to the self-checking code so as to correct the

REPLACEMENT SHEET
7 FEB 1996
Date :.....

* C L M S *

error.

3. A digital communication system according to claim 1, wherein the encoding means includes means for inserting a self-checking code into the fourteen-bit form of the data, and wherein the decoding means includes means for detecting an error contained in the data according to the self-checking code so as to correct the error.

4. A digital communication system according to claim 1, wherein the transmitting station includes database means for storing a karaoke data in an original MIDI format for transmission of the karaoke data in response to a request of a karaoke song from the receiving station, and wherein the receiving station includes performance means for performing the karaoke song according to the karaoke data transmitted from the transmitting station.

5. A digital data transmitter/receiver apparatus for transmitting an outgoing data and receiving an incoming data by means of a carrier wave in a two-way, comprising:

packet/unpacket means for assembling the outgoing data having an original format into a forward packet, and for disassembling a backward packet of the incoming data to restore the original format;

encoding/decoding means for encoding the outgoing data in the forward packet from an initial eight-bit form into a

REPLACEMENT SHEET
Date : 17 FEB 1996

fourteen-bit form, and for decoding the incoming data in the backward packet from the fourteen-bit form into the initial eight-bit form; and

modulating/demodulating means for modulating a carrier wave by the encoded outgoing data so as to transmit the forward packet of the outgoing data in the fourteen-bit form, and for demodulating another carrier wave to separate therefrom the backward packet of the incoming data received in the fourteen-bit form.

* C L M S *

REPLACEMENT SHEET
Date : 7 FEB 1996

DIGITAL COMMUNICATION SYSTEM USING PACKET ASSEMBLING/DISASSEMBLING AND EIGHT-TO-FOURTEEN BIT ENCODING/DECODING

ABSTRACT

A digital communication system communicates a data between a transmitter station and a receiver station by means of a carrier wave. The transmitter station has a packet assembler for assembling a data having an original format into a packet, an encoder for encoding the data in the packet from an initial eight-bit form into a fourteen-bit form, and a modulator for modulating a carrier wave by the encoded data so as to transmit the packet of the encoded data in the fourteen-bit form. The receiver station has a demodulator receptive of the modulated carrier wave for demodulating the same to separate therefrom the packet of the encoded data, a decoder for decoding the encoded data in the packet from the fourteen-bit form into the initial eight-bit form, and a packet disassembler for disassembling the packet of the decoded data to restore the original format of the data having the initial eight-bit form. (Figure 1 is the figure that should accompany the abstract when published).

REPLACEMENT SHEET
Date : 7 FEB 1996