

Programmable logic device with verify circuitry for classifying fuse link states as validly closed, validly open or invalid.

FIELD OF THE INVENTION

The present invention relates to programmable logic devices (PLD's) of a type in which an internal memory of fuse or anti-fuse links is programmable via program circuitry to achieve a desired pattern of "open" and "closed" link states which are verifiable via the program circuitry. More specifically, the invention relates to an electronic circuit that comprises a memory array of programmable elements, each element having an electrical property which is describable by a parameter and which is alterable from an unprogrammed condition in response to an application of energy directed to the element. The parameter has a first value lying in a first range of values when the element is unprogrammed and a second value lying in a second range of values when the element is successfully programmed.

BACKGROUND OF THE INVENTION

Programmable logic devices (PLD's) include a family of integrated circuits (IC's) with an internal memory array of programmable elements (links) of a fuse or an anti-fuse type. A memory array of links of the fuse type has all link states originally "closed" while an array of links of the anti-fuse type has all link states originally "open". The array is programmed in response to high power programming pulses to contain a desired pattern of "open" and "closed" link states in order to customize the PLD's functionality. As a result of the programming, specific links are intended to be brought irreversibly and completely to a state opposite their original state.

While ideally "closed" links should have a zero resistance and "open" links an infinite resistance, this is not achievable in practice. Because zero resistance materials are not available at the operating temperatures of integrated circuits, typically the resistance of a "closed" or intact link may range up to 100Ω while a distribution of resistance of an "open" link may range from $100M\Omega$ down to below 100Ω .

Through proper design and testing methodologies, integrated circuits with link resistance values that would adversely affect functionality can be rejected. Current testing philosophies include a verification during which the links are sequentially selected and the resistance of each selected link is compared with a single reference resistance value, for

example 500K Ω , to classify the link resistance among two resistance zones divided by the reference value, i.e. one resistance zone corresponding to a "closed" or "intact" state and the other resistance zone corresponding to an "open" state. If the resistance of a link is greater than the reference resistance value, the link is considered in the "open" state, otherwise the link is considered in the "closed" state.

Links whose resistance approach the ideally "closed" value of zero or the ideally "open" value of infinity pose no problem. However, as link resistance approaches the reference resistance value, functional and AC failures, which are not usually tested for during or after programming, may result. Functional and AC testing, beyond the usual room temperature functional test, sufficient to identify these possible failures would be unduly costly.

OBJECT OF THE INVENTION

It is an object of the present invention to provide a programmable logic device integrated circuit having verification circuitry configured such that all IC's that pass both programming verification and room temperature functional test are virtually guaranteed to function as programmed. It is another object of the present invention to provide such verification circuitry in integrated circuits of various types, including bipolar and biCMOS.

SUMMARY OF THE INVENTION

Briefly, these and other objects of the present invention are satisfied by the circuit of the invention specified in the preamble and characterized, in that the circuit includes verification means for selectively and reversibly including a selected one of the elements in a verification circuit and for providing one or more signals indicative of whether or not the value of the parameter of the selected element lies in a forbidden range of values of the parameter intermediate the first and second ranges. The explicit indication that the selected programmable element has a parameter value lying within the forbidden range enables discriminating between properly functioning and faulty arrays.

Preferably, the verification means is operative to provide the one or more signals indicative of the value of the parameter of the selected element lying in a specific one of the first, second and forbidden ranges. An indication as to which one of the three parameter ranges is concerned gives a full representation of the status of the selected element.

In case the parameter is a resistance of the element, the verification means

preferably comprises a current source, connectable to the selected element and operative to supply first or second currents to the selected element to create a voltage across the selected element; comparator means coupled to the selected element for comparing the voltage to first and second reference voltages indicative of the first and second ranges, respectively, and for providing comparator output signals representative of the comparison; and logic gate means coupled to the comparator means for providing the one or more signals on the basis of the comparator output signals.

The first range is, for example, the "validly closed" state range corresponding to link resistances less than a lower reference resistance value. The second range then is the "validly open" state range corresponding to link resistances greater than or equal to the higher reference resistance value. The forbidden range then lies between the two reference resistance values. Because the quotient of the higher reference resistance value and the lower reference resistance value is typically more than 50, for example 200, the verification circuitry includes a switchable two level current source in order to produce test voltages across the links (link voltages) of correct dynamic range. The current source produces a predetermined constant higher current through those links having a resistance less than or equal to the lower reference resistance value and a predetermined constant lower current through those links having a resistance greater than or equal to the higher reference resistance value. The quotient between the higher and lower current levels is preferably about one quarter of the quotient between the higher and lower reference resistance values.

A measurement voltage at a node which is produced in response to the link voltage is compared by differential comparator means to respective lower and higher reference voltages, the lower reference voltage corresponding to the measurement voltage that would be produced by a higher link voltage which is the product of the higher reference resistance value and the lower current level, and the higher reference voltage corresponding to the measurement voltage that would be produced by a lower link voltage which is the product of the lower reference resistance value and the higher current level. It should be appreciated that the quotient of the higher and lower link voltages equals the quotient of the higher and lower reference resistance values divided by the quotient of the higher and lower current levels.

In accordance with a first embodiment of the invention useful for a bipolar implementation, the switchable current source is configured to automatically switch a relatively high current source out of the circuit with a selected link as long as the link voltage exceeds the higher link voltage, thereby clamping the link voltage to the higher link

voltage for a link resistance of the selected link in the range less than or equal to the higher reference resistance value and greater than or equal to the quotient of the higher link voltage and the higher current level. Consequently, the link voltage of the selected link will exceed the higher link voltage only when the link resistance exceeds the higher reference resistance value and the link voltage will be less than the lower link voltage only when the link resistance is less than the lower reference resistance value.

In accordance with a second embodiment of the invention useful for a biCMOS implementation, the switchable current source is configured to switch a relatively high current source into the circuit with a selected link during a strobe signal. Otherwise, only a relatively low current source is in the circuit with the selected link. The comparator means is configured to be active for comparison of the measurement voltage with the lower reference voltage only in the absence of the strobe signal and for comparison of the measurement voltage with the higher reference voltage only during the strobe signal.

However done, the results of the comparisons of the measurement voltage with the lower and higher reference voltages enable formation of digital signals classifying the link resistance of the selected link among a "validly closed" state zone, a "validly open" state zone and an "invalid" state zone intermediate the "validly closed" and "validly open" state zones. The "invalid" state zone is chosen to be of sufficient extent to ensure that a PLD having all its link resistance values verified as lying in the "validly closed" and "validly open" state zones is virtually guaranteed to operate as programmed, providing it passes the usual room temperature functional test.

The invention also relates to a method of verifying a status of a plurality of programmable elements in an electronic memory array, wherein each element has an electrical property which is describable by a parameter and which is alterable from an unprogrammed condition in response to an application of energy directed to the element. The parameter has a first value lying in a first range of values when the element is unprogrammed, and a second value lying in a second range of values when the element is successfully programmed. In accordance with the invention, the verifying step comprises reversibly including a selected one of the elements in a verification circuit; and enabling the verification circuit to provide one or more signals indicative of whether or not the value of the parameter of the selected element lies in a forbidden range of values of the parameter intermediate the first and second ranges. This method may be feasible when testing memory arrays with off-chip test circuitry.

BRIEF DESCRIPTION OF THE DRAWING

Other objects, features and advantages of the present invention will become apparent upon perusal of the following detailed description when taken in conjunction with the appended drawing, wherein:

5 Figure 1 is a diagram of link resistance value ranges with respect to a logarithmic scale;

 Figure 2 is a schematic diagram of a first embodiment of the invention implemented using bipolar elements; and

 Figure 3 is a schematic diagram of a second embodiment of the invention
10 implemented using biCMOS elements.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring first to Figure 1 of the drawing, it has been found experimentally that notwithstanding the prior art use of a single reference resistance value, for example 500K Ω ,
15 to classify the link resistance among one resistance zone corresponding to a "closed" or "intact" state and the other resistance zone corresponding to an "open" state, in fact AC and functional failures are possible in a range 10 including those link resistance values lying in the range of about 1K Ω to 50K Ω . Consequently in accordance with the present invention, an "invalid" or "forbidden" state range 12 of link resistance values is established which is wider
20 than the range 10, and spans between lower and higher reference resistance values, preferably 500 Ω and 100K Ω , respectively. Then, a "validly closed" state range corresponds to link resistances less than the lower reference resistance value and the "validly open" state range corresponds to link resistances greater than or equal to the higher reference resistance value. Consequently, in accordance with the invention, the prior art verification circuitry for
25 classifying the states of the links as "open" or "closed" is expanded to classify the states of the links as "validly open", "validly closed" or "invalid". A PLD having a link in an "invalid" state is, in general, rejected.

 It is noted that the higher and lower reference resistance values are in the ratio of at least 50 to 1 and preferably 200 to 1. As will become clearer as the discussion
30 proceeds, this large ratio necessitates using a current source that produces a predetermined constant higher current through those links having a resistance less than or equal to the lower reference resistance value and a predetermined constant lower current through those links having a resistance greater than or equal to the higher reference resistance value in order to produce test voltages across the links of correct dynamic range.

Referring to Figure 2, there is illustrated an embodiment of the invention using bipolar integrated circuit technology. Therein, a plurality of fuse links 14 are shown arranged in a two dimensional array of $M+1$ rows, numbered 0 to M , by $N+1$ columns, numbered 0 to N . For purposes of illustration, links 14 are oriented vertically, having an upper terminal 14a and a lower terminal 14b. Further, the array is arranged, for purposes of illustration, with rows oriented vertically and columns oriented horizontally.

Each link 14 has an individual transistor switch 16 connected between the link's upper terminal 14a and a supply voltage source VCC, preferably equal to 5 volts. The base electrodes 16a of the transistor switches 16 connected to links 14 in each same row are connected to a row selection line 18 fed by a row decoder 20 for that row. Each row decoder 20 includes an AND gate 22 which is responsive to a group of parallel inputs 24, which are all digital ONE when the row number corresponding to the row is decoded and a further input signal VPROG at input 25 which is digital ONE to enable programming or verifying the states of the links 10. It should be appreciated that when all inputs to AND gate 22 of a row decoder are digital ONE, all transistor switches 16 controlled by that row decoder are in an ON state.

Similarly, the lower terminals of links 14 in each same column are connected to a column selection line 26 fed by a column decoder 28 for that column. Each column decoder includes a transistor switch 30 for producing a programming current I_p through a selected link 14 to produce sufficient thermal energy in the link to cause it to become "open". Transistor 30 has its base electrode 30a connected to the output of an AND gate 31.

Also included in each column decoder is a switchable two level verification current source 32 including a first portion 34 for producing a relatively high level verification current I_H , preferably 1ma, through the selected link and a second portion 36 for producing a relatively low level verification current I_L , preferably $20\mu a$, through the selected link. Actually, in order to produce the low level verification current I_L through the selected link, the second portion must actually sink a current equal to $I_L + I_1$, where I_1 is the current passing through a Schottky diode 66 coupling each column control line 26 to comparator circuitry which will be later discussed. Each column decoder 28 has a group of parallel inputs 38 which are all digital ONE in response to decoding of the column number corresponding to the column controlled by the column decoder, a PRO/VER input signal on input 40 which is near VCC (digital ONE) to enable programming and near ground (digital ZERO) to enable verification and the signal VPROG on input 42. The latter is near VCC (digital ONE) for programming and for verification. The inputs 38 feed an AND gate 44. A

pulsatile signal VPROG on input 42 is coupled via a resistor 46 to a point 48 that is connected to the output of AND gate 44 so as to form a wired AND function. Also, the PRO/VER input signal on input 40 and the output of AND gate 44 are inputs to AND gate 31 controlling transistor switch 30.

5 The voltage at point 48 forms the supply voltage coupled via resistors 50, 52 to the collectors and bases of Schottky transistors 54, 56 and bases of Schottky transistors 58, 60, in the current source portions 34, 36, respectively. The emitters of the transistors 54, 56, 58, and 60 are all connected to PRO/VER input 40. Transistors 54, 58 and 56, 60 form input and output of current mirror pairs. The resistors 50, 52 and relative widths or number
10 of parallel junctions of the current mirror pairs are chosen to achieve the current I_H in transistor 58 and the current I_L in transistor 60. The collector of output transistor 58 is connected to column control line 26 via the series combination of a Schottky diode 62 and two diodes formed by base to collector commoned transistors 64, while the collector of transistor 56 is directly connected to line 26. The aforementioned series combination
15 produces a fixed voltage drop equal to two V_{be} 's (one V_{be} = approx. 0.75 volts) plus a Schottky drop (approx. 0.5 volts). Consequently, when the voltage on collector control line 26 falls below 2.75 volts, i.e., one Schottky diode drop plus two pn-diode drops plus one saturation voltage above ground, then diode 62 and transistors 64 reverse bias. This stops current I_H and forces transistor 58 to operate near saturation. All current demanded by
20 transistor 58 then is sourced through its Schottky diode clamp from VPROG.

In operation, a link whose state is to be programmed or verified is selected by provision of its row and column locations to row and column decoders 20, 28 and the assertion of a VPROG pulse of digital ONE value. The transistor switches 16 of the selected row are turned on in response to row decoder 20 for that row and the transistor switch 30,
25 for programming, or the two level current source 32, for verification, within the column decoder 28 for the selected column is turned on to sink current from its associated column conductor 26. Two level current source 32 is turned on for verification purposes during the duration of the VPROG pulse when the PRO/VER input is digital ZERO (near ground) while transistor switch 30 is turned on for programming purposes during the duration of the
30 VPROG pulse when the PRO/VER input is digital ONE.

During verification, the current produced through the selected link by two level current source 32 is dependent upon the link resistance. For a link resistance greater than or equal to $75K\Omega$ ($1.5 \text{ volts}/20\mu\text{a}$), only the lower current level I_L will flow through the selected link, producing a link voltage across the selected link of greater than or equal to 1.5 volts.

The voltage at the lower terminal 14b of the selected link and along line 26 and will be less than or equal to 2.75 volts (subtracting 1.5 volts plus one V_{be} due to transistor switch 16 from $V_{CC} = 5$ volts), thereby maintaining transistor 58 off preventing any flow of the higher level current I_H . At a link resistance equal to the higher reference resistance value R_H of preferably 100K Ω , the voltage at the lower terminal 14b and conductor 26 will be 2.25 volts, which value is hereafter referred to as the lower reference voltage V_1 .

For link resistance less than 1.5K Ω , (1.5 volts/1ma), the high current level I_H of 1 ma will produce a link voltage of less than 1.5 volts. Consequently, the potential of terminal 14b will be greater than 2.75 volts and transistor 58 will never be cut off. At a link resistance equal to the lower reference resistance value R_L of preferably 500 Ω , the voltage at lower terminal 14b will be 3.75 volts, the value thereof being referred to as the higher reference voltage V_2 .

Further, for link resistance between 1.5K Ω and 75K Ω , high level current source 34 will act to clamp the voltage of the lower terminal 14b to just below 2.75 volts.

The various column control lines 26 are connected to the cathodes via Schottky diodes 66 whose anodes are connected to a common node 68. The effect of this interconnection is that the voltage at node 68 is due to the voltage at the lower terminal 14b of the selected link. A further Schottky diode whose anode is connected to node 68 forms a measurement voltage V_{MEAS} at its cathode. The diode 66 associated with the selected column and the diode 68 are biased by current sources 72, 74 and 76 to have equal anode to cathode currents I_1 and consequently equal and opposite voltages. Therefore, measurement voltage V_{MEAS} is equal to the voltage at the lower terminal 14b of the selected link. The current sources and differential comparators 78 and 80 are powered from a voltage source 83 which is active and equal to V_{CC} only during a verification cycle.

Voltage V_{MEAS} is compared in differential comparator 78 with the lower reference voltage V_1 , which is formed by passing a current having the value I_L through a resistance having the value R_H which is connected to supply 83 via a V_{be} junction. If V_{MEAS} exceeds V_1 , which means the resistance of the link is less than R_H , output 82 of comparator 78 will be high (digital ONE). Similarly, voltage V_{MEAS} is compared in differential comparator 80 with the higher reference voltage V_2 , which is formed by passing a current having the value I_H through a resistance having the value R_L which is connected to supply 83 via a V_{be} junction. If V_{MEAS} exceeds V_2 , which means the resistance of the link is less than R_L , output 82 of comparator 78 will be high (digital ONE).

Outputs 82 and 84 form the inputs of an AND gate 86 and of an Exclusive

NOR gate 88. The output of gate 86 is digital ONE when both inputs are digital ONE, which corresponds to the resistance of the link being less than R_L . The output of gate 88 is digital one when both inputs have the same digital value, which corresponds to the link resistance being greater than or equal to R_H or less than R_L . It should be appreciated that from these
5 two digital outputs, it can be determined whether the state of the link is "validly open" (link resistance greater than or equal to R_H), "validly closed" (link resistance less than R_L), or "invalid" (link resistance greater than or equal to R_L and less than R_H).

Referring to Figure 2, there is illustrated an embodiment of the invention using biCMOS integrated circuit technology. Therein, the same reference numerals are used for
10 elements corresponding to the bipolar embodiment shown in Figure 1. The biCMOS embodiment differs from the bipolar embodiment in the design of the two level verification current source and in the voltage measuring section because the low level current I_L and high level current I_H are sequentially applied through the selected link under the control of a strobe signal and the result of comparison of the resultant two measurement values with the
15 associated voltage reference values V_1 and V_2 are latched. As will be seen as the discussion proceeds, low level current I_L is produced through the selected link when the strobe signal is low (digital ZERO) while high level current I_H is produced through the selected link when the strobe signal is high (digital ONE).

The switchable two level verification current source 132 within each column
20 decoder is formed by a pair of series connected FET's 202, 204. FET 202 has its gate electrode connected to output of AND gate 44 turning FET 202 on when the selected column is decoded by AND gate 44. The gate electrodes 204a of FET's 204 are connected together and are fed by line 216 output from column decoders controller 206. Controller 206 controls the current through a FET 218 to selectively add a high current I_H to the low current $I_L + I_1$
25 flowing in the drain to source path of FET 218. Line 216, connected to the commoned drain and gate of FET 216 has a voltage which causes FET 204 to have a drain to source current mirroring the current flowing in FET 218. Controller 206 is responsive to the output of an NOR gate 208 which receives a strobe signal on input 210 and the PRO/VER signal on input
30 212. It includes a voltage controlled current source 214 between voltage source 83 and line 216 producing I_H , FET 218 between line 216 and ground, and current source 220 between source 83 and line 216 producing the low current $I_L + I_1$. Current due to $I_L + I_1$ flows into the drain to source path of FET 218 whenever voltage source 83 is active, irrespective of the state of the strobe signal. Since the PRO/VER signal is digital ZERO during verification, as long as the strobe signal is digital ZERO, the output of NOR gate 208 will be digital ZERO.

The current source 214 will be off and solely the current $I_L + I_1$ will flow in the drain to source path of FET 218, and by current mirror action, also in the drain to source path of FET 204.

When the strobe signal goes to digital ZERO, the output of NOR gate 208 will go to digital ONE turning on upper current source 214 and thereby adding I_H to the current flowing in the drain to source path of FET 218. Current mirror action will cause I_H to flow in the drain to source path of FET 204 in addition to the much smaller $I_L + I_1$.

For comparing the measurement voltage V_{MEAS} produced when the strobe signal is high with the lower reference value V_1 , a comparator 178 is provided which is identical to comparator 78 in Figure 2 except that a FET 222 is located for selectively activating comparator 178 when it is turned on. The gate electrode 222a of FET 222 is fed from the output of NOR gate 208, via an inverter 234, thereby turning FET 222 on when the output of NOR gate 208 is digital ZERO, which is when the strobe signal has not gone to digital ZERO. The output 82 of comparator 178 is applied via the series combination of an inverter 224 and gate element 226 to a latch 228 formed by cross coupled inverters 230, 232. Gate element 226, which is controlled by two complementary inputs, one directly from the output of OR gate 208 and the other via an inverter 234, is on when FET 22 is on.

Similarly, for comparing the measurement voltage V_{MEAS} produced when the strobe signal is low with the lower reference value V_2 , a comparator 180 is provided which is identical to comparator 80 in Figure 1 except that a FET 236a is located for selectively activating comparator 180 when it is turned on. The gate electrode 236a of FET 236 is fed directly from the output of NOR gate 208, thereby turning FET 236 on when the output of NOR gate 208 is digital ONE, which is when the strobe signal goes to digital ZERO. The output 84 of comparator 180 is applied via the series combination of an inverter 224 and gate element 240 to a latch 242 formed by cross coupled inverters 244, 246. Gate element 240, which is controlled opposite complementary inputs to gate element 226, is on when FET 236 is on. The output of latch 228 is digital ONE when the link resistance, as measured when the strobe is digital ONE, is less than the higher reference resistance value R_H . Similarly, the output of latch 242 is digital ONE when the link resistance, as measured when the strobe is digital ZERO, is less than the lower reference resistance value R_L . These outputs are applied to AND gate 86 and exclusive NOR gate 88, as in the embodiment shown in Figure 1 to produce two digital outputs, one of which indicates whether or not the state of the selected link is valid and the other which effectively gives the result of a comparison with at least one of the reference resistance values.

Above embodiments disclose the verification circuitry being on-chip and physically merged with column decoder means. Alternatively, the verification circuitry or the switchable two-level current source may be part of off-chip test equipment. The invention then provides a method of verifying the status of an unprogrammed or programmed element
5 whose basic step includes determining whether or not the value of the describing parameter lies in a forbidden range between two ranges of allowed parameter values.

CLAIMS:

This Sheet Has Been Replaced



1. An electronic circuit comprising:
 - a memory array of programmable elements, each element having an electrical property which is describable by a parameter and which is alterable from an unprogrammed condition in response to an application of energy directed to the element, wherein the parameter has a first value lying in a first range of values when the element is unprogrammed, and a second value lying in a second range of values when the element is successfully programmed; characterized in that the circuit comprises:
 - verification means for selectively and reversibly including a selected one of the elements in a verification circuit and for providing one or more signals indicative of whether or not the value of the parameter of the selected element lies in a forbidden range of values of the parameter intermediate the first and second ranges.
2. The circuit of claim 1, wherein the verification means is operative to provide the one or more signals indicative of the value of the parameter of the selected element lying in a specific one of the first, second and forbidden ranges.
3. The circuit of claim 1 or 2, wherein the parameter comprises a resistance and wherein the verification means comprises:
 - a current source connectable to the selected element and operative to supply first or second currents to the selected element to create a voltage across the selected element, the first current being substantially greater than the second current;
 - comparator means coupled to the selected element for comparing the voltage to first and second reference voltages indicative of the first and second ranges, respectively, and for providing comparator output signals representative of the comparison;
 - logic gate means coupled to the comparator means for providing the one or more signals on the basis of the comparator output signals.
4. The circuit of claim 3, wherein a ratio of the first and second currents is in the order of magnitude of fifty.
5. The circuit of claim 3 or 4, wherein the current source is operative to produce the first current if the selected element has a resistance less than or equal to a lower reference value and the second current if the selected element has a resistance greater than or



equal to a higher reference value.

6. A method of verifying a status of a plurality of programmable elements in an electronic memory array, each element having an electrical property which is describable by a parameter and which is alterable from an unprogrammed condition in response to an application of energy directed to the element, wherein the parameter has a first value lying in a first range of values when the element is unprogrammed, and a second value lying in a second range of values when the element is successfully programmed;
- 5
- characterized in that the verifying comprises:
- reversibly including a selected one of the elements in a verification circuit;
 - 10 - enabling the verification circuit to provide one or more signals indicative of whether or not the value of the parameter of the selected element lies in a forbidden range of values of the parameter intermediate the first and second ranges.

This Sheet Has Been Replaced



1/3

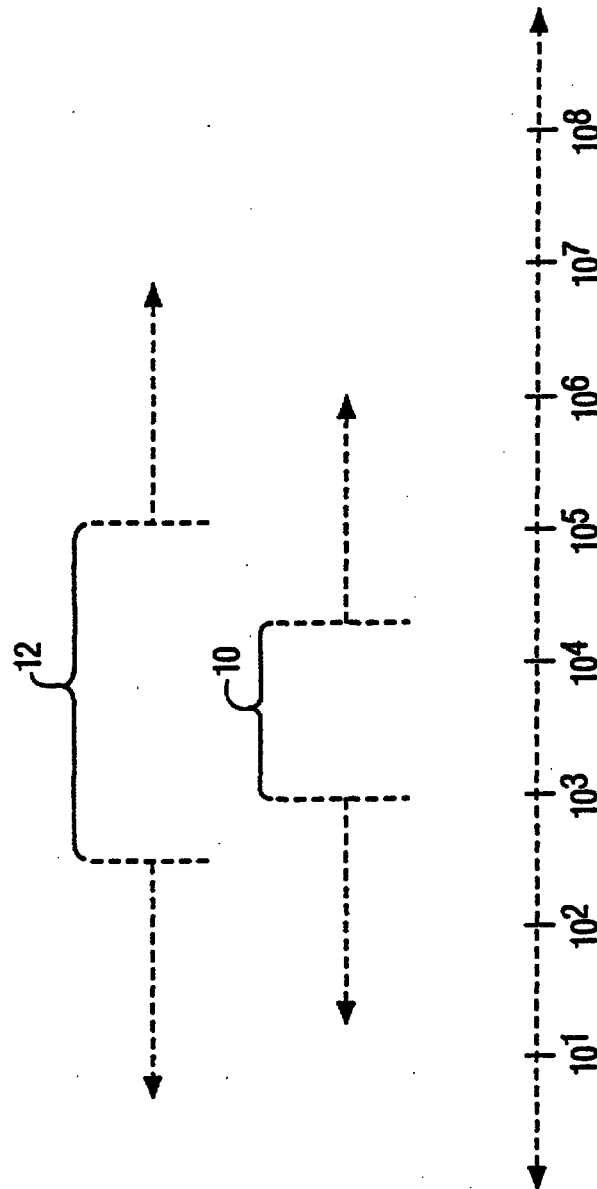


FIG. 1

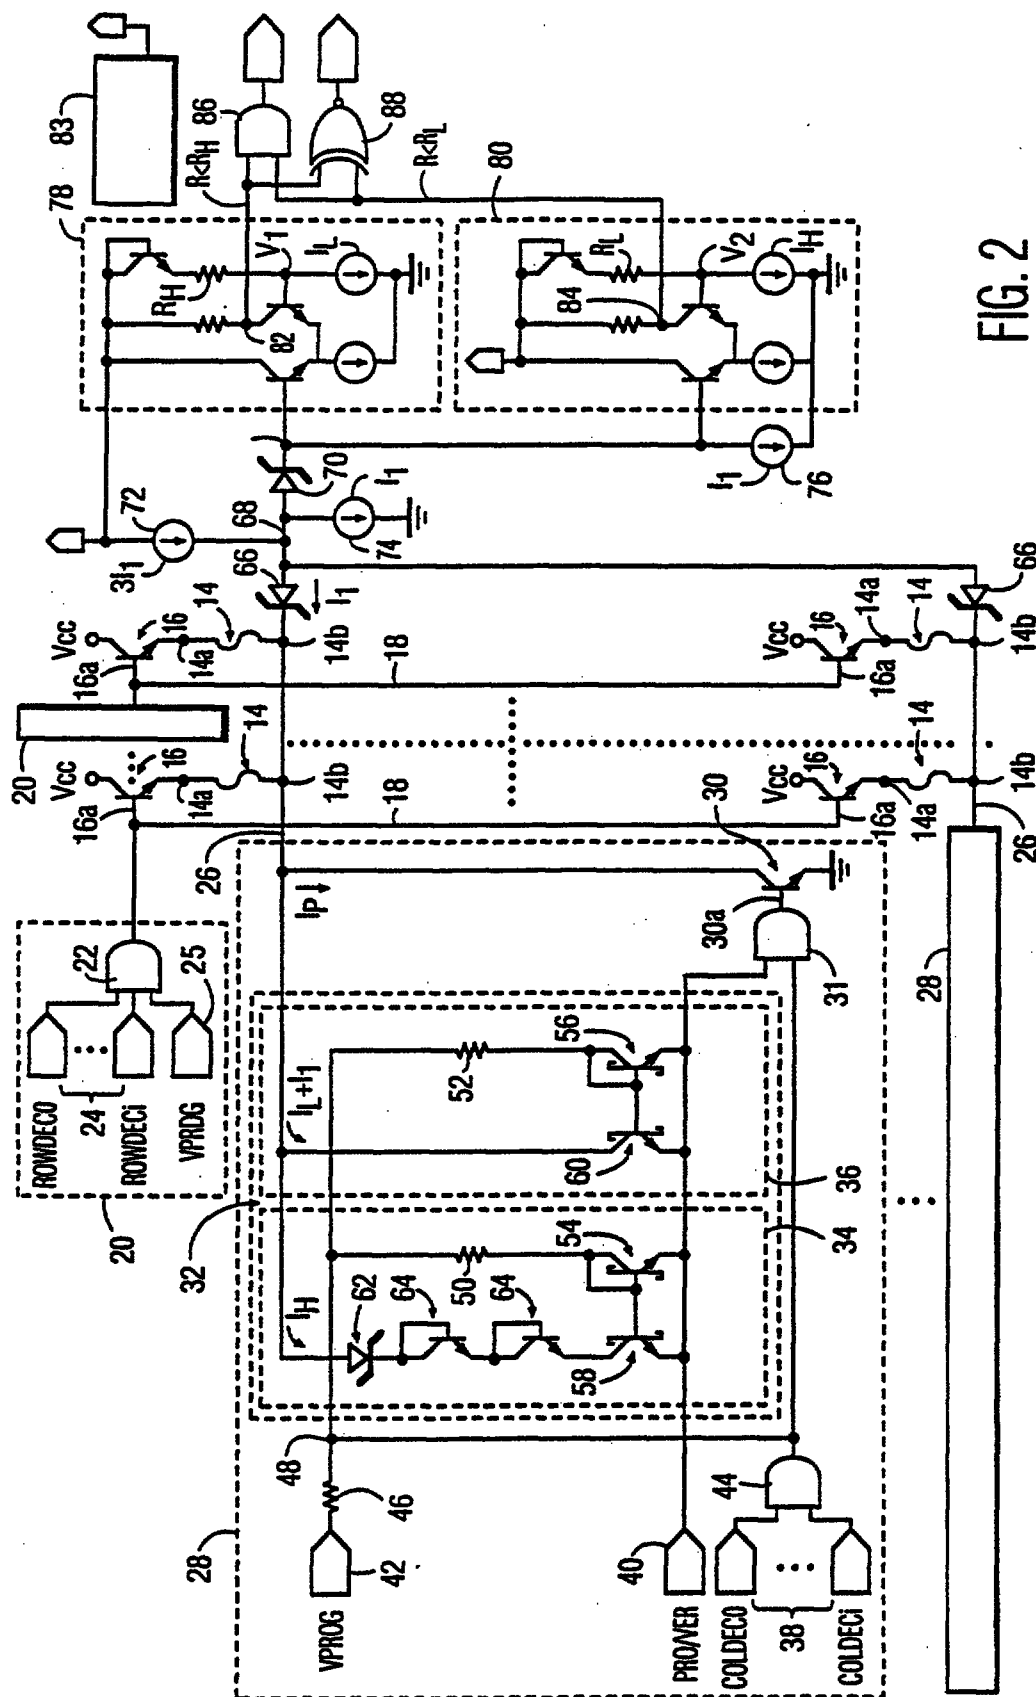


FIG. 2

3/3

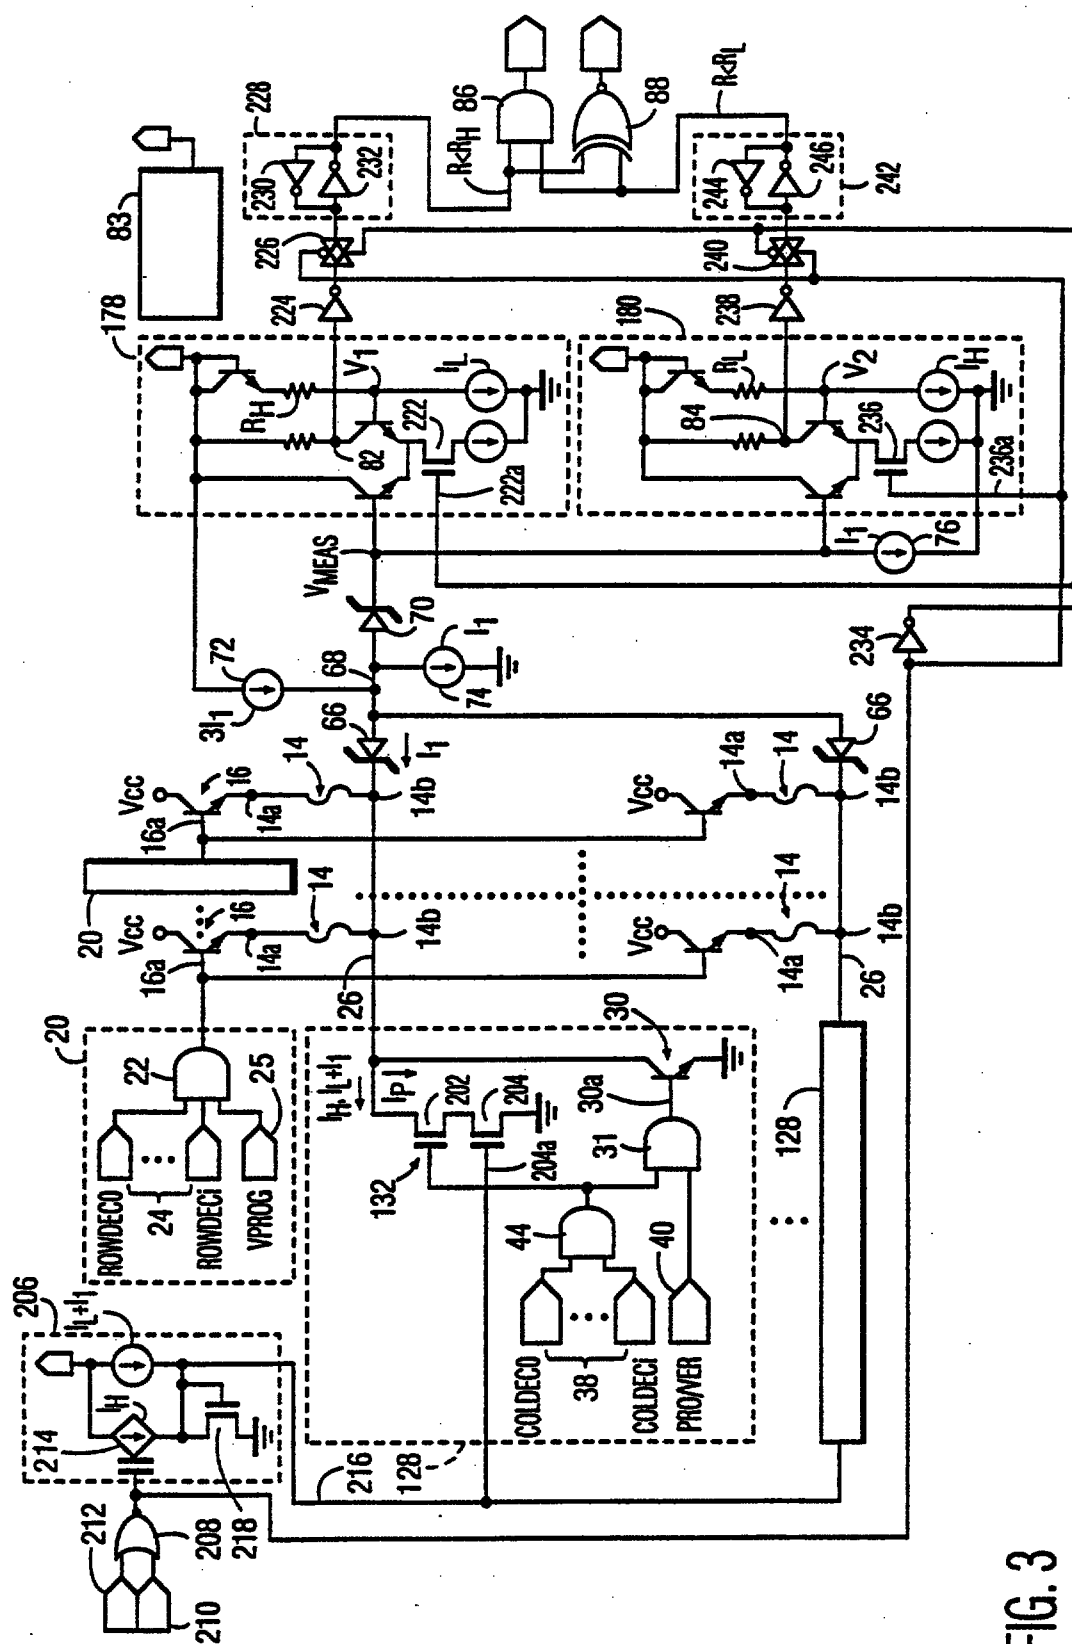


FIG. 3

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

SG 9600359-5



1

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ :

G11C 29/00, 17/14

A1

(11) International Publication Number:

WO 95/32507

(43) International Publication Date: 30 November 1995 (30.11.95)

(21) International Application Number:

PCT/IB95/00339

(22) International Filing Date:

9 May 1995 (09.05.95)

(30) Priority Data:

08/247,934

24 May 1994 (24.05.94)

US

(71) Applicant: PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(71) Applicant (for SE only): PHILIPS NORDEN AB [SE/SE]; Kottbygatan 5, Kista, S-164 85 Stockholm (SE).

(72) Inventors: SHIMANEK, Schuyler, 9221 Holm Bursen Drive, N.W., Albuquerque, MN 87113 (US). ANDERSON, Alma: 2042 Rivers Edge Drive, N.E., Rio Rancho, NM 87124 (US).

(74) Agent: VERDONK, Peter, Lambert, Frans, Maria; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).

(81) Designated States: JP, KR, SG, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).


Published

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

SG's copy

(54) Title: PROGRAMMABLE LOGIC DEVICE WITH VERIFY CIRCUITRY FOR CLASSIFYING FUSE LINK STATES AS VALIDLY CLOSED, VALIDLY OPEN OR INVALID

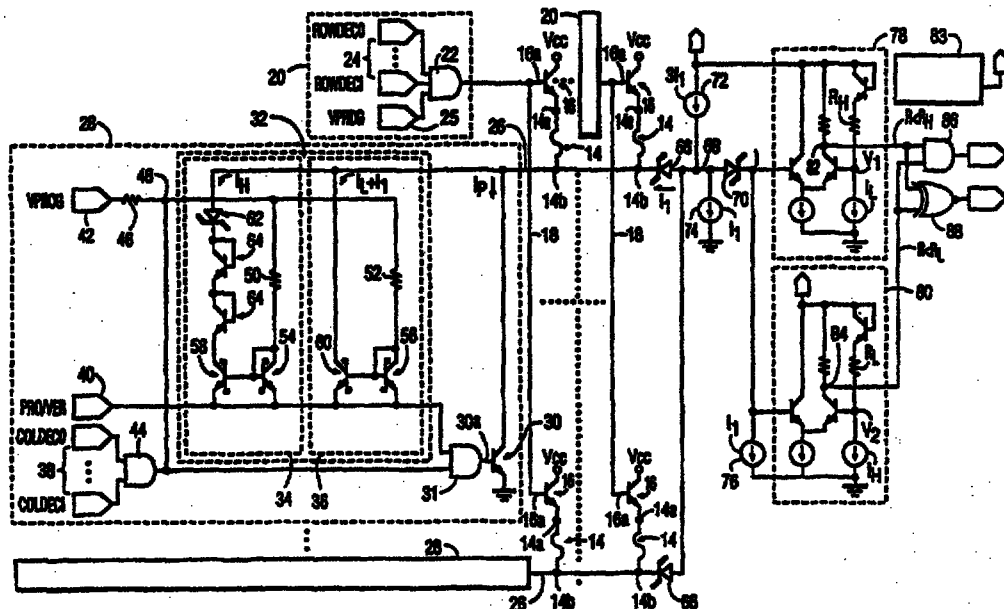

(57) Abstract

A PLD with an array of fuse or anti-fuse links includes verification circuitry configured to classify the links into three zones, corresponding to a "closed" state zone of low resistance values, an "open" state zone of high resistance values and a "forbidden" state zone intermediate the "closed" and "open" state zones. Because the ratio between the higher and lower resistance value is typically 200, the verification circuitry includes a switchable two level current source that produces a voltage across the link of correct dynamic range.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

12

REPLACEMENT SHEET

Date 0..6..SEP..1996.....

CLAIMS:

1. An electronic circuit comprising:

- a memory array of programmable elements, each element having an electrical property which is describable by a resistance and which is alterable from an unprogrammed condition to a programmed condition in response to an application of energy directed to the element, wherein the resistance has a first value lying in a first range of values when the element is unprogrammed, and a second value lying in a second range of values when the element is successfully programmed;

- verification means for selectively and reversibly including a selected one of the elements in a verification circuit, the verification means comprising:

- a current source connectable to the selected element and operative to supply first or second currents to the selected element to create a voltage across the selected element, the first current being substantially greater than the second current;

- comparator means coupled to the selected element for comparing the voltage to first and second reference voltages indicative of the first and second ranges, respectively, and for providing comparator output signals representative of the comparison; characterized in that the verification means comprise

- logic gate means coupled to the comparator means for providing one or more signals on the basis of the comparator output signals,
the current source being operative to produce the first current or the second current as a function of whether the selected element has a resistance less than or equal to a lower reference value or whether the selected element has a resistance greater than or equal to a higher reference value, respectively.

2. The circuit of claim 1, wherein the verification means is operative to provide the one or more signals indicative of the value of the parameter of the selected element lying in a specific one of the first, second and forbidden ranges.

3. The circuit of claim 1 or 2, wherein a ratio of the first and second currents is in the order of magnitude of fifty.

This Sheet Has Been Replaced



**CLAIMS:**

1. An electronic circuit comprising:
 - a memory array of programmable elements, each element having an electrical property which is describable by a resistance and which is alterable from an unprogrammed condition to a programmed condition in response to an application of energy directed to the element, wherein the resistance has a first value lying in a first range of values when the element is unprogrammed, and a second value lying in a second range of values when the element is successfully programmed;
 - verification means for selectively and reversibly including a selected one of the elements in a verification circuit, the verification means comprising:
- 10 - a current source connectable to the selected element and operative to supply first or second currents to the selected element to create a voltage across the selected element, the first current being substantially greater than the second current;
- comparator means coupled to the selected element for comparing the voltage to first and second reference voltages indicative of the first and second ranges, respectively, and for
- 15 providing comparator output signals representative of the comparison;
- characterized in that the verification means comprise
- logic gate means coupled to the comparator means for providing one or more signals on the basis of the comparator output signals,
- the current source being operative to produce the first current or the second current as
- 20 a function of whether the selected element has a resistance less than or equal to a lower reference value or whether the selected element has a resistance greater than or equal to a higher reference value, respectively.
2. The circuit of claim 1, wherein the verification means is operative to provide the one or more signals indicative of the value of the resistance of the selected element lying
- 25 in a specific one of the first, second and forbidden ranges.
3. The circuit of claim 1 or 2, wherein a ratio of the first and second currents is in the order of magnitude of fifty.