

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 October 2002 (31.10.2002)


PCT

(10) International Publication Number
WO 02/086666 A3

- (51) International Patent Classification⁷: **G06F 19/00**, G01F 1/00, G01D 1/00, G01P 11/00
- (21) International Application Number: PCT/US02/12336
- (22) International Filing Date: 19 April 2002 (19.04.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/839,050 20 April 2001 (20.04.2001) US
- (71) Applicant (for all designated States except US): **ADS CORPORATION** [US/US]; 5030 Bradford Drive, Building 1, Suite 210, Huntsville, AL 35805 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **SCHUTZBACH, James, Scott** [US/US]; 110 Springton Drive, Madison, AL 35758 (US). **STEVENS, Patrick, Lee** [US/US]; 7637 North Audubon Road, Indianapolis, IN 46250 (US).
- (74) Agents: **GROMADA, James, A.** et al.; Katten Muchin Zavis Rosenman, 525 West Monroe Street, Suite 1600, Chicago, IL 60661-3693 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- (88) Date of publication of the international search report:
6 November 2003

[Continued on next page]

(54) Title: FLOW TRANSPORT ANALYSIS METHOD AND SYSTEM

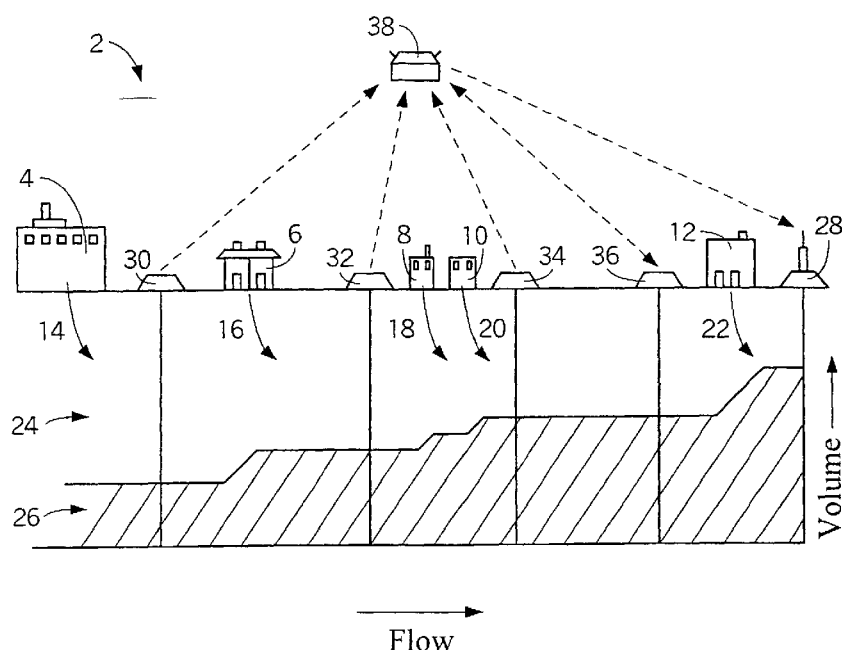

(57) Abstract: A method and system for analyzing flow of a substance in a sewer system determines a first flow velocity (50) at a first location and a second flow velocity (52) at a second location. Using a processor (54), the travel time (56) between the two locations is determined using only the flow velocities and a constant. The travel time may then be used to provide a substantially accurate determination of net flow between the two locations (64).



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.