

CFE 1857 SG

9609318-2
1708 com

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 606 074 A1

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 94100094.5

(51) Int. Cl.⁵: G03G 5/147

(22) Date of filing: 05.01.94

(30) Priority: 06.01.93 JP 755/93
06.01.93 JP 811/93
06.01.93 JP 823/93

(43) Date of publication of application:
13.07.94 Bulletin 94/28

(84) Designated Contracting States:
DE ES FR GB IT

(71) Applicant: CANON KABUSHIKI KAISHA
30-2, 3-chome, Shimomaruko,
Ohta-ku
Tokyo(JP)

(72) Inventor: Kikuchi, Toshihiro
c/o CANON K.K.,
3-30-2, Shimomaruko
Ohta-ku, Tokyo(JP)

Inventor: Maruyama, Akio
c/o CANON K.K.,
3-30-2, Shimomaruko
Ohta-ku, Tokyo(JP)

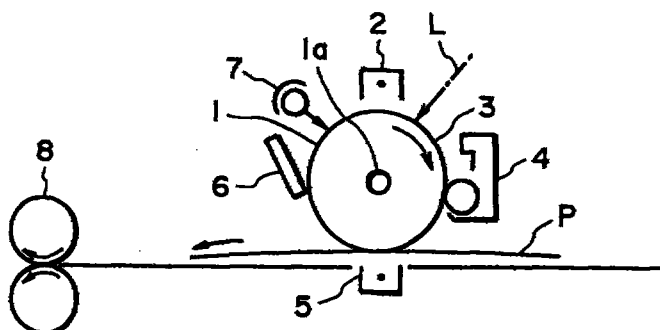
Inventor: Nakamura, Kazushige
c/o CANON K.K.,
3-30-2, Shimomaruko
Ohta-ku, Tokyo(JP)

Inventor: Sekiya, Michiyo
c/o CANON K.K.,
3-30-2, Shimomaruko
Ohta-ku, Tokyo(JP)

(74) Representative: Tiedtke, Harro, Dipl.-Ing. et al
Patentanwaltsbüro
Tiedtke-Bühling-Kinne & Partner
Bavariaring 4
D-80336 München (DE)

(54) Electrophotographic photosensitive member, electrophotographic apparatus using same and device unit using same.

(57) An electrophotographic photosensitive member is constituted by disposing a protective layer and a photosensitive layer on an electroconductive support in this order. The protective layer is characterized by containing an electroconductive particles, fluorine-containing resin particles and a binder resin. The photosensitive layer is suitable for providing an electrophotographic apparatus showing excellent electrophotographic characteristics such as a high photosensitivity and a low residual potential and also providing good image forming properties under any environmental condition, improved pause memory characteristics and a decreased transfer memory.

**FIG. 1**

This Sheet Has Been Replaced



EP 0 606 074 A1