



(51) International Patent Classification:
B65G 11/16 (2006.01)

(21) International Application Number:
PCT/IN2013/000455

(22) International Filing Date:
22 July 2013 (22.07.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
374/KOL/2013 3 April 2013 (03.04.2013) IN

(71) Applicant: **TEGA INDUSTRIES LIMITED** [IN/IN];
147, Block-G, New Alipore, West Bengal, India, Kolkata
700 053 (IN).

(72) Inventors: **MOHANKA, Madan Mohan**; 147, Block-G,
New Alipore, West Bengal, India, Kolkata 700 053 (IN).
KISHOR, Kaushal; 147, BLOCK-G, New Alipore, West
Bengal, India, Kolkata 700 053 (IN).

(74) Agents: **SAHA, Monaj** et al.; 288/1, B.B. Chatterjee
Road, Ground Floor, West Bengal, India, Kolkata 700 042
(IN).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: LINER UNIT FOR CHUTE WALL

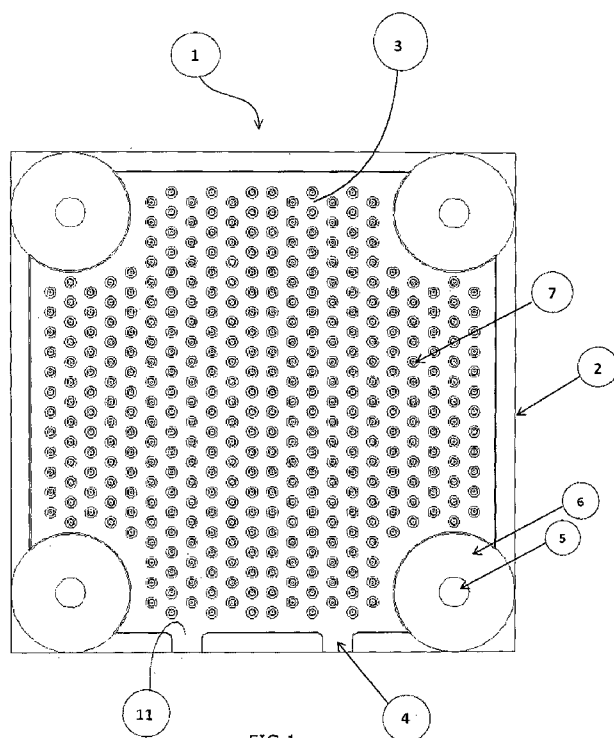


FIG 1

(57) Abstract: A liner unit (1) adapted to be detachably attached on a chute wall (12) comprises a liner base enclosed within an integrally formed frame (2) and having a front (10) and a back face (11), said liner unit (1) is adapted to be affixed with the said chute wall (12) through bolt holes (5) by means of fastening means (8), said liner base being provided with pockets on the surface thereof providing cushioning effect in the event of the liner base being impacted with a load during operation.