

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 March 2003 (27.03.2003)

PCT

(10) International Publication Number
WO 03/024533 A1

(51) International Patent Classification⁷: **A62C 35/00**

(21) International Application Number: PCT/FI02/00726

(22) International Filing Date:
10 September 2002 (10.09.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20011840 19 September 2001 (19.09.2001) FI

(71) Applicant (for all designated States except US): **MAR-IOFF CORPORATION OY** [FI/FI]; P.O. Box 25, Hakamäenkuja 4, FIN-01511 Vantaa (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SUNDHOLM, Göran** [FI/FI]; Ilmari Kiannon kuja 3, FIN-04310 Tuusula (FI). **TUOMISAARI, Maarit** [FI/FI]; Kluuvintie 11 A, FIN-02180 Espoo (FI).

(74) Agent: **HEINÄNEN OY**; Annankatu 31-33 C, FIN-00100 Helsinki (FI).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FIRE EXTINGUISHING METHOD AND APPARATUS

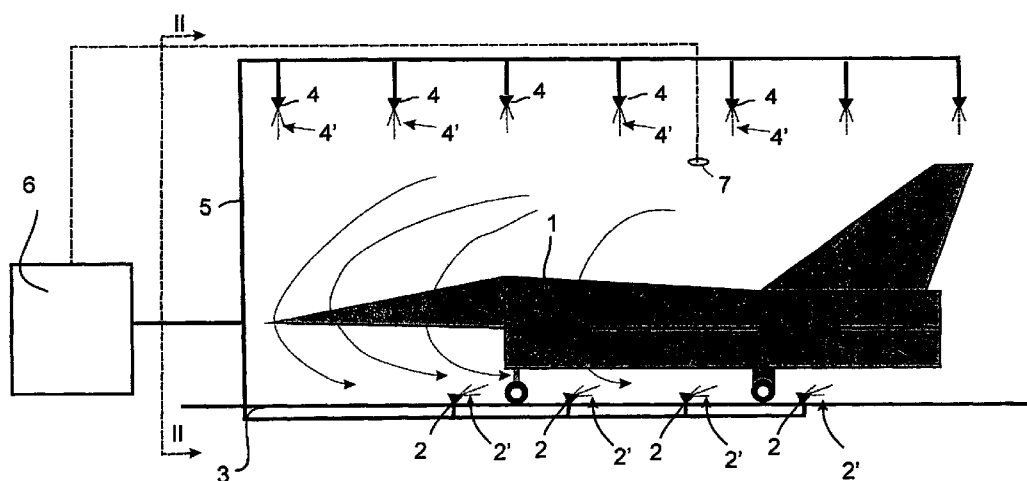

(57) Abstract: Fire extinguishing method, especially for spaces intended for the storage of aircraft, such as hangars, in which method a fire extinguishing medium, especially a liquid mist, is sprayed via at least one first nozzle (2) in the area, seen in a vertical direction, between an object (1) to be protected/extinguished, such as an aircraft, and the floor (3) or equivalent of the storage space. At least one first nozzle (2) is arranged to spray mainly in the area between the object (1) to be extinguished, such as an aircraft, and the floor (3) of the storage space or equivalent at least in a horizontal plane mainly in one first direction.



WO 03/024533 A1