

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 March 2001 (08.03.2001)

PCT

(10) International Publication Number
WO 01/16982 A1

(51) International Patent Classification⁷: **H01H 71/08**

(21) International Application Number: **PCT/IB00/01199**

(22) International Filing Date: **24 August 2000 (24.08.2000)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
09/386,087 **30 August 1999 (30.08.1999)** **US**

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant: **EATON CORPORATION [US/US]**; Eaton Center, 111 Superior Avenue, Cleveland, OH 44114 (US).

Published:
— *With international search report.*

(72) Inventors: **GULA, Lance**; 147 Saratoga Drive, Clinton, PA 15026 (US). **JANUSEK, Mark, A.**; 5074 Brownsville Road, Pittsburgh, PA 15236-1942 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **CIRCUIT INTERRUPTER WITH SECURE BASE AND TERMINAL CONNECTION**

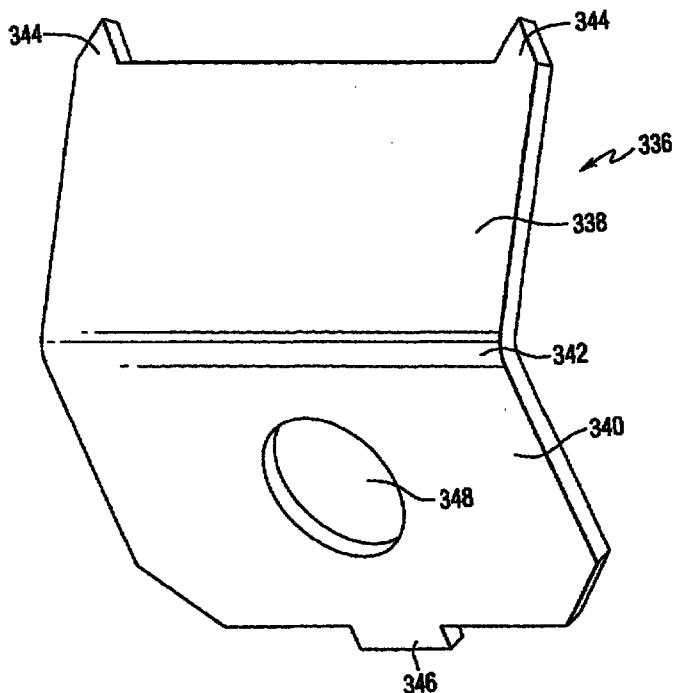

(57) Abstract: A circuit interrupter including a housing including an abutment wall, separable main contacts within the housing, and an operating mechanism within the housing and interconnected with the contacts. A terminal is at least partially disposed within the housing. A locking plate is positionable between the terminal and the abutment wall for securing the terminal within the housing.

WO 01/16982 A1