



TELEPHONIC HEADSET STRUCTURE FOR REDUCING AMBIENT NOISE

FIELD OF THE INVENTION

This invention relates to telephone or radio receiver headset apparatus and, more specifically, to a physical structure of such apparatus which reduces the
5 energy of unwanted local or ambient noise in relation to the energy of the desired signal.

BACKGROUND OF THE INVENTION

Telephone headsets worn by the user and comprising one or two receiving ear pieces and a speech transmitter, have multitudes of uses including
10 major uses as operator and airline pilot headsets. Often, however, the use location or environment contains substantial amounts of unwanted ambient noise which interferes with the intelligibility to the user of the incoming speech.

Noise suppression circuits in the prior headset art detect the unwanted noise, convert this from an acoustic signal to an electronic replica, create an
15 inversion thereof which is essentially 180 degrees out of phase with the ambient noise signal and play the inverted signal into the headset's receive channel which subtractively interferes with the unwanted noise signal.

The effectiveness of suppression circuits, however, is critically dependent upon a careful design of the headset housing and its interior acoustics.
20 For example, identification and control of acoustic paths within the headset housing are important in achieving cancellation over wide bandwidths.

SUMMARY OF THE INVENTION

The "error microphone" which picks up ambient noise signals is located approximately on the speaker axis as close as practical to the speaker cone surface
25 but not touching the speaker surface. The error microphone orientation is angled relative to the speaker axis so that its sound entry port axis is substantially perpendicular thereto. In this position the error microphone port is pointed laterally for the purpose of accepting acoustic energy from both the acoustic speaker containing incoming speech and the user's external ear cavity.

30 Structure is provided to locate and fix the speaker and error microphone in their own separate acoustic cavity in a headset housing at the end of the housing which is adjacent to the user's ear, with the error microphone effectively protruding into the ear canal. This expedient enables the headset noise-cancellation circuit to

derive an effective noise-cancelling signal at the very point where the user perceives and experiences the noise itself, namely at the entrance to the ear.

DESCRIPTION OF THE DRAWING

FIG. 1 is a top and side view, the latter in partial section of a housing for a telephone headset speaker and noise suppression error microphone using the invention;

FIG. 2 is an assembly diagram of the housing and its end cap;

FIG. 3 is a top and side view (the latter in section) of an error microphone and speaker support;

FIG. 4 is a side schematic diagram showing the assembly of the support and associated sound-shaping pads into the headset housing;

FIG. 5 is a side perspective sketch of a preferred speaker unit for use with the error microphone;

FIG. 6 is a schematic side view of the speaker unit;

FIG. 7 is a schematic sectional side view of the speaker unit shown in greater detail;

FIG. 8 is an exploded side perspective view of a preferred error microphone for use with the invention;

FIG. 9 is a graph demonstrating the relative improvement in frequency response gained by use of venting ports in the housing; and

FIG. 10 is a schematic diagram of a headset configuration in which the invention is useful, shown mounted on a user.

DETAILED DESCRIPTION OF AN ILLUSTRATIVE EMBODIMENT

The headset housing and its associated components is illustrated beginning with FIGS. 1-3. The housing 10 contains an error microphone and associated speaker denoted 55. The housing 10 has an open end 11 and a cylindrical wall portion 12. A baffle 23 acoustically isolates a bottom chamber 8 within housing 10, in which the speech transmitter circuitry is located, from the top chamber 16. Advantageously, baffle 23 is relatively stiff to provide the needed acoustic isolation between the two chambers of housing 10. Material with a modulus of elasticity of essentially 250,000 or more is especially advantageous. A series of port openings 13 in wall 12 are formed in the chamber above baffle 23. As will be discussed in detail hereinafter, the ports 23 help control the acoustic response of the speaker by providing a useful adjustment to the phase and amplitude of the noise-cancelling

signal.

Housing 10 is formed with an exterior flange 14 which serves the dual purpose of providing a mount for a shaped earmuff 32 shown in FIG. 2, and also as an acoustic shunt which diverts the radiated sound from the ports 13 into a relatively longer path denoted 15 from the ports 13 to the user's ear, thus to reduce interference of this sound energy with the noise-cancellation energy.

Housing 10 is further formed with a tapered dome 17 which culminates in a projection 18. The latter has a flattened circular end 9 modeled to fit into the concha of the ear, as shown in FIG. 10. The dome 17 and its end 9 serve as a tactile form to assist the user in locating the housing 10 securely into close proximity of the ear canal. Projection 18 with its end 9 thus aids in precisely positioning the error microphone and the associated speaker with respect to the user's ear. This feature of the invention will be further described in connection with FIG. 7.

Dome 17 is formed by a series of upwardly-extending concave spokes 19, as seen in the top view of FIG. 1. This shape for the spokes is advantageous to lend strength to the dome 18 to enable it to resist forces generated if the user forcefully mounts or adjusts the housing 10 onto the ear. The space between spokes is left open to form voids 20, which assure relatively unobstructed passage of desired speech and noise-cancelling signals from the circuit network and speaker. An opening 22 in the top of the dome 17 is formed to give the error microphone direct physical presence in the user's ear. The open "grill" formed by the spokes and voids correctly positions the headset over the pinna and concha of the user's ear. The concave contour of the end 9, which is the grill center, rests over and slightly within the concha cavity of the user's ear, aiding in the reception of sound energy incident upon the opening of the user's ear canal. The muff 32 is constructed of porous foam or similar material to be acoustically transparent so as not to restrict the flow of signal, noise, and noise-cancellation signal through it. In combination with the muff 32, the contoured grill thus provides a controlled acoustic venting path; and in addition the grill contour is designed to provide a comfortable fit for the user.

FIG. 2 shows the headset transmitter boom 27 and a closed-end cap 24 mountable on the exterior of wall 12. The cap interior houses speech transmitter circuit 30. Cap 24 swivel-mounts boom 27 to conventionally locate a speech transmitter 25 with respect to the user's mouth. Wires 29 connecting the transmitter 25 to the circuitry 30 are run in the interior 28 of boom 27. An acoustic muff 26 suppresses certain typical speech sounds, such as hissing, which are unwanted in the telephonic transmission. The circuitry of headset housing 10 is connected to a

transmission network (not shown) through line cord 31.

As further seen in FIG. 2, two swivels 38 (one shown) connect to the wall 12 of housing 10 to mount it to the yoke 37 of a headband 34. The yoke is attached through a pivot 36 to a support 35. The latter is slideably mounted to
5 headband 34, the latter extending into an interior channel of the support 35. These mountings provide a needed range of adjustments to ensure not only that the headset is comfortable to the user, but also that the end 9 can be entered firmly and certainly into the user's ear concha during use.

The speaker enclosure portion of housing 10, designated 16 in FIG. 1, is
10 located on the side of baffle 23 facing the user's ear. Enclosure 16 comprises an acoustically controlled and separate compartment for housing the speaker-error microphone assembly. Referring now to FIGS. 3 and 7, a support frame denoted 40 for the speaker-error microphone assembly is shaped as an open cylinder connected by a disc-shaped base 39. The base 39 is recessed to create shoulders 51. Base 39
15 carries the error microphone 41 in a position centered on the normal through pedestal 43 and the base 39. A series of spokes 48 connect the pedestal 43 to the base rim. Spokes 48 are spaced to form openings 49 to acoustically access the underlying speaker on the other side of base 39, as best seen in FIG. 7.


The error microphone 41 is of the electret type. Error microphone 41
20 advantageously has an omnidirectional response over a frequency range extending to a minimum of 16 kHz acoustic energy. The phase response is flat over this range to facilitate the noise-cancellation function performed by associated noise-cancelling circuitry. The error microphone 41 contains an internal electrical amplifier (not shown) which has approximately unity gain to facilitate electrical transmission of the
25 sound pressure signal. As seen in FIG. 8, error microphone 41 advantageously comprises a cylindrical housing with the transducer diaphragm 44 recessed in a central well 45. A felt membrane 46 caps the diaphragm 44.

FIG. 4 shows the assembly of support 40. The acoustic response of the speaker 55 is improved by the combination of a rear enclosure consisting of the
30 housing wall 12 and baffle 23, together with two acoustical foam structures 47, 50. The foam pad 47 behind speaker 55 and foam pad 50 in front of the speaker 55 provide damping of undesirable acoustic resonant modes and reflections emanating from the enclosure 16 and the user's ear. The pads 47, 50 advantageously are installed slightly compressed, which helps stabilize the position of speaker support
35 40 while at the same time providing useful frequency response shaping. Use of the front foam pad 50 provides the added benefit of reducing a high frequency response


peak into a higher frequency range wherein the noise cancellation will not be adversely affected. It has also been found, however, that too much compression of the foam uses up space needed for the speaker support, and in addition, occasions poor low frequency response.

5 Referring now to FIGS. 5, 6 and 7, the speaker type found most useful in the practice of the invention is of the moving coil variety. A specific embodiment of such a speaker consists of a frame 56 with a recessed flange 57 open at the center to accommodate a magnet assembly consisting of two pole pieces 63 and 64 and a permanent magnet 65. Several equalization ports 58 are formed in flange 57. A
10 mylar diaphragm 59 having a center bubble section 60 is fastened along its outer perimeter to one side of flange 57. The exterior ring of diaphragm 59 is formed with corrugations denoted 68. Several equalization ports 58 are placed through the flange 57, to enhance frequency response of the speaker. A disc of felt 66 is laid on the underside of flange 57; and a disc of foam material denoted 67 is laid over base 39 to
15 control resonance. The coil wire 61 forming the moving coil armature of the speaker is fastened around the lateral sides of the bubble 60, the wire coil extending into the gap between the magnet pole pieces 63, 64. A permanent magnet 65 is conventionally disposed between the poles. The overall magnet assembly 62 is mounted rigidly on support 40.

20 Returning to the description of housing ports 13, FIG. 9 shows that the frequency response curve of a selected noise-suppression circuit may be improved by using several of the ports 13 rather than no ports. The dotted trace denoted 68 is a measure of the frequency response of the apparatus when housing 10 has solid walls with no ports 13. The solid trace denoted 69 was taken using a housing with ten
25 ports evenly spaced along wall 12. It is seen that frequency response with the ports added is substantially and advantageously flattened. The frequency response curve is increased in the 500 to 1200 Hz region. Further, the ports in combination with the foam pads 47 and 50, reduce resonances in the 1500 to 2500 Hz region. It also has been found that use of substantially more ports 13 on the specific embodiment shown
30 can detract from performance.



This Sheet Has Been Replaced



- 6 -

Claims:

1. A telephonic headset comprising a speech transmitter, at least one speech-receiving ear-mounted speaker, an error microphone for receiving ambient noise, and
 - 5 a housing (10) for mounting said error microphone (41) and said speaker, said housing characterized by
 - a lower chamber (8)
 - an upper chamber (16) separated by a baffle (23) from said lower chamber and comprising
 - 10 a cylindrical wall (12)
 - a plurality of port openings (13) in said wall
 - an exterior flange (14) encircling said upper chamber above said ports
 - a domed extension (17) of said upper chamber rising
 - 15 above said flange, comprising a plurality of spokes (19), the space between said spokes defining voids (20) for unobstructed passing of desired speech and noise-cancelling signals; and
 - a flattened platform in the center of said dome having an opening (22) for exposing said error microphone (41) into direct physical presence in
 - 20 the user's ear.
 2. Apparatus in accordance with claim 1, wherein said spokes are contoured with an inwardly-directed concavity.
 3. Apparatus in accordance with claim 2, further comprising a porous muff fitting snugly around said dome and elastically gripping the underside of said
 - 25 flange.
 4. Apparatus in accordance with claim 3, further comprising a speaker and error microphone mounting means comprising
 - a cylindrical member disposed in said upper chamber of said housing, said member comprising
 - 30 a recessed base extending across a first interior end of said member,
 - means for mounting said error microphone in a position on said base centered on the normal through said member, and

THIS SHEET HAS BEEN
REPLACED



This Sheet Has Been Replaced



- 7 -

a chamber for containing said speaker, said chamber defined by the opposite side of said base and the interior of said member.

5. Apparatus in accordance with claim 4, wherein said base comprises a plurality of spaced spokes defining acoustic openings to said speaker.

5 6. Apparatus in accordance with claim 5, wherein said error microphone comprises an electret component and a sound entry port acoustically accessing said electret component; and said error microphone mounting means comprises means for orienting said error microphone relative to the speaker axis so that said sound entry port axis is substantially perpendicular thereto.

10 7. Apparatus in accordance with claim 6, further comprising a felt membrane capping said sound entry port.

 8. Apparatus in accordance with claim 7, further comprising a first compliant means disposed behind said speaker, and a second compliant means disposed atop said spaced spokes of said base for providing damping of undesirable
15 acoustic resonant modes.

 9. Apparatus in accordance with claim 8, wherein said second compliant means comprises a felt pad; and wherein said first compliant means is compressed in its installed position.

 10. Apparatus in accordance with claim 9, wherein said baffle comprises
20 relatively stiff material having a modulus of elasticity of essentially 250,000 or more.

 11. In a telephonic headset comprising a boom, a speech transmitter mounted on said boom, at least one speech-receiving ear-mounted speaker, an error microphone for receiving ambient noise, and control circuit means, the improvement
25 comprising:

 a housing for mounting said error microphone and said speaker, comprising

 a lower chamber for mounting said boom and for housing said control circuit means

THIS SHEET HAS BEEN
REPLACED



This Sheet Has Been Replaced



- 8 -

an upper chamber separated by a baffle from said lower chamber
and comprising

a cylindrical wall having sound venting means

a domed extension of said upper chamber rising above

5 said flange for containing said speaker and said error microphone

said dome further comprising sound venting means and
culminating in a flattened central platform having an opening for positioning said
error microphone into direct proximity to the user's ear.


THIS SHEET HAS BEEN
REPLACED

**TELEPHONIC HEADSET STRUCTURE FOR REDUCING AMBIENT NOISE****Abstract**

Telephone headsets used by operators and airline pilot headsets are subject to substantial amounts of interfering ambient noise which detract from the intelligibility of incoming speech. Noise reduction circuitry does not altogether eliminate the interfering sound. A headset speaker (55) and error microphone (41) housing (10) are disclosed which enable a greater amount of unwanted noise elimination. The speaker and microphone (41) are configured closely with respect to each other and also to the user's ear. They are acoustically isolated in their own chamber. The microphone is located approximately on the speaker axis and protrudes substantially into the user's ear; and also is disposed close to the speaker cone surface. Additional acoustical tuning features include venting ports (13) in the housing, and acoustic damping padding at the microphone entrance and on either side of the speaker (55). These expedients enhance the ability of the noise-cancelling circuitry to effectively reduce the undesired noise heard by the user.



FIG. 1

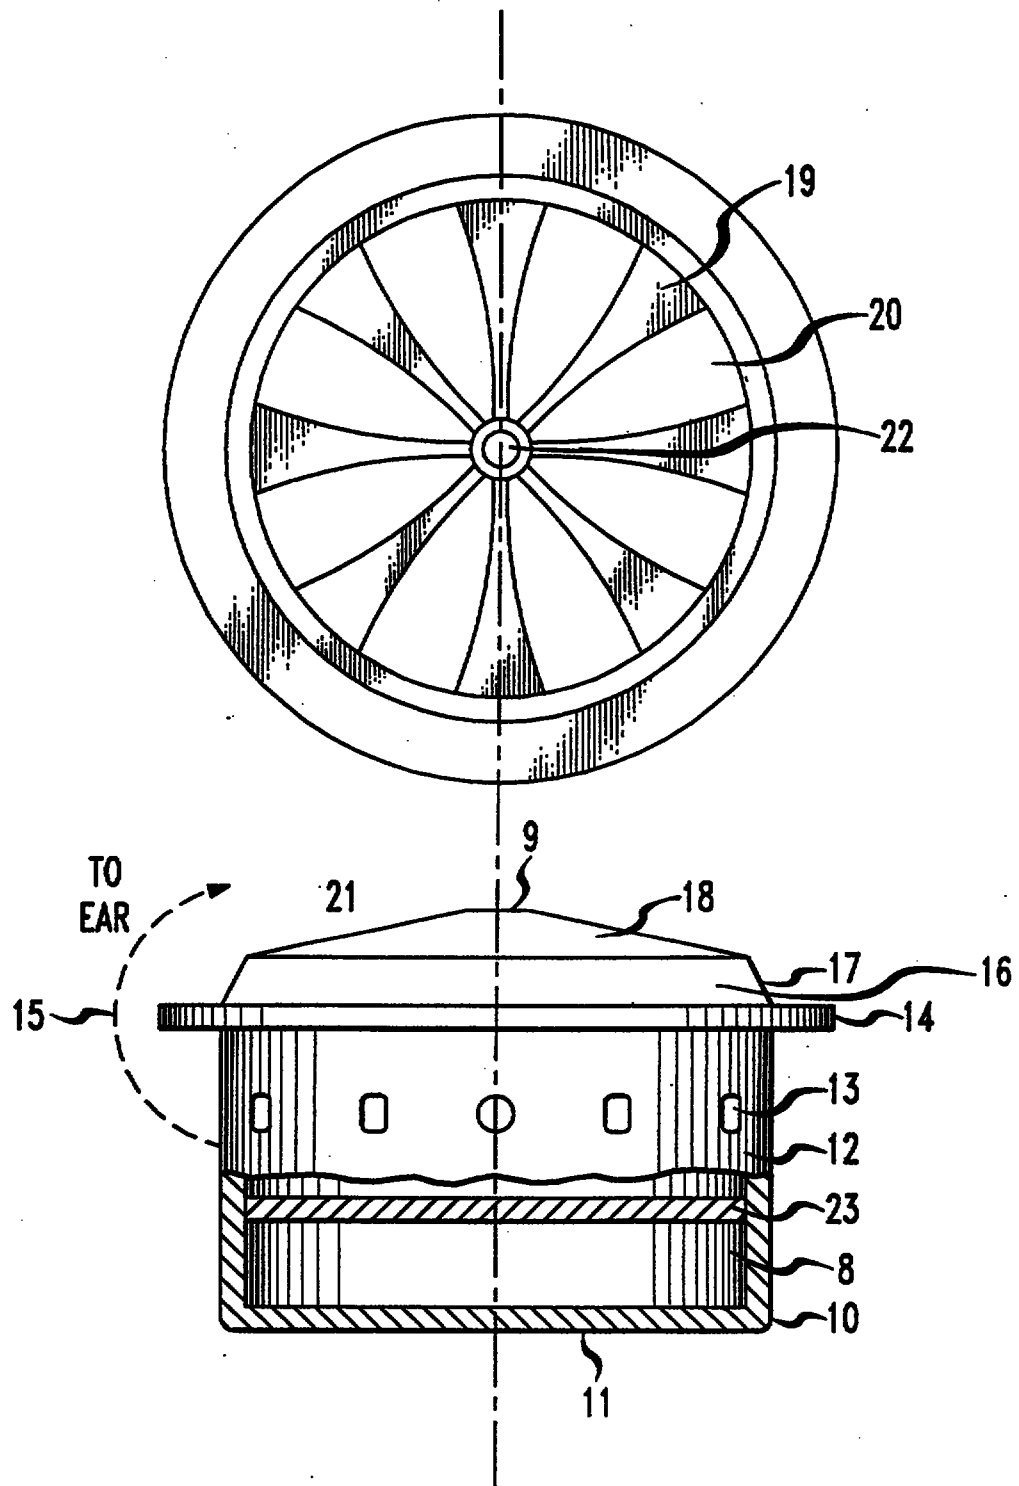

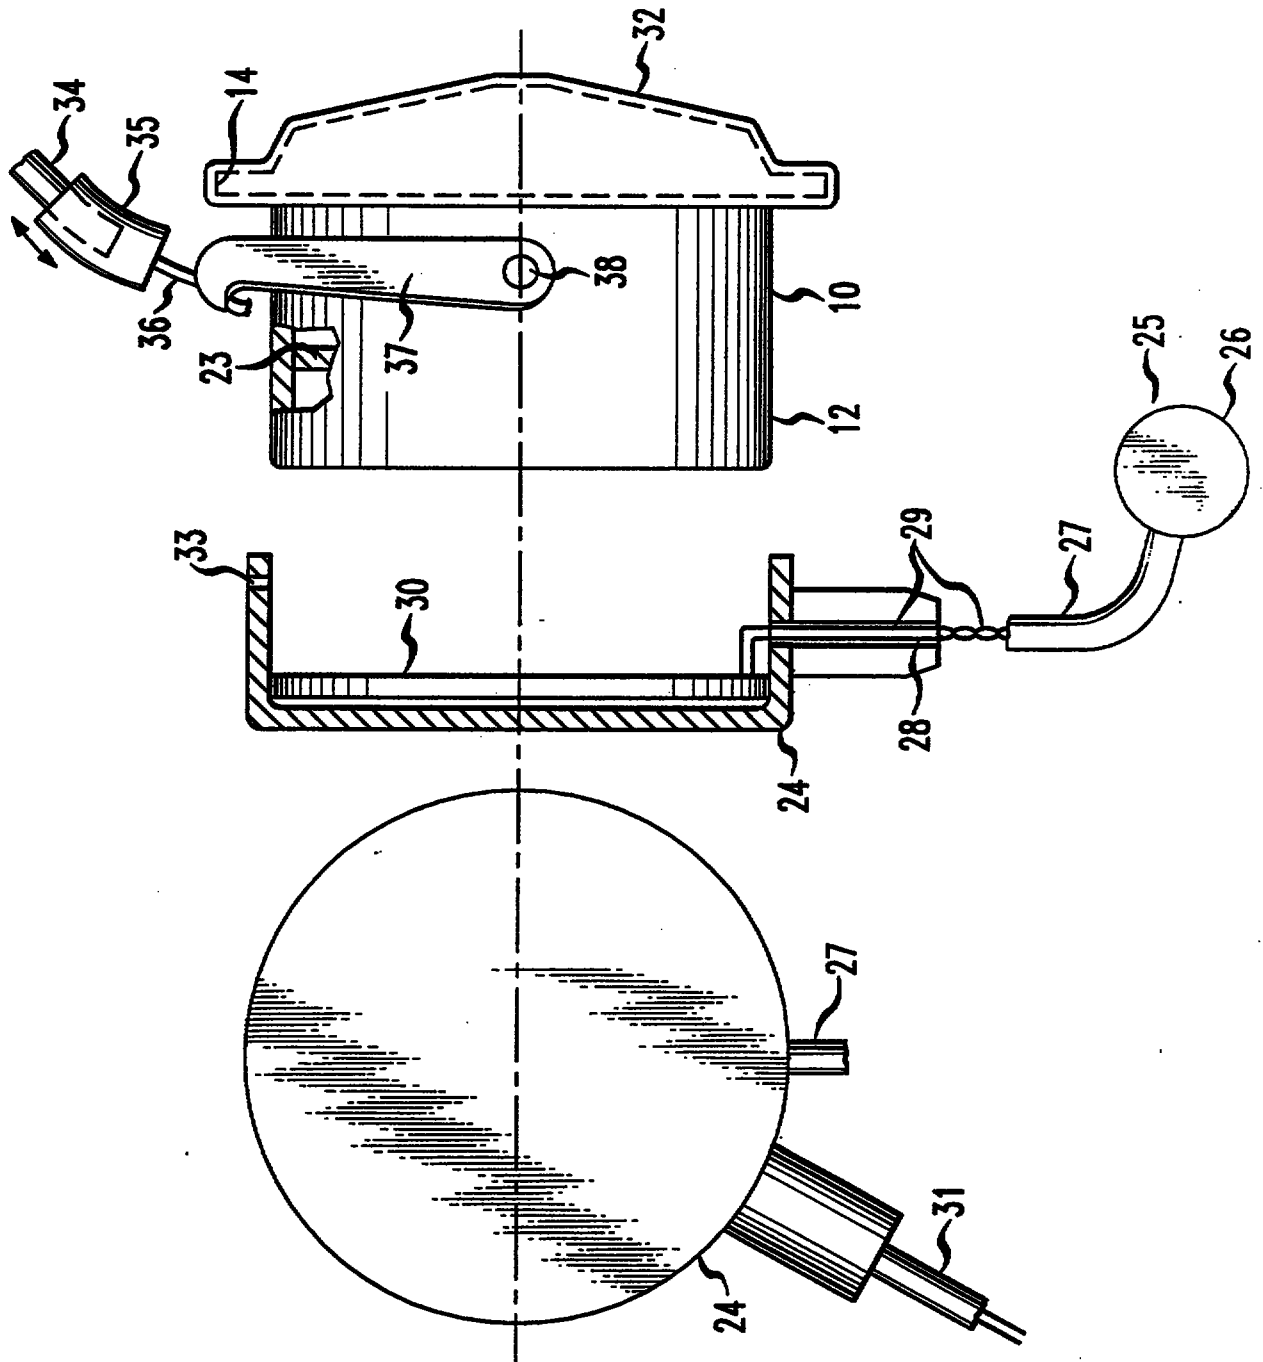



FIG. 2



FIG. 3

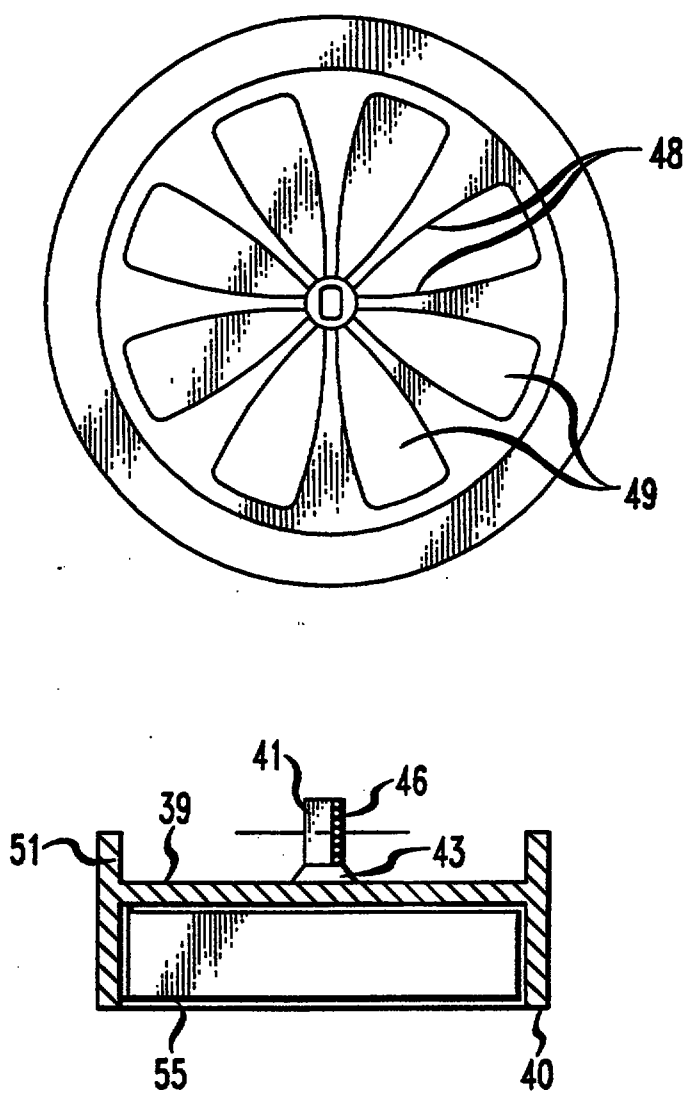


FIG. 4

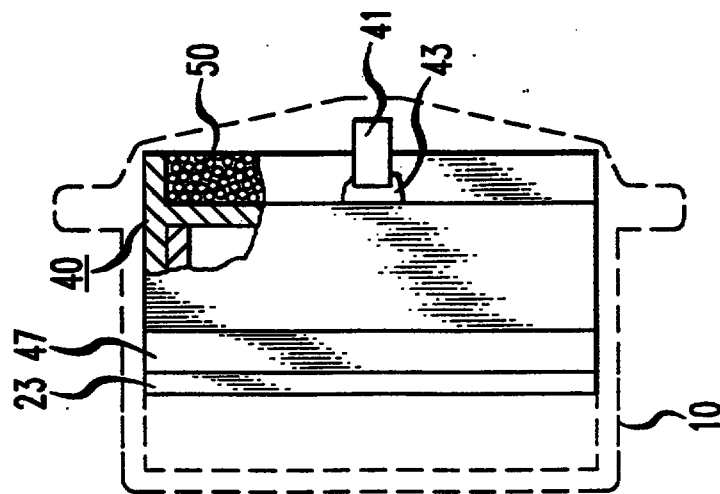
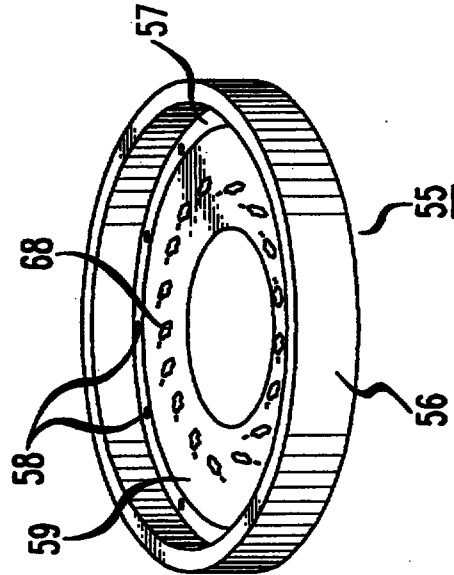


FIG. 5






FIG. 7

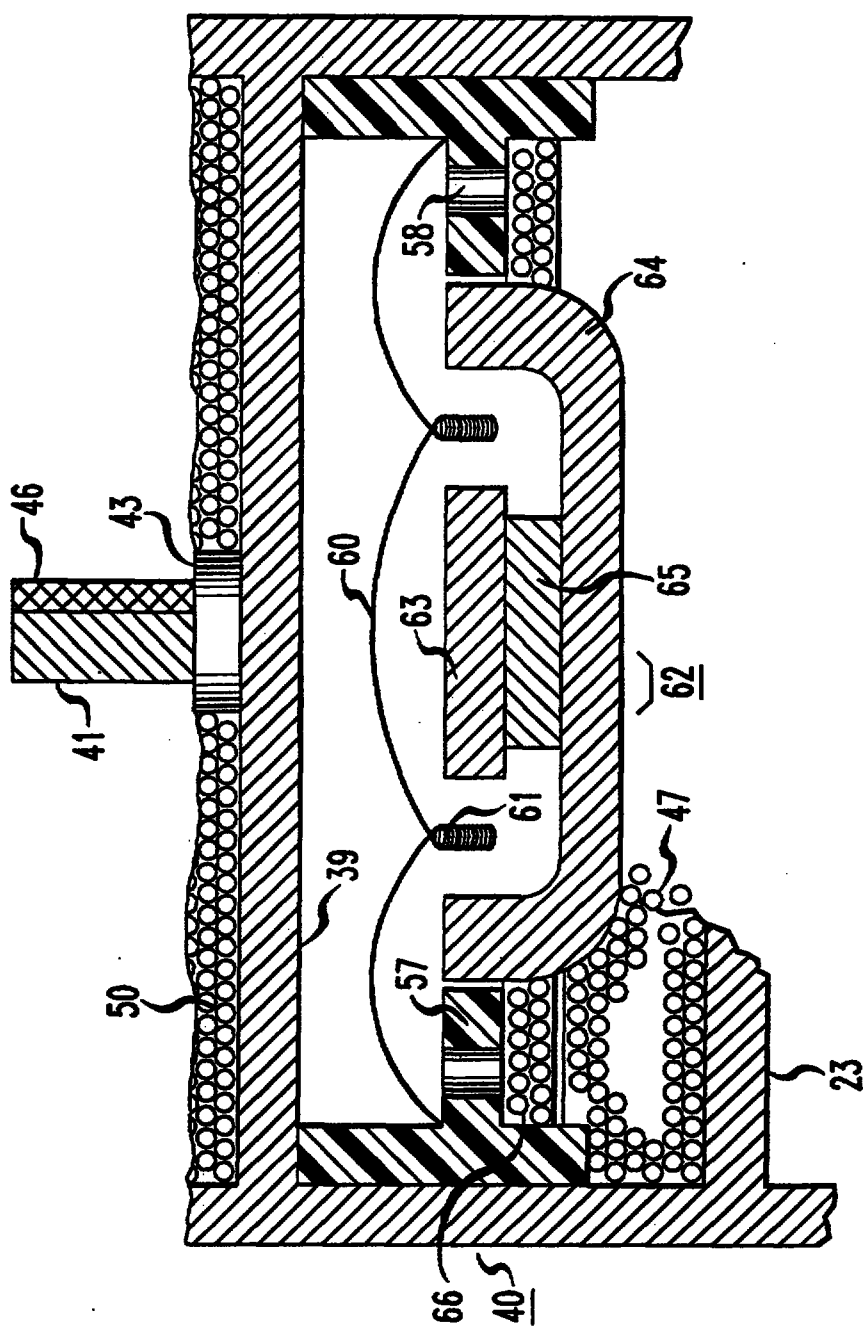


FIG. 8


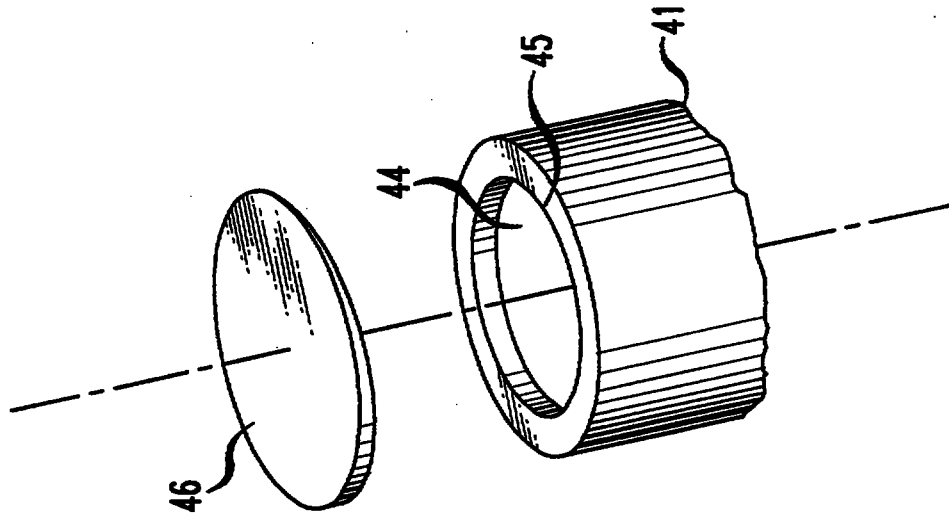


FIG. 6



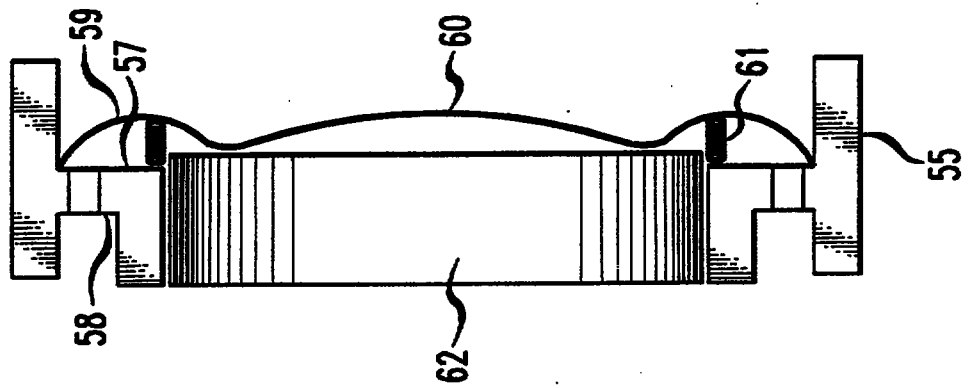

7/7

FIG. 9


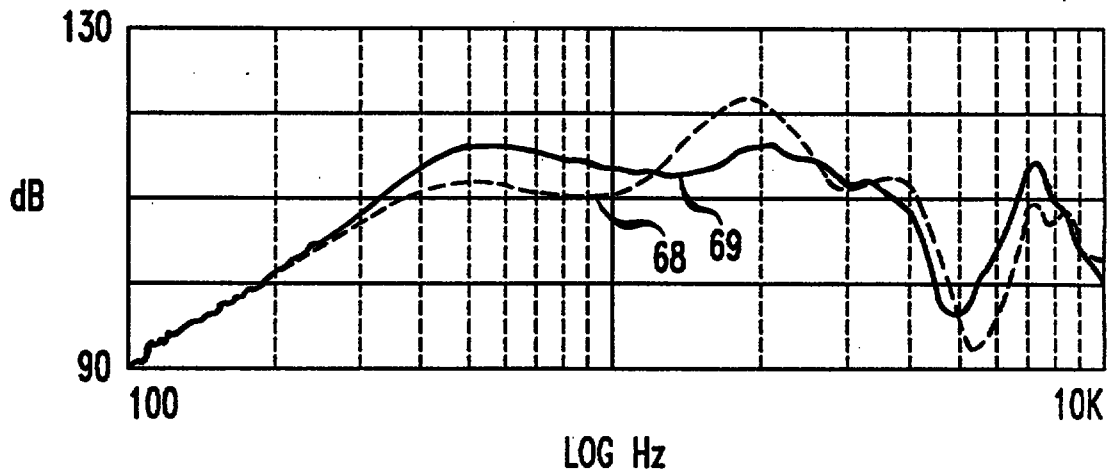


FIG. 10

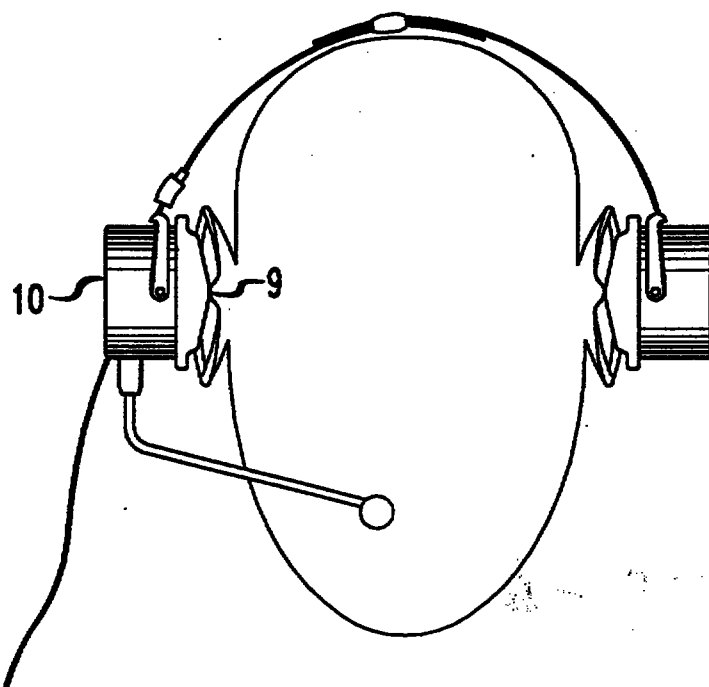

THIS SHEET HAS BEEN
REPLACED

**TELEPHONIC HEADSET STRUCTURE FOR REDUCING AMBIENT NOISE****Abstract**

Telephone headsets used by operators and airline pilot headsets are subject to substantial amounts of interfering ambient noise which detract from the

5 intelligibility of incoming speech. Noise reduction circuitry does not altogether eliminate the interfering sound. A headset speaker (55) and error microphone (41) housing (10) are disclosed which enable a greater amount of unwanted noise elimination. The speaker and microphone (41) are configured closely with respect to

10 each other and also to the user's ear. They are acoustically isolated in their own chamber. The microphone is located approximately on the speaker axis and protrudes substantially into the user's ear; and also is disposed close to the speaker cone surface. Additional acoustical tuning features include venting ports (13) in the

15 housing, and acoustic damping padding at the microphone entrance and on either side of the speaker (55). These expedients enhance the ability of the noise-cancelling circuitry to effectively reduce the undesired noise heard by the user.

FIGURE 3.


REPLACEMENT SHEET

17 JUN 1996

**THIS SHEET HAS BEEN
REPLACED**

1

FIG. 1

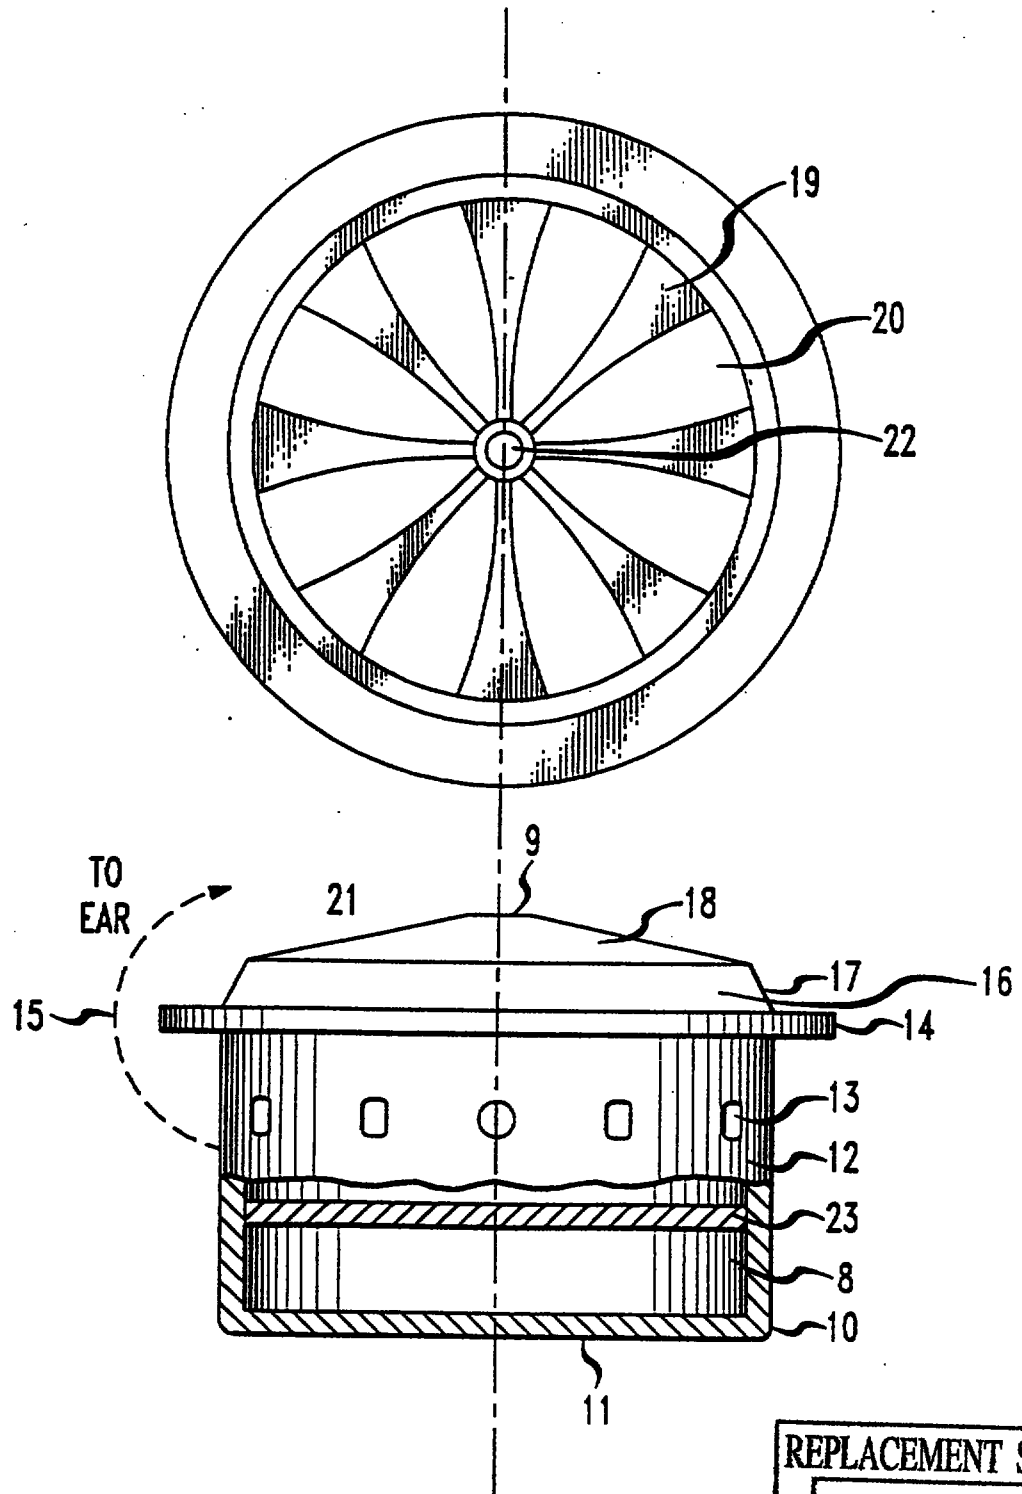

REPLACEMENT SHEET

17 JUN 1996


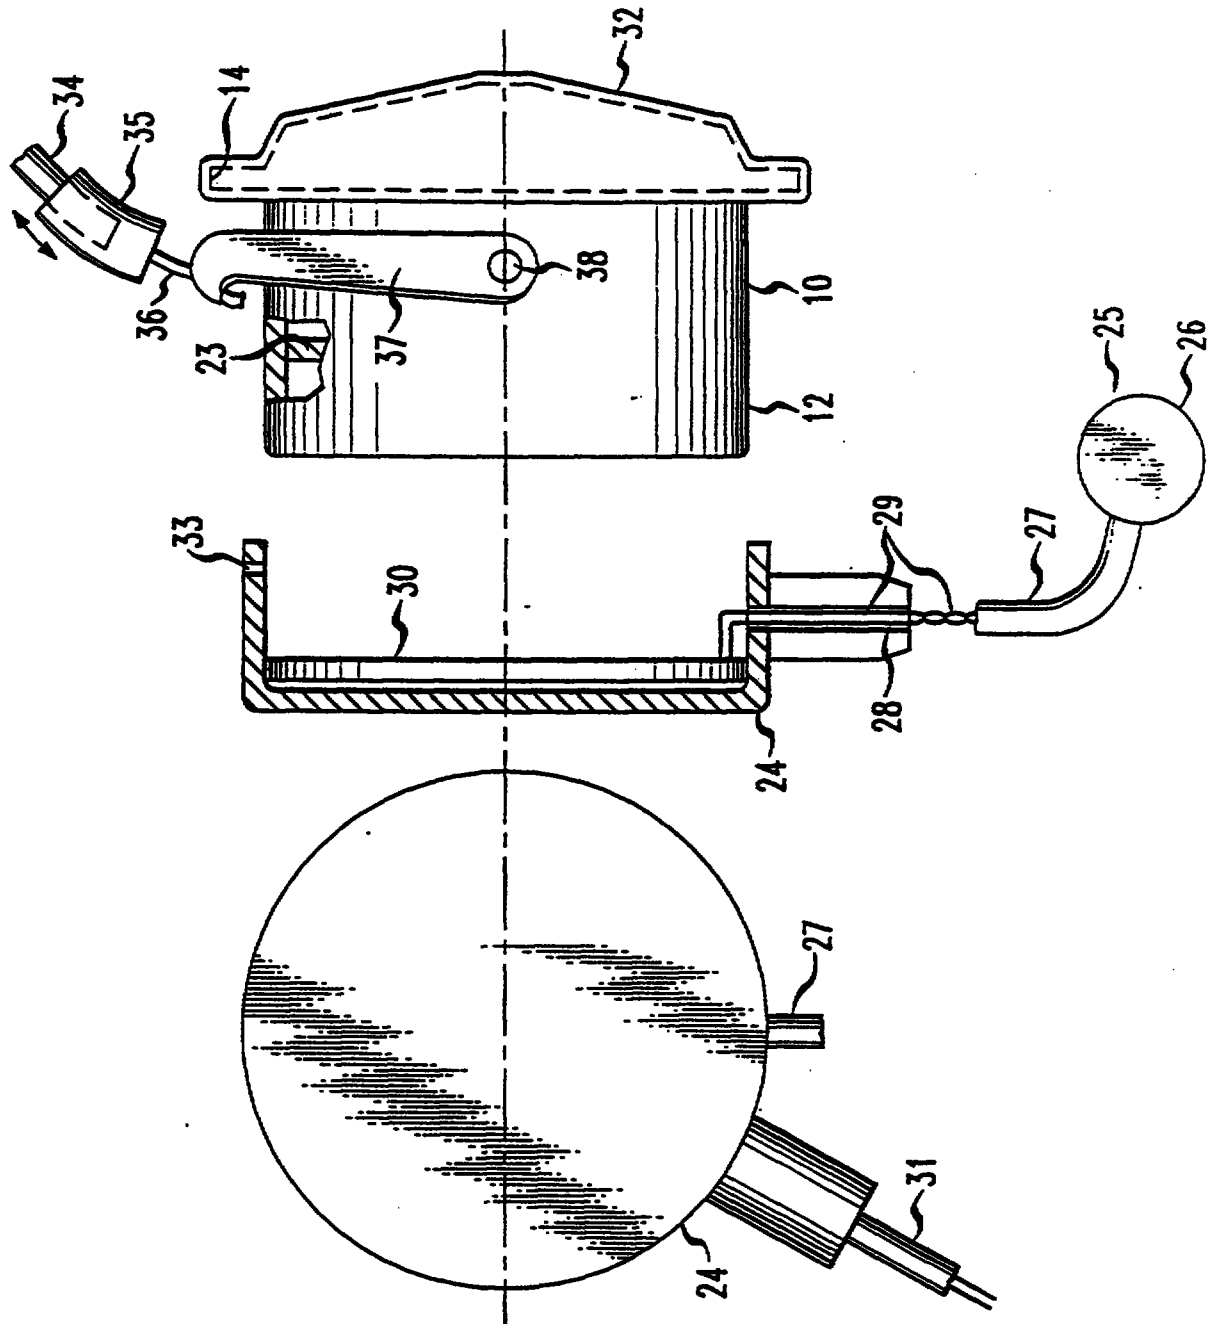


FIG. 2

REPLACEMENT SHEET

17 JUN 1996

FIG. 3

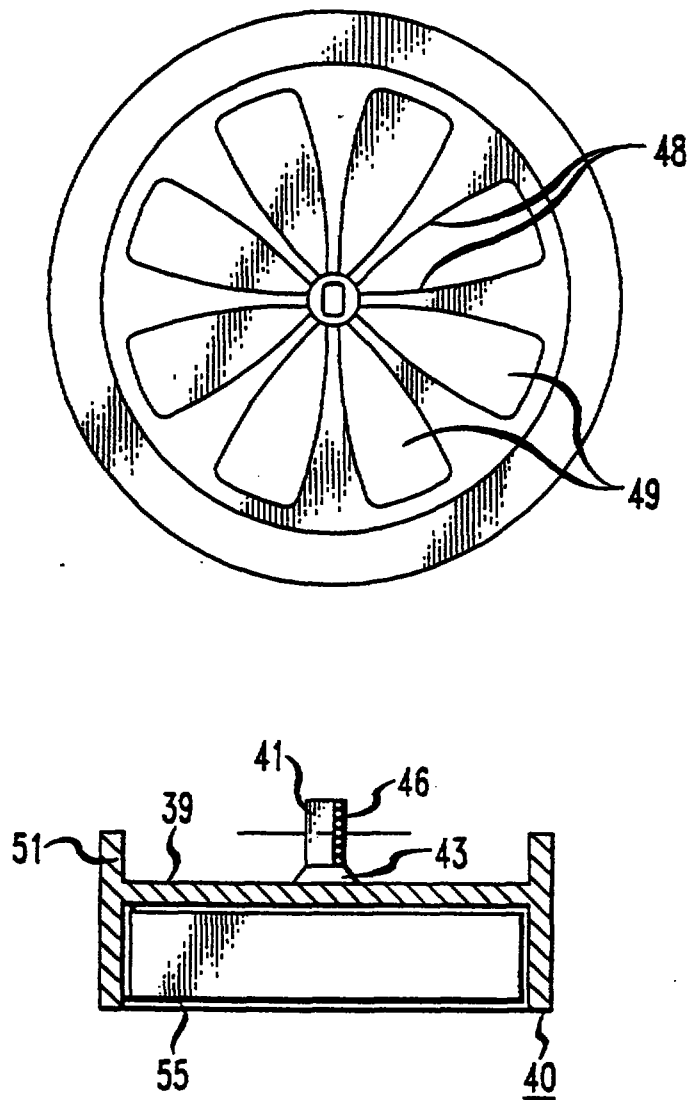

REPLACEMENT SHEET

17 JUN 1996

FIG. 4

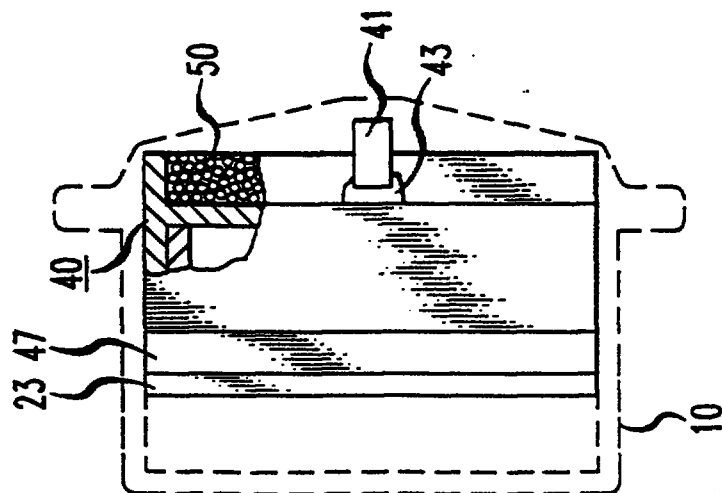


FIG. 5


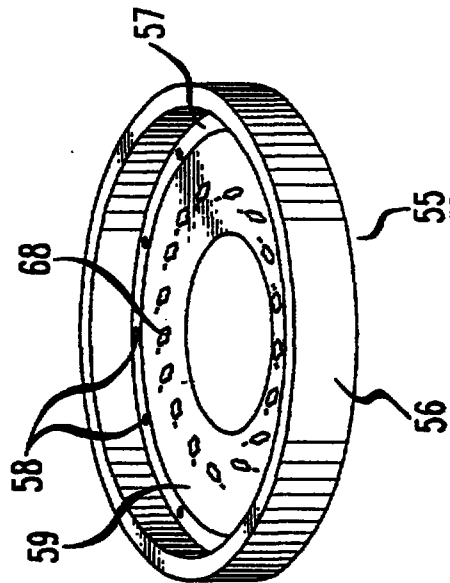



FIG. 6

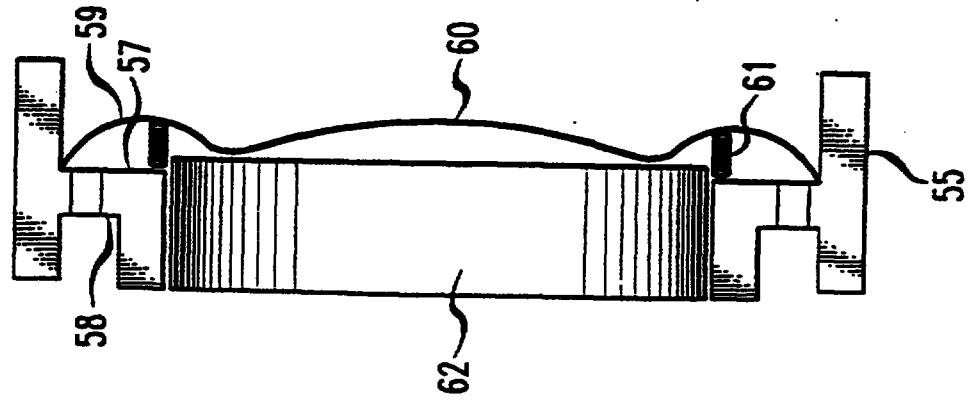

REPLACEMENT SHEET

17 JUN 1996

FIG. 7

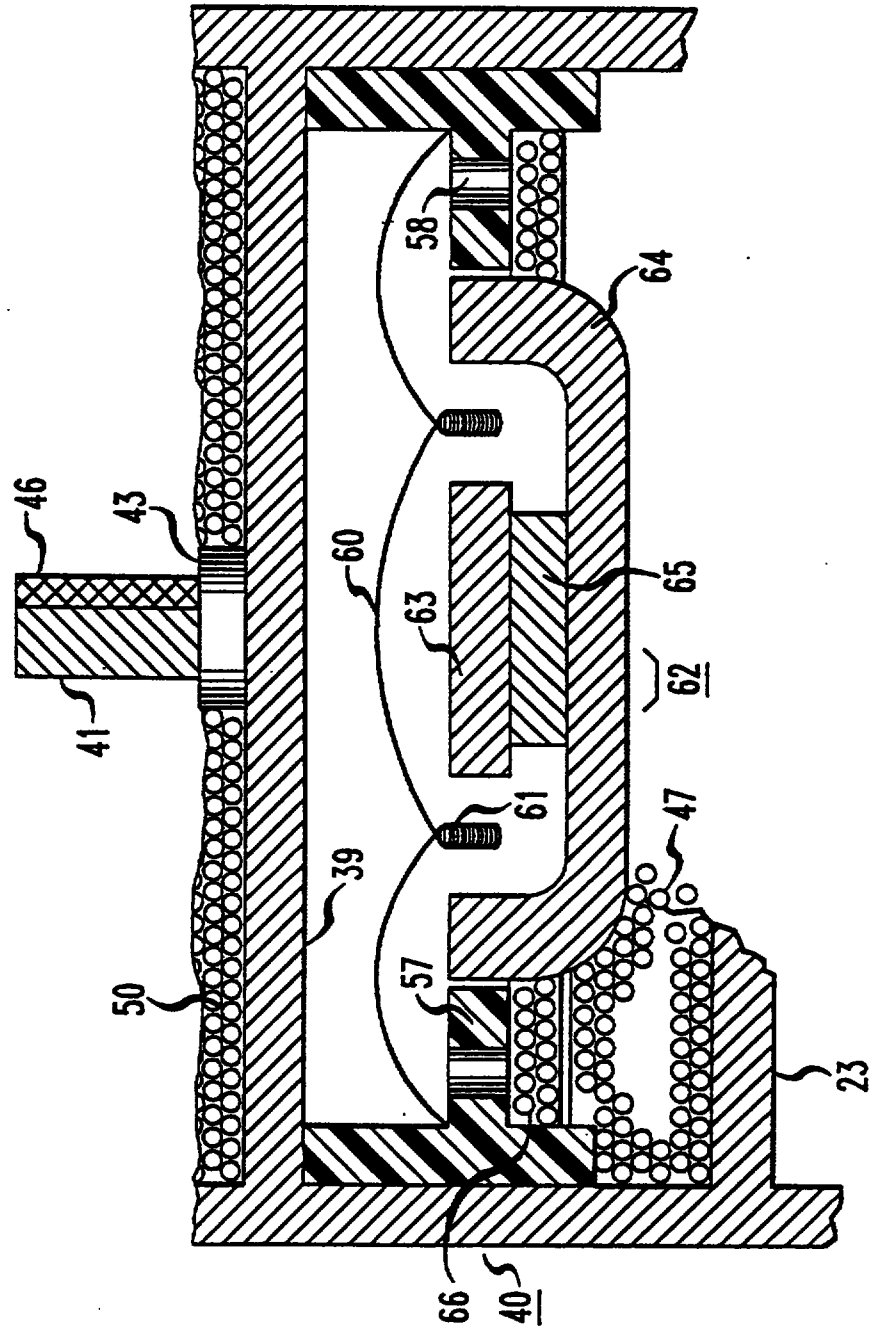

REPLACEMENT SHEET

17 JUN 1996



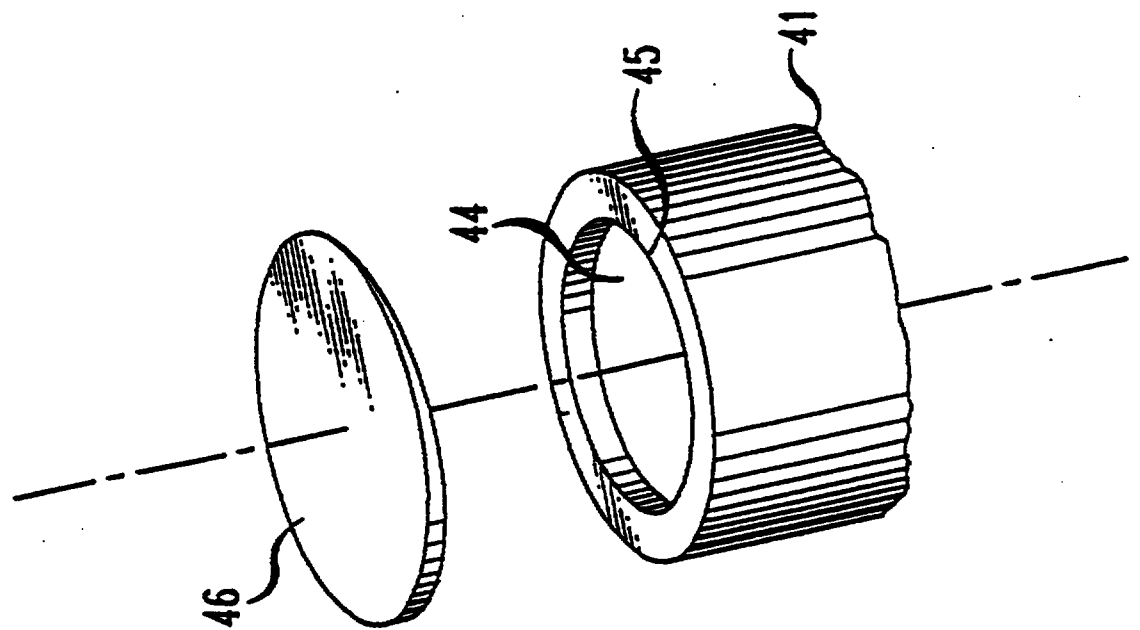
FIG. 8

FIG. 9*FIG. 10*

REPLACEMENT SHEET

17 JUN 1996

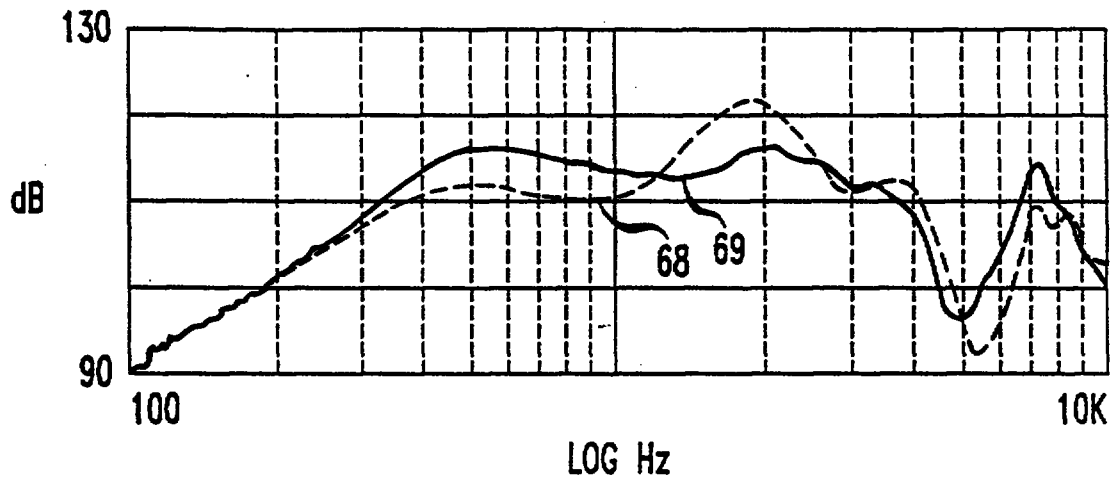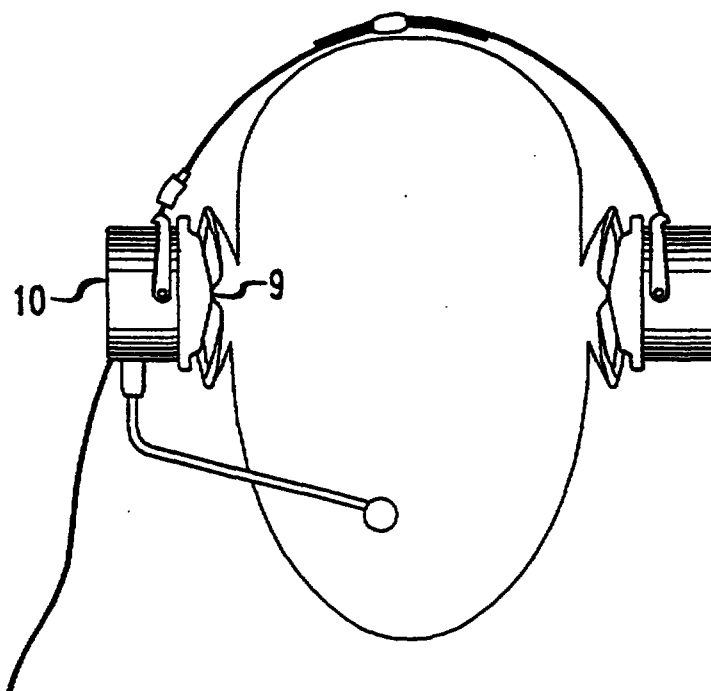

We claim:

1. In a telephonic headset comprising a speech transmitter, at least one speech-receiving ear-mounted speaker and an error microphone including a directional port for receiving ambient noise, the improvement comprising:

a substantially cylindrical housing for mounting said error microphone and said speaker, said housing comprising

a bottom chamber

a top chamber separated by a baffle from said lower chamber and comprising

a cylindrical wall,

a plurality of port openings in said wall,

an exterior flange encircling said top chamber above said ports;

a domed extension of said top chamber rising above said flange, said extension comprising a plurality of spokes, the space between said spokes defining voids for passing of desired speech and noise-cancelling signals;

a flattened platform in the center of said dome having an opening for exposing said error microphone into direct physical presence in the user's ear; and

means for mounting said speaker and error microphone in said top chamber such that said directional port of said microphone is aligned substantially perpendicular to the axis of propagation of said speaker.

2. Apparatus in accordance with claim 1, wherein said spokes are contoured with an inwardly-directed concavity.

3. Apparatus in accordance with claim 2, further comprising a porous muff fitting snugly around said dome and elastically gripping the underside of said flange.

4. Apparatus in accordance with claim 3, wherein mounting means further comprises:

a cylindrical frame disposed in said top chamber of said housing, said frame comprising

a recessed base extending across a first interior end of said frame,

REPLACEMENT SHEET

15 AUG 1997



means for mounting said error microphone in a position on said base centered on the normal through said member, and
a chamber for containing said speaker, said chamber defined by the opposite side of said base and the interior of said frame.

5. Apparatus in accordance with claim 4, wherein said base comprises a plurality of spaced spokes defining acoustic openings to said speaker.

6. Apparatus in accordance with claim 5, wherein said error microphone comprises an electret component and a sound entry port acoustically accessing said electret component; and said error microphone mounting means comprises means for orienting said error microphone relative to the speaker axis so that said sound entry port axis is substantially perpendicular thereto.

7. Apparatus in accordance with claim 6, further comprising a felt membrane capping said sound entry port.

8. Apparatus in accordance with claim 7, further comprising a first compliant means disposed behind said speaker, and a second compliant means disposed atop said spaced spokes of said base for providing damping of undesirable acoustic resonant modes.

9. Apparatus in accordance with claim 8, wherein said second compliant means comprises a felt pad; and wherein said first compliant means is compressed in its installed position.

10. Apparatus in accordance with claim 9, wherein said baffle comprises relatively stiff material having a modulus of elasticity of essentially 250,000 or more.

REPLACEMENT SHEET

15 AUG 1997

This Sheet Has Been Replaced




- 8 -

TELEPHONIC HEADSET STRUCTURE FOR REDUCING AMBIENT NOISE**Abstract**

Telephone headsets used by operators and airline pilot headsets are subject to substantial amounts of interfering ambient noise which detract from the intelligibility of incoming speech. Noise reduction circuitry does not altogether eliminate the interfering sound. A headset speaker (55) and error microphone (41) housing (10) are disclosed which enable a greater amount of unwanted noise elimination. The speaker and microphone (41) are configured closely with respect to each other and also to the user's ear. They are acoustically isolated in their own chamber. The microphone is located approximately on the speaker axis and protrudes substantially into the user's ear, and also is disposed close to the speaker cone surface. Additional acoustical tuning features include venting ports (13) in the housing, and acoustic damping padding at the microphone entrance and on either side of the speaker (55). These expedients enhance the ability of the noise-cancelling circuitry to effectively reduce the undesired noise heard by the user.

FIGURE 3.

THIS SHEET HAS BEEN
REPLACED

26 AUG 1998

TELEPHONE HEADSET STRUCTURE FOR REDUCING AMBIENT NOISEFIELD OF THE INVENTION

This invention relates to telephone or radio receiver headset apparatus and, more specifically, to a physical structure of such apparatus which reduces the energy of unwanted local or ambient noise in relation to the energy of the desired signal.

BACKGROUND OF THE INVENTION

Telephone headsets worn by the user and comprising one or two receiving ear pieces and a speech transmitter, have multitudes of uses including major uses as operator and airline pilot headsets. Often, however, the use location or environment contains substantial amounts of unwanted ambient noise which interferes with the intelligibility to the user of the incoming speech.

Noise suppression circuits in the prior headset art detect the unwanted noise, convert this from an acoustic signal to an electronic replica, create an inversion thereof which is essentially 180 degrees out of phase with the ambient noise signal and play the inverted signal into the headset's receive channel which subtractively interferes with the unwanted noise signal.

The effectiveness of suppression circuits, however, is critically dependent upon a careful design of the headset housing and its interior acoustics. For example, identification and control of acoustic paths within the headset housing are important in achieving cancellation over wide bandwidths.

SUMMARY OF THE INVENTION

The "error microphone" which picks up ambient noise signals is located approximately on the speaker axis as close as practical to the speaker cone surface but not touching the speaker surface. The error microphone orientation is angled relative to the speaker axis so that its sound entry port axis is substantially perpendicular thereto. In this position the error microphone port is pointed laterally for the purpose of accepting acoustic energy from both the acoustic speaker containing incoming speech and the user's external ear cavity.

Structure is provided to locate and fix the speaker and error microphone in their own separate acoustic cavity in a headset housing at the end of the housing which is adjacent to the user's ear, with the error microphone effectively protruding into the ear canal. This expedient enables the headset noise-cancellation circuit to

26 AUG 1998

TELEPHONE HEADSET STRUCTURE FOR REDUCING AMBIENT NOISE**Abstract**

Telephone headsets used by operators and airline pilot headsets are subject to substantial amounts of interfering ambient noise which detract from the intelligibility of incoming speech. Noise reduction circuitry does not altogether eliminate the interfering sound. A headset speaker (55) and error microphone (41) housing (10) are disclosed which enable a greater amount of unwanted noise elimination. The speaker and microphone (41) are configured closely with respect to each other and also to the user's ear. They are acoustically isolated in their own chamber. The microphone is located approximately on the speaker axis and protrudes substantially into the user's ear; and also is disposed close to the speaker cone surface. Additional acoustical tuning features include venting ports (13) in the housing, and acoustic damping padding at the microphone entrance and on either side of the speaker (55). These expedients enhance the ability of the noise-cancelling circuitry to effectively reduce the undesired noise heard by the user.

FIGURE 3.