

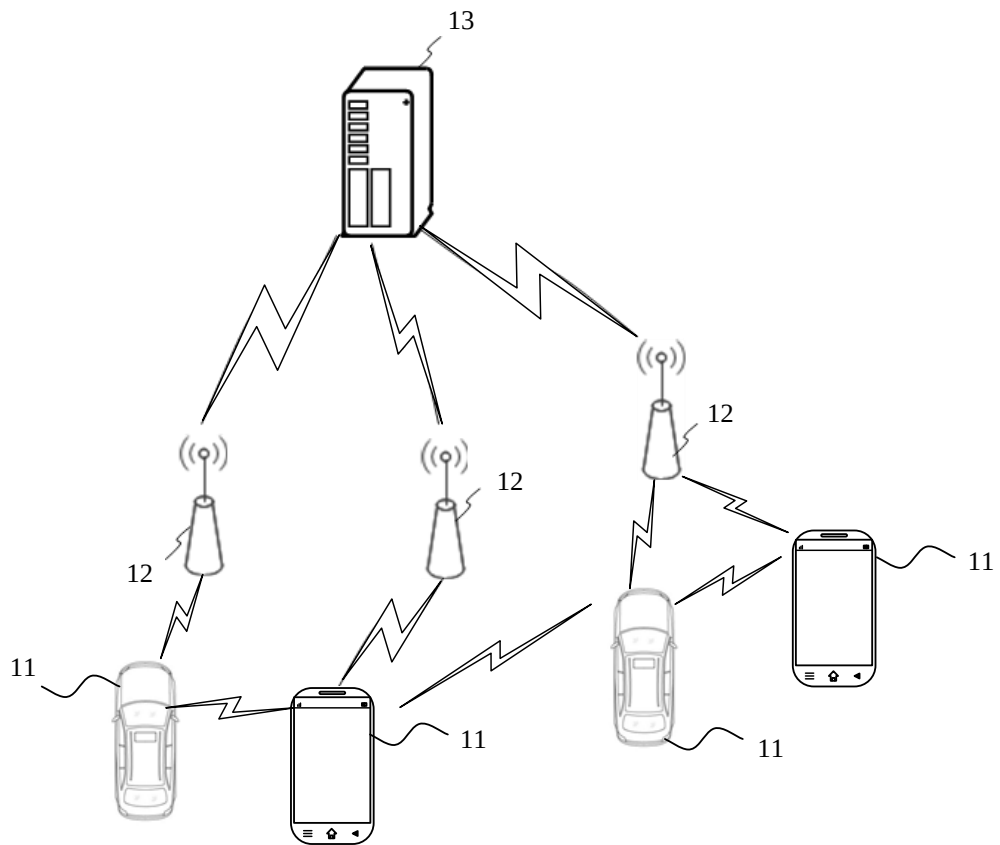


FIG. 1

S110: a mobility operation of a cell and/or a cell group is performed based on second configuration information corresponding to first configuration information

FIG. 2

S120: first configuration information sent by a current serving MN or a current serving SN is received, the first configuration information includes or indicates public measurement configuration information

FIG. 3

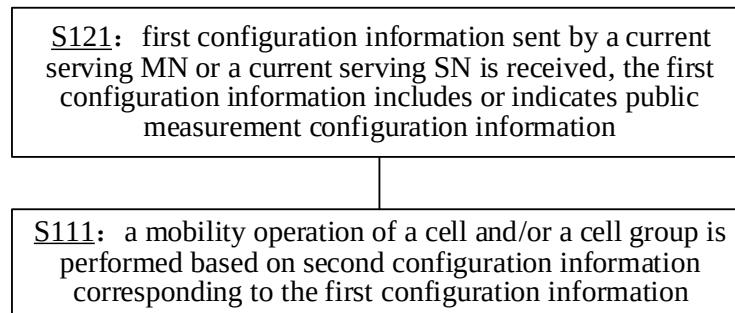


FIG. 4

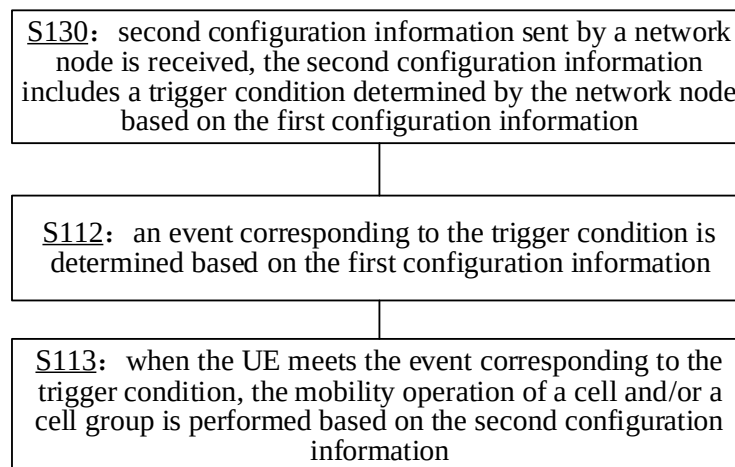


FIG. 5

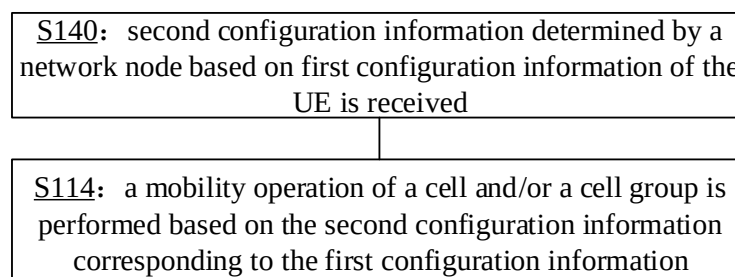


FIG. 6

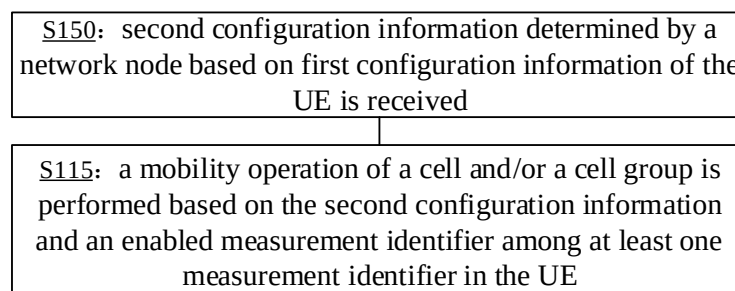


FIG. 7




FIG. 8

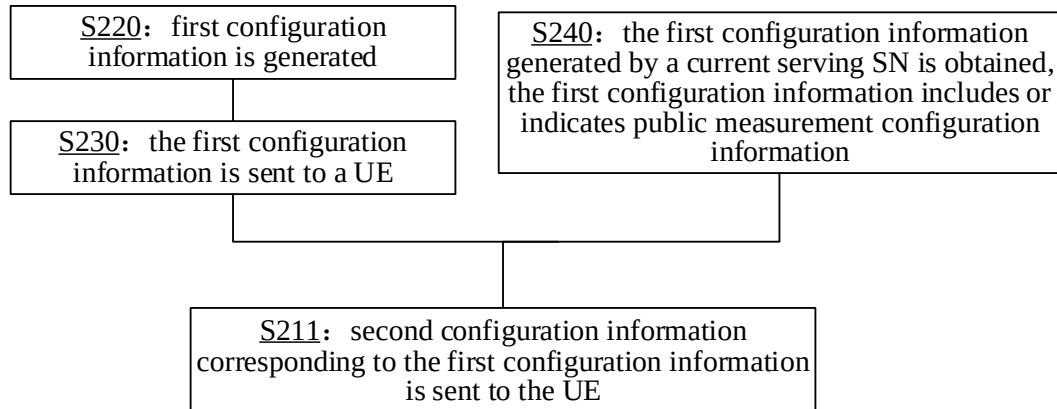


FIG. 9

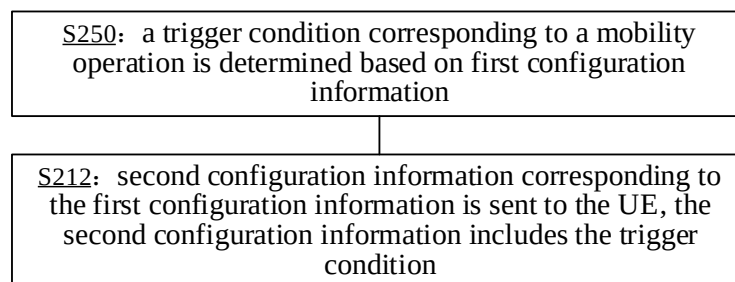


FIG. 10

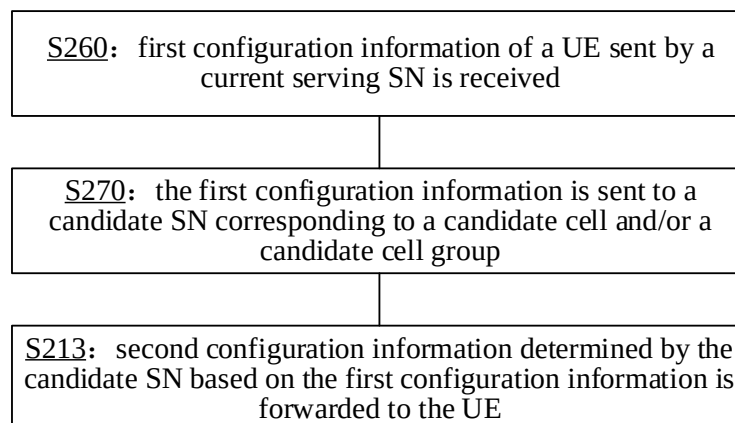


FIG. 11

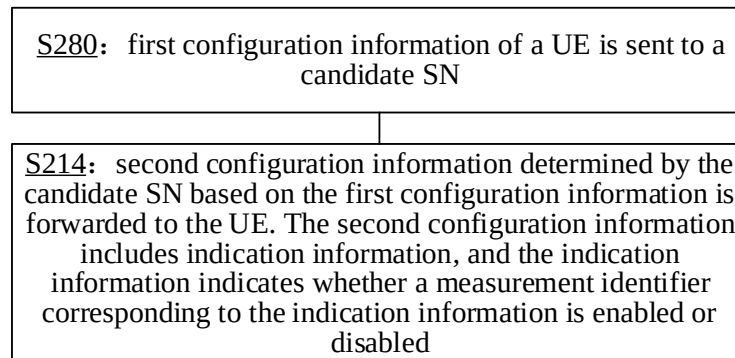


FIG. 12




FIG. 13

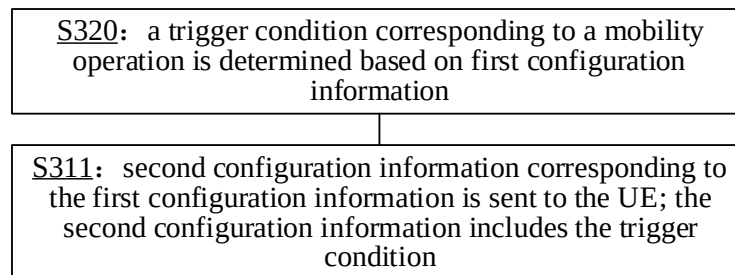


FIG. 14

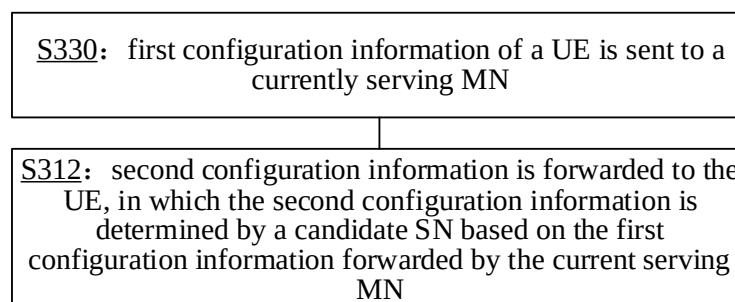


FIG. 15

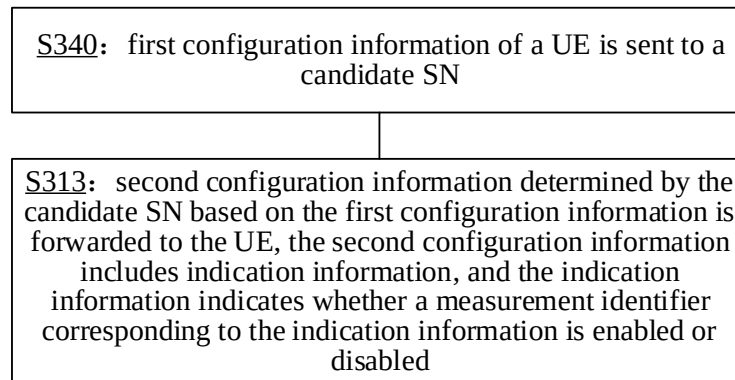


FIG. 16




FIG. 17

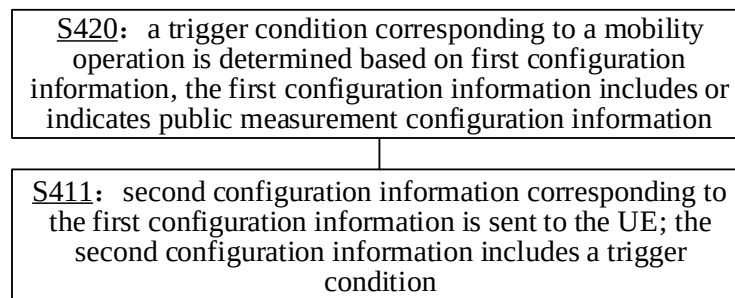


FIG. 18

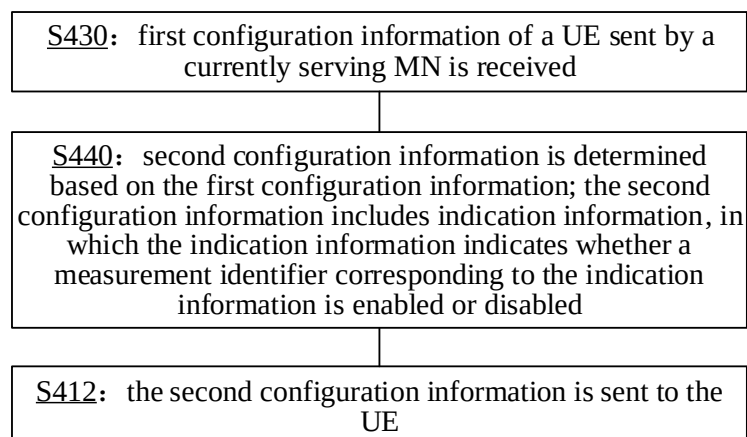


FIG. 19

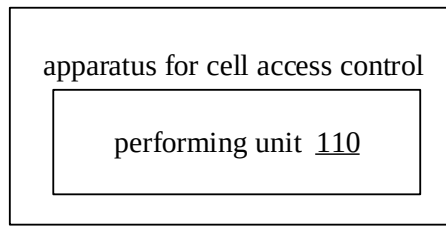


FIG. 20

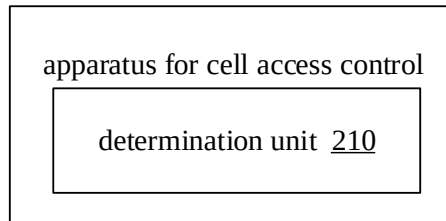


FIG. 21

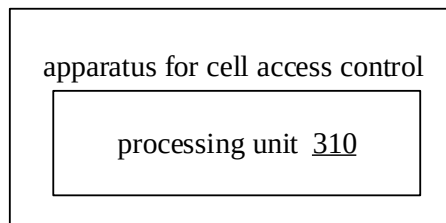


FIG. 22

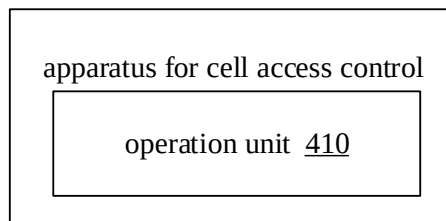


FIG. 23

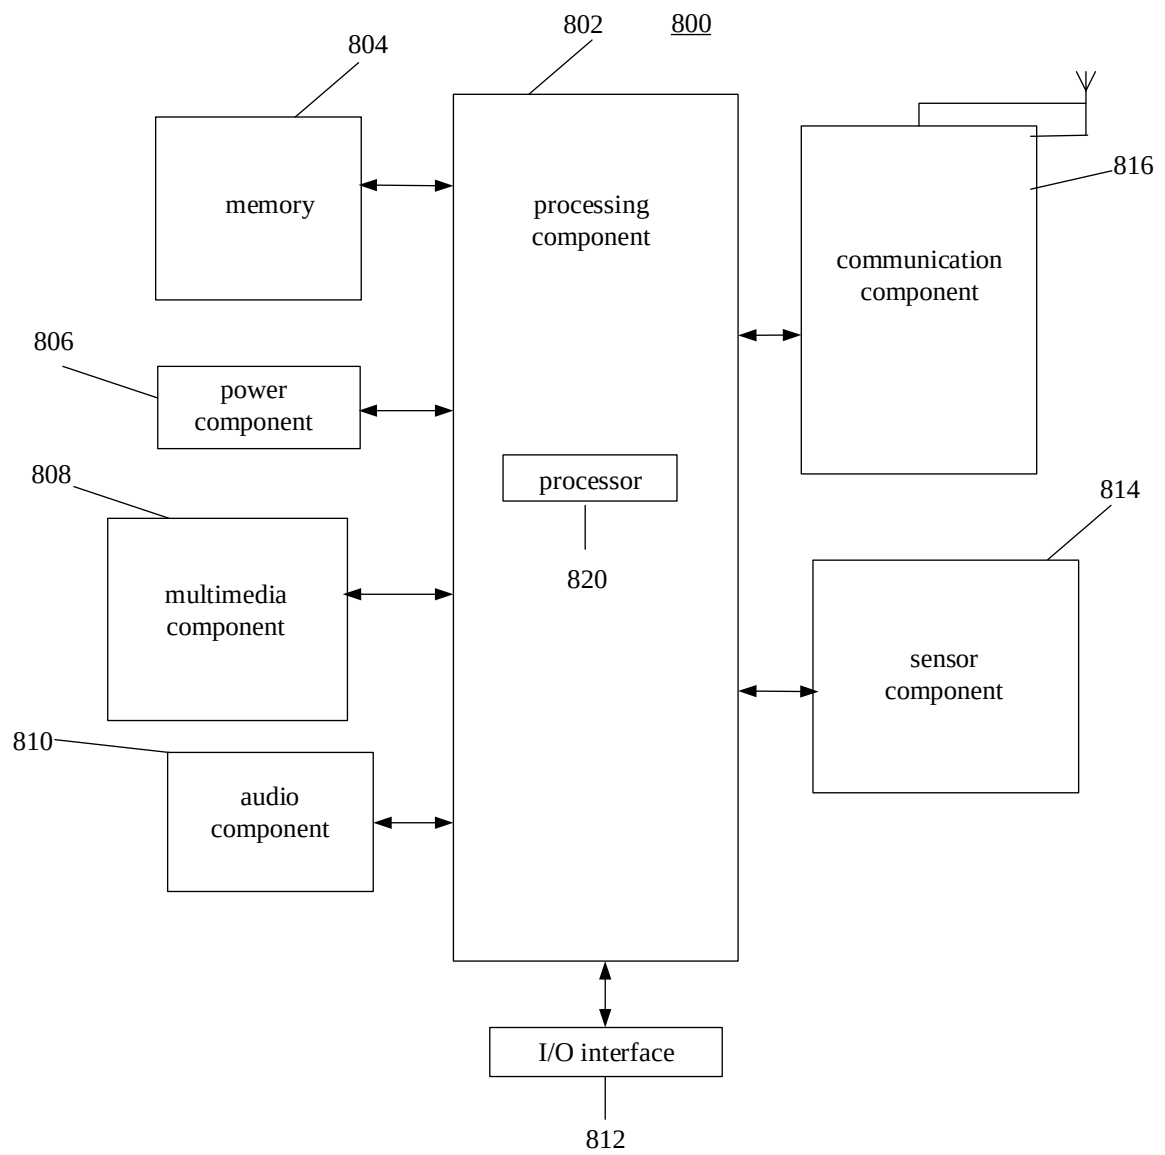


FIG. 24

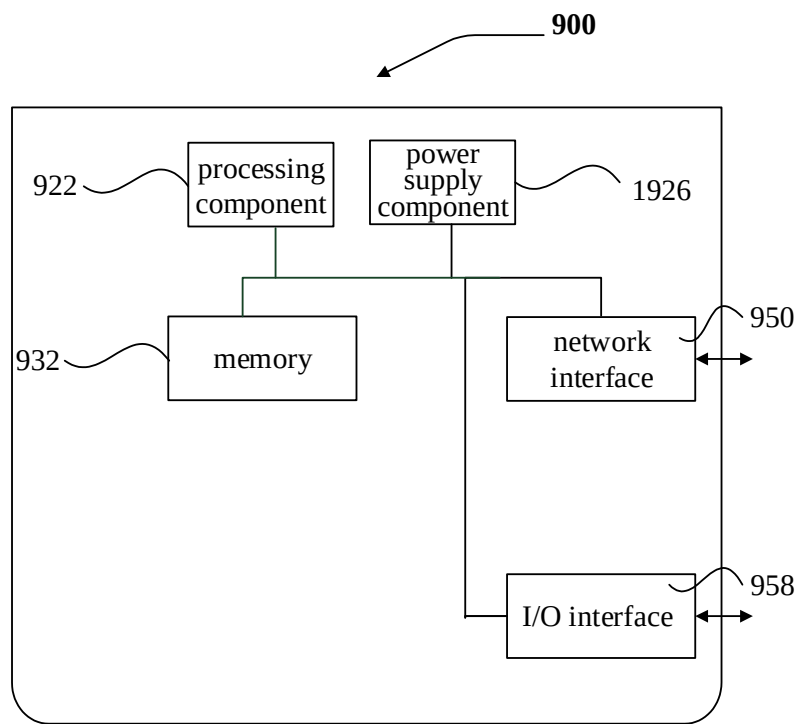


FIG. 25