

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
30 November 2000 (30.11.2000)

PCT

(10) International Publication Number
WO 00/72309 A1

- (51) International Patent Classification⁷: **G10L 19/00**, H04L 9/00, H04H 9/00
- (21) International Application Number: **PCT/US00/14057**
- (22) International Filing Date: **22 May 2000 (22.05.2000)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
09/318,045 **25 May 1999 (25.05.1999)** **US**
- (71) Applicant (for all designated States except US): **CERIDIAN CORPORATION [US/US]; 9705 Patuxent Woods Drive, Columbia, MD 21046 (US).**
- (81) Designated States (national): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.**
- (84) Designated States (regional): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).**
- Published:
— *With international search report.*
- (74) Agent: **FLANAGAN, Eugene, L., III; Whitman Breed Abbott & Morgan LLP, 200 Park Avenue, New York, NY 10166 (US).**
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **DECODING OF INFORMATION IN AUDIO SIGNALS**

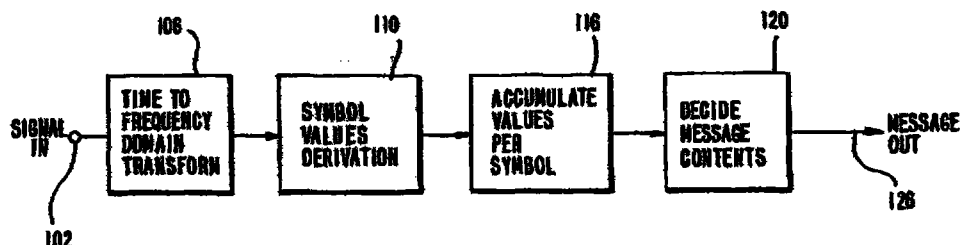

WO 00/72309 A1

(57) Abstract: Systems and methods are provided for decoding a message symbol in an audio signal. This message symbol is represented by first and second code symbols displaced in time. Values representing the code signals are accumulated (116) and the accumulated values are examined to detect the message symbol (120).