



(51) International Patent Classification:

B64F 1/12 (2006.01) *E01F 3/00* (2006.01)
B63B 35/50 (2006.01) *E04H 6/44* (2006.01)

(21) International Application Number:

PCT/NO2012/050230

(22) International Filing Date:

21 November 2012 (21.11.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20111624 24 November 2011 (24.11.2011) NO

(71) Applicant: MARINE ALUMINIUM AS [NO/NO]; Post-boks 2044, N-5505 Haugesund (NO).

(72) Inventor: RØD, Karl Johan; Smedasundet 56, N-5528 Haugesund (NO).

(74) Agent: HÅMSØ PATENTBYRÅ ANS; Boks 171, N-4302 Sandnes (NO).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: ANCHORING DEVICE IN A HELICOPTER DECK

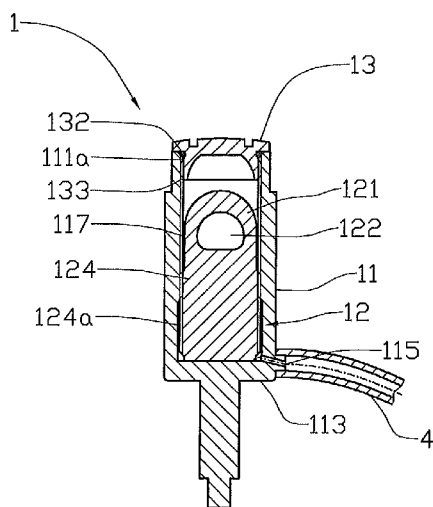


Fig. 3a

(57) Abstract: Anchoring device (1) in a helicopter deck (2), where a housing (11) that is provided with an open top (111) and lowered into the helicopter deck (2), contains a fastener (12) which is vertically displaceable between a withdrawn, inactive position and an active position where an upper fastener portion (121) extends at least partly up from the helicopter deck (2) and where the upper fastener portion (121) is arranged to be detachably connected to an anchoring means (3); and the housing (11) is provided with a detachable lid (13) arranged to be able to close tightly against the housing (11).