



- (51) International Patent Classification:
B26B 21/52 (2006.01)
- (21) International Application Number:
PCT/US2013/039058
- (22) International Filing Date:
1 May 2013 (01.05.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/640,754 1 May 2012 (01.05.2012) US
- (71) Applicant: **THE GILLETTE COMPANY** [US/US];
World Shaving Headquarters, IP/Legal Patent Department
- 3E, One Gillette Park, Boston, MA 02127 (US).
- (72) Inventors: **GAJRIA, Chandrasen**; 84 Cushing Street,
Hingham, MA 02043 (US). **SCHULZ, Kristopher, William**;
One Gillette Park, Boston, MA 02127 (US).
- (74) Agent: **GUFFEY, Timothy, B.**; c/o The Procter & Gamble
Company, Global Patent Services, 299 East 6th Street, Sy-
camore Building, 4th Floor, Cincinnati, OH 45202 (US).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

[Continued on next page]

(54) Title: HANDLE FOR A SHAVING RAZOR

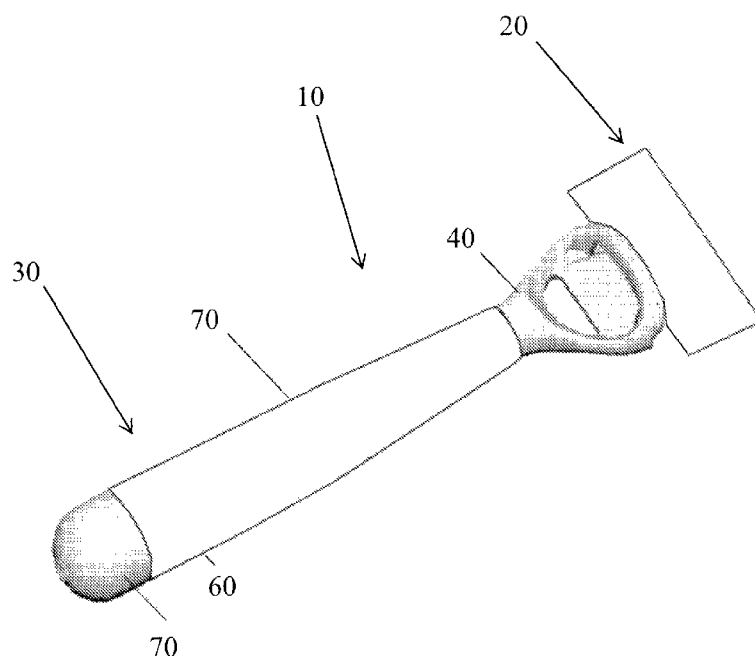


FIG. 1

(57) Abstract: A shaving razor comprising a handle comprising a head portion, a tail portion opposite the head portion, and a grip portion disposed between the head portion and the tail portion. The grip portion comprises an inner shaft spanning a length of the grip portion; an outer shaft coupled to the inner shaft, the outer shaft configured to be rotationally asymmetric to the inner shaft such that the outer shaft is not free to rotate about an axis along the length of the grip portion; and a gel grip coupled to the outer shaft, the gel grip having a Shore 000 hardness of less than about 80.



WO 2013/166142 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, **Published:**
ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*